




Elver-1 EcoScope Service RT 200TVD


Format: ECO-SON-GVR_200TVD_RT Vertical Scale: 1:200 Graphics File Created: 04-Jan-2009 11:41


		Shallow Button Resistivity, Real-Time (RES_BS_RT)						
		0.2 (OHMM) 2000						
		Deep Button Resistivity, Real-Time (RES_BD_RT)				Equivalent Circulating Density, Real-Time (ECD_ECO_RT)		
		0.2 (OHMM) 2000				0 (G/C3) 2		
Ultrasonic Caliper, Average Diameter, Real-Time, Recomputed at Surface (UCAV_ECO_RT)		Ring Resistivity, Real-Time (RES_RING_RT)		Photoelectric Factor, Bottom, Real-Time, Computed Downhole (PEB_DH_ECO_RT)	Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_ECO_RT)	Delta-T Compressional, Real-Time (DTCO_RT)		
								0.2 (OHMM) 2000
8 (IN) 13				0 (----) 10	-0.25 0.25			
Gamma Ray, Average, Real-Time (GRMA_ECO_RT)		ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT)		Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_RT)		Coherence at Compressional Peak, Real-Time (CHCO_RT)		
		0.2 (OHMM) 2000		1.95 (G/C3) 2.95		-9 (----) 1		
0 (GAPI) 200								
ROP*5 (ROP5)		MWD Collar RPM (CRPM_RT) (RPM)	ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT)		Best Thermal Neutron Porosity, Average, Real-Time (BPHI_ECO_RT)		Downhole Annulus Temperature, Real Time, Computed Downhole (DHAT_DH_ECO_RT)	
			0.2 (OHMM) 2000		45 (PU) -15		0 (DEGC) 200	
200 (M/HR) 0		0 400						

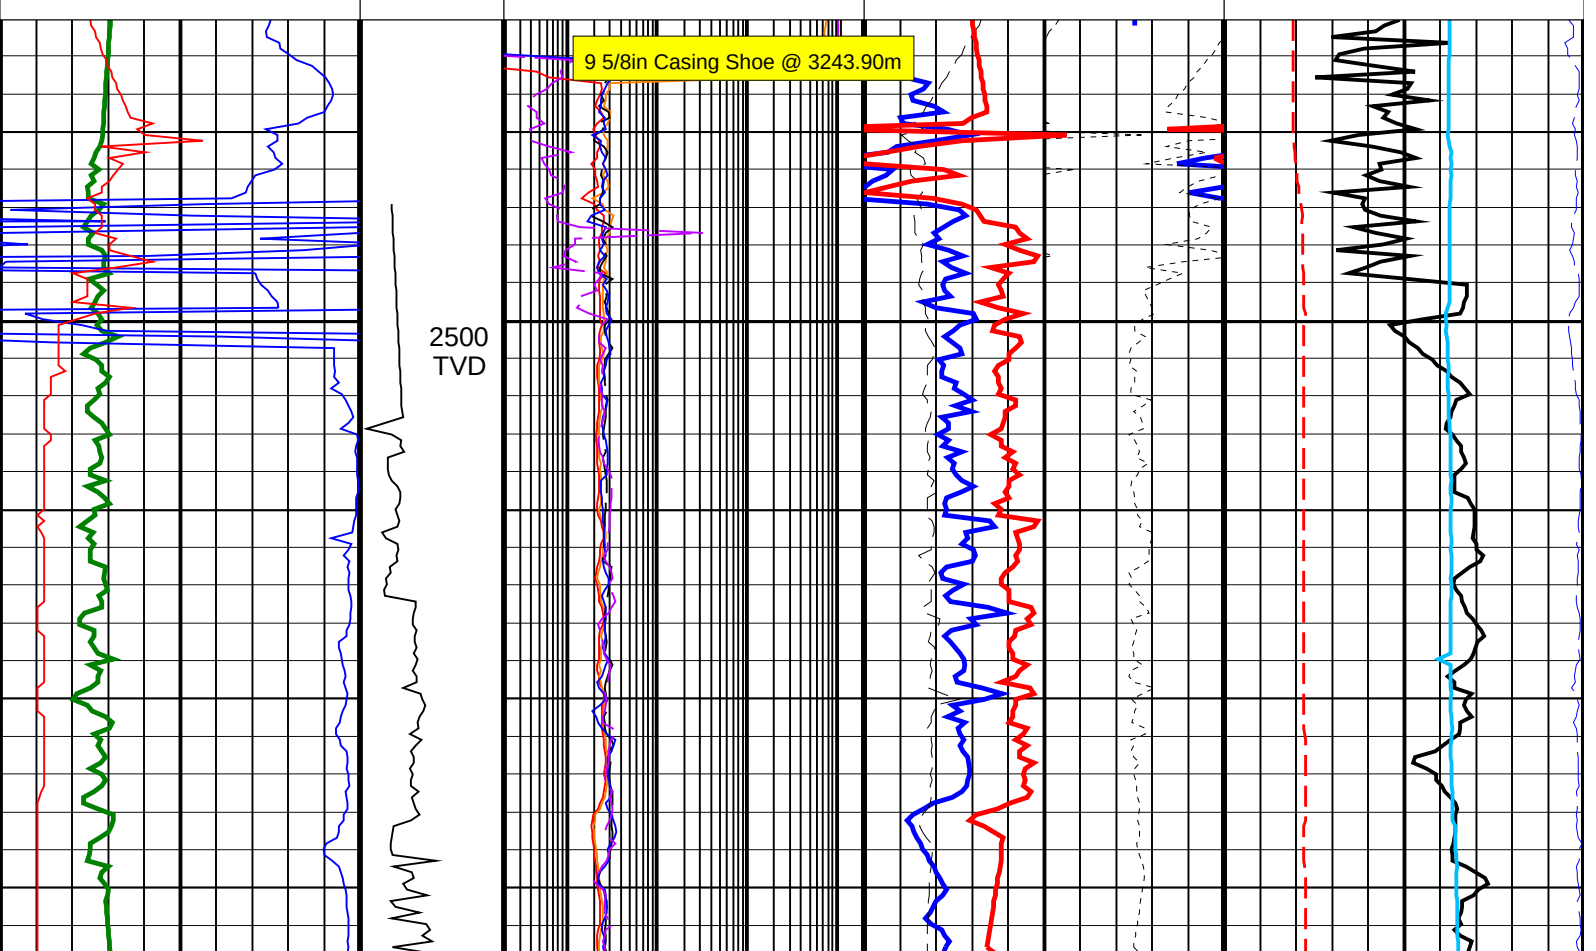

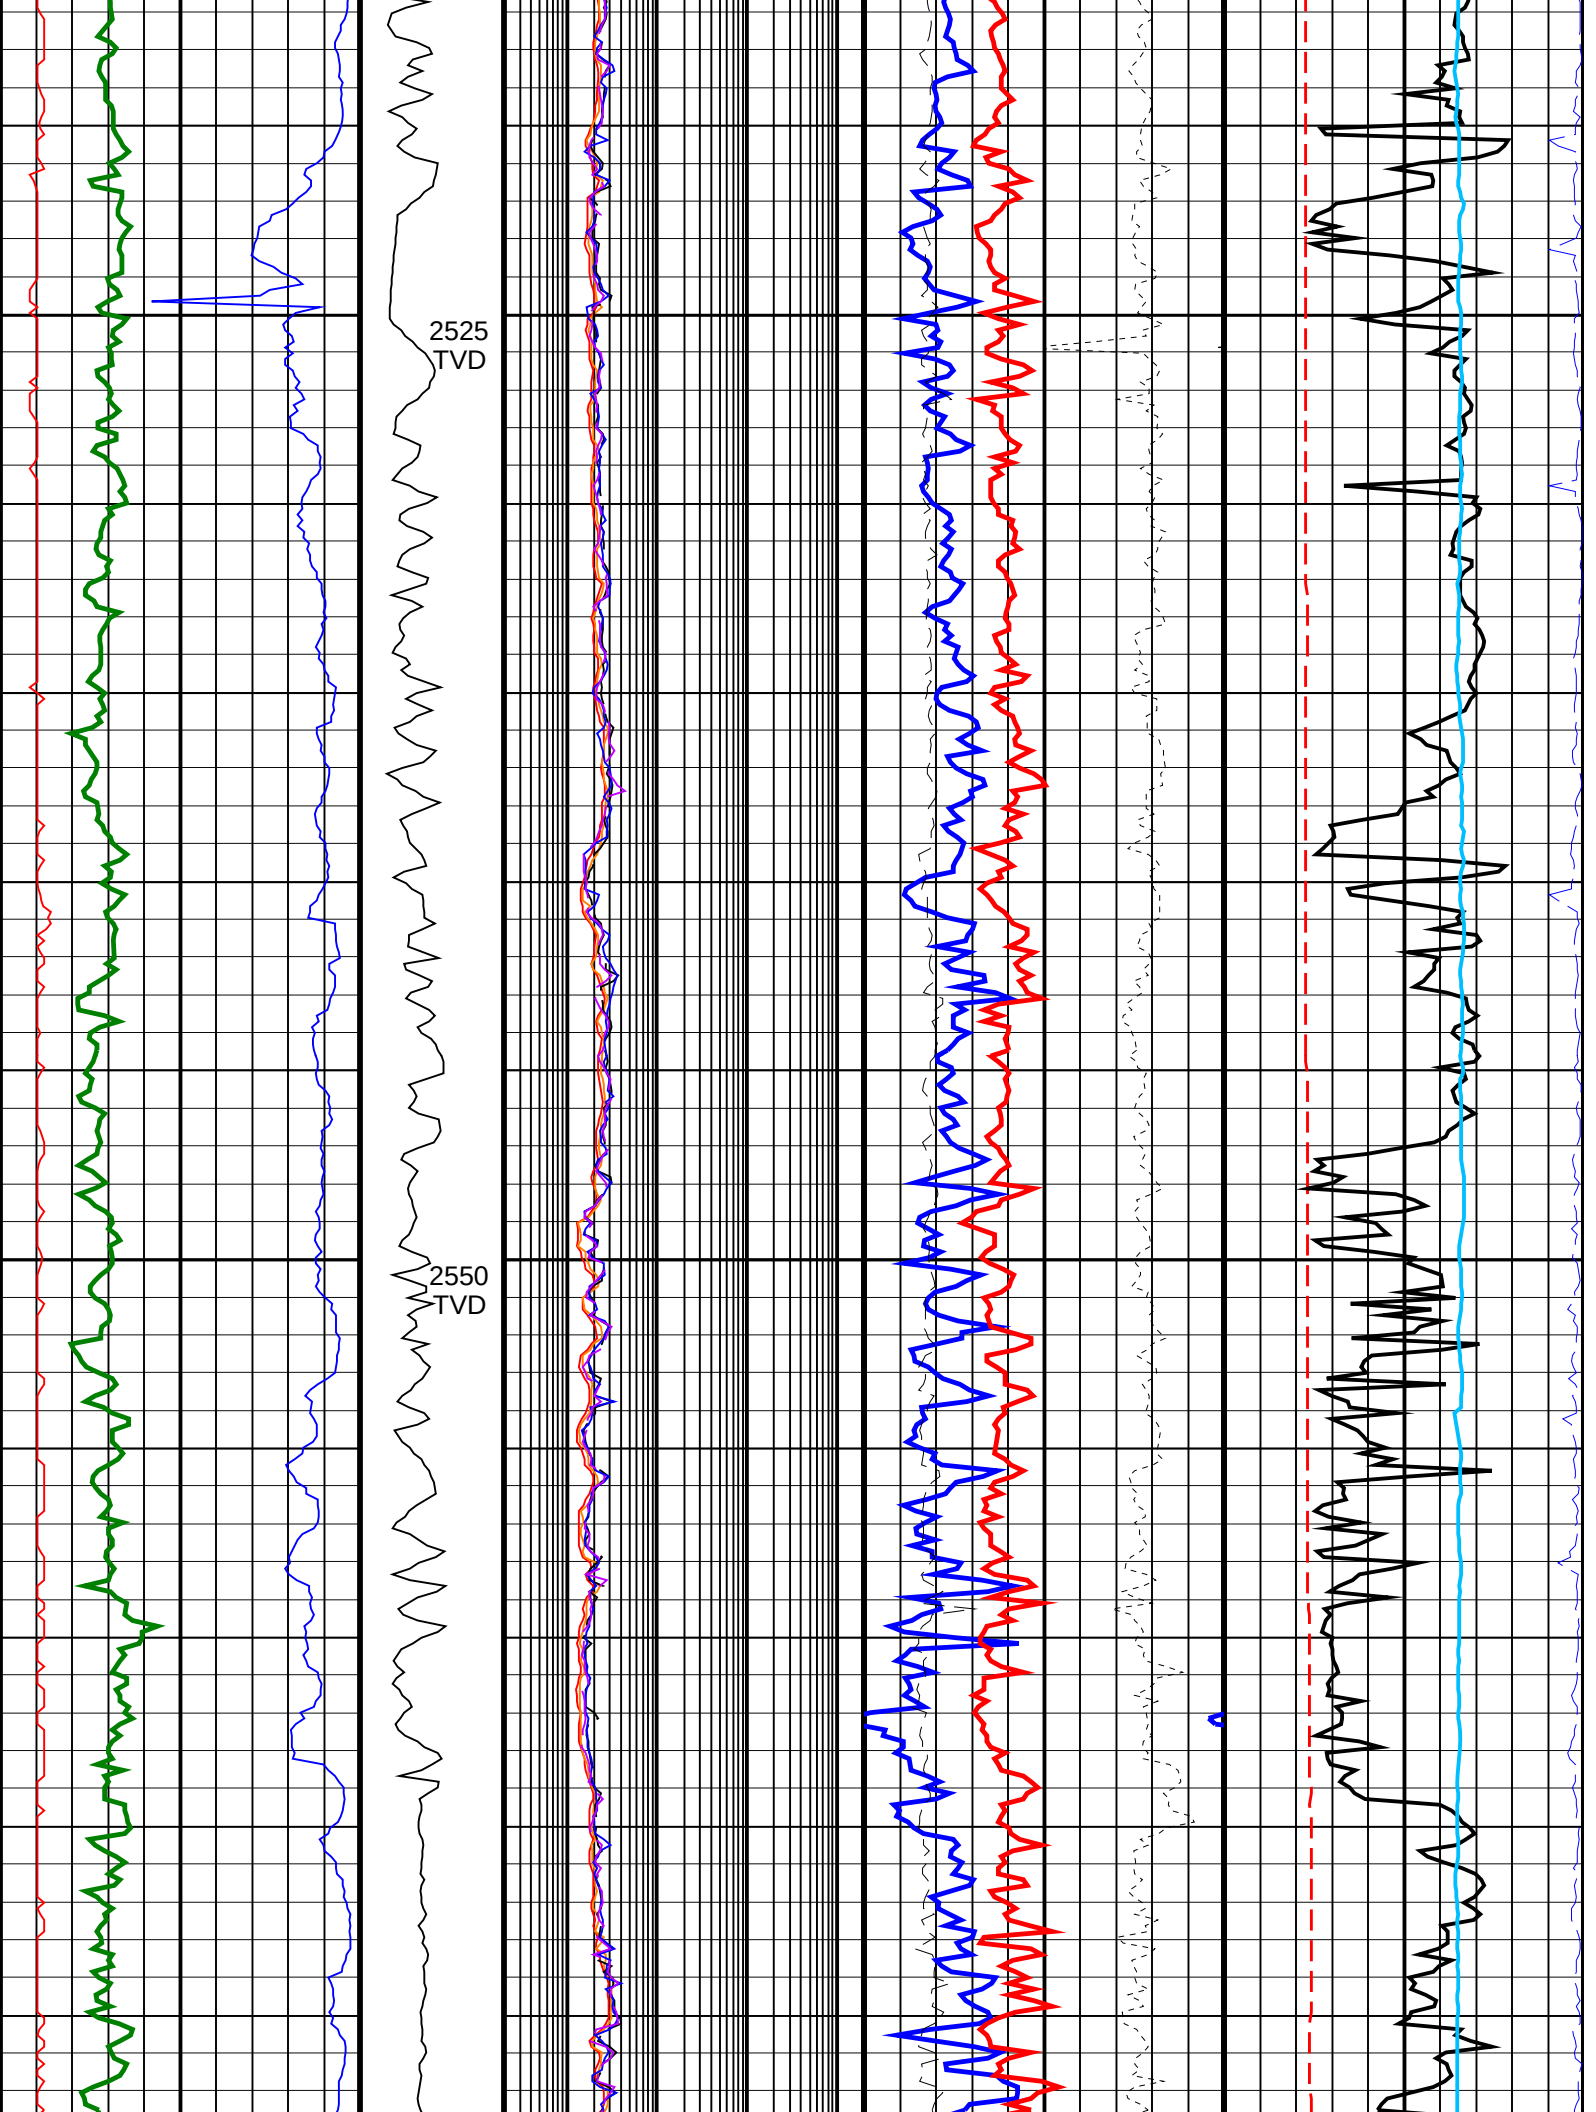

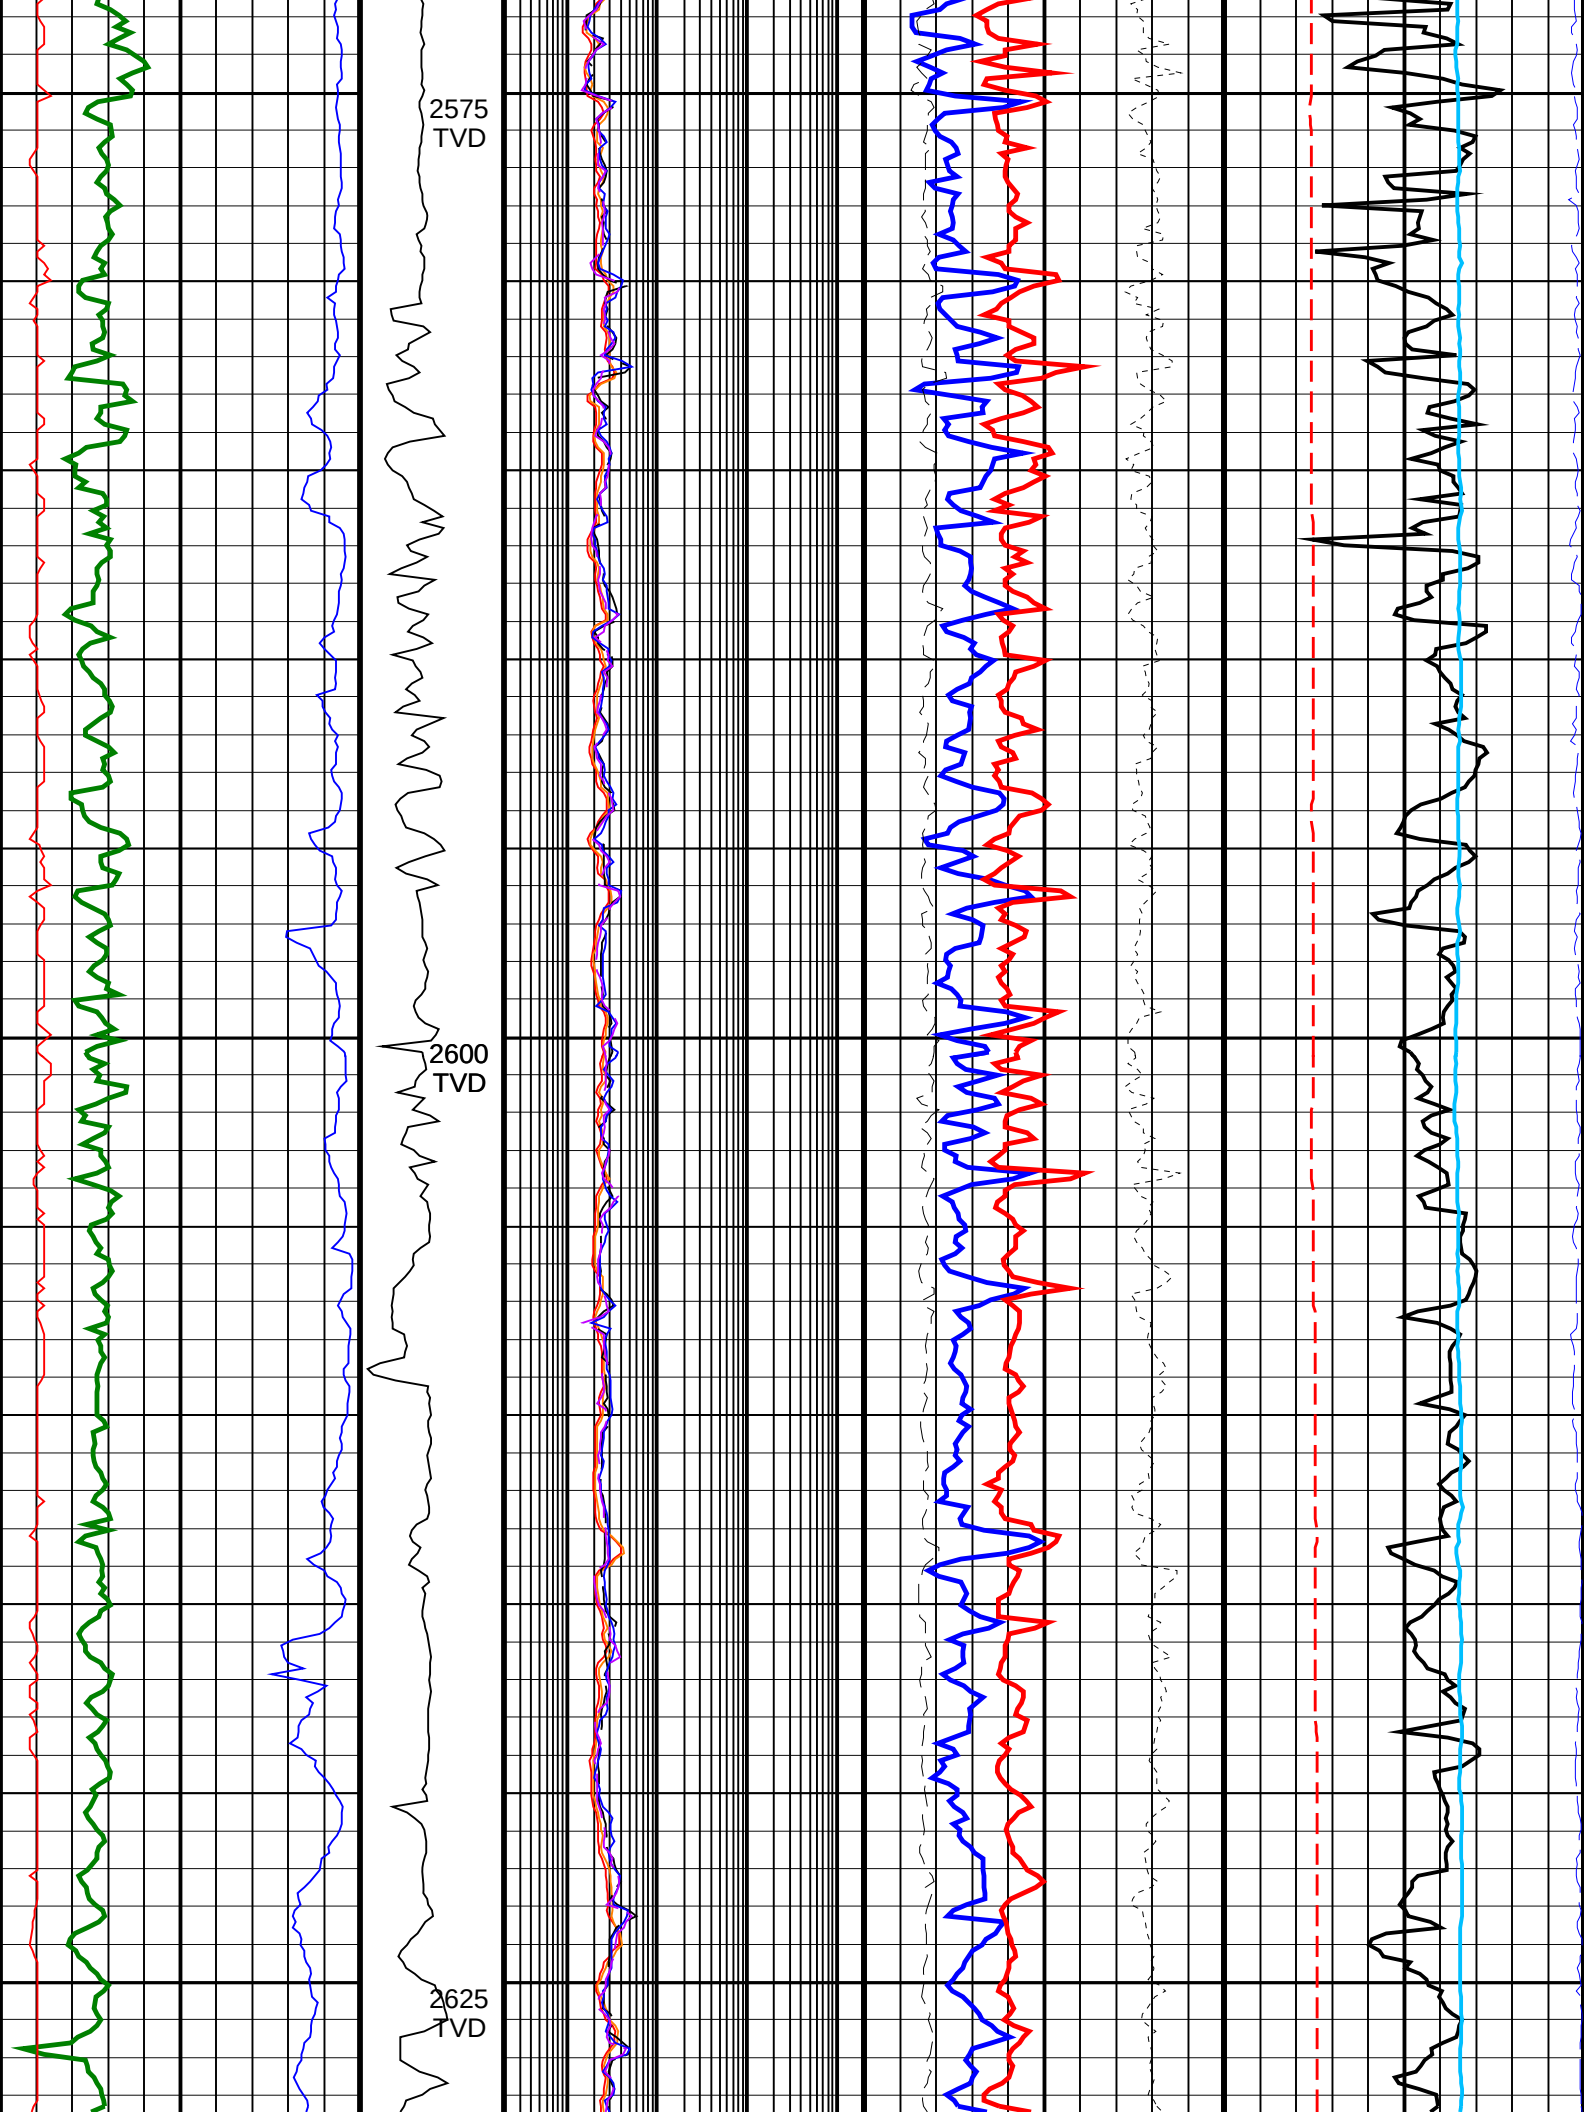


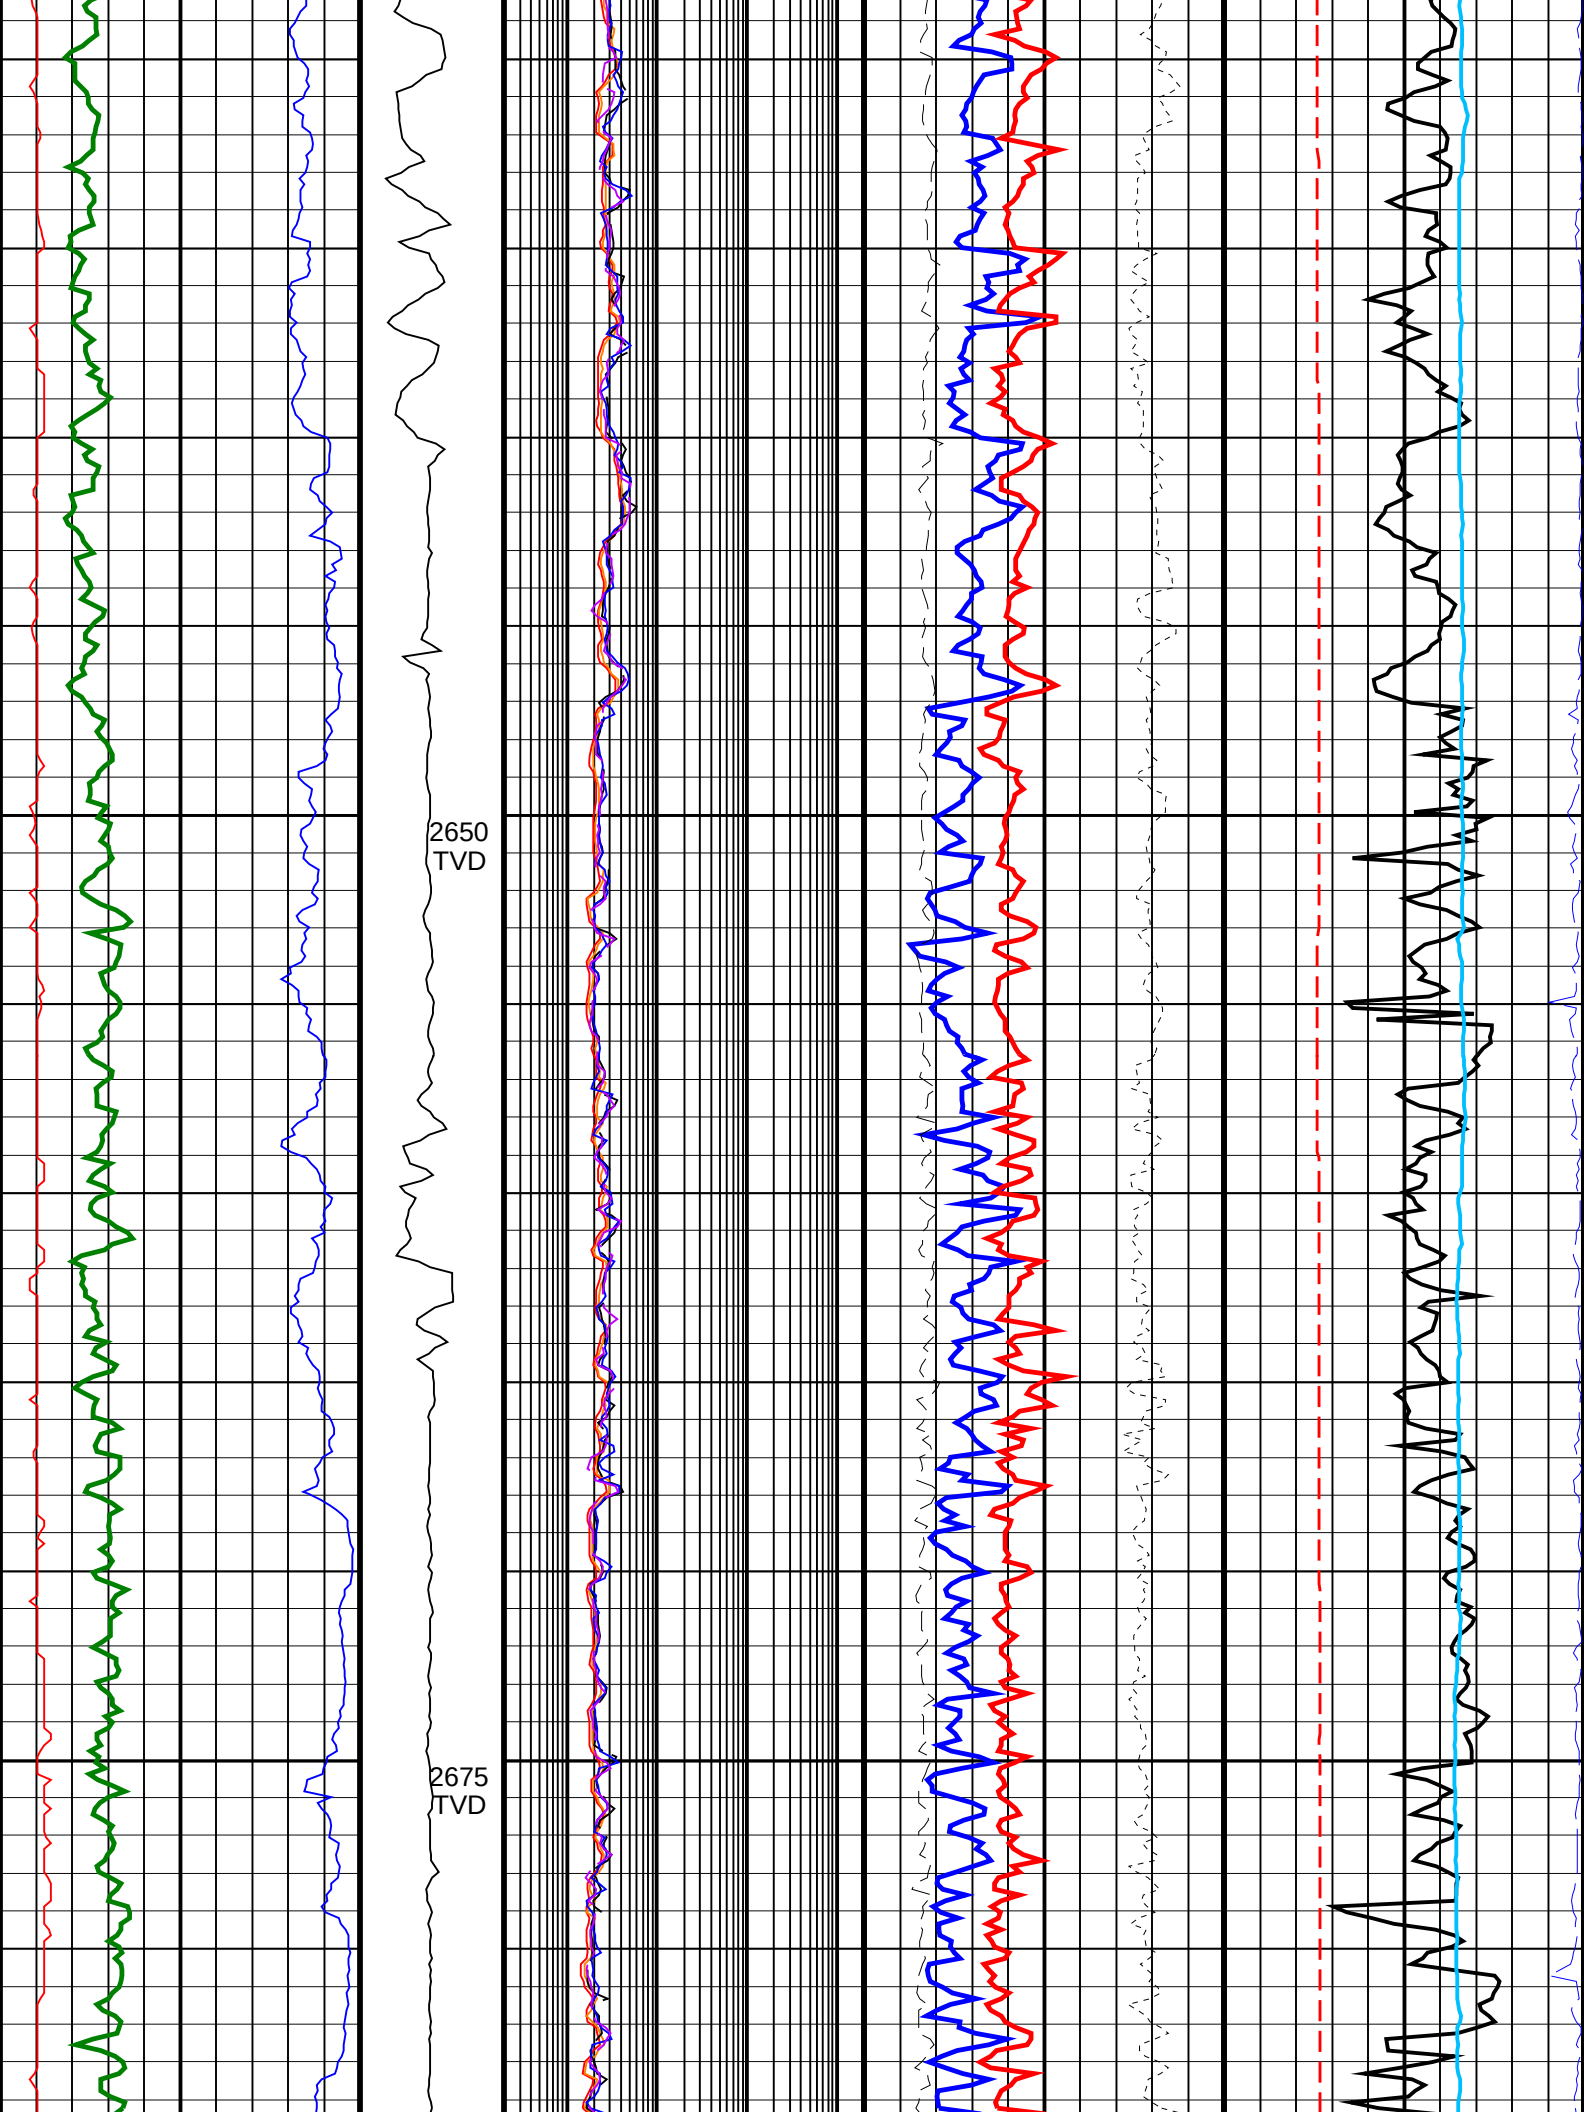


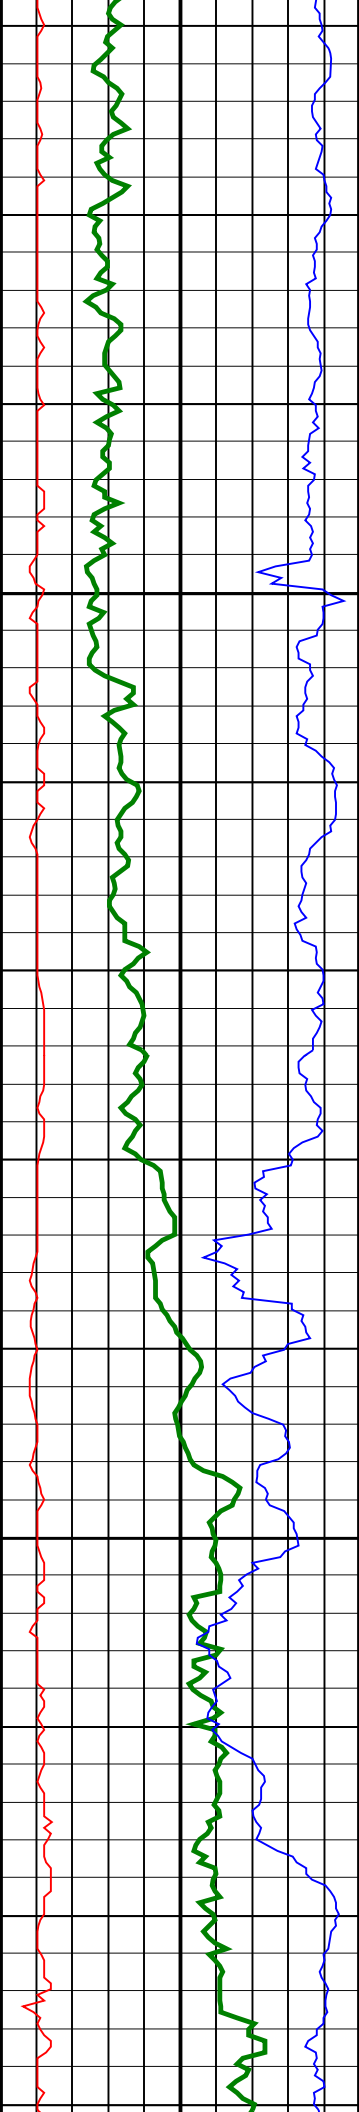

2700
TVD

2725
TVD

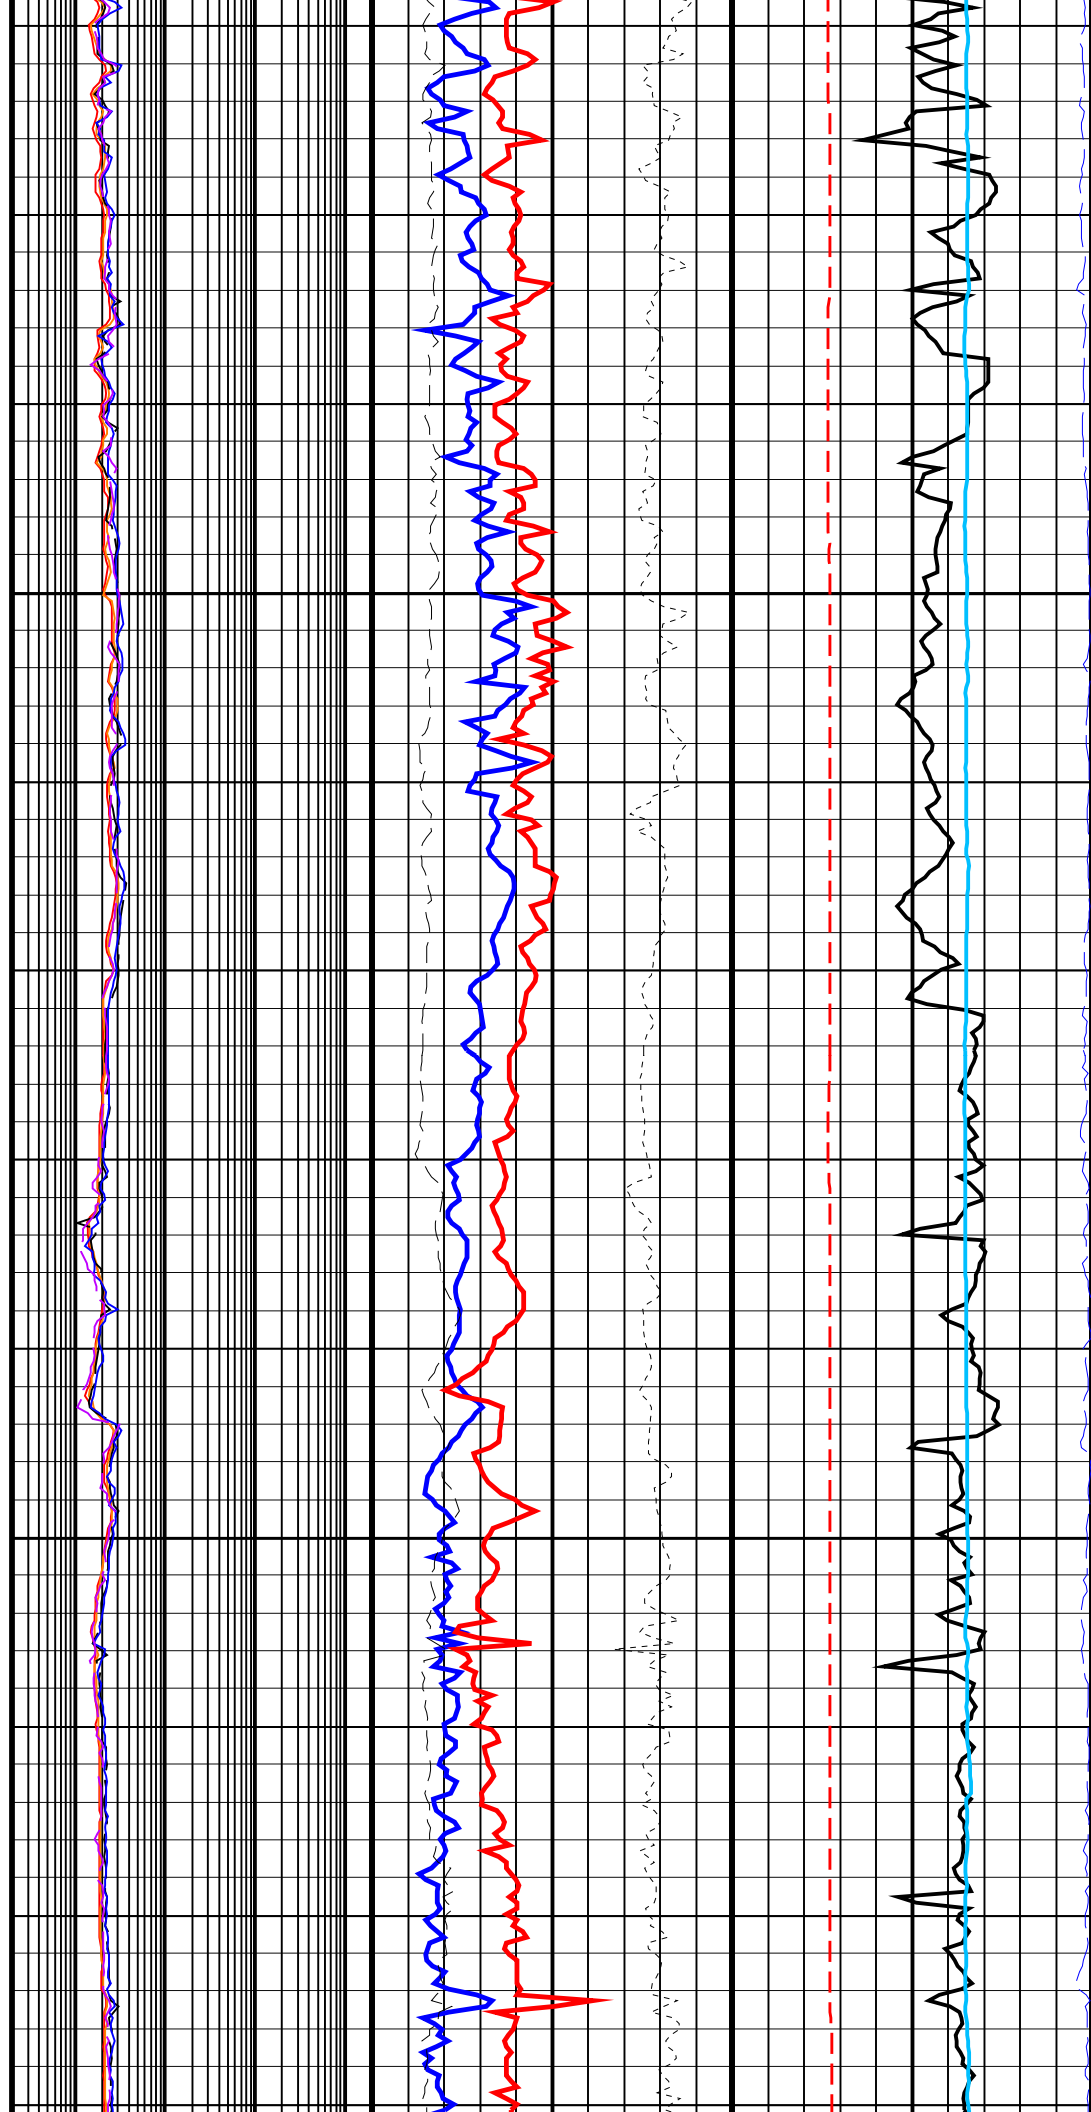

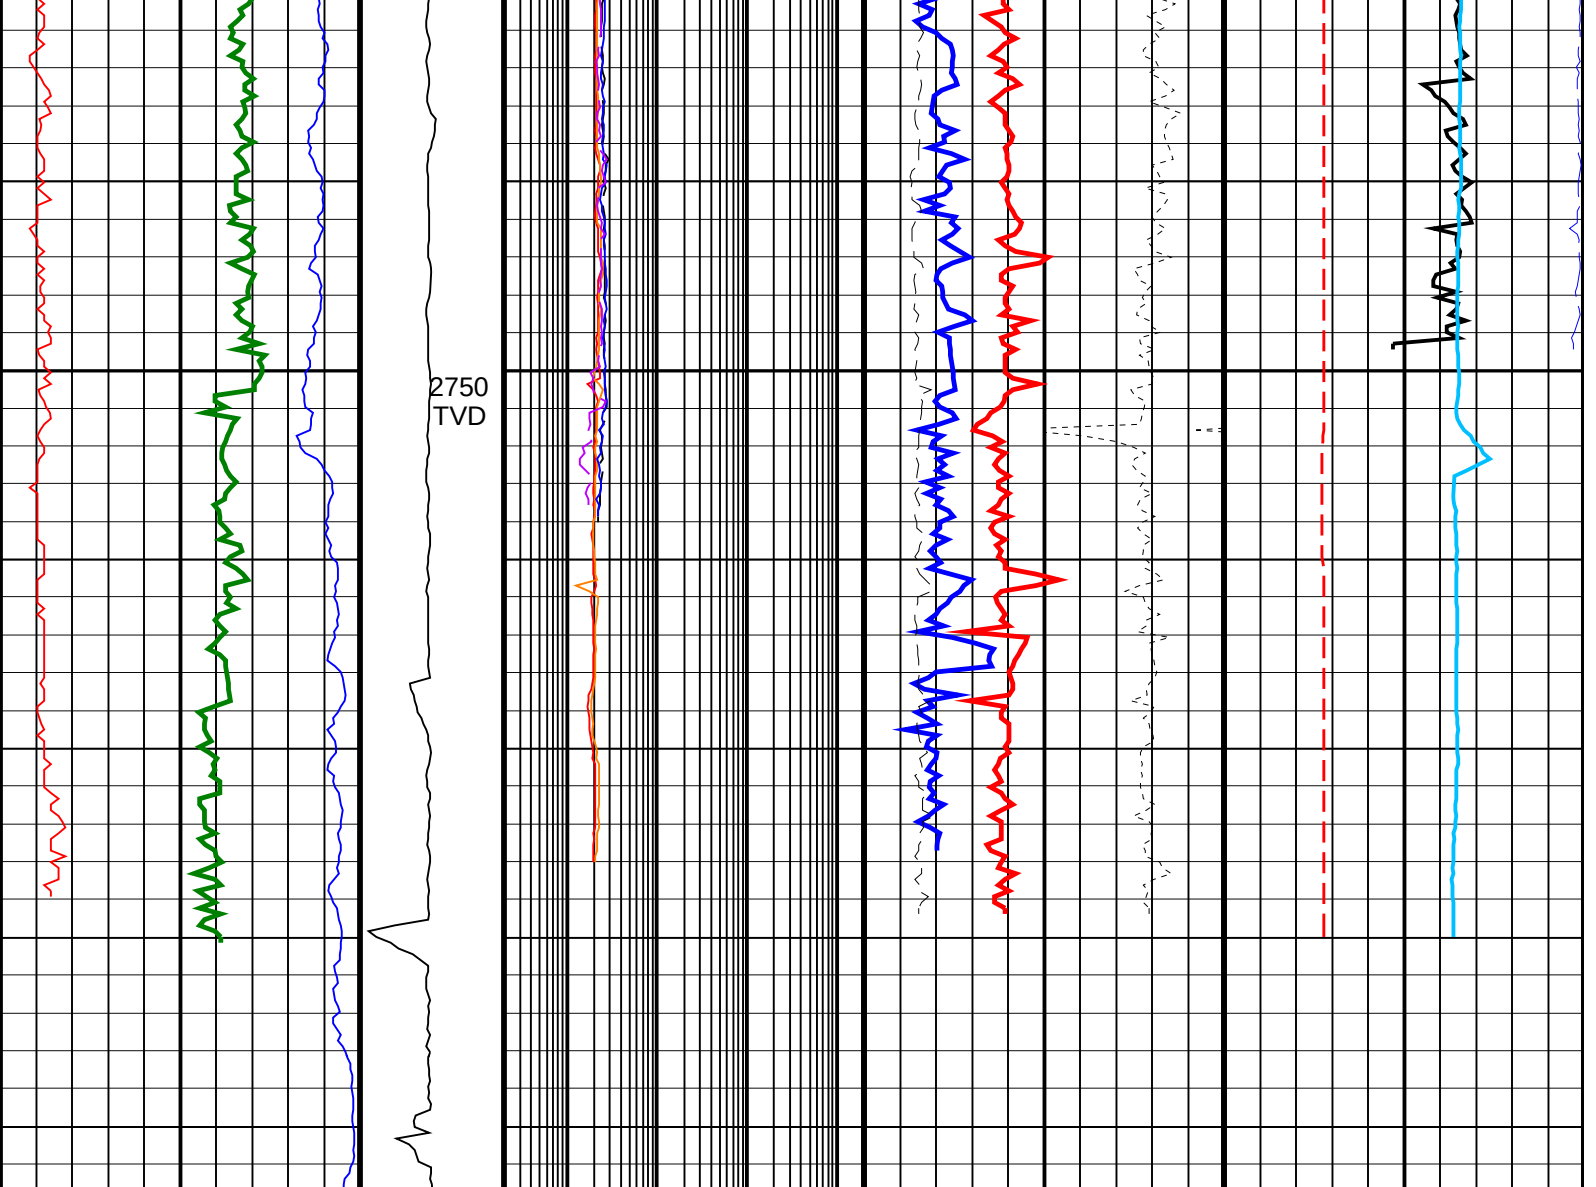

ROP*5 (ROP5) 200 (M/HR) 0	MWD Collar RPM (CRPM_RT) (RPM) 0 400	ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT) 0.2 (OHMM) 2000	Best Thermal Neutron Porosity, Average, Real-Time (BPHI_ECO_RT) 45 (PU) -15	Downhole Annulus Temperature, Real Time, Computed Downhole (DHAT_ DH_ECO_RT) 0 (DEGC) 200
Gamma Ray, Average, Real-Time (GRMA_ECO_RT) 0 (GAPI) 200		ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT) 0.2 (OHMM) 2000	Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_ RT) 1.95 (G/C3) 2.95	Coherence at Compressional Peak, Real-Time (CHCO_RT) -9 (----) 1
Ultrasonic Caliper, Average Diameter, Real-Time, Recomputed at Surface (UCAV_ECO_RT) 8 (IN) 13		Ring Resistivity, Real-Time (RES_RING_RT) 0.2 (OHMM) 2000	Photoelectric Factor, Bottom, Real-Time, Computed Downhole (PEB_DH_ ECO_RT) 0 (----) 10 Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_ ECO_RT) -0.25 (G/C3) 0.25	Delta-T Compressional, Real-Time (DTCO_RT) 40 (US/F) 140
		Deep Button Resistivity, Real-Time (RES_BD_RT) 0.2 (OHMM) 2000		Equivalent Circulating Density, Real-Time (ECD_ ECO_RT) 0 (G/C3) 2
		Shallow Button Resistivity, Real-Time (RES_BS_RT) 0.2 (OHMM) 2000		

IDEAL Version: ID13_0C_08

IDF

ECO6	id13_0c_02	MWD_10	id13_0c_02
RAB	id13_0c_02	SON675	id13_0c_02