

Netherby 1DW1 LWD RT 200MD

IDEAL Version: ID13_OC_08 <MD > Vertical Scale: 1:200

Graphics File Created: 10-Aug-2008 05:09


PIP SUMMARY


Neutron PIP +


Density ROBB PIP +

RP40 PIP +

Ultrasonic Caliper, Average Diameter, Real-Time, Computed Downhole (UCAV_DH_ECO_RT) 6 (IN) 16		ARC Attenuation Resistivity 40 inch at 400 KHz, Real-Time (A40L_ECO_RT) 0.2 (OHMM) 200	
Gamma Ray, Up, Real-Time (GRMU_ECO_RT) 0 (GAPI) 200		ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT) 0.2 (OHMM) 200	Thermal Neutron Porosity, Average, Real-Time (TNPH_ECO_RT) 45 (PU) -15
Gamma Ray, Bottom, Real-Time (GRMB_ECO_RT) 0 (GAPI) 200	MWD Collar RPM (CRPM_RT) (RPM) 0 400	ARC Phase Shift Resistivity 28 inch at 2 MHz, Real-Time (P28H_ECO_RT) 0.2 (OHMM) 200	Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_RT) 1.95 (G/C3) 2.95
ROP*5 (ROP5) (M/HR) 200 0	PKPK_RPM (Stick_RT) (RPM) 0 400	ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT) 0.2 (OHMM) 200	Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_ECO_RT) -0.25 (G/C3) 0.25

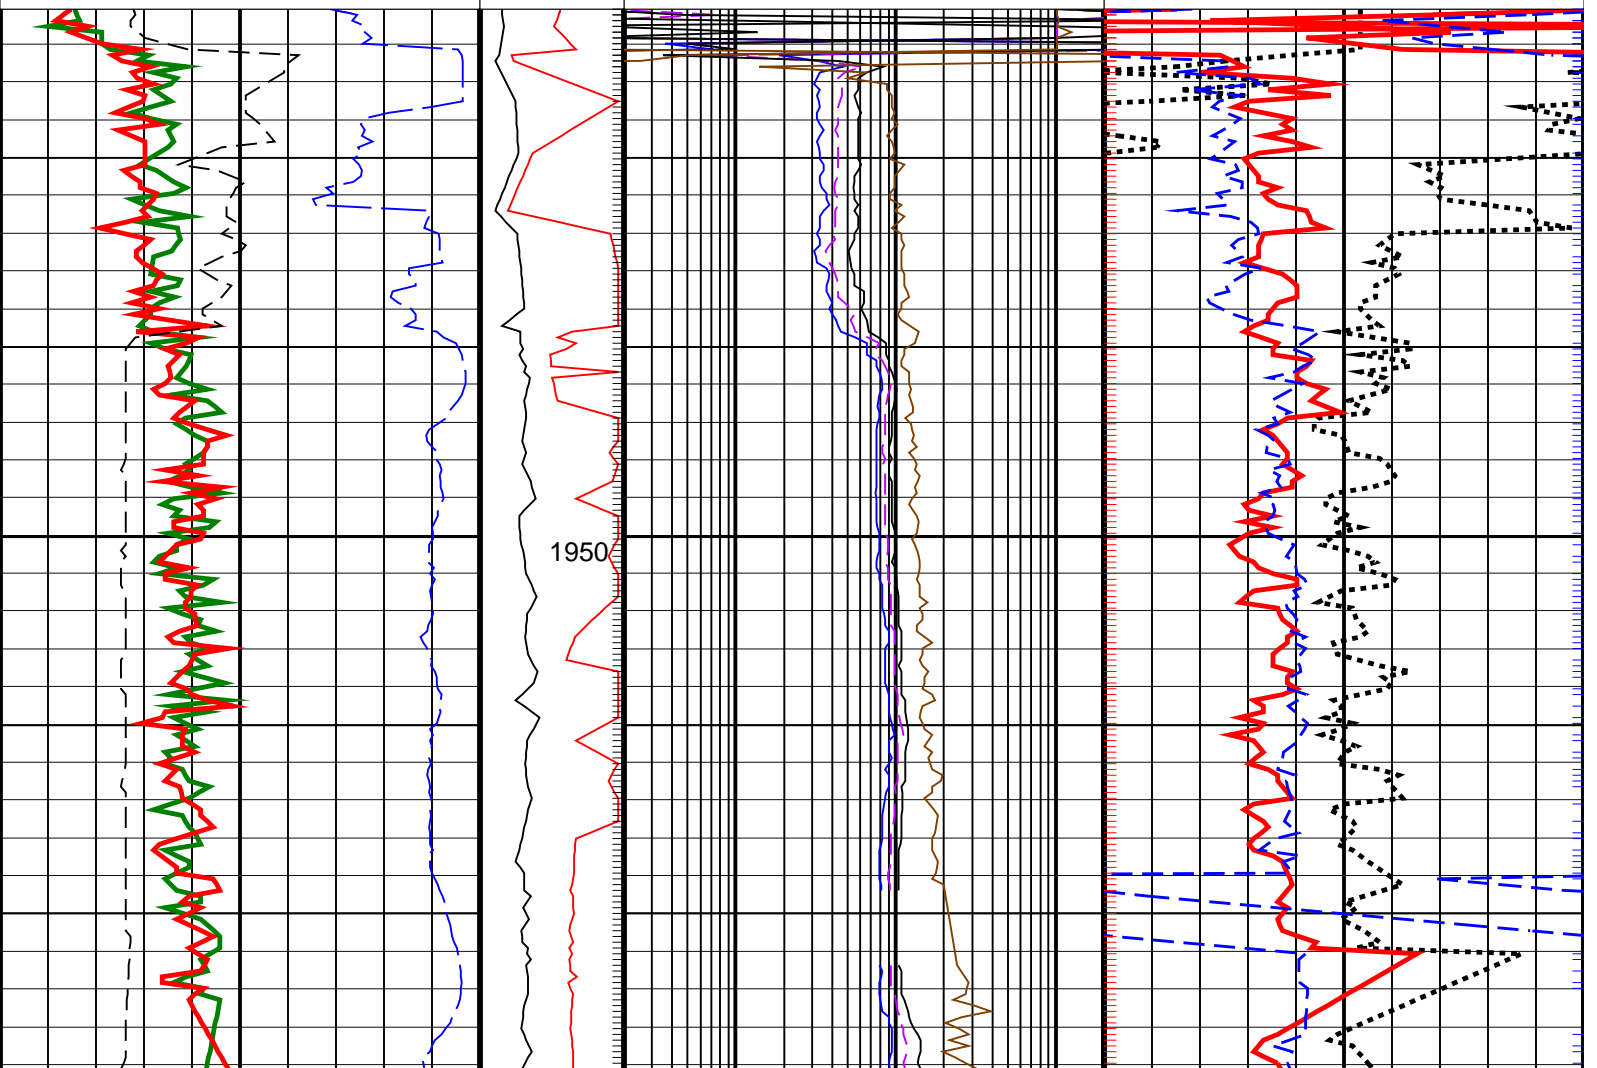

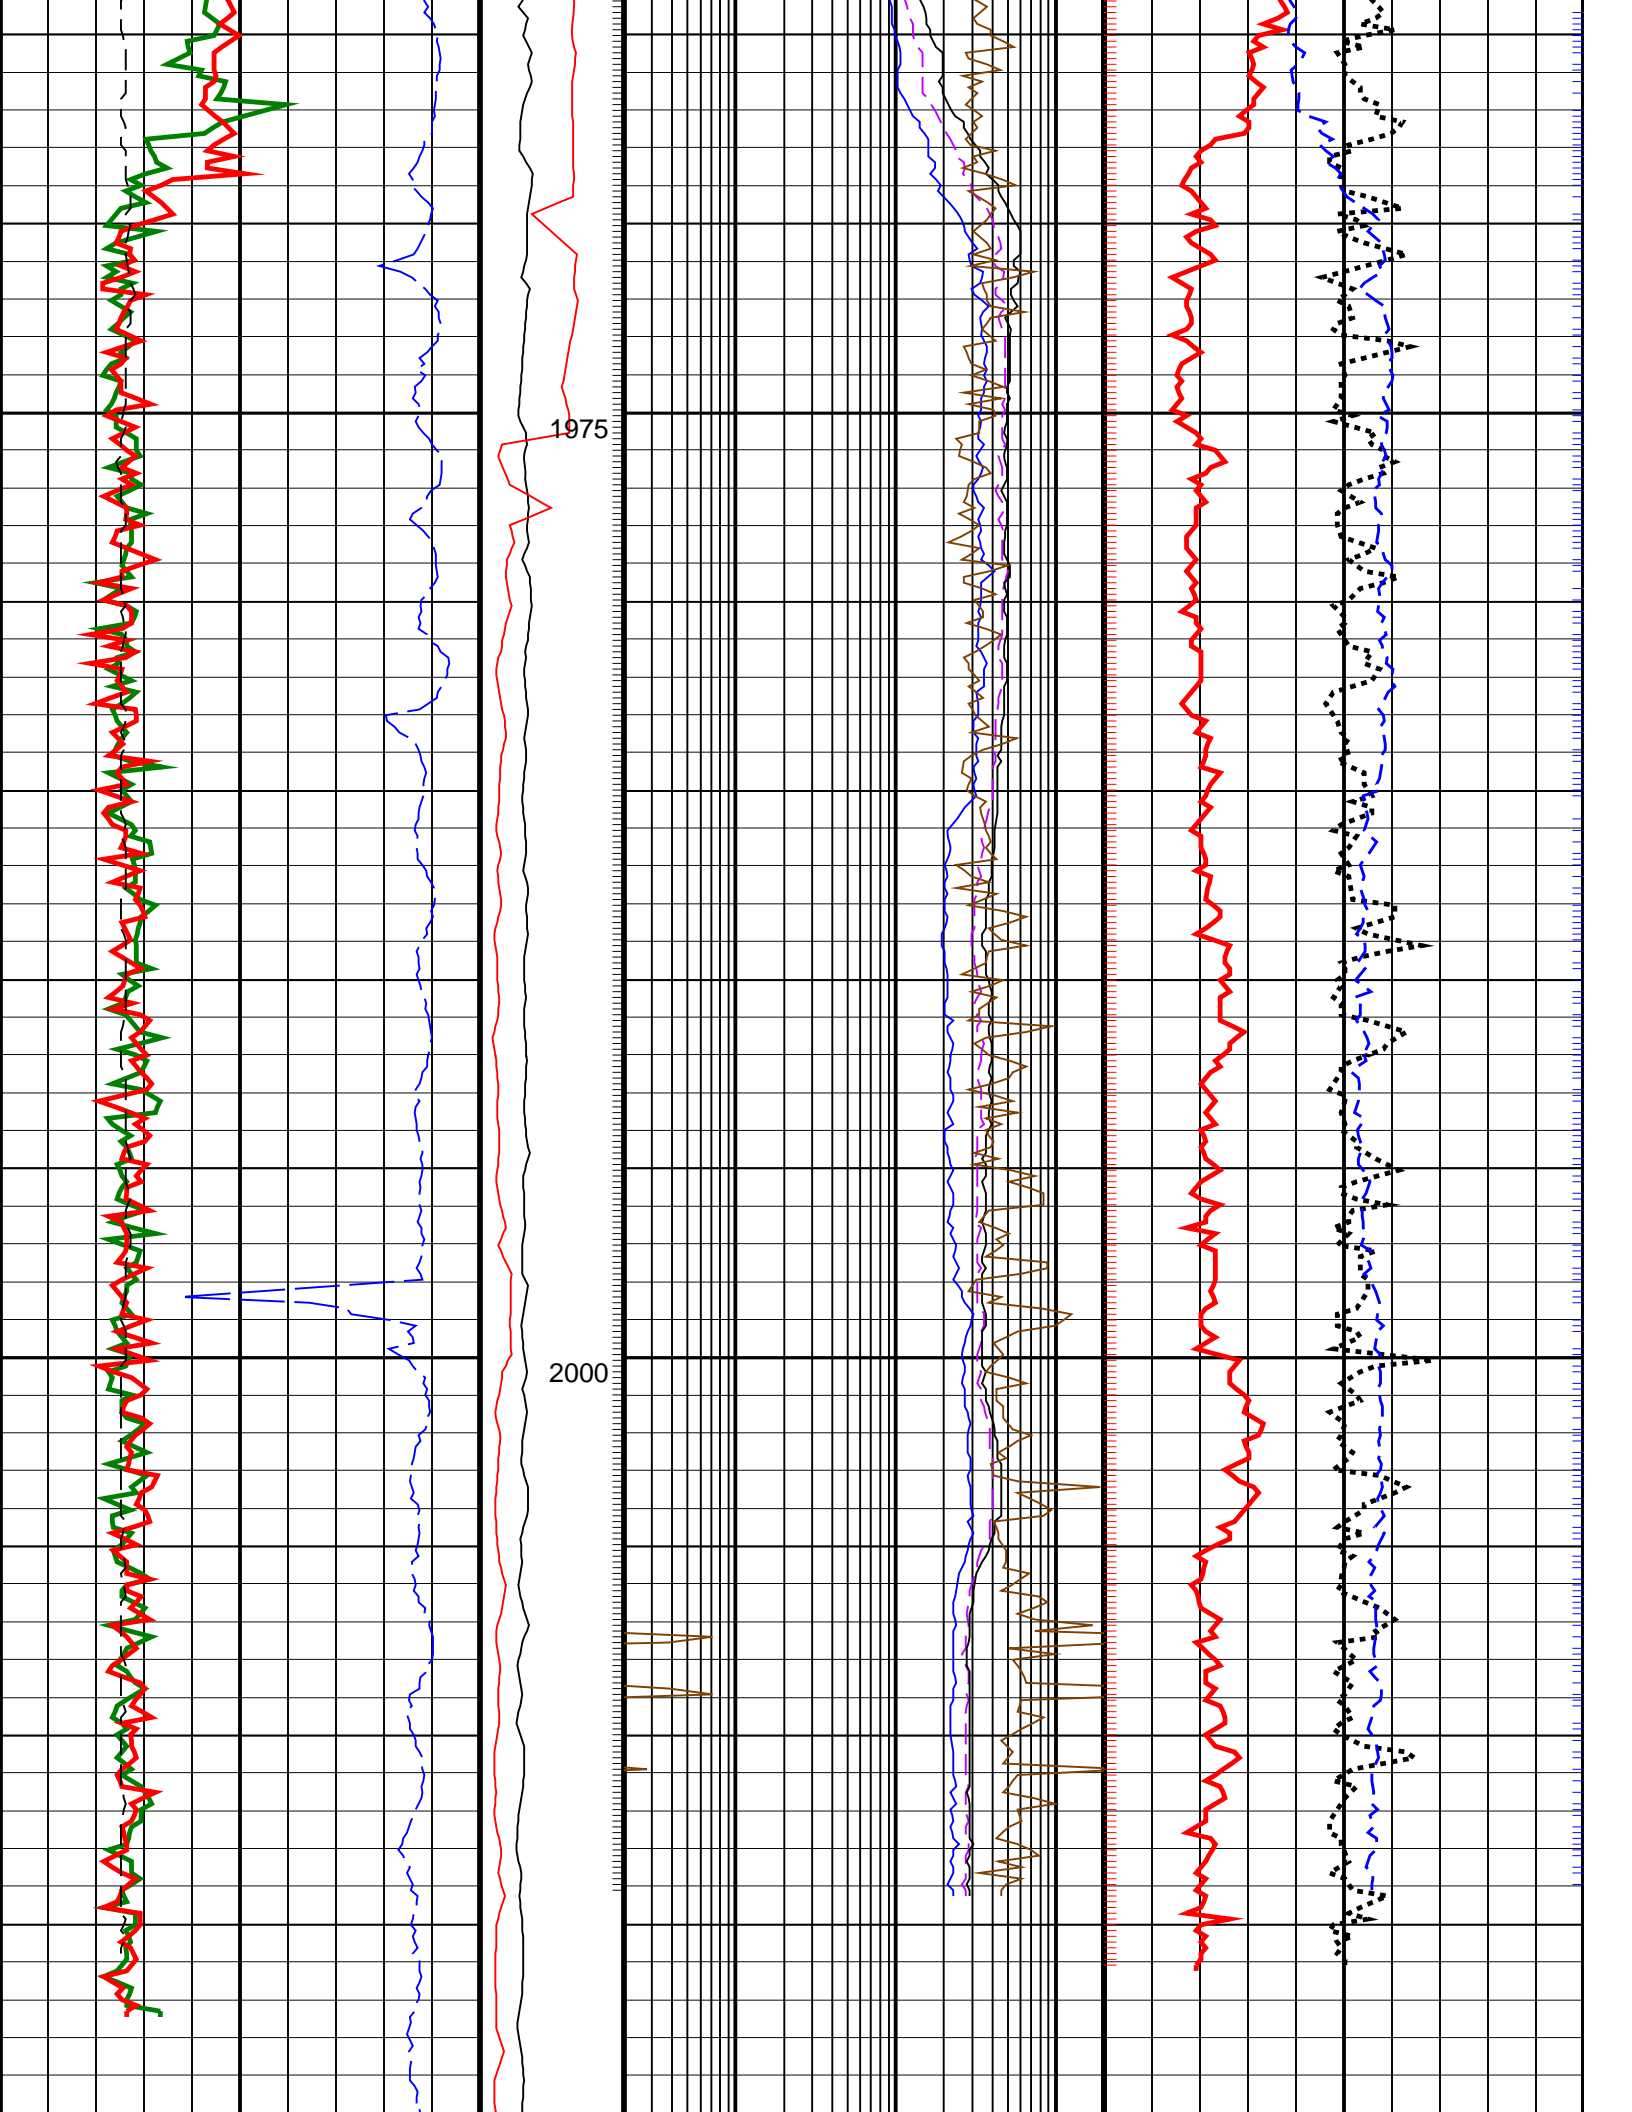

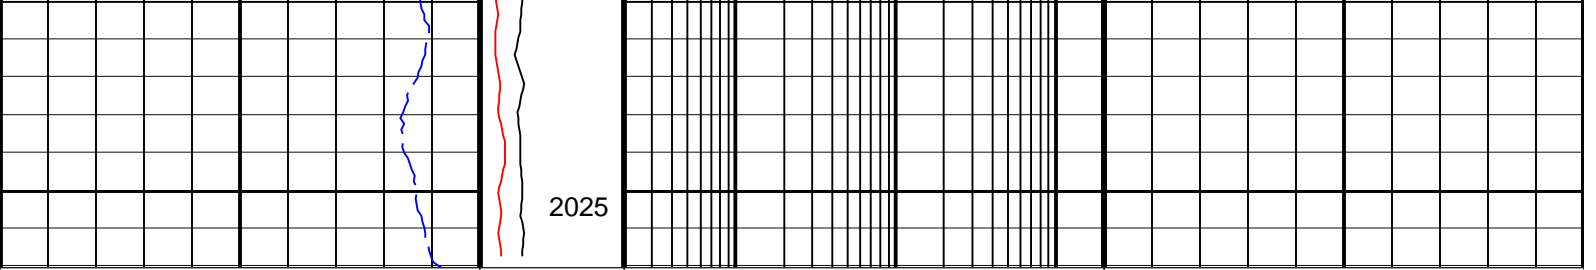

<p>ROP*5 (ROP5) (M/HR)</p> <p>200 ————— 0</p>	<p>PKPK RPM (Stick_RT) (RPM)</p> <p>0 ————— 400</p>	<p>ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT)</p> <p>0.2 ————— 200 (OHMM)</p>	<p>Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_ DH_ECO_RT)</p> <p>----- -0.25 ————— 0.25 (G/C3)</p>
<p>Gamma Ray, Bottom, Real-Time (GRMB_ECO_RT)</p> <p>0 ————— 200 (GAPI)</p>	<p>MWD Collar RPM (CRPM_RT) (RPM)</p> <p>0 ————— 400</p>	<p>ARC Phase Shift Resistivity 28 inch at 2 MHz, Real-Time (P28H_ECO_RT)</p> <p>0.2 ————— 200 (OHMM)</p>	<p>Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_ RT)</p> <p>----- 1.95 ————— 2.95 (G/C3)</p>
<p>Gamma Ray, Up, Real-Time (GRMU_ ECO_RT)</p> <p>0 ————— 200 (GAPI)</p>		<p>ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT)</p> <p>0.2 ————— 200 (OHMM)</p>	<p>Thermal Neutron Porosity, Average, Real-Time (TNPH_ECO_RT)</p> <p>----- 45 ————— -15 (PU)</p>
<p>Ultrasonic Caliper, Average Diameter, Real-Time, Computed Downhole (UCAV_DH_ECO_RT)</p> <p>6 ————— 16 (IN)</p>		<p>ARC Attenuation Resistivity 40 inch at 400 KHz, Real-Time (A40L_ECO_RT)</p> <p>0.2 ————— 200 (OHMM)</p>	

PIP SUMMARY

Neutron PIP †

Density ROBB PIP †

† RP40 PIP