

Company: OMV Australia Pty Ltd

Well: Baleen-4

Field: OMV-Baleen

State: Victoria

Country: Australia

Back-off

Scale 1:200

State: Victoria
 Field: OMV-Baleen
 Location: ADG84 / AMG84 Zone 55
 Well: Baleen-4
 Company: OMV Australia Pty Ltd

LOCATION	
ADG84 / AMG84 Zone 55	Elev.: K.B. 25 m
Northings: 5 792 541.30 m	G.L. -53.1 m
Eastings: 626 675.90 m	D.F. 25 m
Permanent Datum: _____	Mean Sea Level _____
Log Measured From: _____	Drill Floor _____
Drilling Measured From: _____	Drill Floor _____
Rig: _____	Max. Well Deviation 10 deg
Ocean Bounty	Longitude 148 26' 34.417" E
	Latitude 38 00' 20.986" S

Logging Date	5-Oct-2004
Run Number	5
Depth Driller	320 m
Schlumberger Depth	
Bottom Log Interval	289.8 m
Top Log Interval	289.8 m
Casing Fluid Type	Oil-Based Mud
Salinity	
Density	9.3 g/cm3
Fluid Level	0 m
BIT/CASING/TUBING STRING	
Bit Size	16,000 in
From	112 m
To	320 m
Casing/Tubing Size	13.375 in
Weight	68 lbm/ft
Grade	K-55
From	81 m
To	327 m
Maximum Recorded Temperatures	
Logger On Bottom	5-Oct-2004
Unit Number	25
Recorded By	G.Ruthven / T.Awobadejo
Witnessed By	C.Roots / H.Heinzle

PVT DATA

	Run 1	Run 2	Run
Oil Density			
Water Salinity			
Gas Gravity			
Bo			
Bw			
1/Bg			
Bubble Point Pressure			
Bubble Point Temperature			
Solution GOR			
Maximum Deviation	10 deg		
CEMENTING DATA			
Primary/Squeeze	Primary		
Casing String No			
Lead Cement Type			
Volume			
Density			
Water Loss			
Additives			
Tail Cement Type			
Volume			
Density			
Water Loss			
Additives			
Expected Cement Top			

Logging Date	
Run Number	
Depth Driller	
Schlumberger Depth	
Bottom Log Interval	
Top Log Interval	
Casing Fluid Type	
Salinity	
Density	
Fluid Level	
BIT/CASING/TUBING STRING	
Bit Size	
From	
To	
Casing/Tubing Size	
Weight	
Grade	
From	
To	
Maximum Recorded Temperatures	
Logger On Bottom	
Unit Number	
Recorded By	
Witnessed By	

DISCLAIMER
 THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE OF AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

OTHER SERVICES1
 OS1:
 OS2:
 OS3:
 OS4:
 OS5:


REMARKS: RUN NUMBER 1


Log compared to drill pipe & BHA configuration diagram provided by company man, but no depth correction applied.
 A 5-strand back-off charge was fired at 289.8m MD to back-off the pipe.
 Distance from CCL to centre of charge was 5.2m. CCL located at 284.6m MD to fire charge.

Crew:
 Paul Flood, Peter Lawrence, Rob Duncan, Tim Osler

RUN 1			RUN 2		
SERVICE ORDER #:			SERVICE ORDER #:		
PROGRAM VERSION: 11C0-305			PROGRAM VERSION:		
FLUID LEVEL: 0 m			FLUID LEVEL:		
LOGGED INTERVAL	START	STOP	LOGGED INTERVAL	START	STOP

EQUIPMENT DESCRIPTION

RUN 1	RUN 2
<p style="text-align: center;">SURFACE EQUIPMENT</p> <p>WITM (SHM)</p>	Empty space for Run 2 equipment description
<p style="text-align: center;">DOWNHOLE EQUIPMENT</p> <div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div style="width: 60%;"> <p>MH-22 MH-22</p> <p>CCL-L CCL-L</p> </div> <div style="width: 30%; text-align: center;">  <p>CCL Secure Se Tension</p> </div> <div style="width: 10%; text-align: right;"> <p>6.94</p> <p>6.46</p> </div> </div> <p style="text-align: center;">TOOL ZERO</p>	

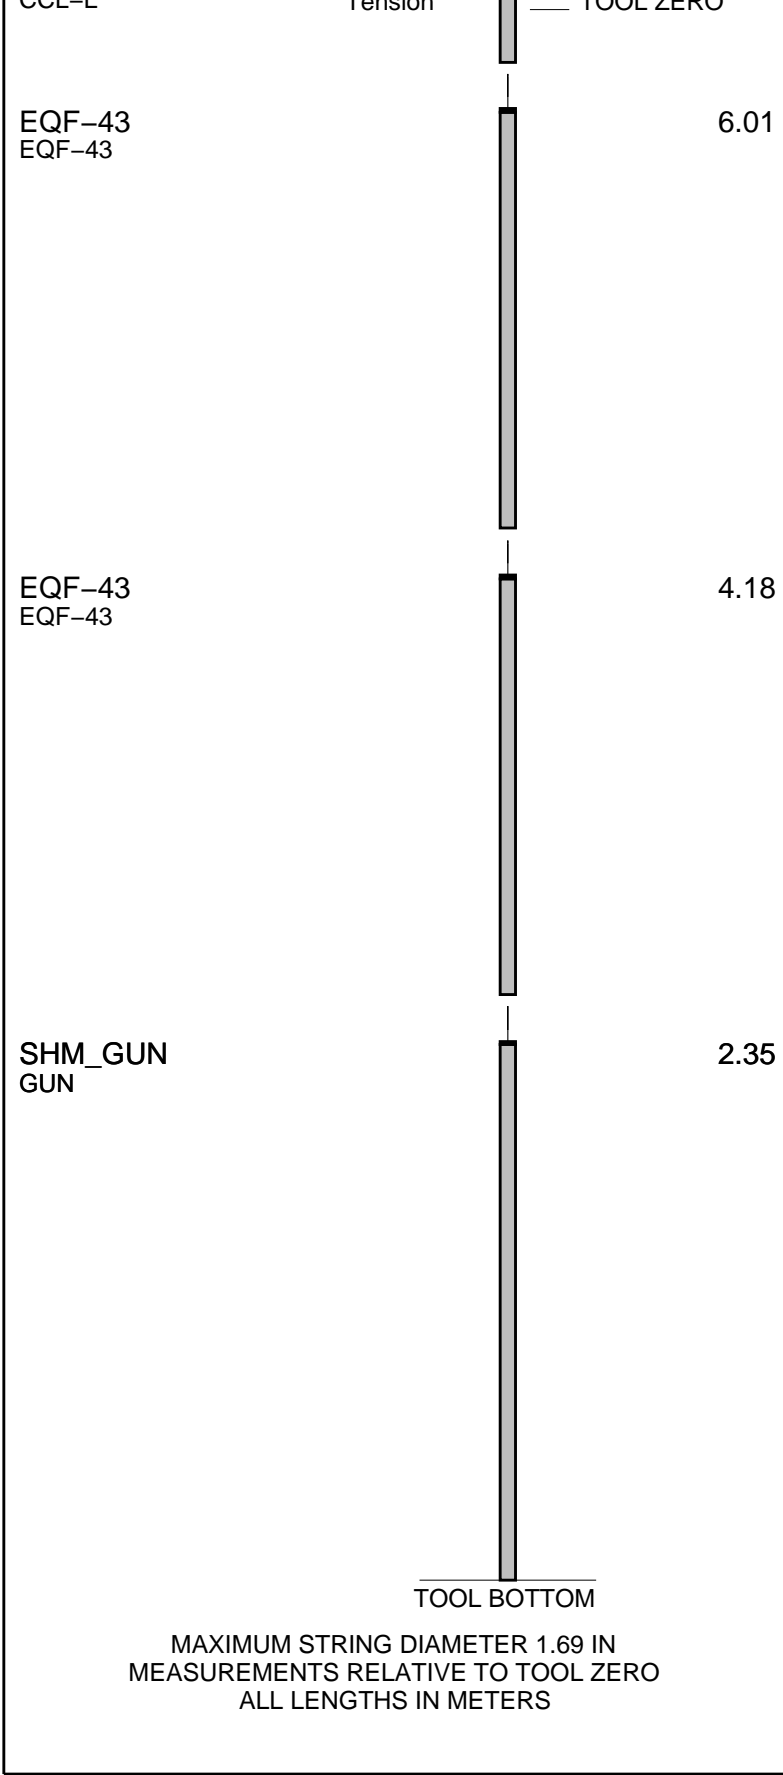

Client: OMV Australia Pty Ltd Drawing Date: 10/4/2004
 Well: Baleen-4 API #:
 Field: OMV - Baleen Rig Name: Ocean Bounty
 State: Victoria Reference Datum: Mean Sea Level
 Country: Australia Elevation: 25.0 m


Production String	(in)	(m)	Well Schematic	(m)	(in)	Casing String
	OD	ID		MD	OD	ID

Kelly Bushing Elevation
Derrick Floor Elevation

Mean Sea Level

0.0
0.0

25.0

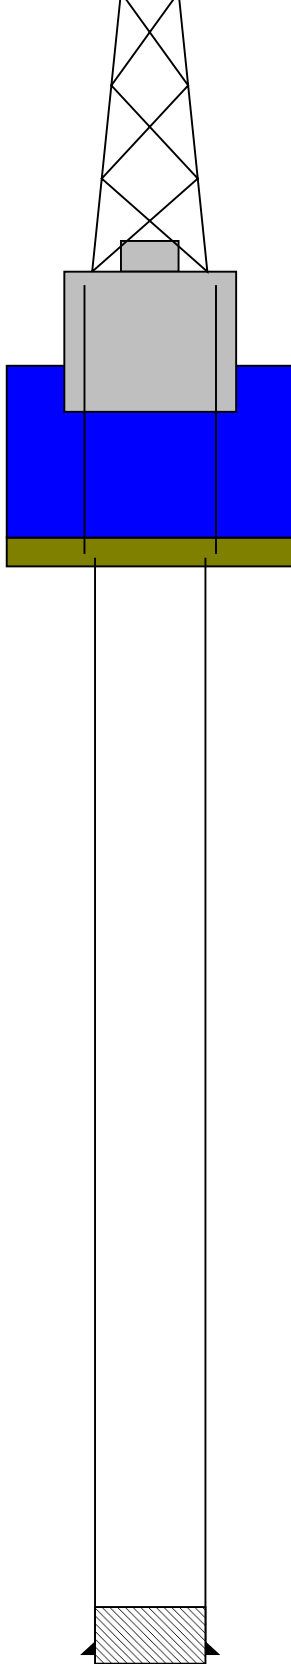

0.0 20.000

Casing String

81.0 20.000
81.0 13.375

Casing Shoe
Casing String

320.0
327.0 13.375

PBT
Casing Shoe

Schlumberger

Operational Summary Listing

MAXIS Field Log

PERFO2 Operational Summary Listing

Device	Status	Req Depth (M)	Obs Depth (M)	Time Used
GUN1	Used	289.8	289.8	Tue Oct 05 21:29:44 2004

Schlumberger

Backoff Pass

Company: OMV Australia Pty Ltd

Well: Baleen-4

Output DLIS Files

DEFAULT PERFO_026LUP FN:25 PRODUCER 05-Oct-2004 20:51

OP System Version: 11C0-305


MCM


SHM_GUN OP11-KP1 CCL-L 11C0-305


PIP SUMMARY

└ Casing Collars

Time Mark Every 60 S

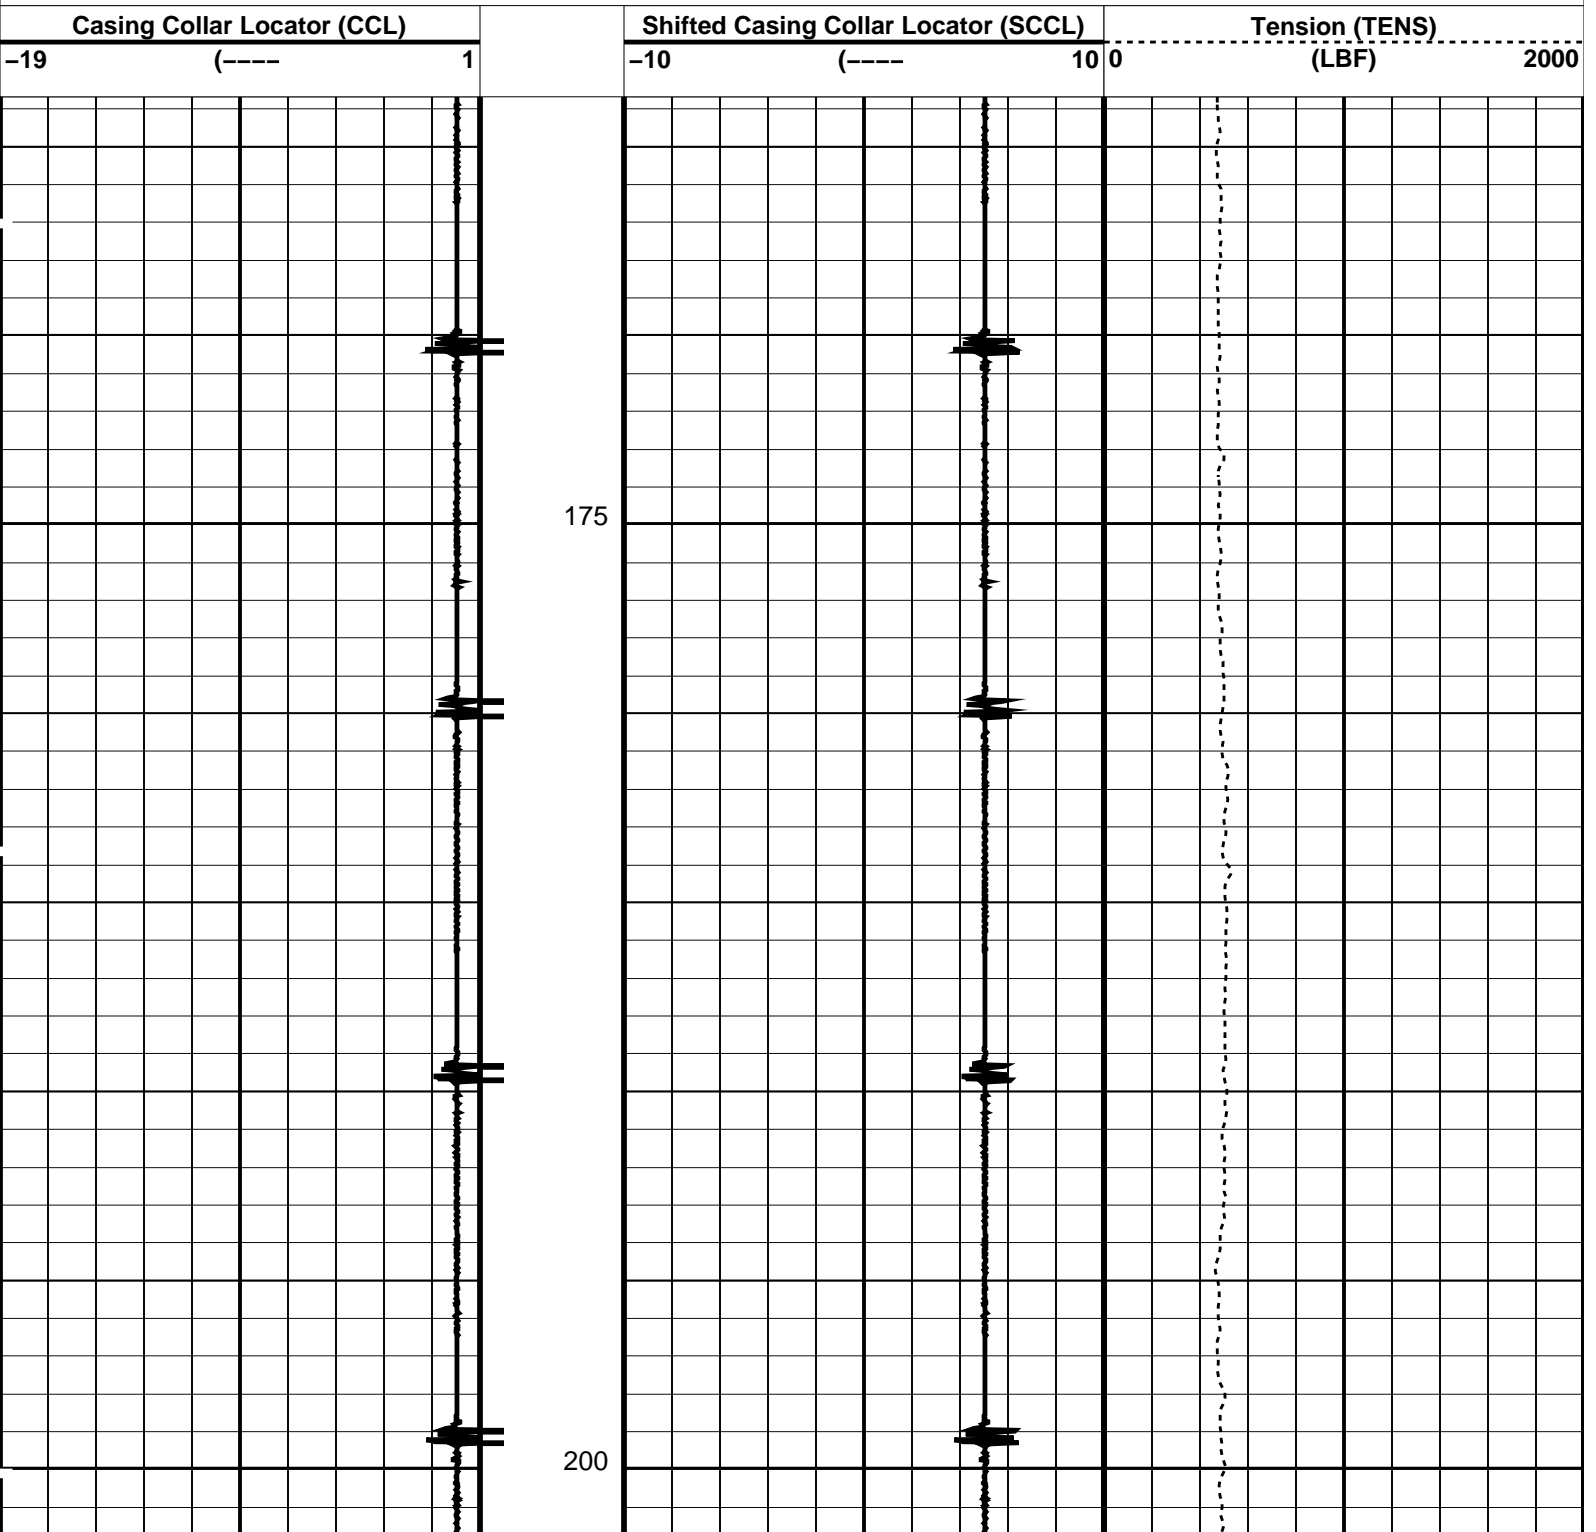

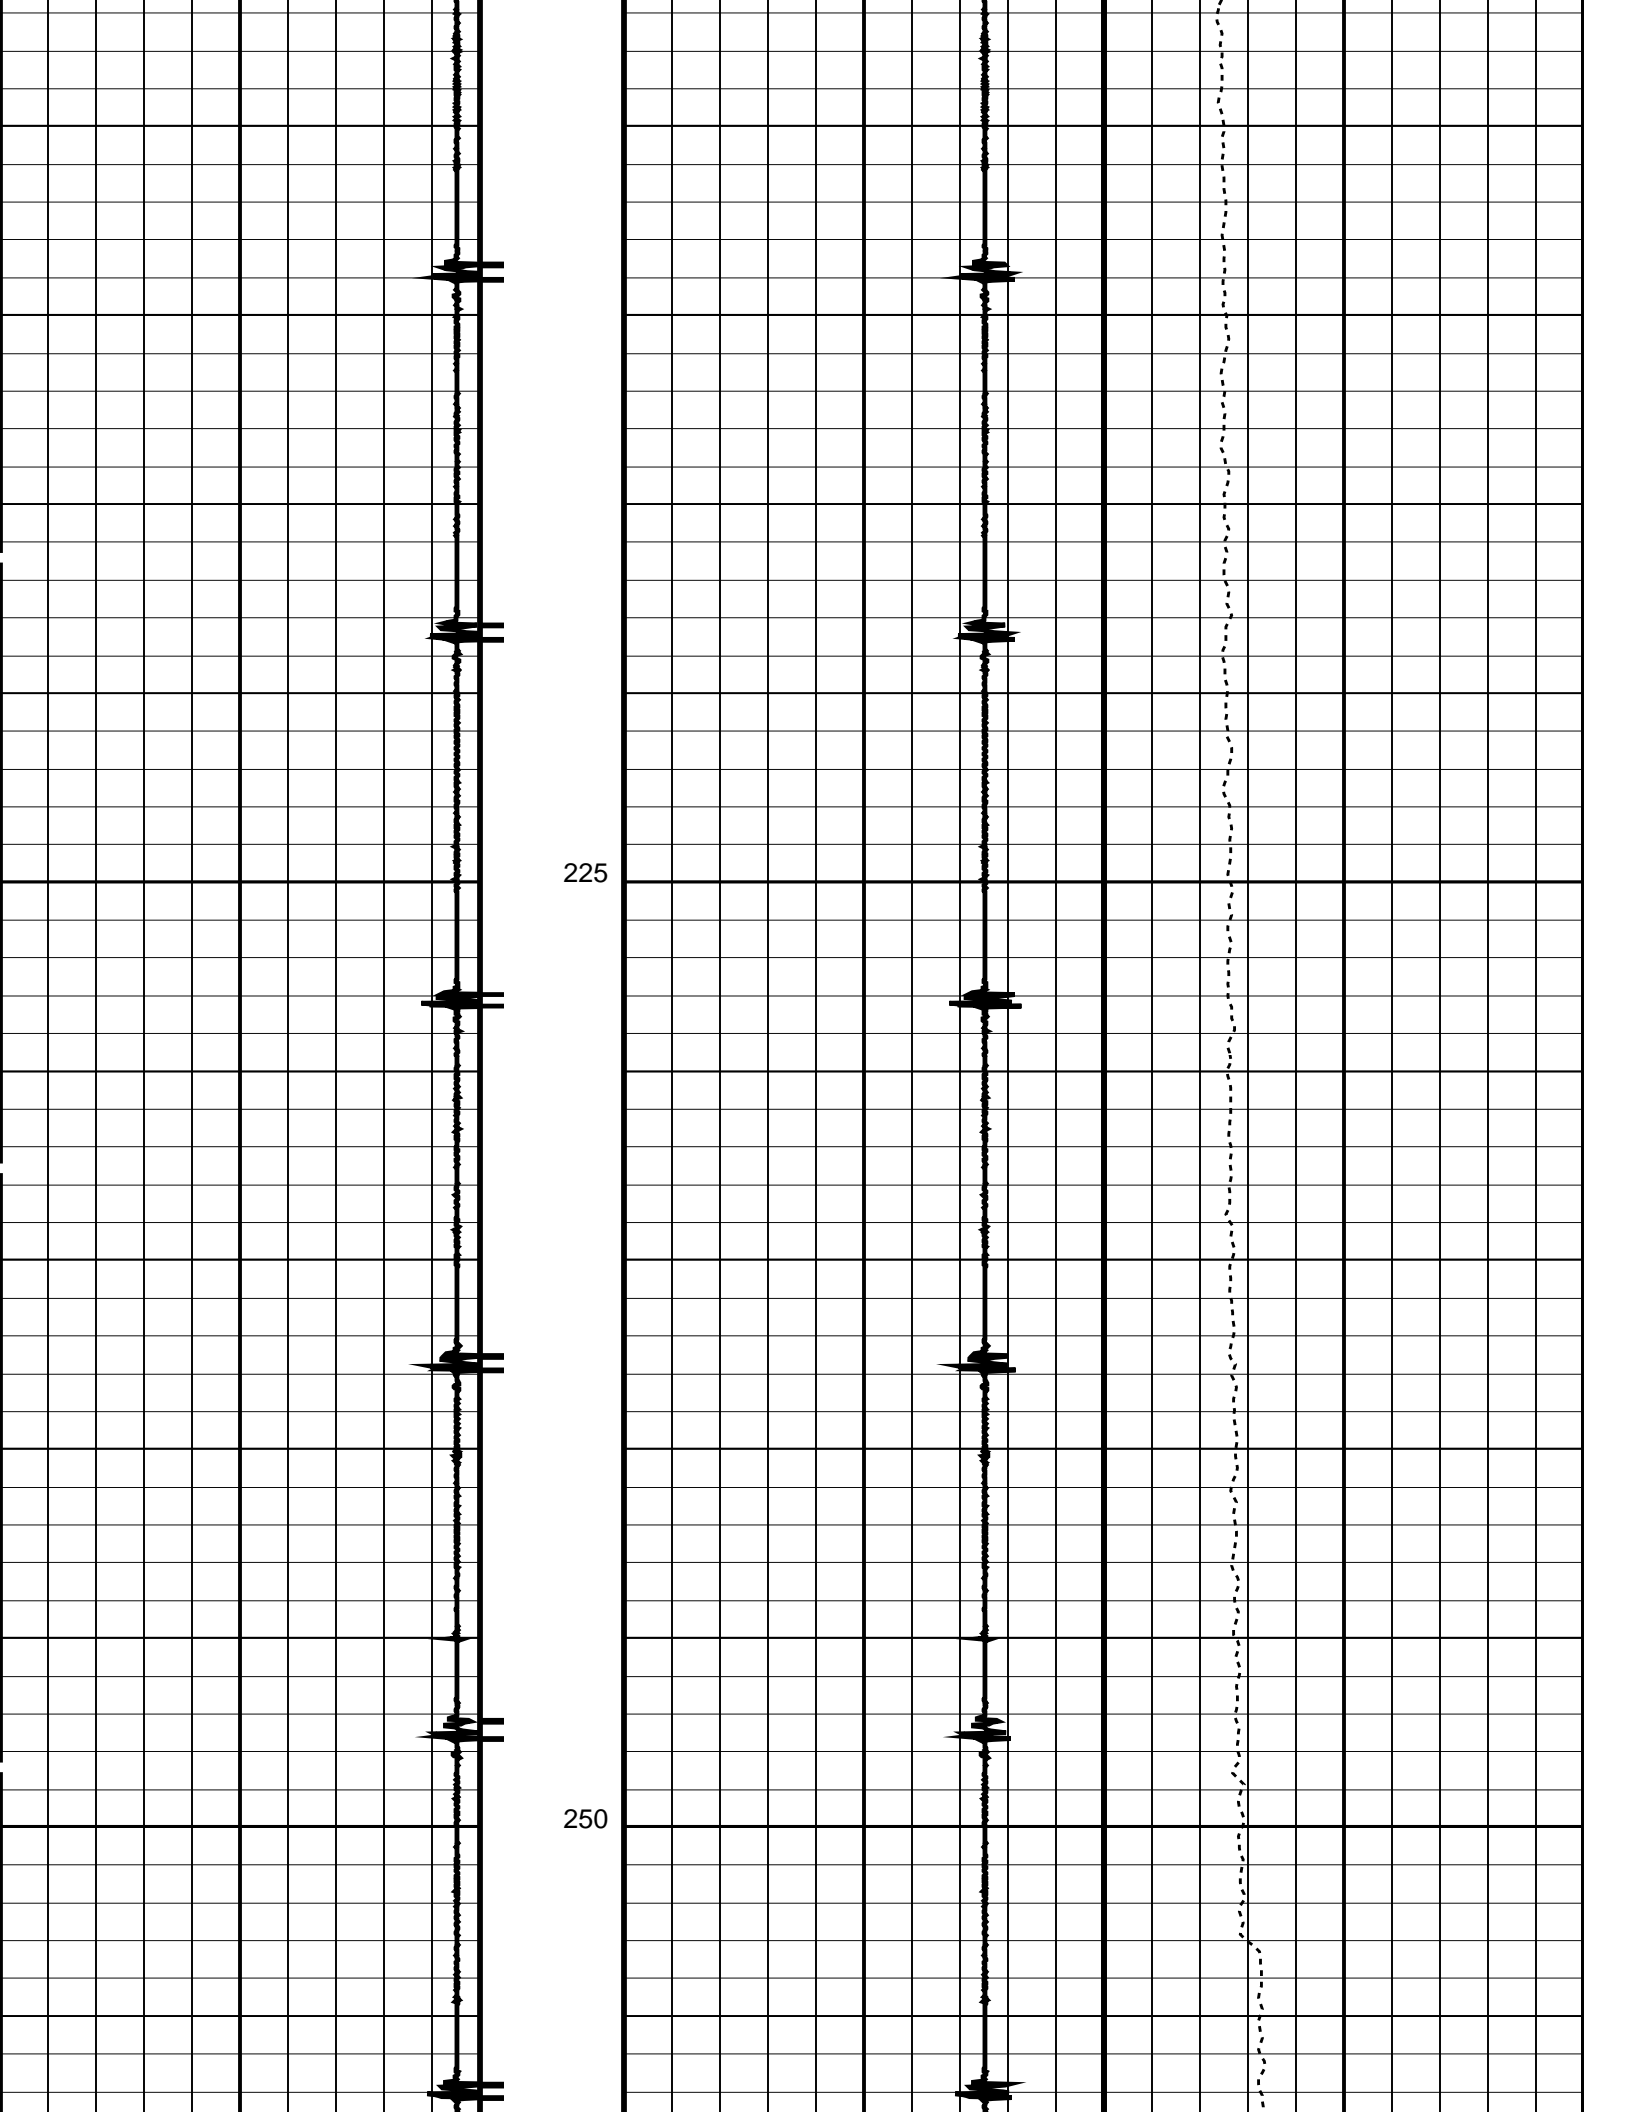

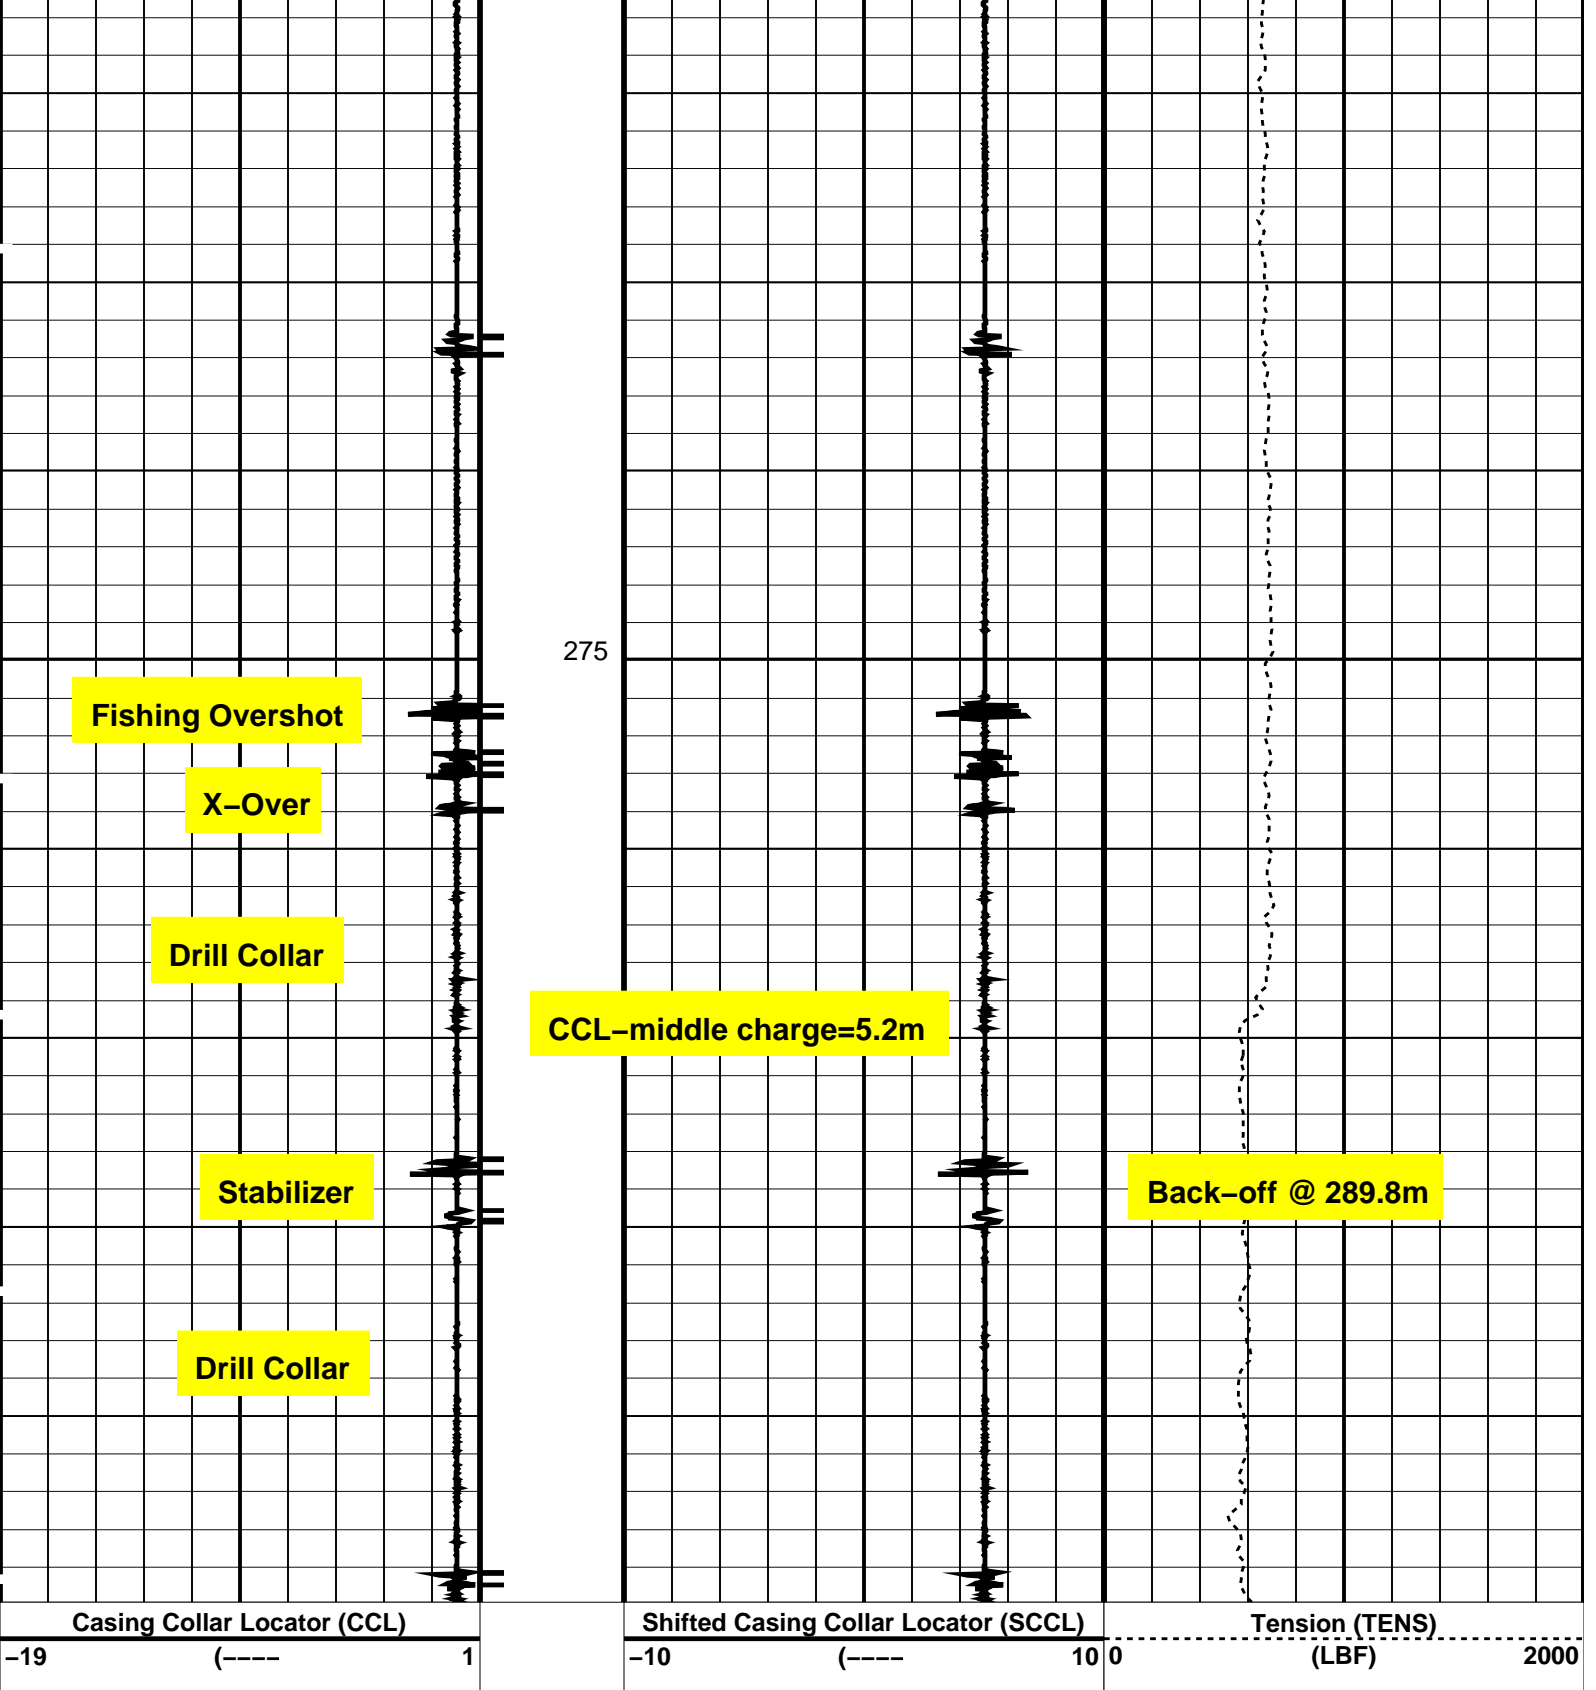

PIP SUMMARY

└─ Casing Collars

■ Time Mark Every 60 S

Parameters

DLIS Name	Description	Value
CCL-L	Casing Collar Locator	
CCLD	CCL reset delay	12 IN
CCLT	CCL Detection Level	0.3 V

Format: PERFO Vertical Scale: 1:200

Graphics File Created: 05-Oct-2004 20:51

SHM_GUN

OP11-KP1

CCL-L

11C0-305

Output DLIS Files

DEFAULT

PERFO_026LUP

FN:25

PRODUCER

05-Oct-2004 20:51

Company: **OMV Australia Pty Ltd**

Schlumberger

Well: **Baleen-4**

Field: **OMV-Baleen**

State: **Victoria**

Country: **Australia**

Back-off

Scale 1:200