
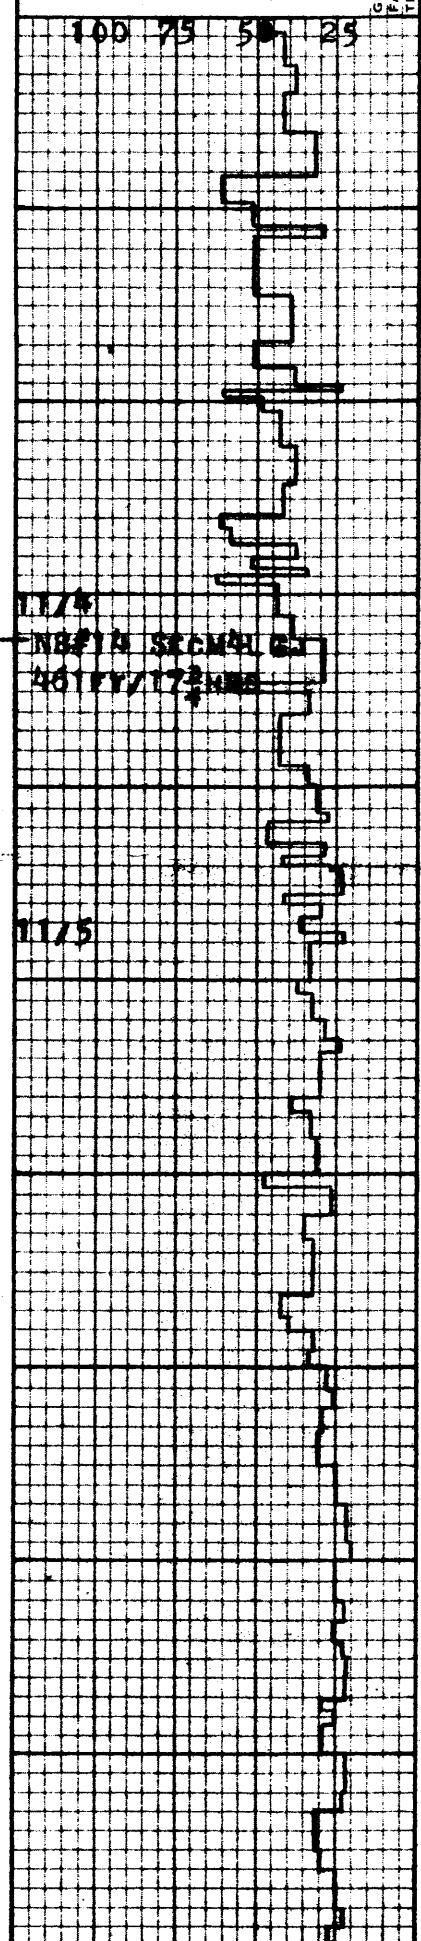


EXPLORATION LOGGING
DRILLING RATE AND DATA
 FT/HR
 MIN/FT
 VISUAL POROSITY
 GO. FAIR TR.
 CORE TEST

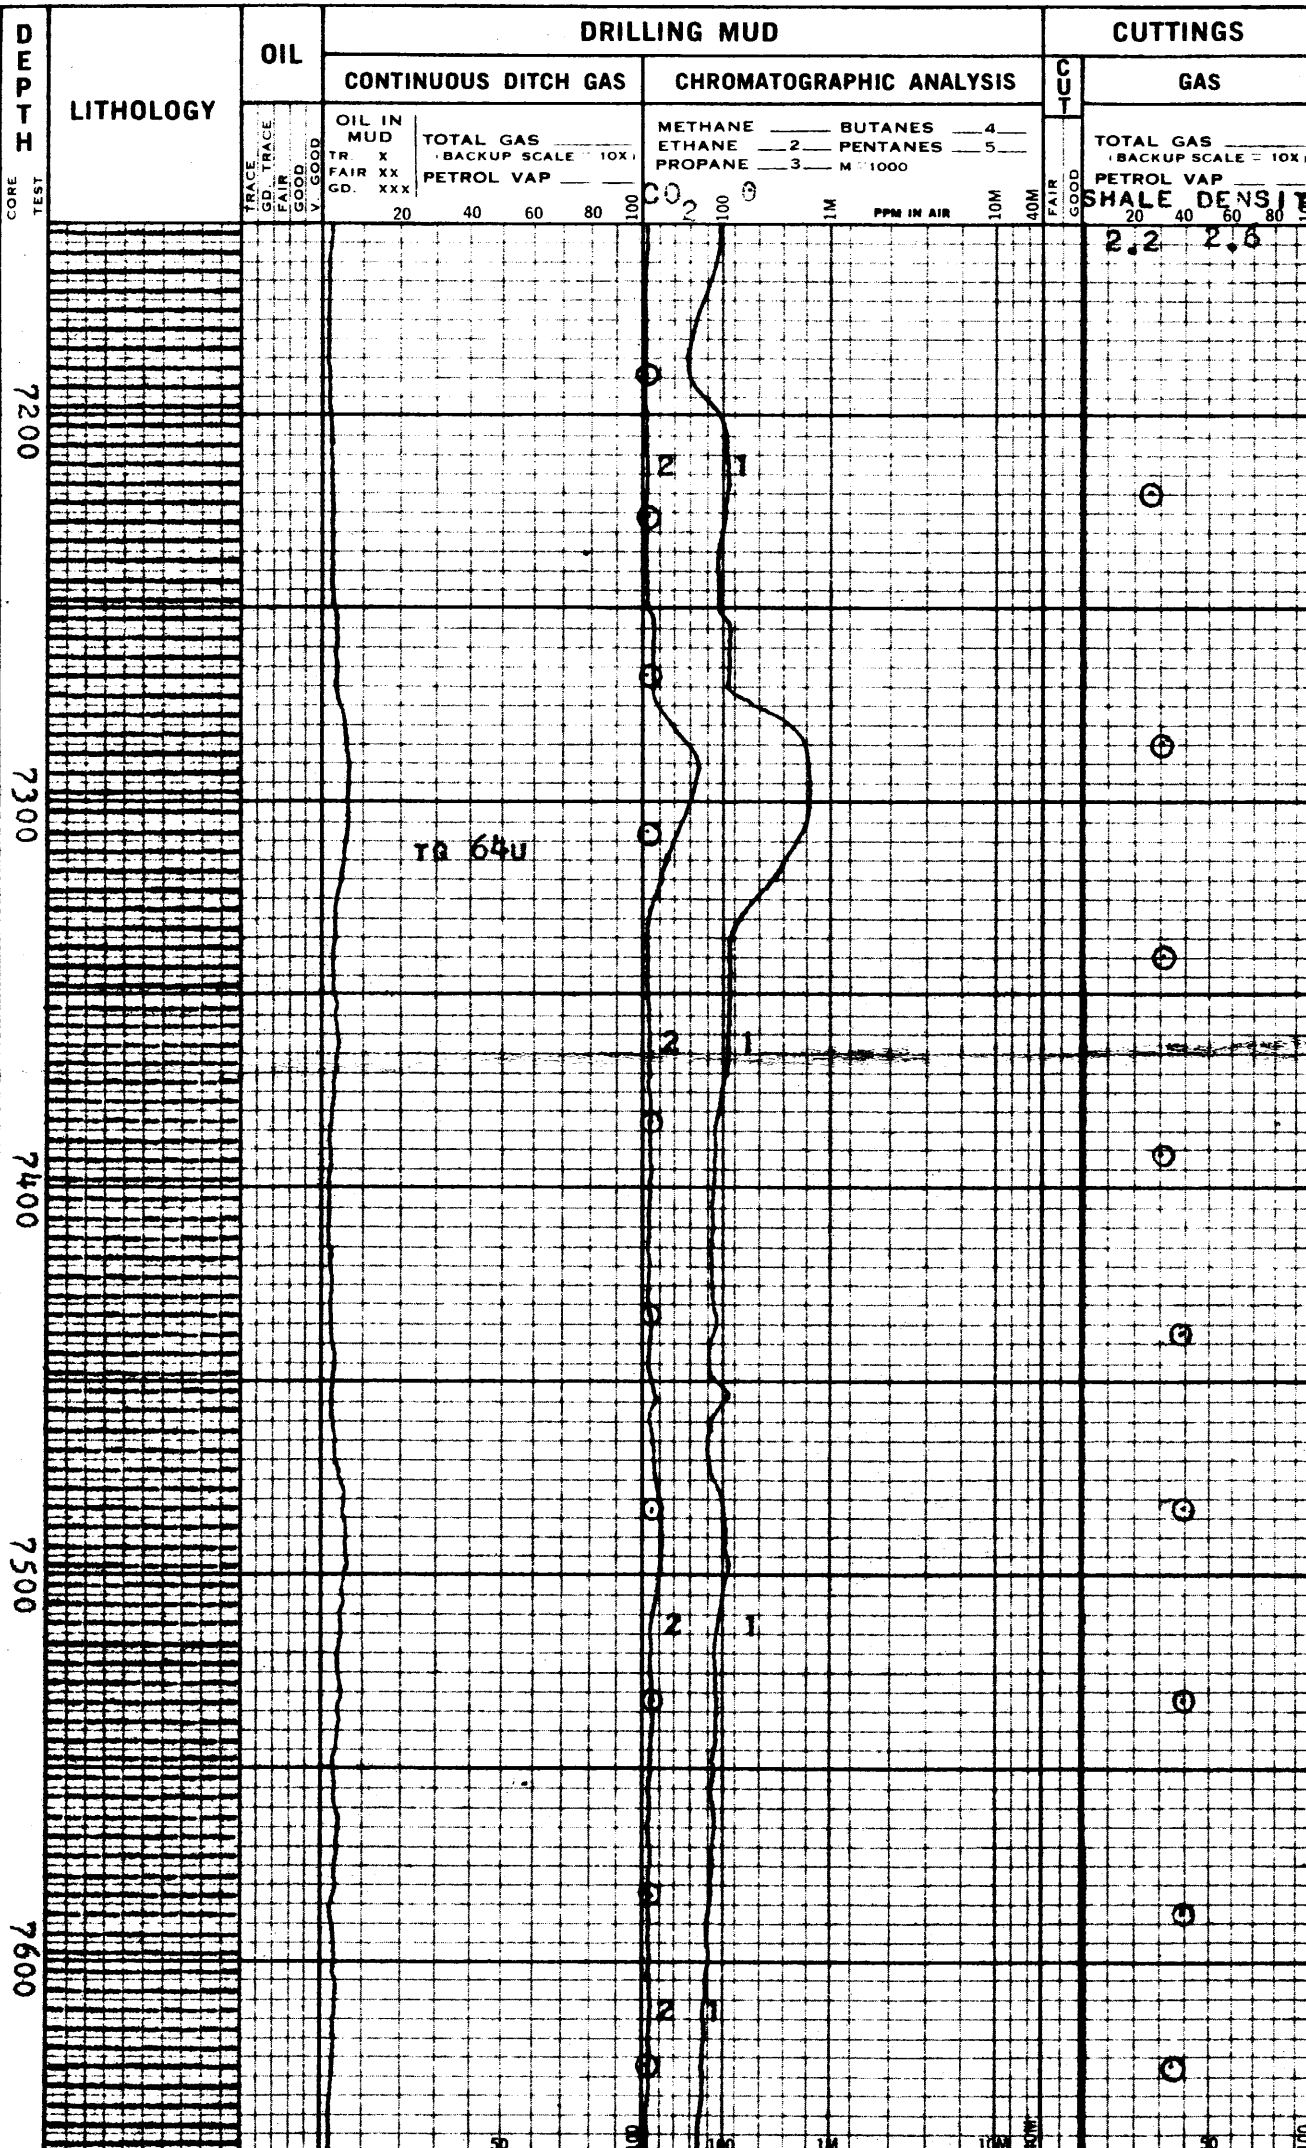

1174
 NB21A SEGMENT
 461FY/172MS

1175

TR 64U

DEPT. NAT. RES & ENV

 PE603698

MUDSTONE, LIGHT GREY,
 SOFT-FIRM, LOCALLY
 SILTY, ABUNDANT
 FORAMS

W 9.8
 V 49

2 1/2°

WHEN TRIPPING BACK
 IN HOLE, BRAKES
 FAILED; BLOCKS HIT
 DRILL FLOOR.

MUDSTONE, GRADING TO
 SHALE, LIGHT TO MED-
 GREY, FIRM, CALCAREOUS
 ABUNDANT FORAMS, TRACE
 PYRITE.

C = 27U AT 42V

SHALE, MEDIUM GREY,
 SILTY, FIRM, VERY
 CALCAREOUS, TRACE
 PYRITE.

W 9.7
 V 38
 PH 9.5
 F 13.2
 NACL 2975

SHALE, MEDIUM GREY,
 CALCAREOUS, FOSSILI-
 FEROUS, MINOR FRAG-
 MENTS GREY-GREEN
 SHALE, TRACE PYRITE.