

Company: **SANTOS – INPEX – UNOCAL**

VIC-P-52

Amrit-1

Exploration

Jack Bates

State:

Victoria

CDR – Resistivity 1:500 Measured Depth Recorded Mode Data

Total depth:		2979.0 m	K.B.	Top Drive
Spud date:		20-Nov-2004	G.L.	-1396.0 m
Runs:		1 To 4	D.F.	29.0 m
Permanent datum:		LAT	Elev.: 0 m	
Log measured from:		Rotary Table	29.0 m above Perm. datum	
Depth reference:		Driller's Pipe Tally		
API serial no.	X = 563729.6mE Y = 5690204.1mN	Longitude	Latitude	
		141° 44' 07.08"E	38° 56' 05.20"S	

Rig: Jack Bates
Field: Exploration
Location: Otway Basin
Well: Amrit-1
Company: SANTOS – INPEX – UNOCAL

Depth logged:	1425.0 m To 2763.0 m	Mag decl:	10.48 deg.	Other services:		
Date logged:	20-Nov-04 To 7-Dec-04	Mag dip:	-70.25 deg.	Directional Surveys		
Bore hole record		Casing record				
Hole size	from	to	Size	Density	from	to
26 in.	1425.0 m	1835.0 m	30 in.	456/309 lb/ft	1425.0 m	1510.0 m
17.5 in.	1835.0 m	2459.0 m	20 in.	133 lb/ft	1425.0 m	1822.0 m
12.25 in.	2459.0 m	2979.0 m	13.375 in.	68 lb/ft	1425.0 m	2454.5 m
Mud record		Borehole deviation record				
Type	from	to	Min	Max	from	to
Seawater	1425.0 m	1835.0 m	0.26 deg.	1.07 deg.	1425.0 m	1835.0 m
KCl/PHPA/Glycol	1835.0 m	2979.0 m	0.12 deg.	0.40 deg.	1835.0 m	2459.0 m
			0.00 deg.	0.07 deg.	2459.0 m	2797.0 m
Surface equipment		Software record				
Unit	OLU ME 0104	IDEAL Wis	ID9_1C_01			
Depth system	Geolograph	SPM	hspm9_2c_08			
		LWD	6.0 B08			
		MWD	7.0C00			

Bit Run Summary

Run number	1	2	3	4
Bit size	in 26	17.5	12.25	12.25
Bit start depth	m 1425.0	1835.0	2459.0	2695.0
Bit end depth	m 1835.0	2459.0	2695.0	2979.0
Top interval logged	m 1425.0	1820.0	2444.0	2678.5
Bottom interval logged	m 1820.0	2444.0	2678.5	2963.0
Begin log: time	08:20:00	13:10:00	03:50:00	8:30:00
Begin log: date	20-Nov-04	27-Nov-04	4-Dec-04	6-Dec-04
End log: time	16:30:00	22:15:00	7:00:00	16:00:00
End log: date	22-Nov-04	1-Dec-04	6-Dec-04	7-Dec-04
Mud data				
Depth	m 1835.0	2459.0	2695.0	2979.0
Type	Sea water	KCl/PHPA/Glycol	KCl/PHPA/Glycol	KCl/PHPA/Glycol
Mud weight	ppg 8.6	9.2	9.5	9.6
Solids	% N/A	4.0	8.8	9.5
Chlorides	mg/l N/A	38500	52500	48000
Rm	OHHM@°C N/A	0.1192@25.1	0.078@26.3	0.0968@25.2
Rmf	OHHM@°C N/A	0.1087@24.9	0.0732@25.8	0.0891@24.9
Rmc	OHHM@°C N/A	0.1248@26.8	0.1005@25.5	0.1285@24.5

Potassium	%	N/A	4.0	5.4	5.1						
Environmental data											
GR											
Mud weight	ppg	8.6	9.2	9.5	9.6						
Bit size	in	26	17.5	12.25	12.25						
Resistivity											
Neutron porosity											
Hole Size	in	26	17.5	12.25	12.25						
Mud weight	ppg	8.6	9.2	9.5	9.6						
Bottom Hole Temperature	°C	17.0	23.0	24.0	26.0						
Mud salinity	ppm	N/A	N/A	N/A	N/A						
Formation salinity	ppm	N/A	N/A	N/A	N/A						
Recording rate 1	SEC	6	6	6	6	GR-APWD					
Recording rate 2	SEC	6	6	6	6	RES					
Filtering GR		3-Point	3-point	3-point	3-point						
Filtering density		N/A	N/A	N/A	N/A						
Filtering Neutron		N/A	N/A	N/A	N/A						
Company representative		D. Atkins	P. King	J. Young	R. Subramanian						
Anadrill personnel		D. Borges	O. Radicevic	L. Watson	B. Manjenic						

DISCLAIMER

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE OF AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

OTHER SERVICES FOR RUN1 Directional Surveys Performance Drilling Annular Pressure, ECD & Temperature Internet Web Witness	OTHER SERVICES FOR RUN2 Directional Surveys Performance Drilling Annular Pressure, ECD & Temperature Internet Web Witness	OTHER SERVICES FOR RUN3 Directional Surveys Performance Drilling Annular Pressure, ECD & Temperature Multi Vibrational Chassis (MVC) Internet Web Witness
REMARKS: RUN NUMBER 1 Depth is Driller's Depth. CDR gamma ray is corrected for bit size, mud weight and tool size. CDR resistivity is borehole compensated but not environmentally corrected. Run Objective: Jet in 30" casing & continue to drill 26" to TD. POOH: Section TD. Remarks: Low Gamma Ray readings are due to enlarged hole size.	REMARKS: RUN NUMBER 2 Depth is Driller's Depth. CDR gamma ray is corrected for bit size, mud weight and tool size. CDR resistivity is borehole compensated but not environmentally corrected. Run Objective: Drill 17.5" section to TD. POOH: Section TD.	REMARKS: RUN NUMBER 3 Depth is Driller's Depth. CDR gamma ray is corrected for bit size, mud weight and tool size. CDR resistivity is borehole compensated but not environmentally corrected. Run Objective: Drill 12.25" section to TD. POOH: Rate of penetration.

EQUIPMENT DESCRIPTION

RUN1	RUN2	RUN3
DOWNHOLE E	DOWNHOLE E	DOWNHOLE E

PowerPl
Software ver:
s/n W4





CDR
Software ver:
s/n L9

26" WB St
s/n 53

Float S
s/n 32

A962GT Po
s/n 10
lobes
Stabilizer Sleeve

26" Mill T
Smith MSDS, Jets 2x
s/n MR



28.6
— 24.3

20.1
— 18.4
— 15.7
— 15.0

13.0

11.3

10.3

0.0

PowerPl
Software ver:
s/n: W4

CDR
Software ver:
s/n: L9

17 1/2" String
s/n 207

Float S
s/n: 32

A962GT Po
s/n: 10
lobes
Stabilizer sleeve

17 1/2" Mill T
Reed T11C, Jets
s/n: J6



D&I — 24.4

Gamma — 18.6
APW — 15.8
Resisti — 15.1

0.4

PowerPl
Software ver:
s/n: ED

In Line Sta
OD 12
s/n: 2132

CDR
Software ver:
OD 8

12 1/4" String
s/n: AIB


XO
s/n: X/

Float S
s/n: 37

A962GT Po
s/n: 20
lobes:
Stabilizer sleeve

XO
s/n: L 9

12 1/4" PI
Hughes HCH606
s/n 700



D&I MV — 26.7
— 26.0

Gamma — 19.4
APW — 16.6
Resist — 16.1

0.6
— 0.0 (0.3)

Maximum string dian
All lengths in

Maximum string dian
All lengths in


Maximum string dian
All lengths in


DISCLAIMER

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE OF AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

<p>OTHER SERVICES FOR RUN4 Directional Surveys Performance Drilling Annular Pressure, ECD & Temperature Multi Vibrational Chassis (MVC) Internet Web Witness</p>	<p>OTHER SERVICES FOR RUN</p>	<p>OTHER SERVICES FOR RUN</p>
<p>REMARKS: RUN NUMBER 4 Depth is Driller's Depth.</p> <p>CDR gamma ray is corrected for bit size, mud weight and tool size.</p> <p>CDR resistivity is borehole compensated but not environmentally corrected.</p> <p>Run Objective: Drill 12.25" section to TD.</p> <p>POOH: TD of Armit-1.</p>	<p>REMARKS: RUN NUMBER</p>	<p>REMARKS: RUN NUMBER</p>

EQUIPMENT DESCRIPTION

RUN4	RUN	RUN
<p align="center">DOWNHOLE E</p> <p>PowerPul Software ver s/n: ED</p> <p align="right">30.9</p> <p>D&I MVC</p> <p align="right">— 26.7 — 26.0</p> <p>In Line Sta OD 12</p> <p align="right">22.5</p> 		

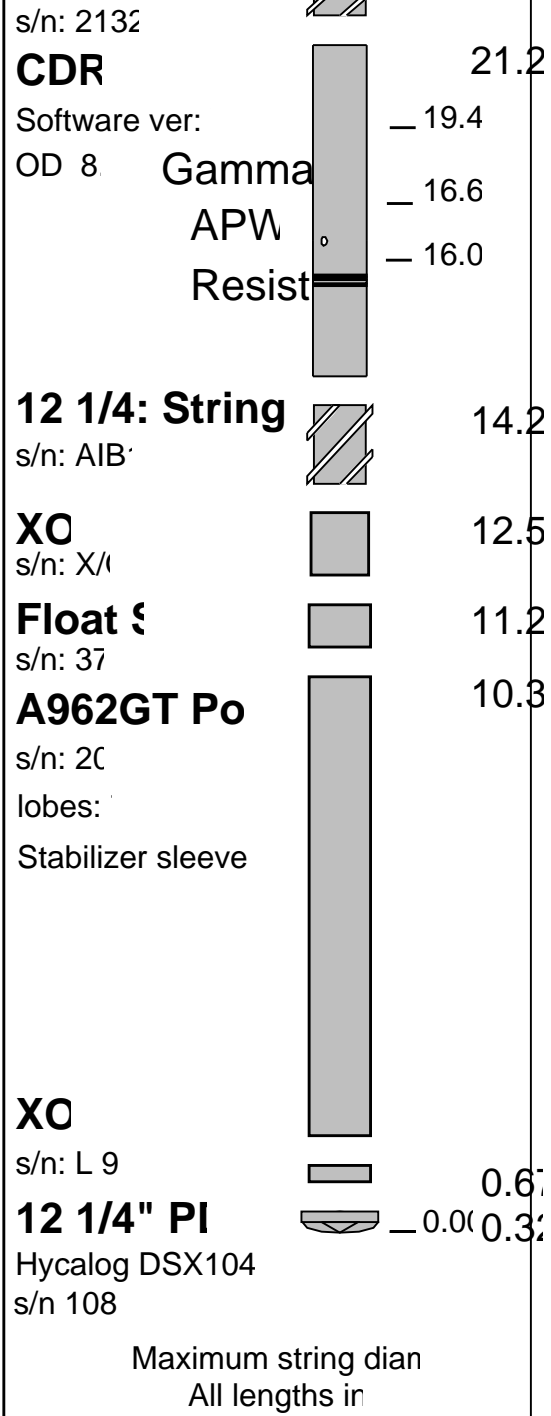

Variable Name

Variable Description

Run Name & Value

Run #1 Run #2 Run #3 Run #4

BHT_RM	Bottom Hole Temperature (degC)		17.000000	23.000000	24.000000	26.000000
BS_RM	Bit Size (in)	26.000000	17.500000	12.250000	12.250000	
MST_RM	Mud Sample temperature (degC)		12.000000	25.100000	26.300000	25.200000
MW_RM	Mud Weight (ppg)		8.600000	9.200000	9.500000	9.600000
OBMF_RM	Oil Based Mud		NO	NO	NO	NO
RMS_RM	Resistivity of Mud Sample (ohmm)		0.000000	0.119200	0.078000	0.096800
SHT_RM	Surface Hole Temperature (degC)		12.000000	15.000000	15.000000	15.000000
TD_RM	Total Measured Depth (m)		1835.000000	2459.000000	2695.000000	2979.000000
ENV_SELECT	Res. Env. Corr. Selection		BS	BS	BS	BS
TSIZ_CDR	CDR Tool Size (in)		9.500000	9.500000	8.250000	8.250000
PLATEU	CDR: Plateau GR sensor		YES	YES	YES	YES
VERS_CDR	CDR Down hole software version Number		6.0B0800	6.0B0800	6.0B0800	6.0B0800


Parameters



DLIS Name	Description	Value
DO	Depth Offset	0.0 m

PIP SUMMARY

- ┆ CDR Gamma Ray Samples
- ┆ CDR Resistivity Samples


CDR Resistivity Time After Bit (TAB_ CDR_RES) (HR)	0	10	Annular Pressure (PRSA) (PSI)	0	6000
Rate of Penetration, Averaged over Last 5ft (ROP5_RM) (M/HR)	200	0	Uncorrected Phase Shift Resistivity (PSR) (OHMM)	0.2	200
CDR Gamma Ray (GR_CDR) (GAPI)	0	200	Equivalent Circulating Density (ECD_CDR) (LB/G)	5	15
			Uncorrected Attenuation Resistivity (ATR) (OHMM)	0.2	200
			Annular Temperature (ATMP_CDR) (DEGC)	0	100

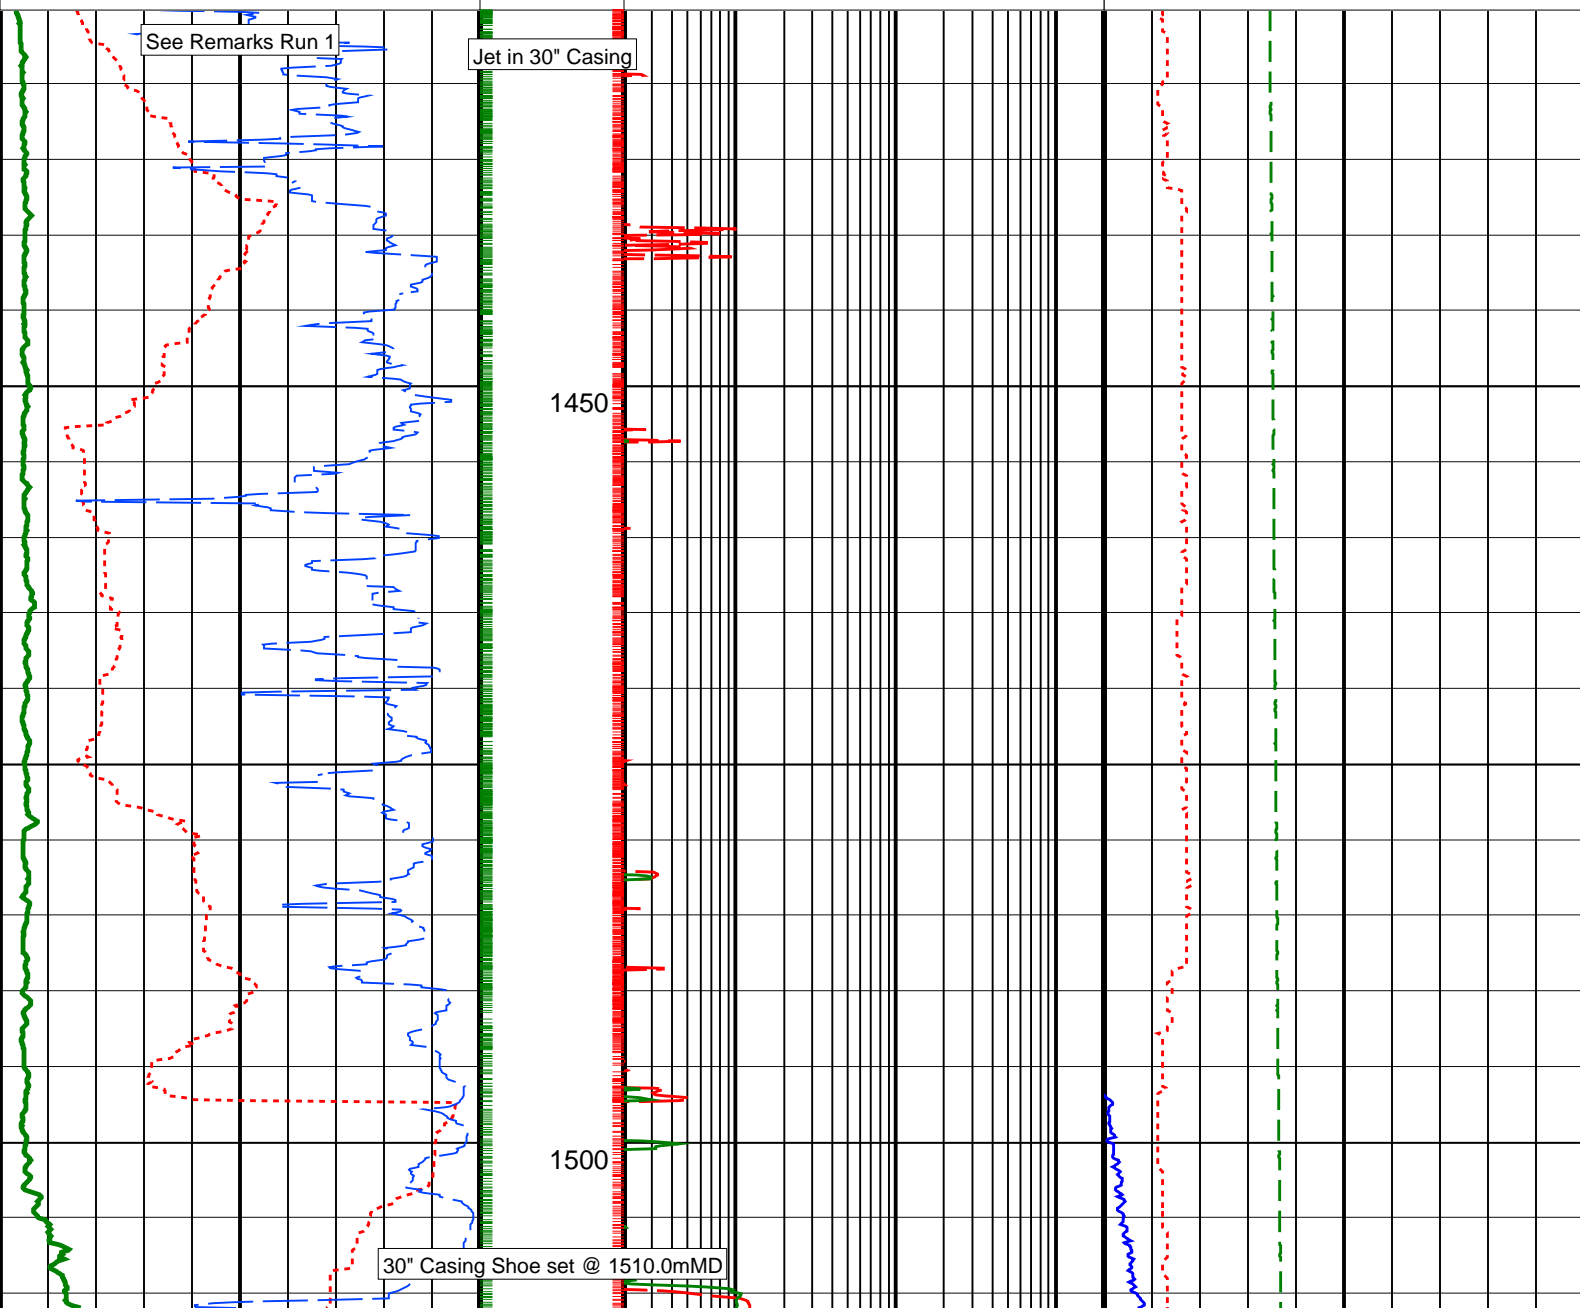


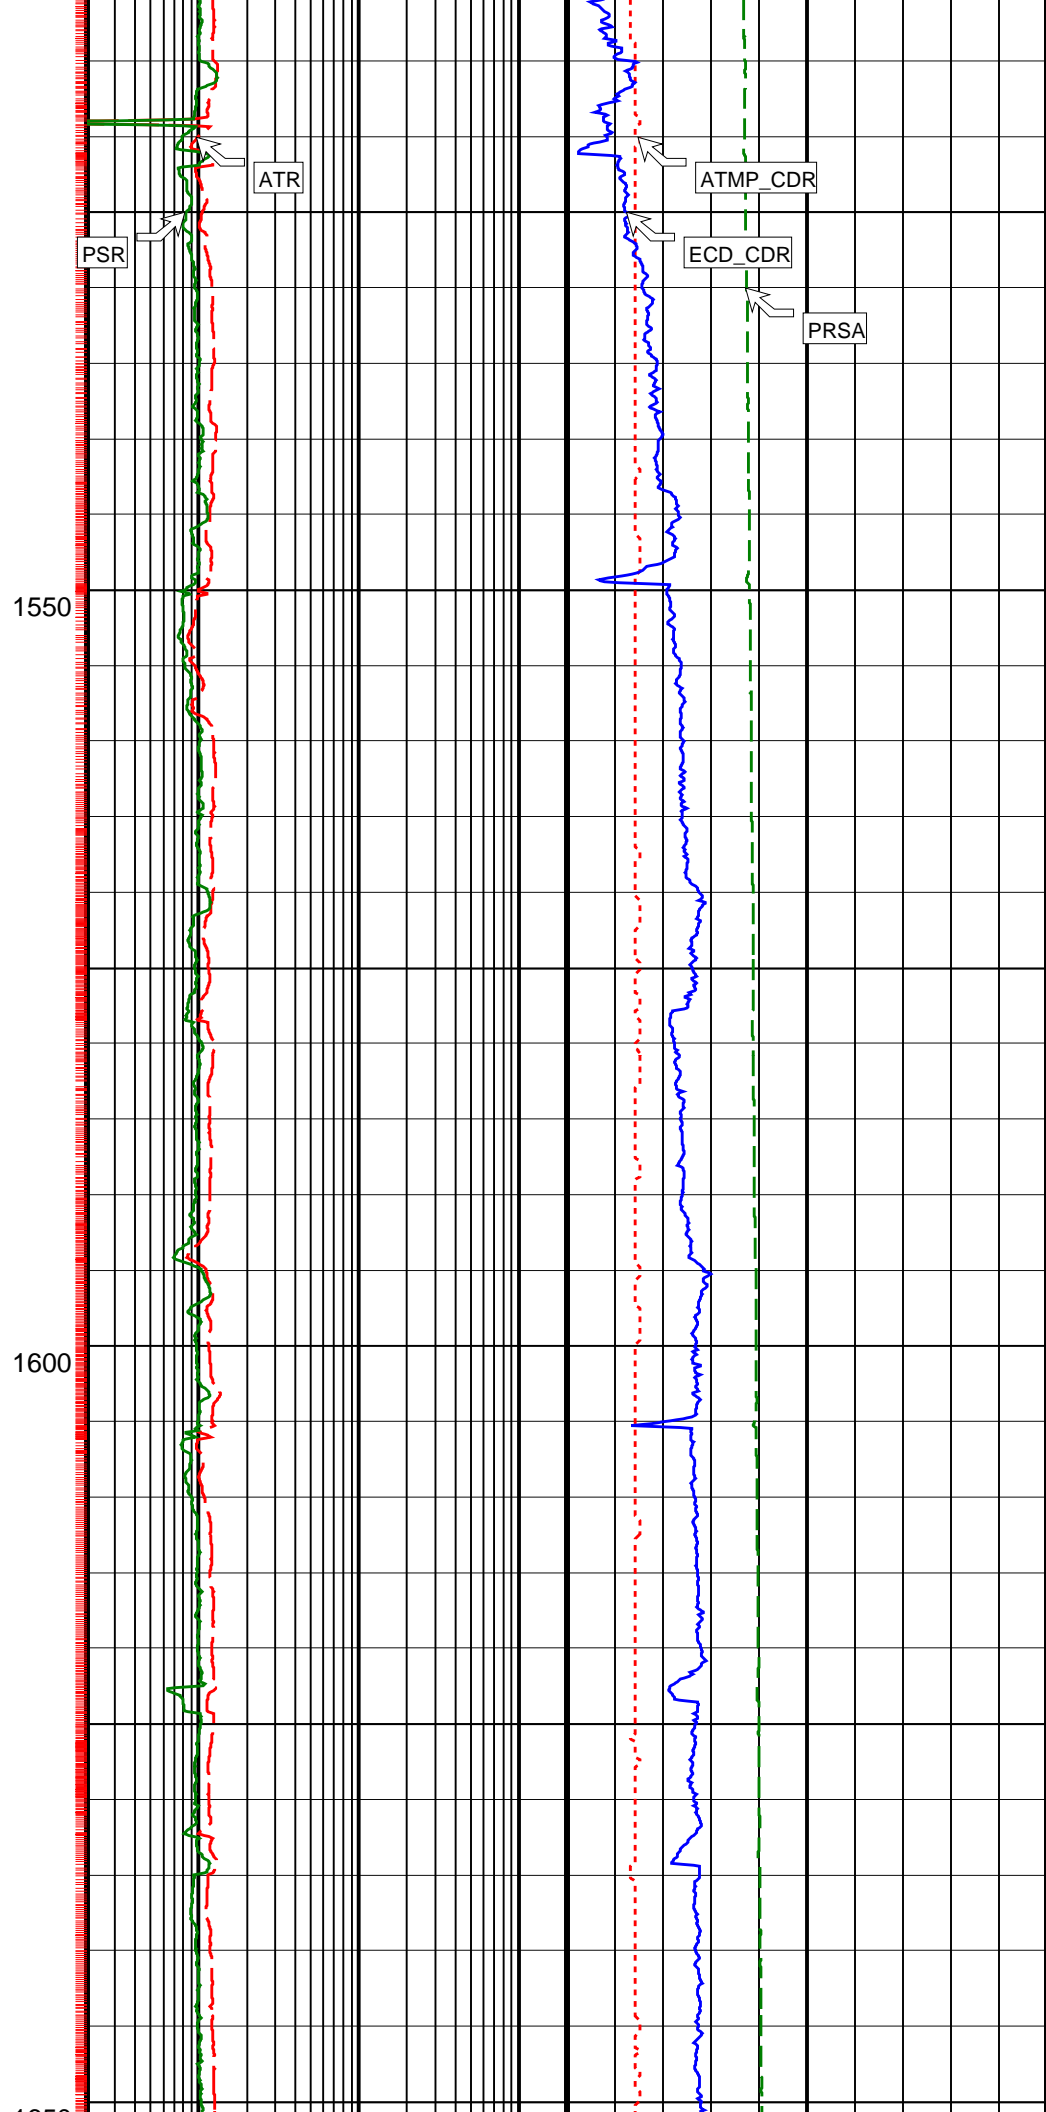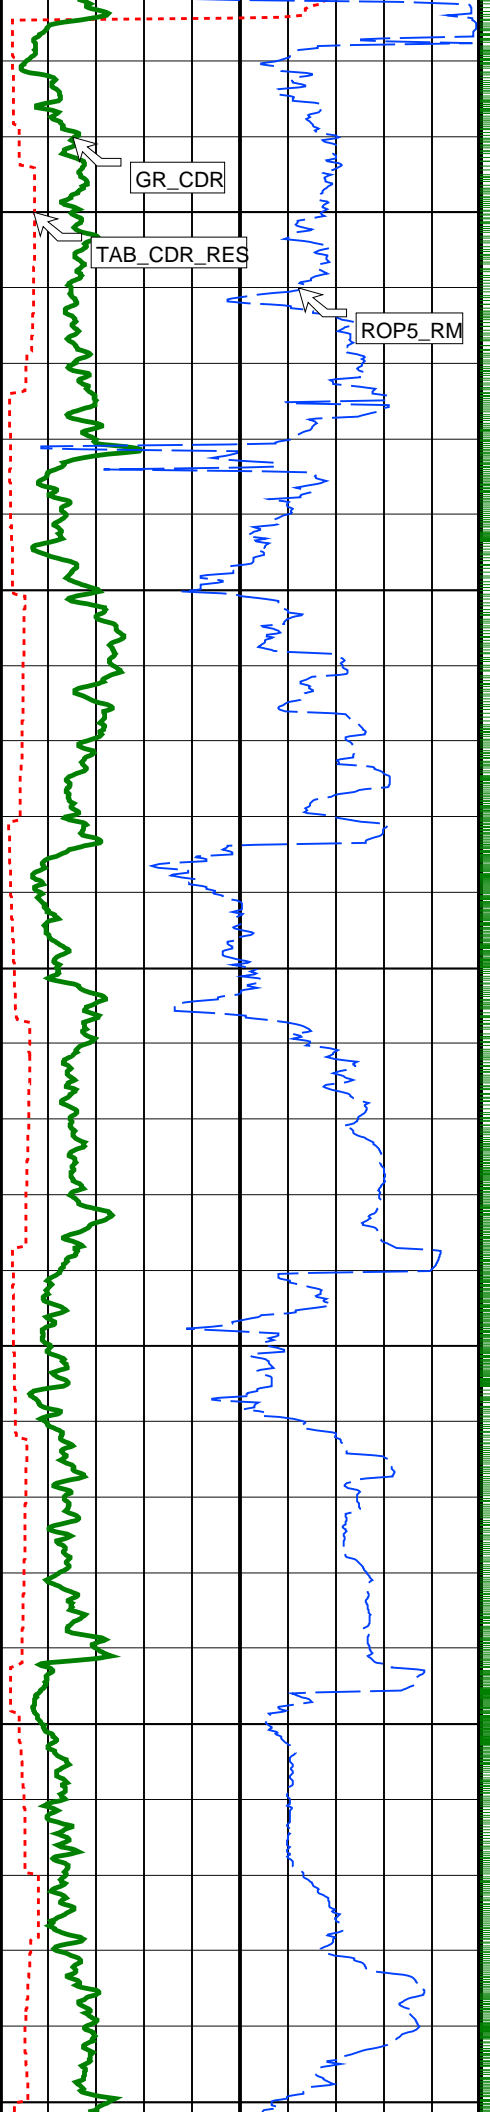

1550

1600

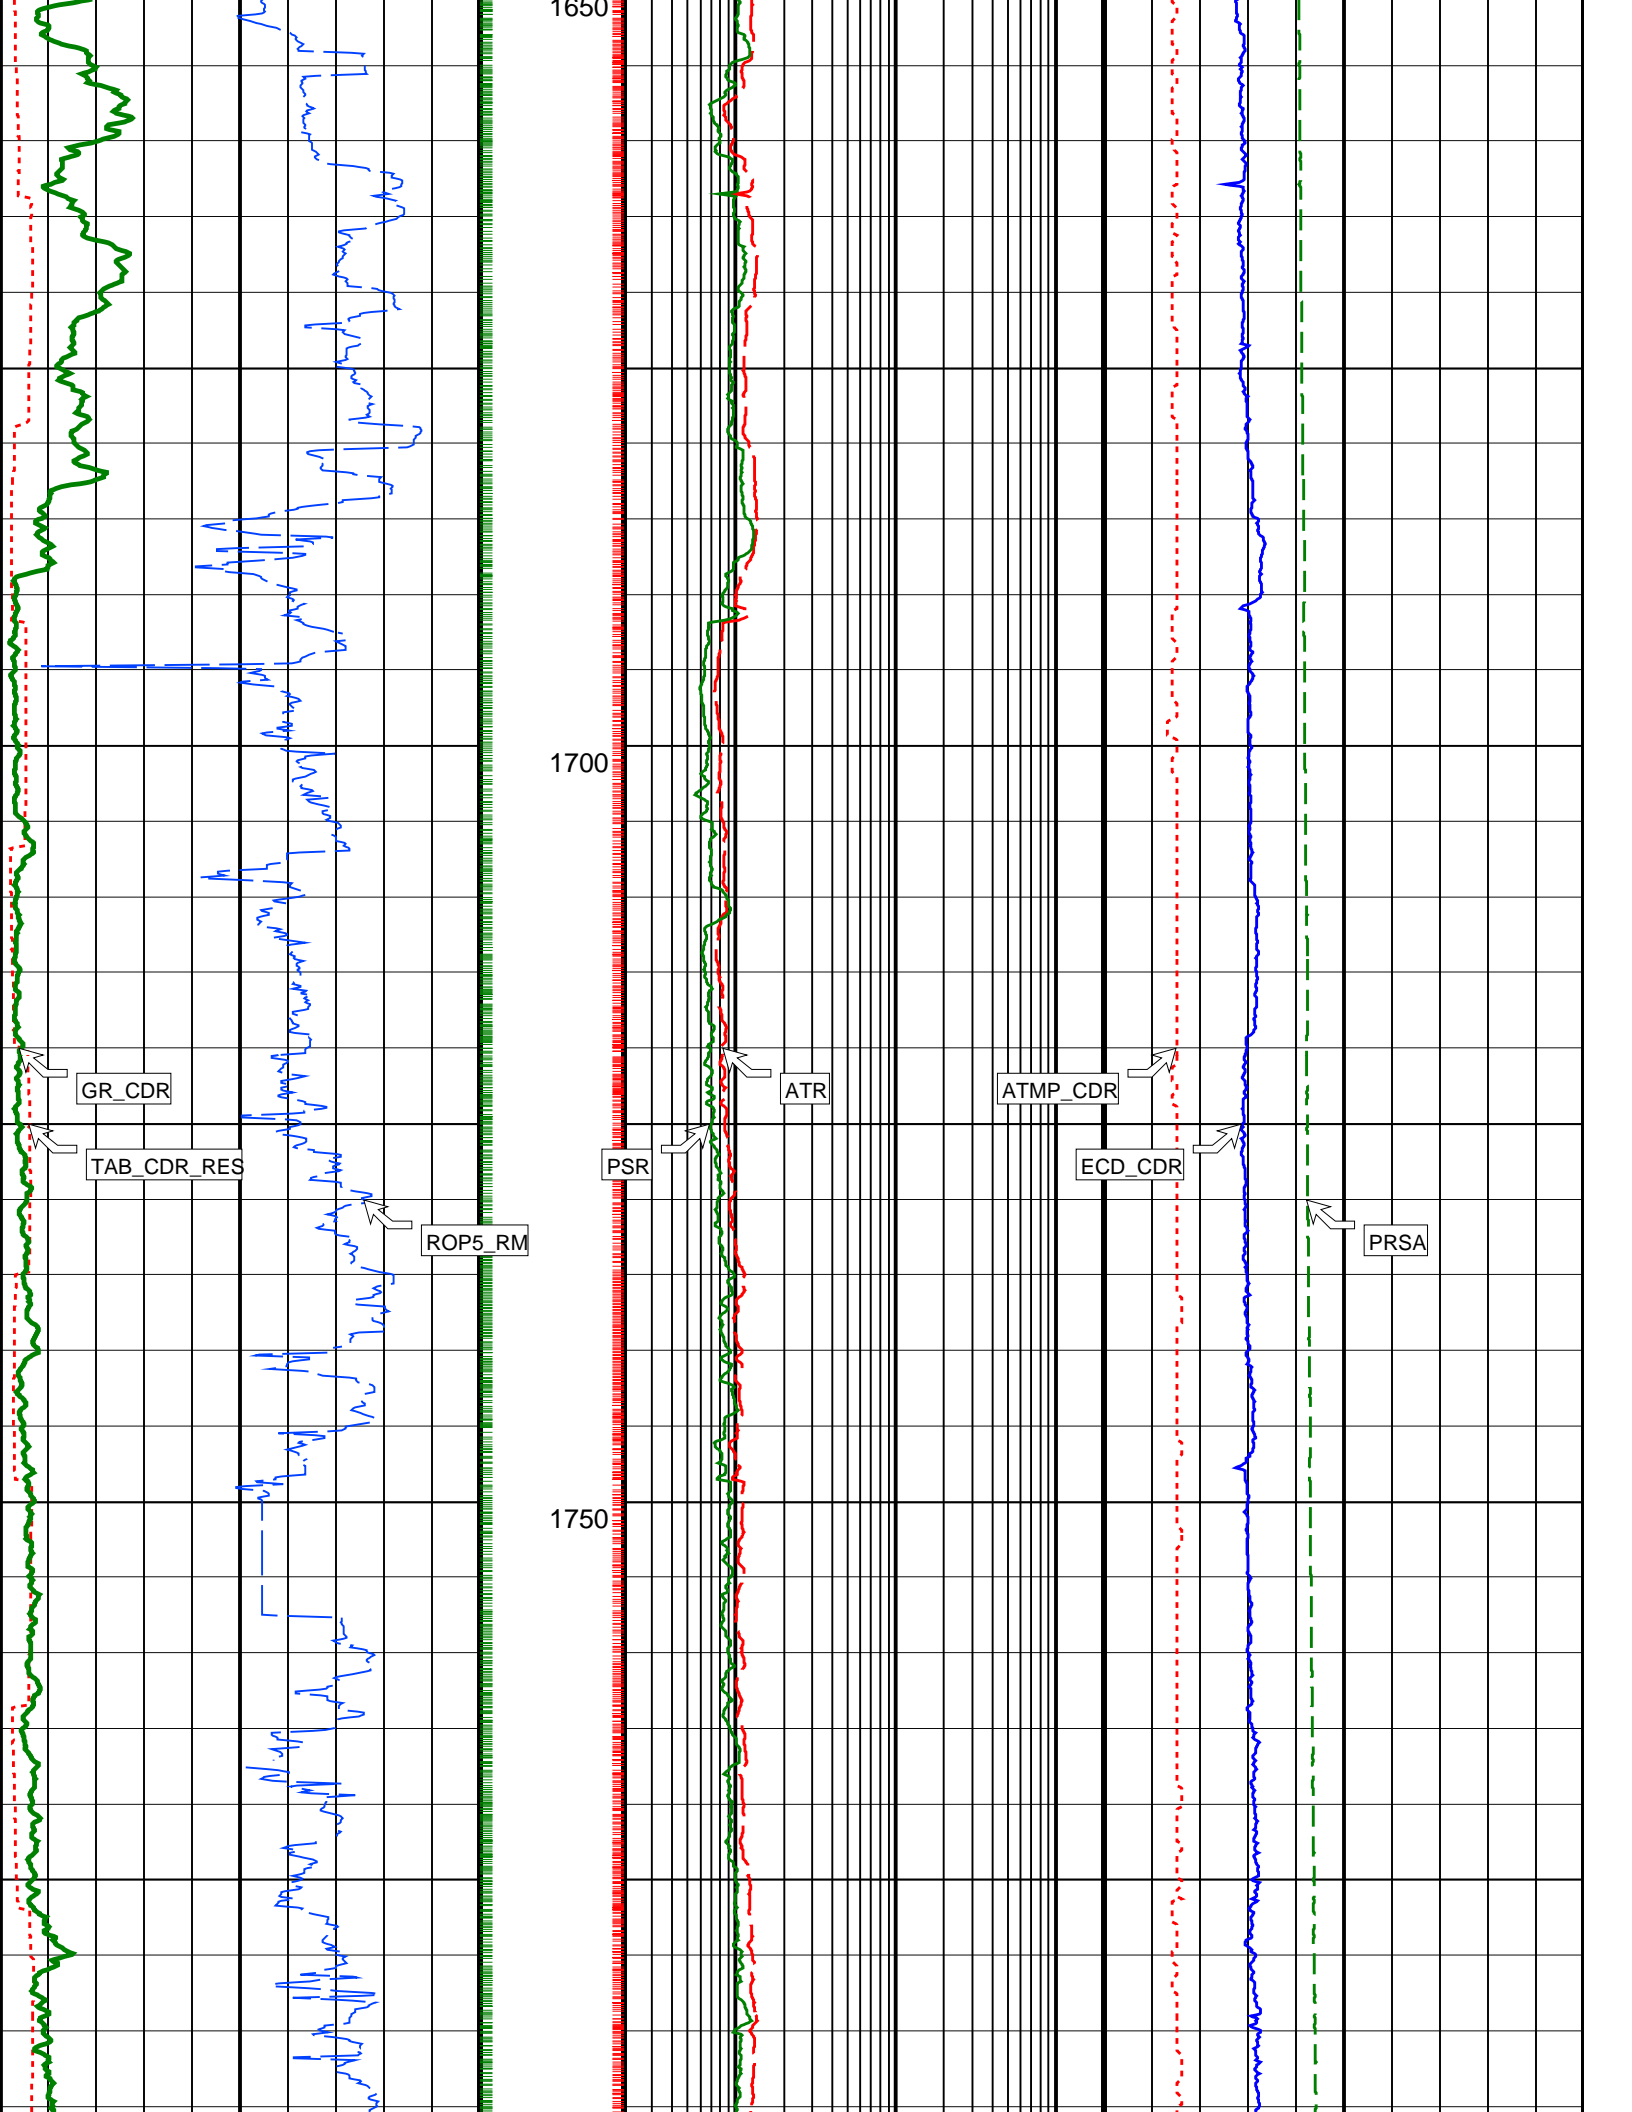

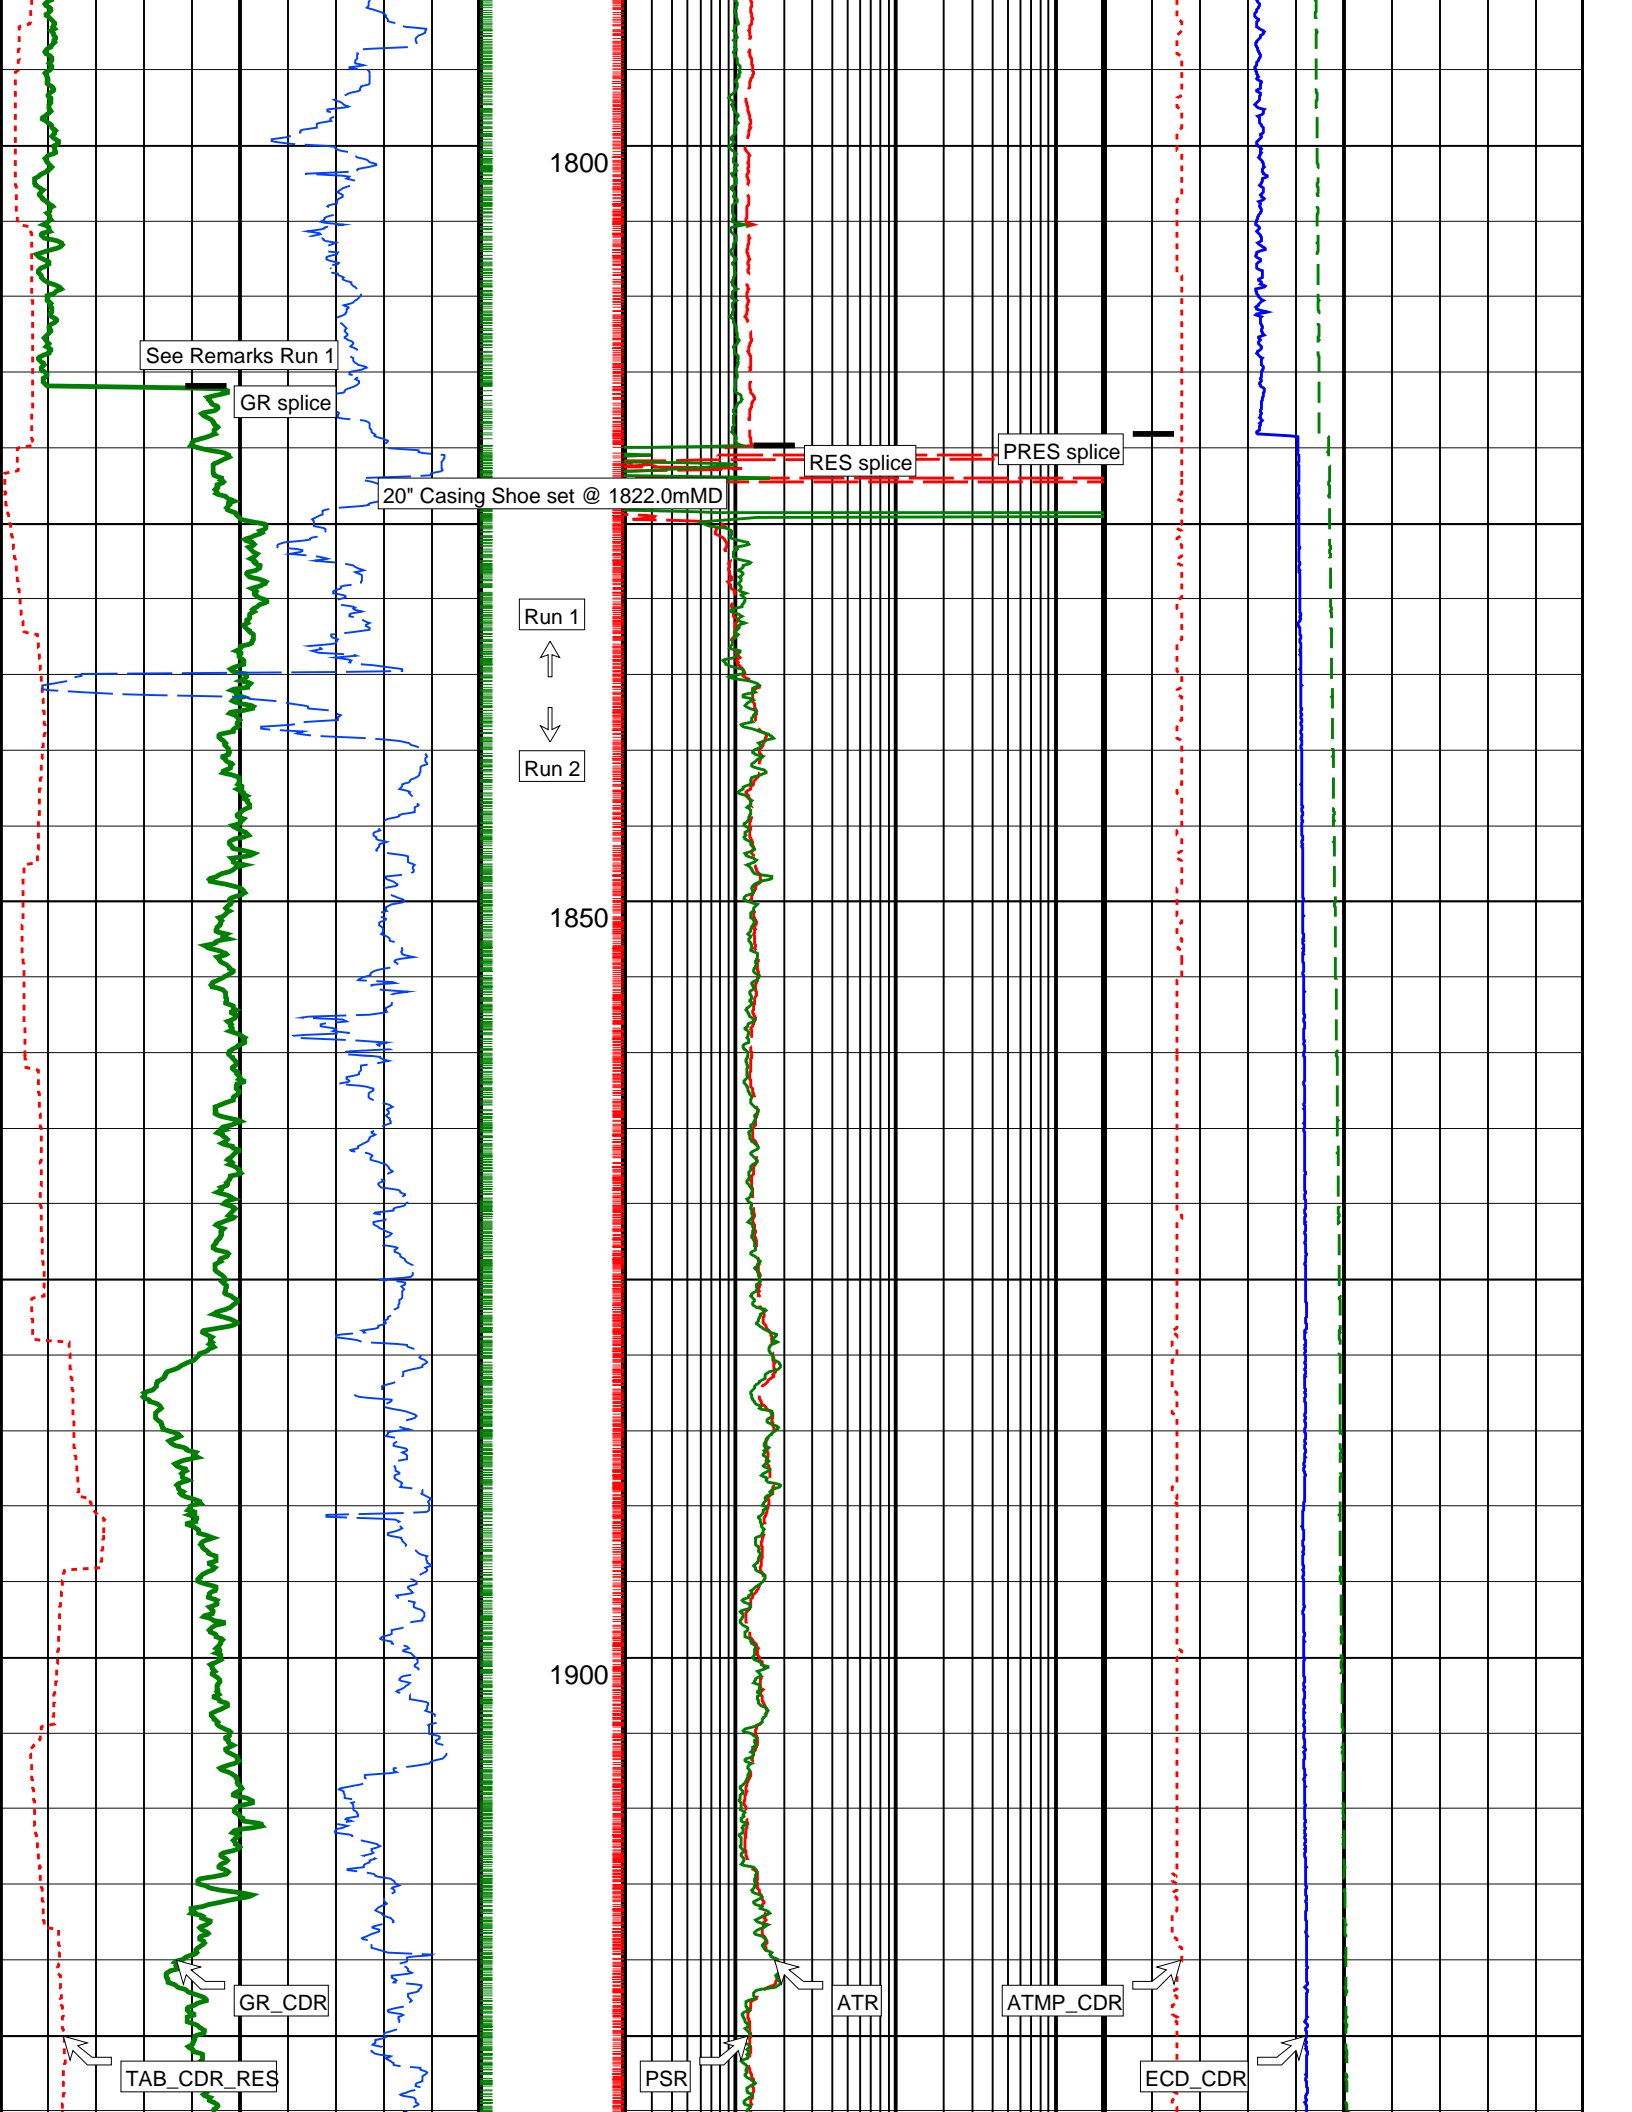

See Remarks Run 1

GR splice

20" Casing Shoe set @ 1822.0mMD

RES splice

PRES splice

Run 1



Run 2



1850

1900

GR_CDR


TAB_CDR_RES


PSR


ATR


ATMP_CDR

ECD_CDR

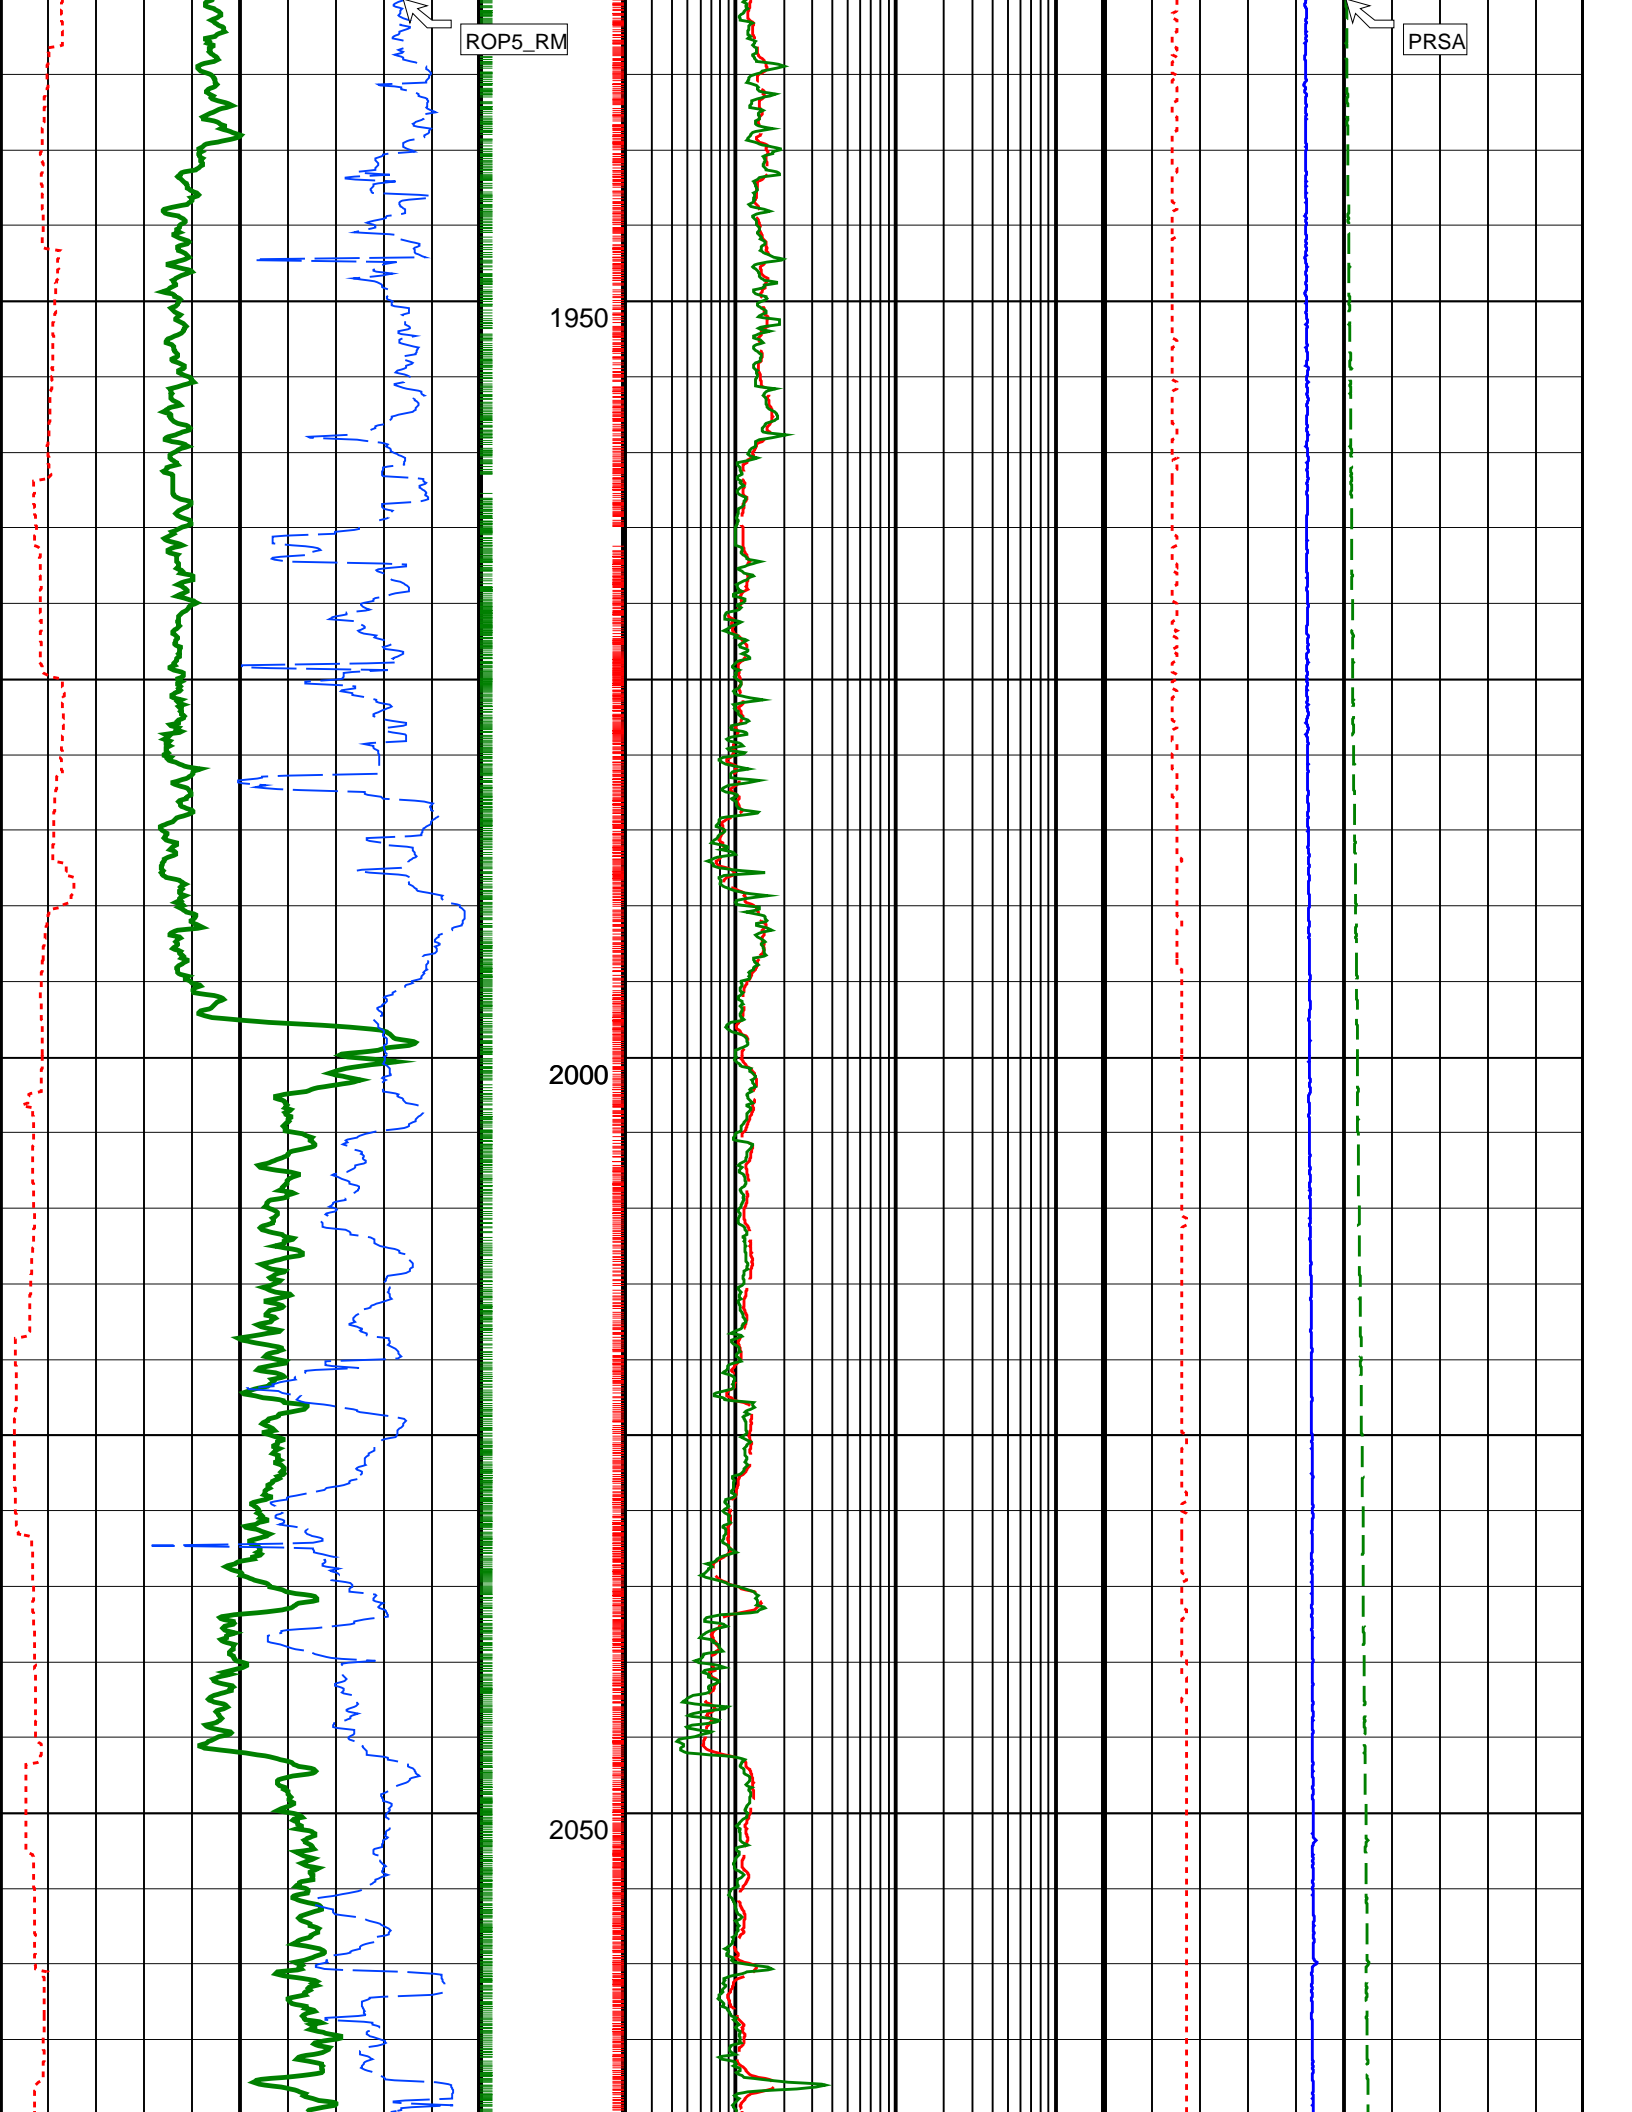

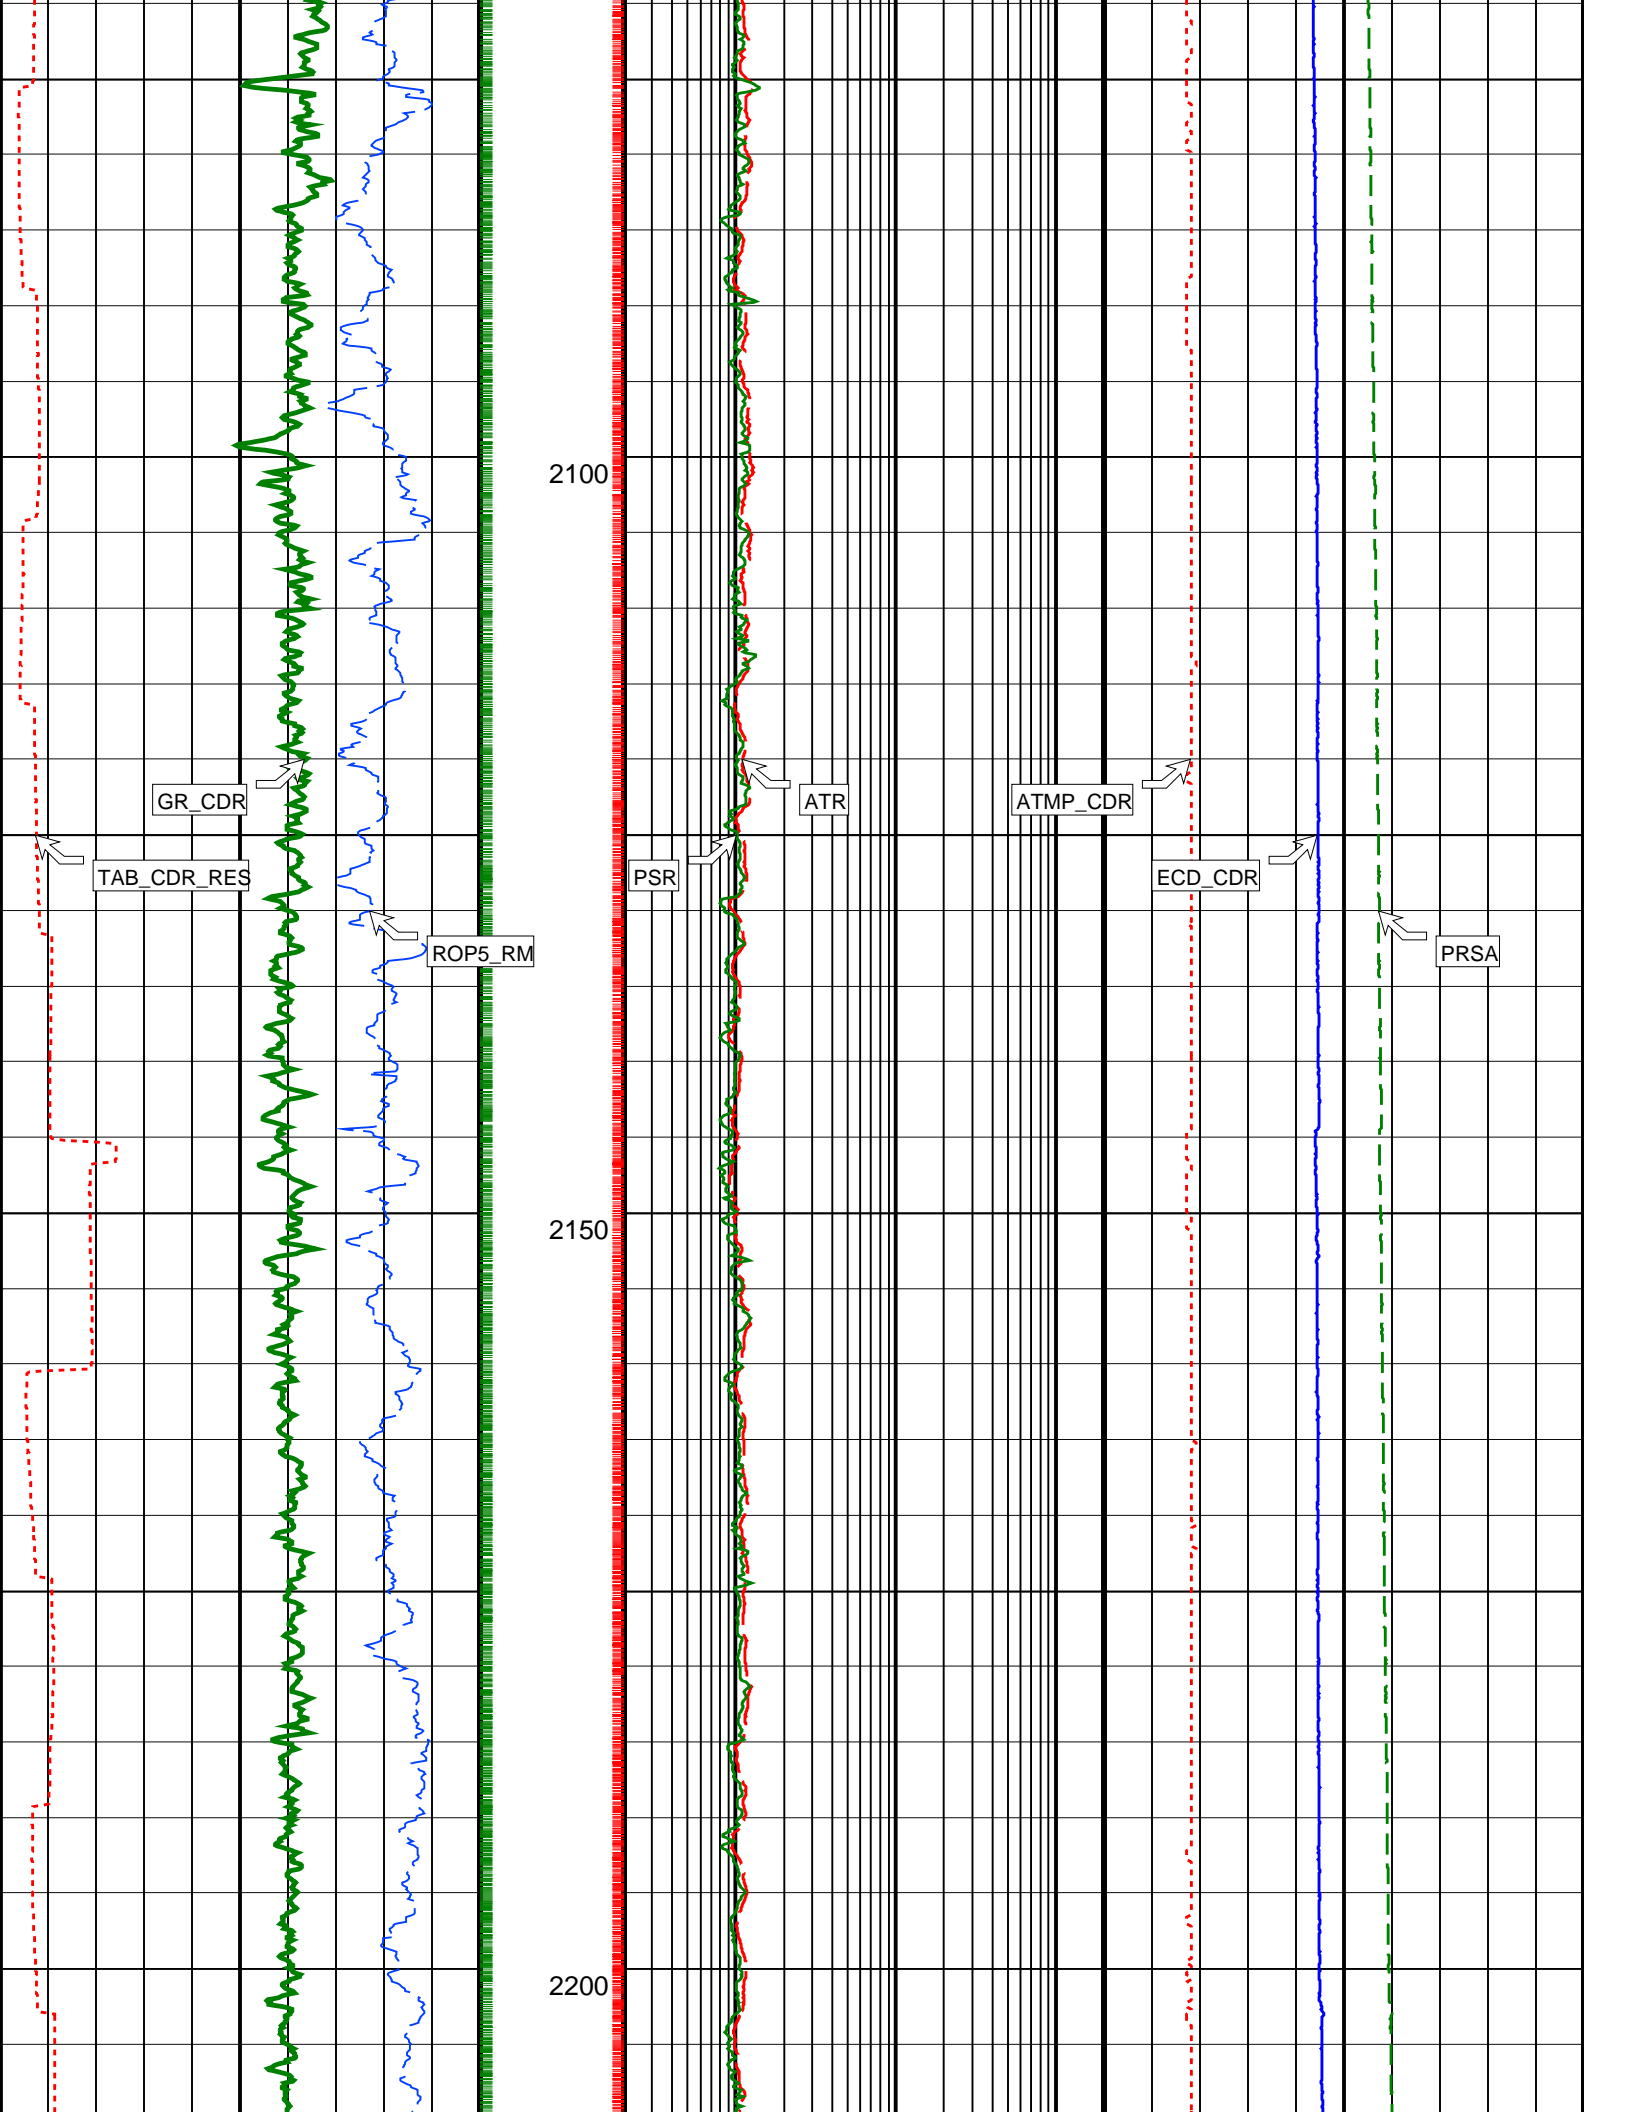

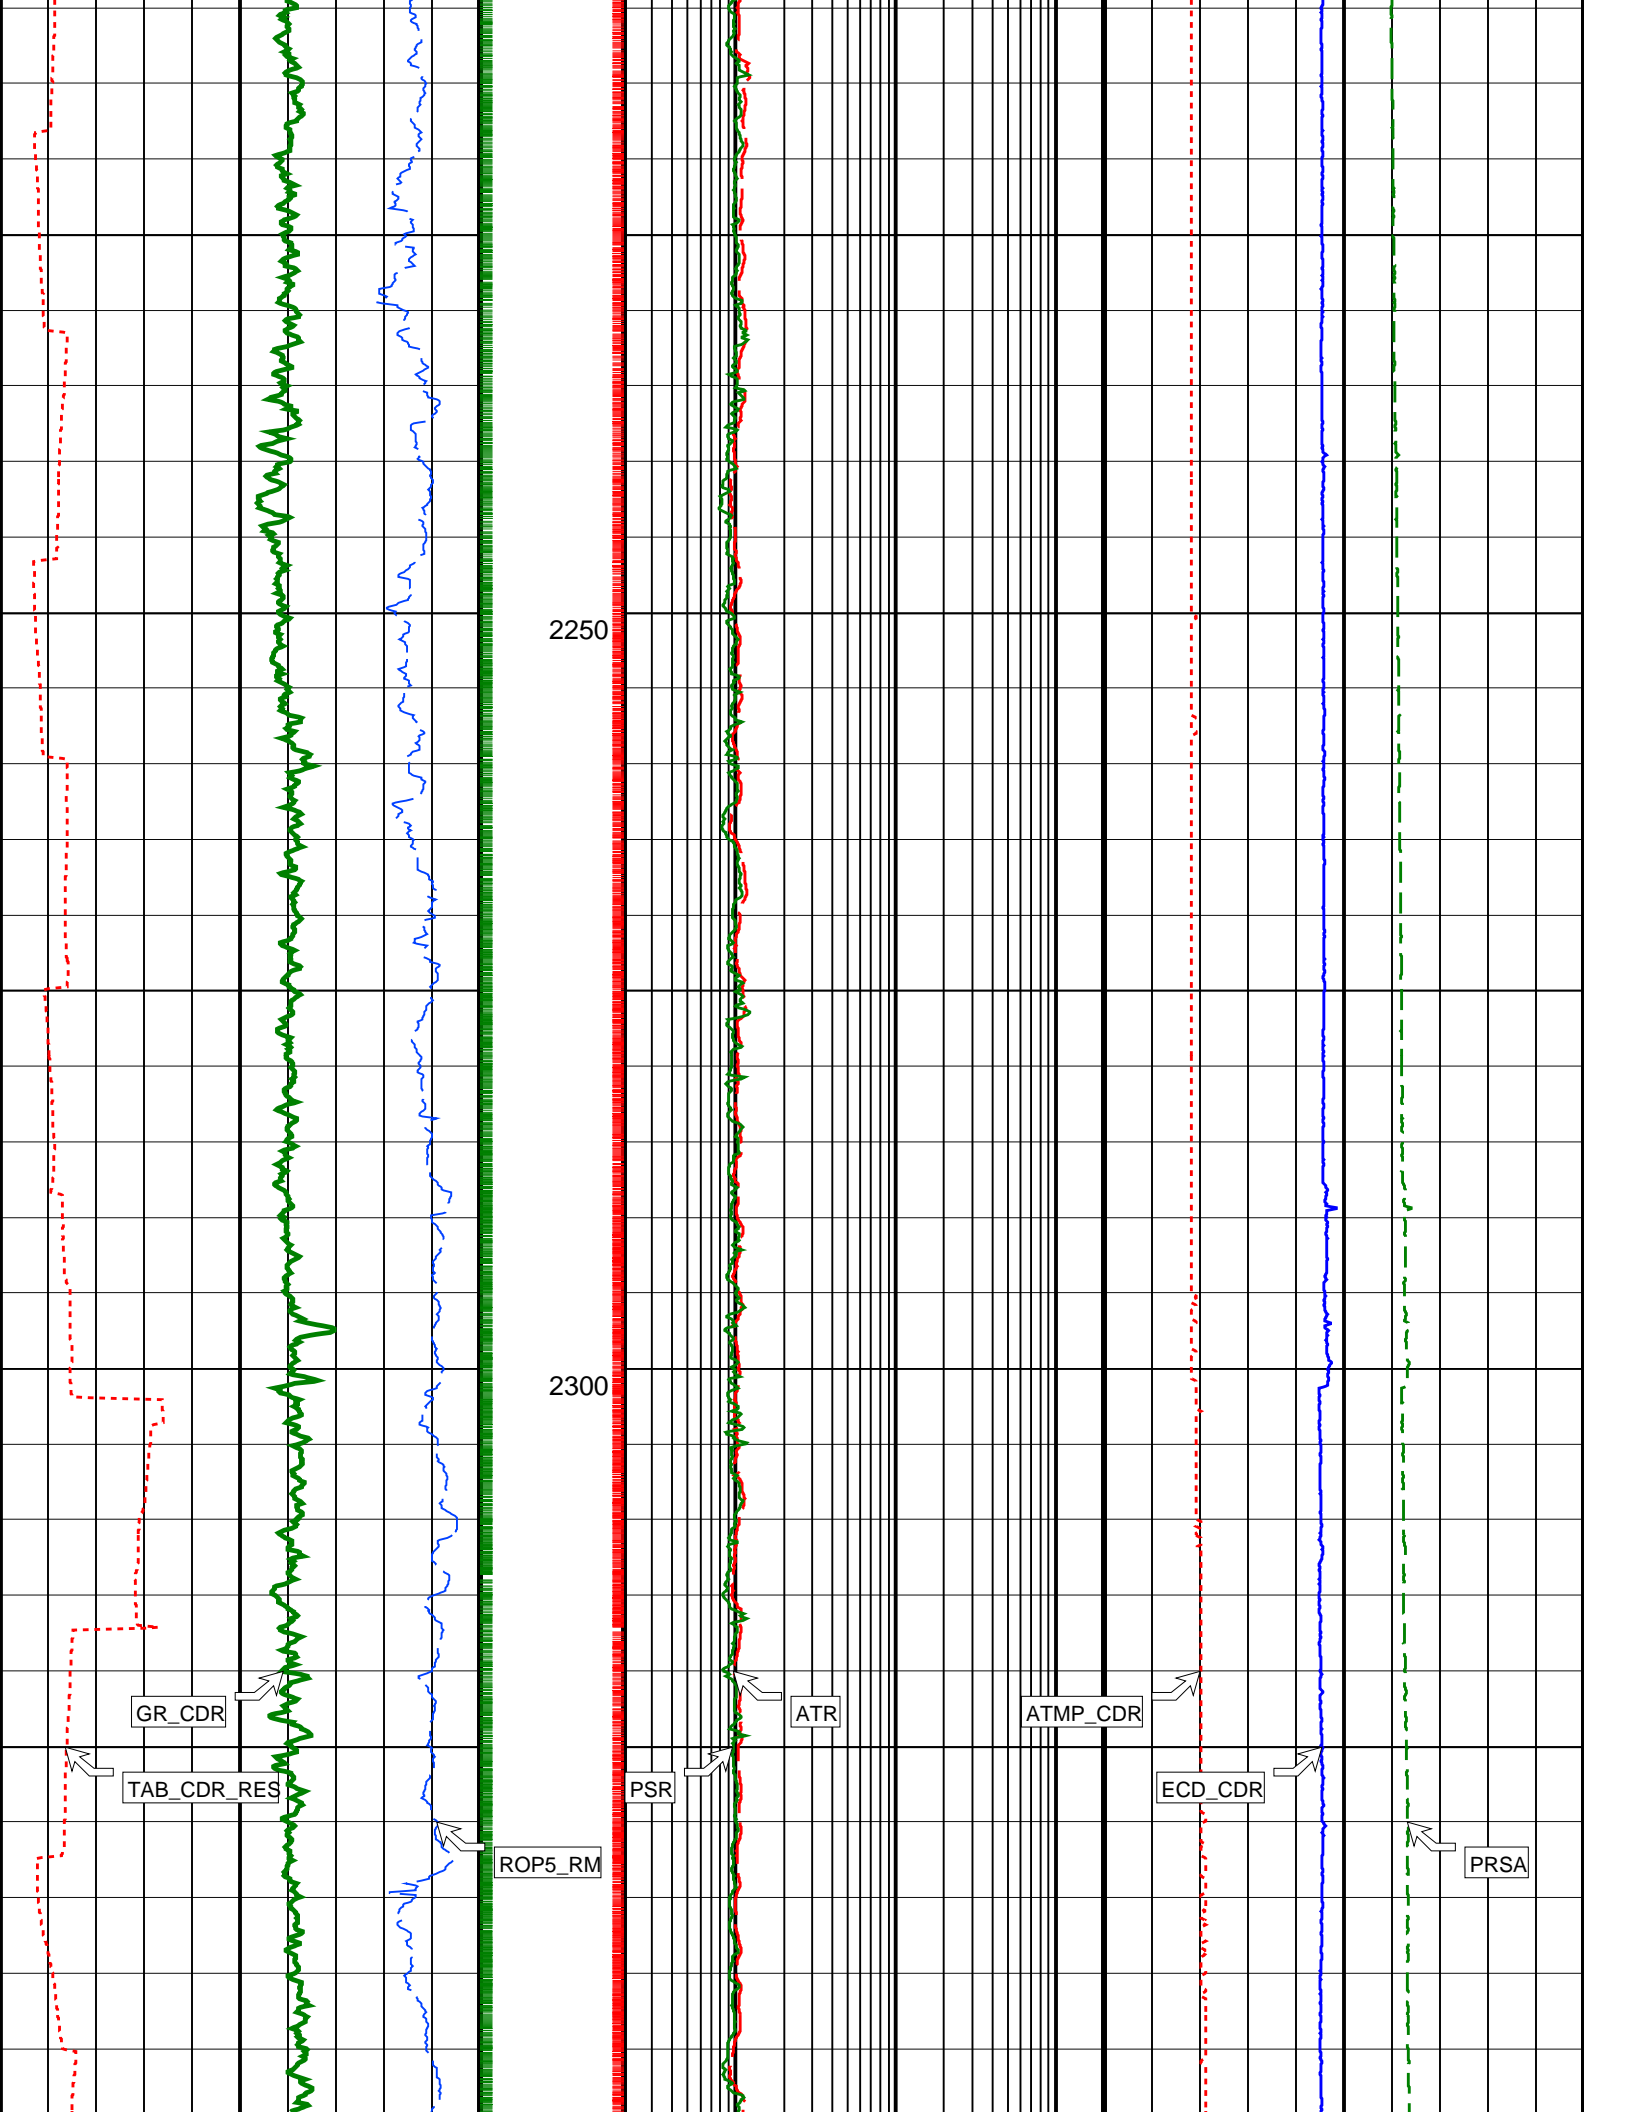

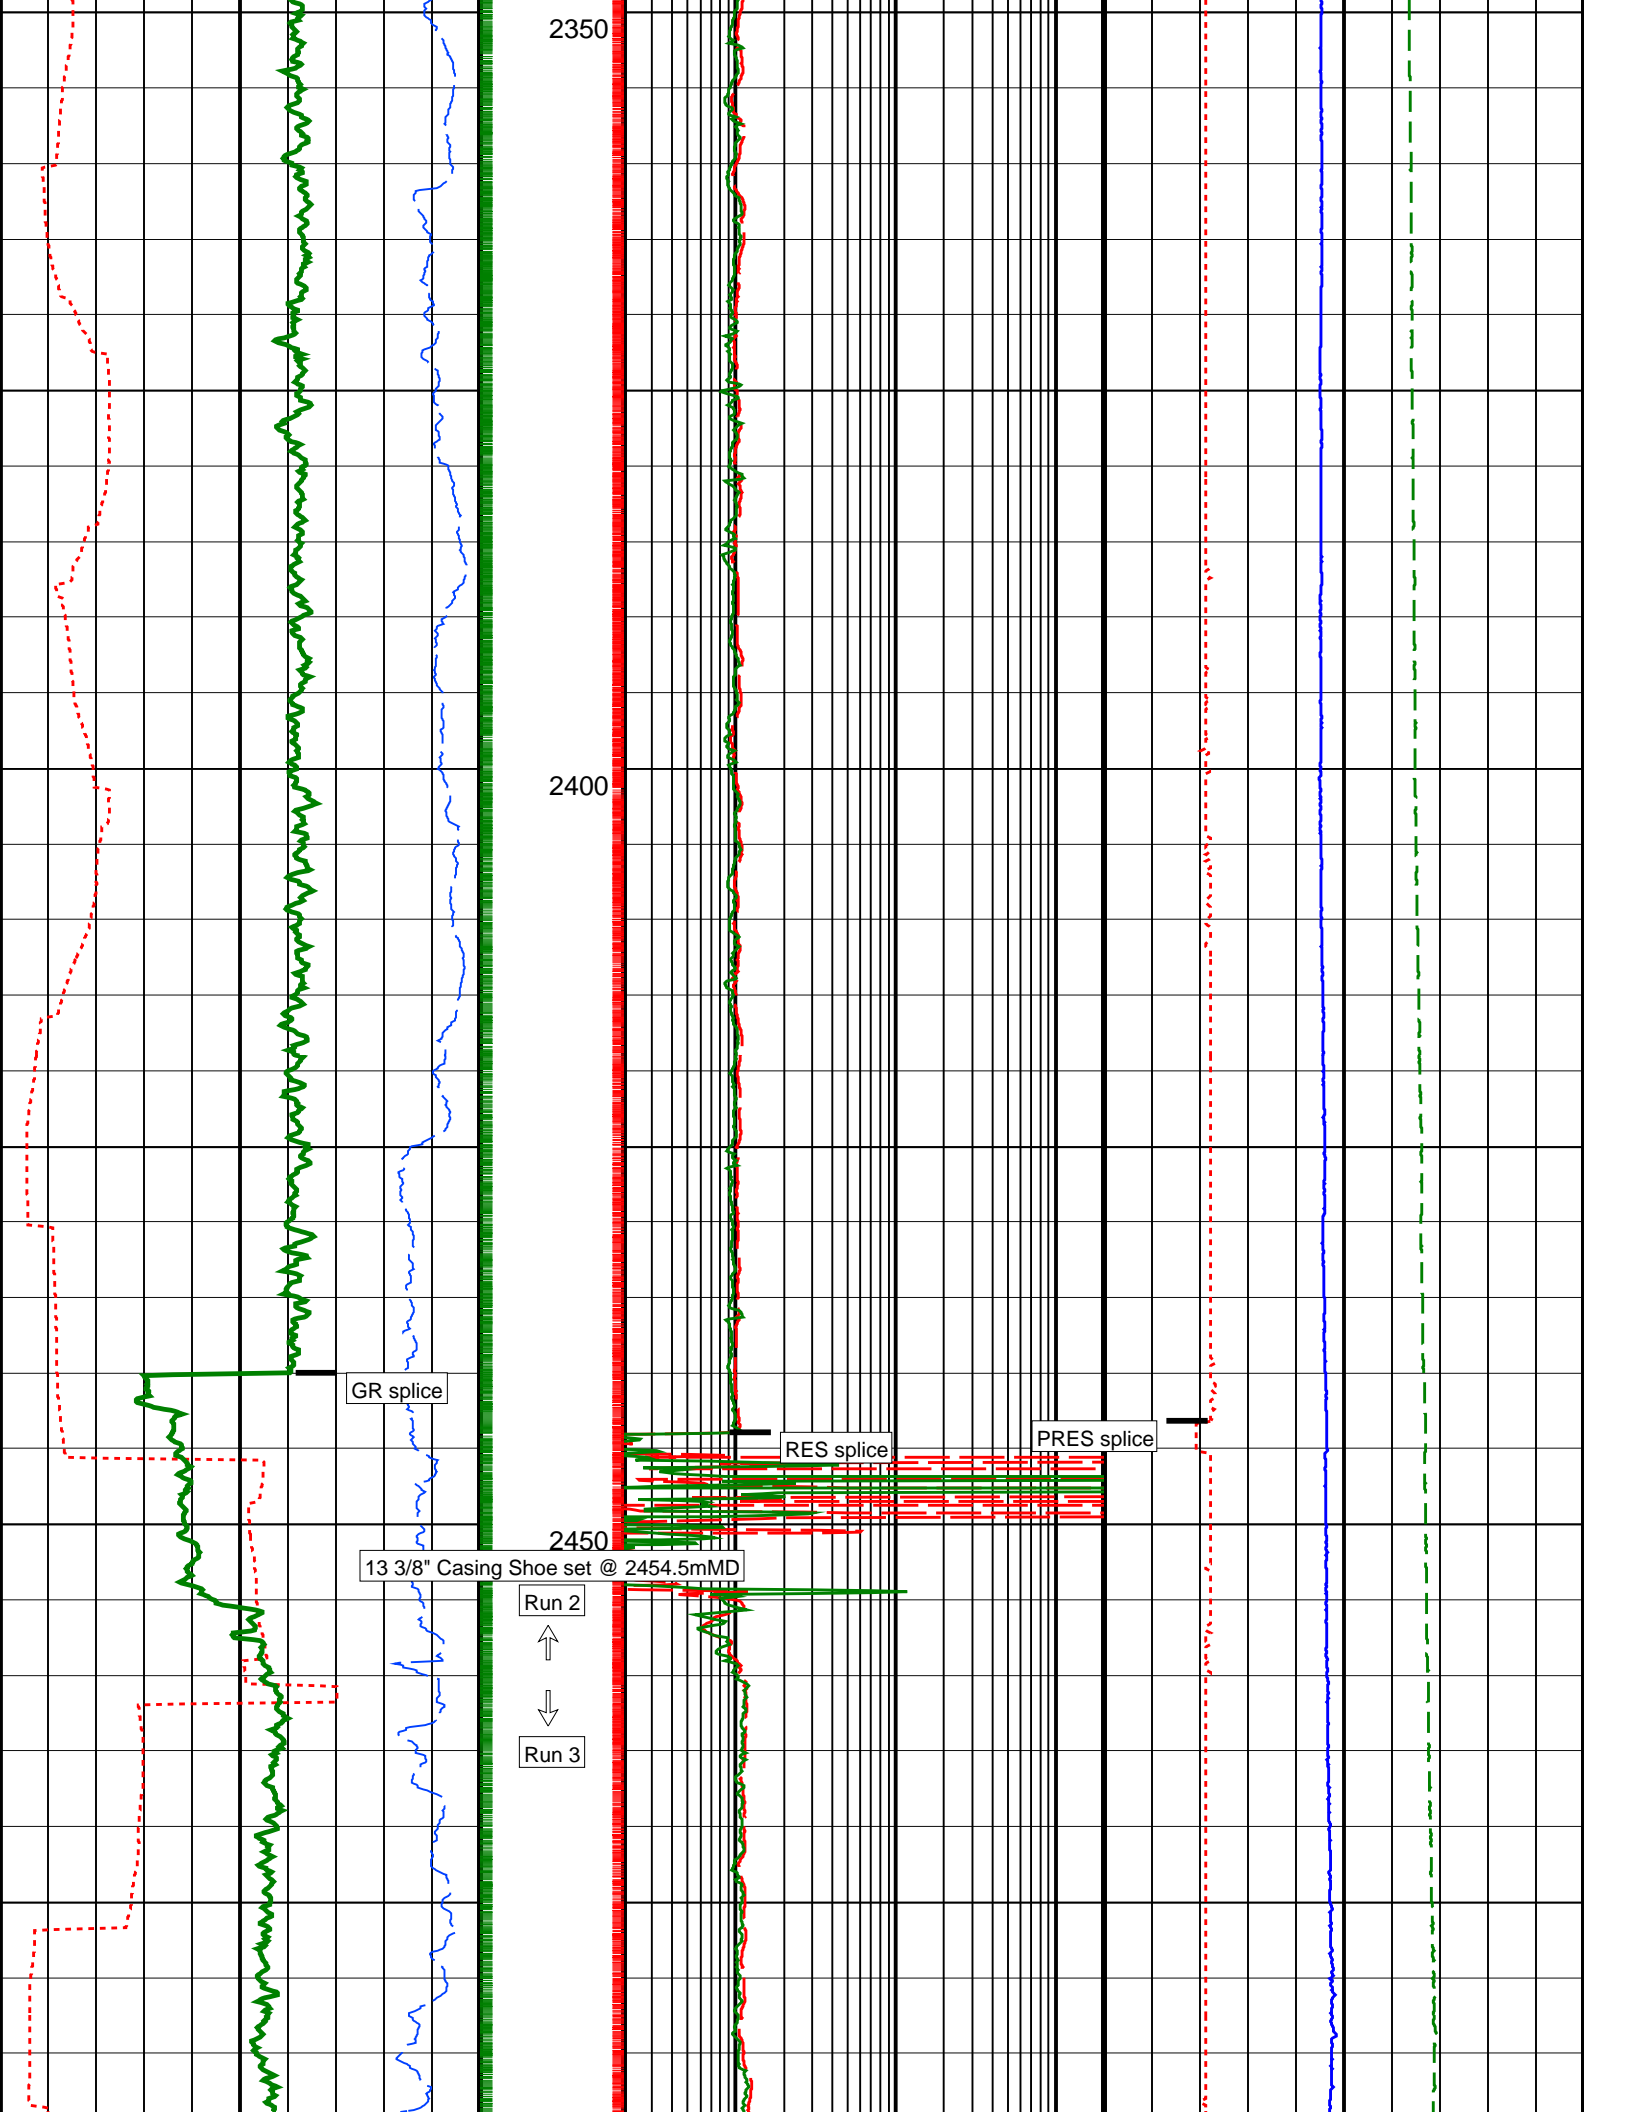

2350

2400

2450

GR splice

RES splice


PRES splice


13 3/8" Casing Shoe set @ 2454.5mMD

Run 2



Run 3

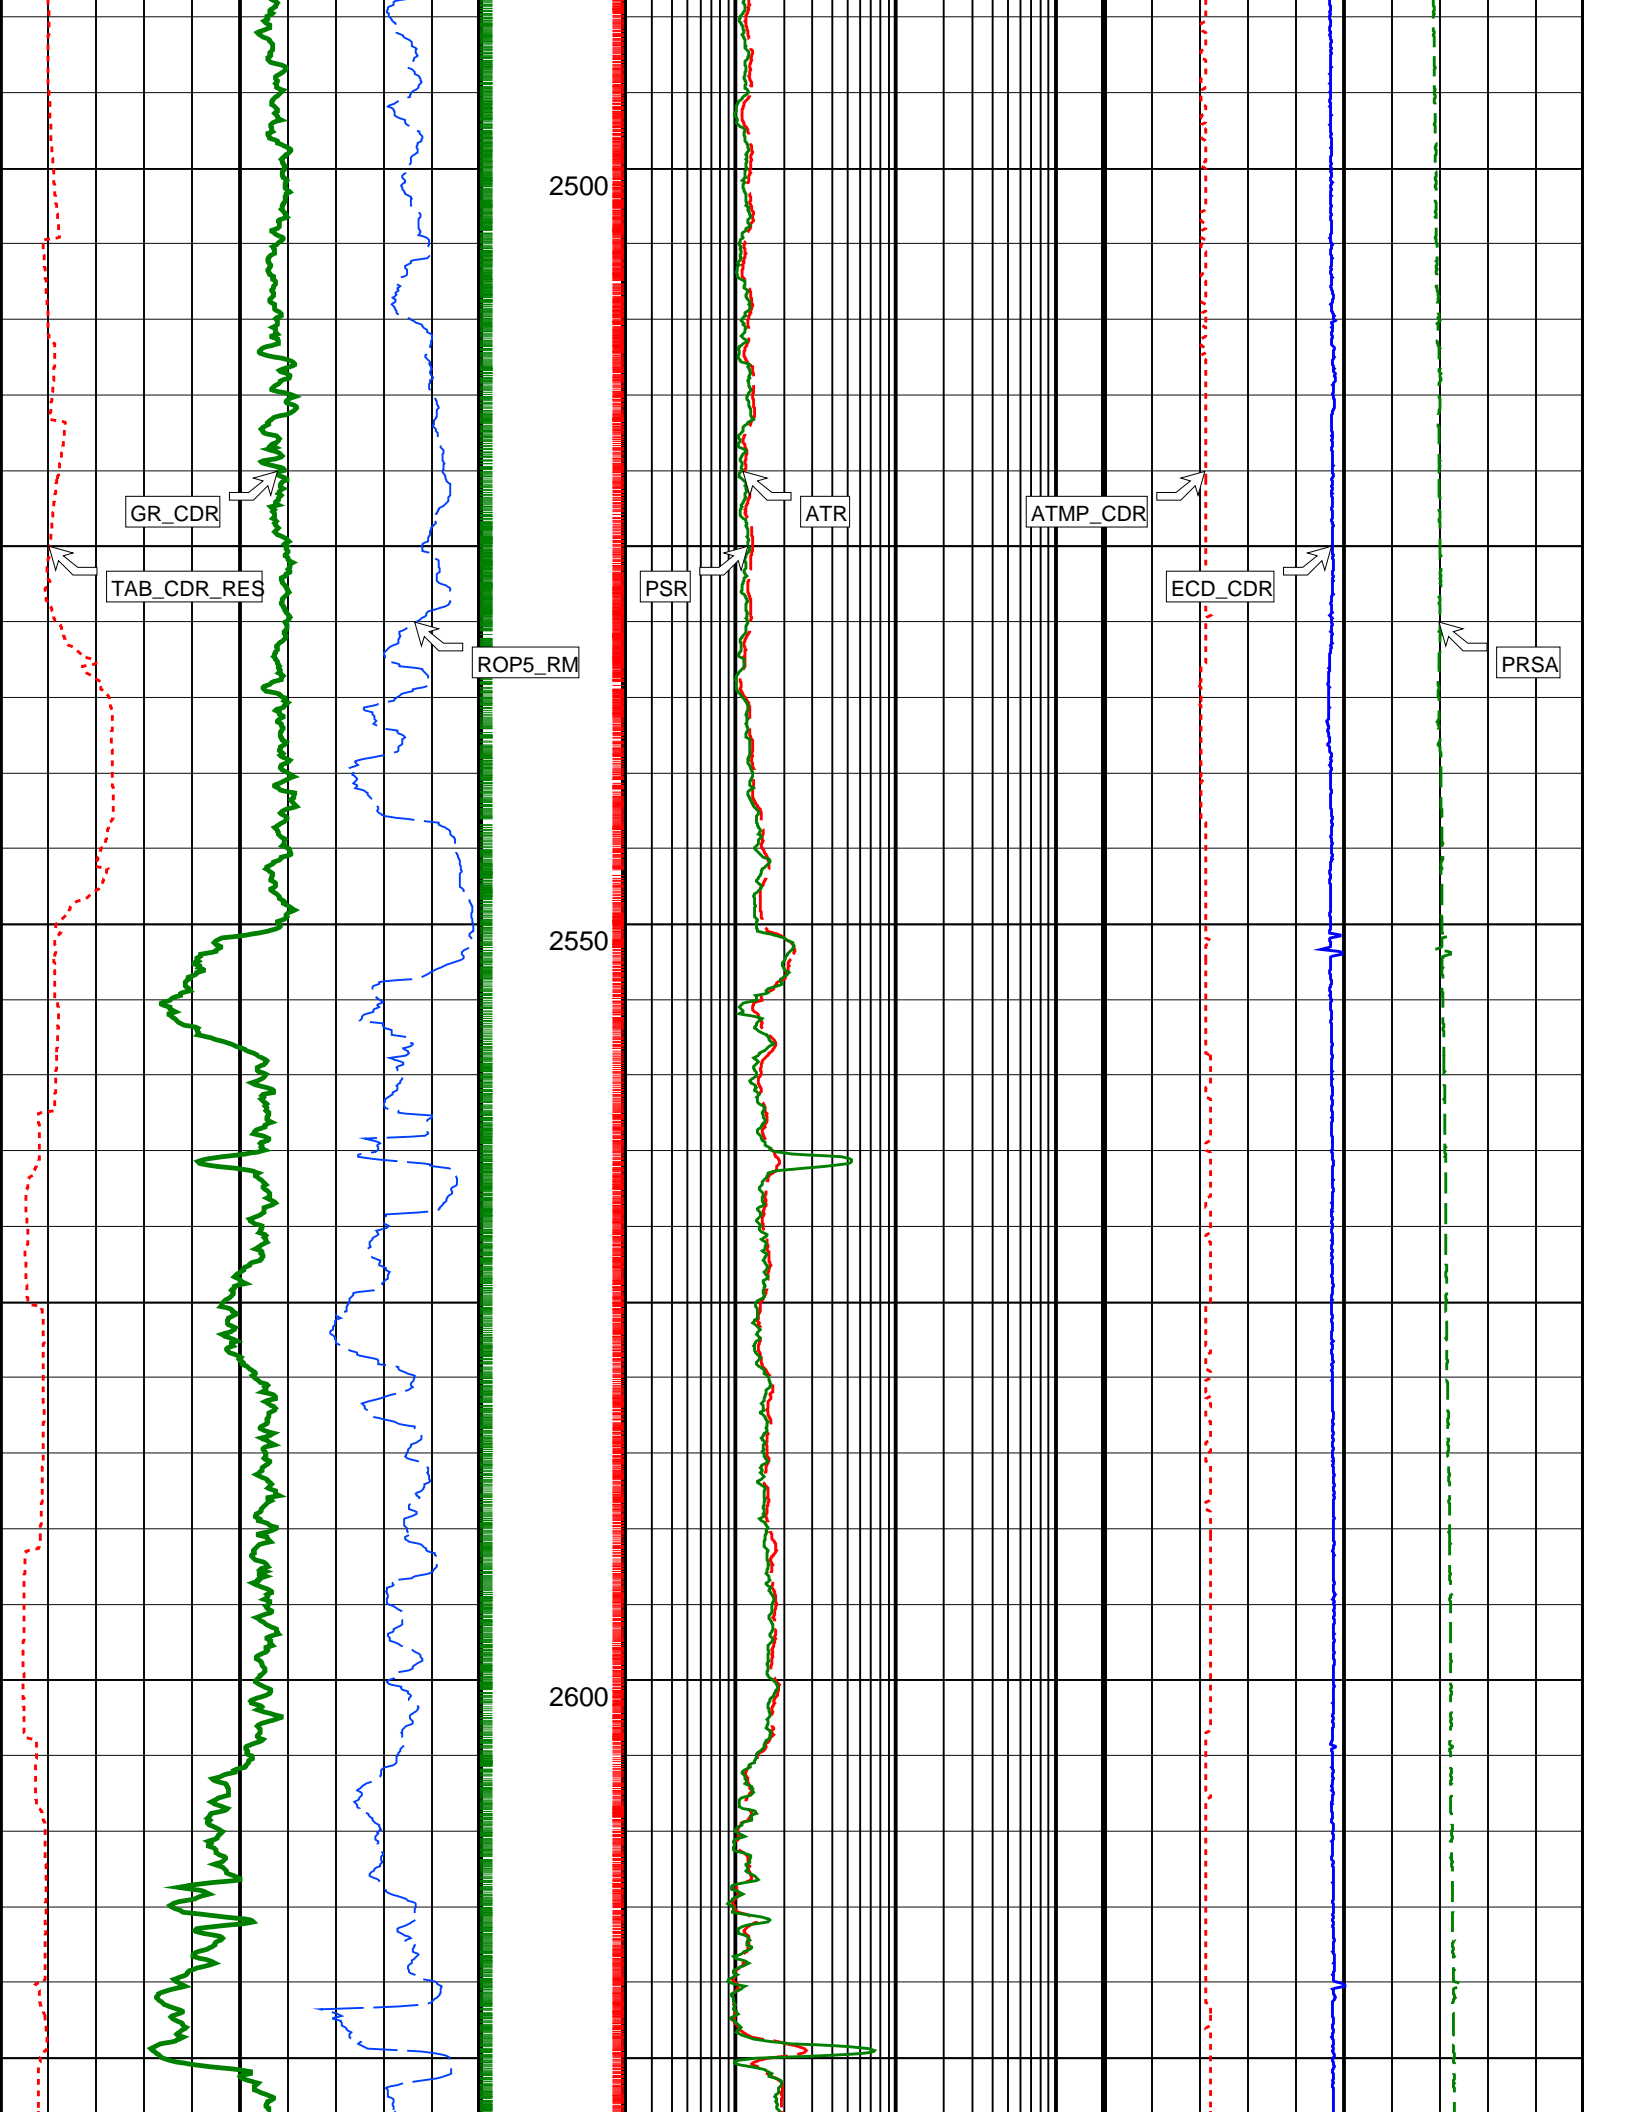

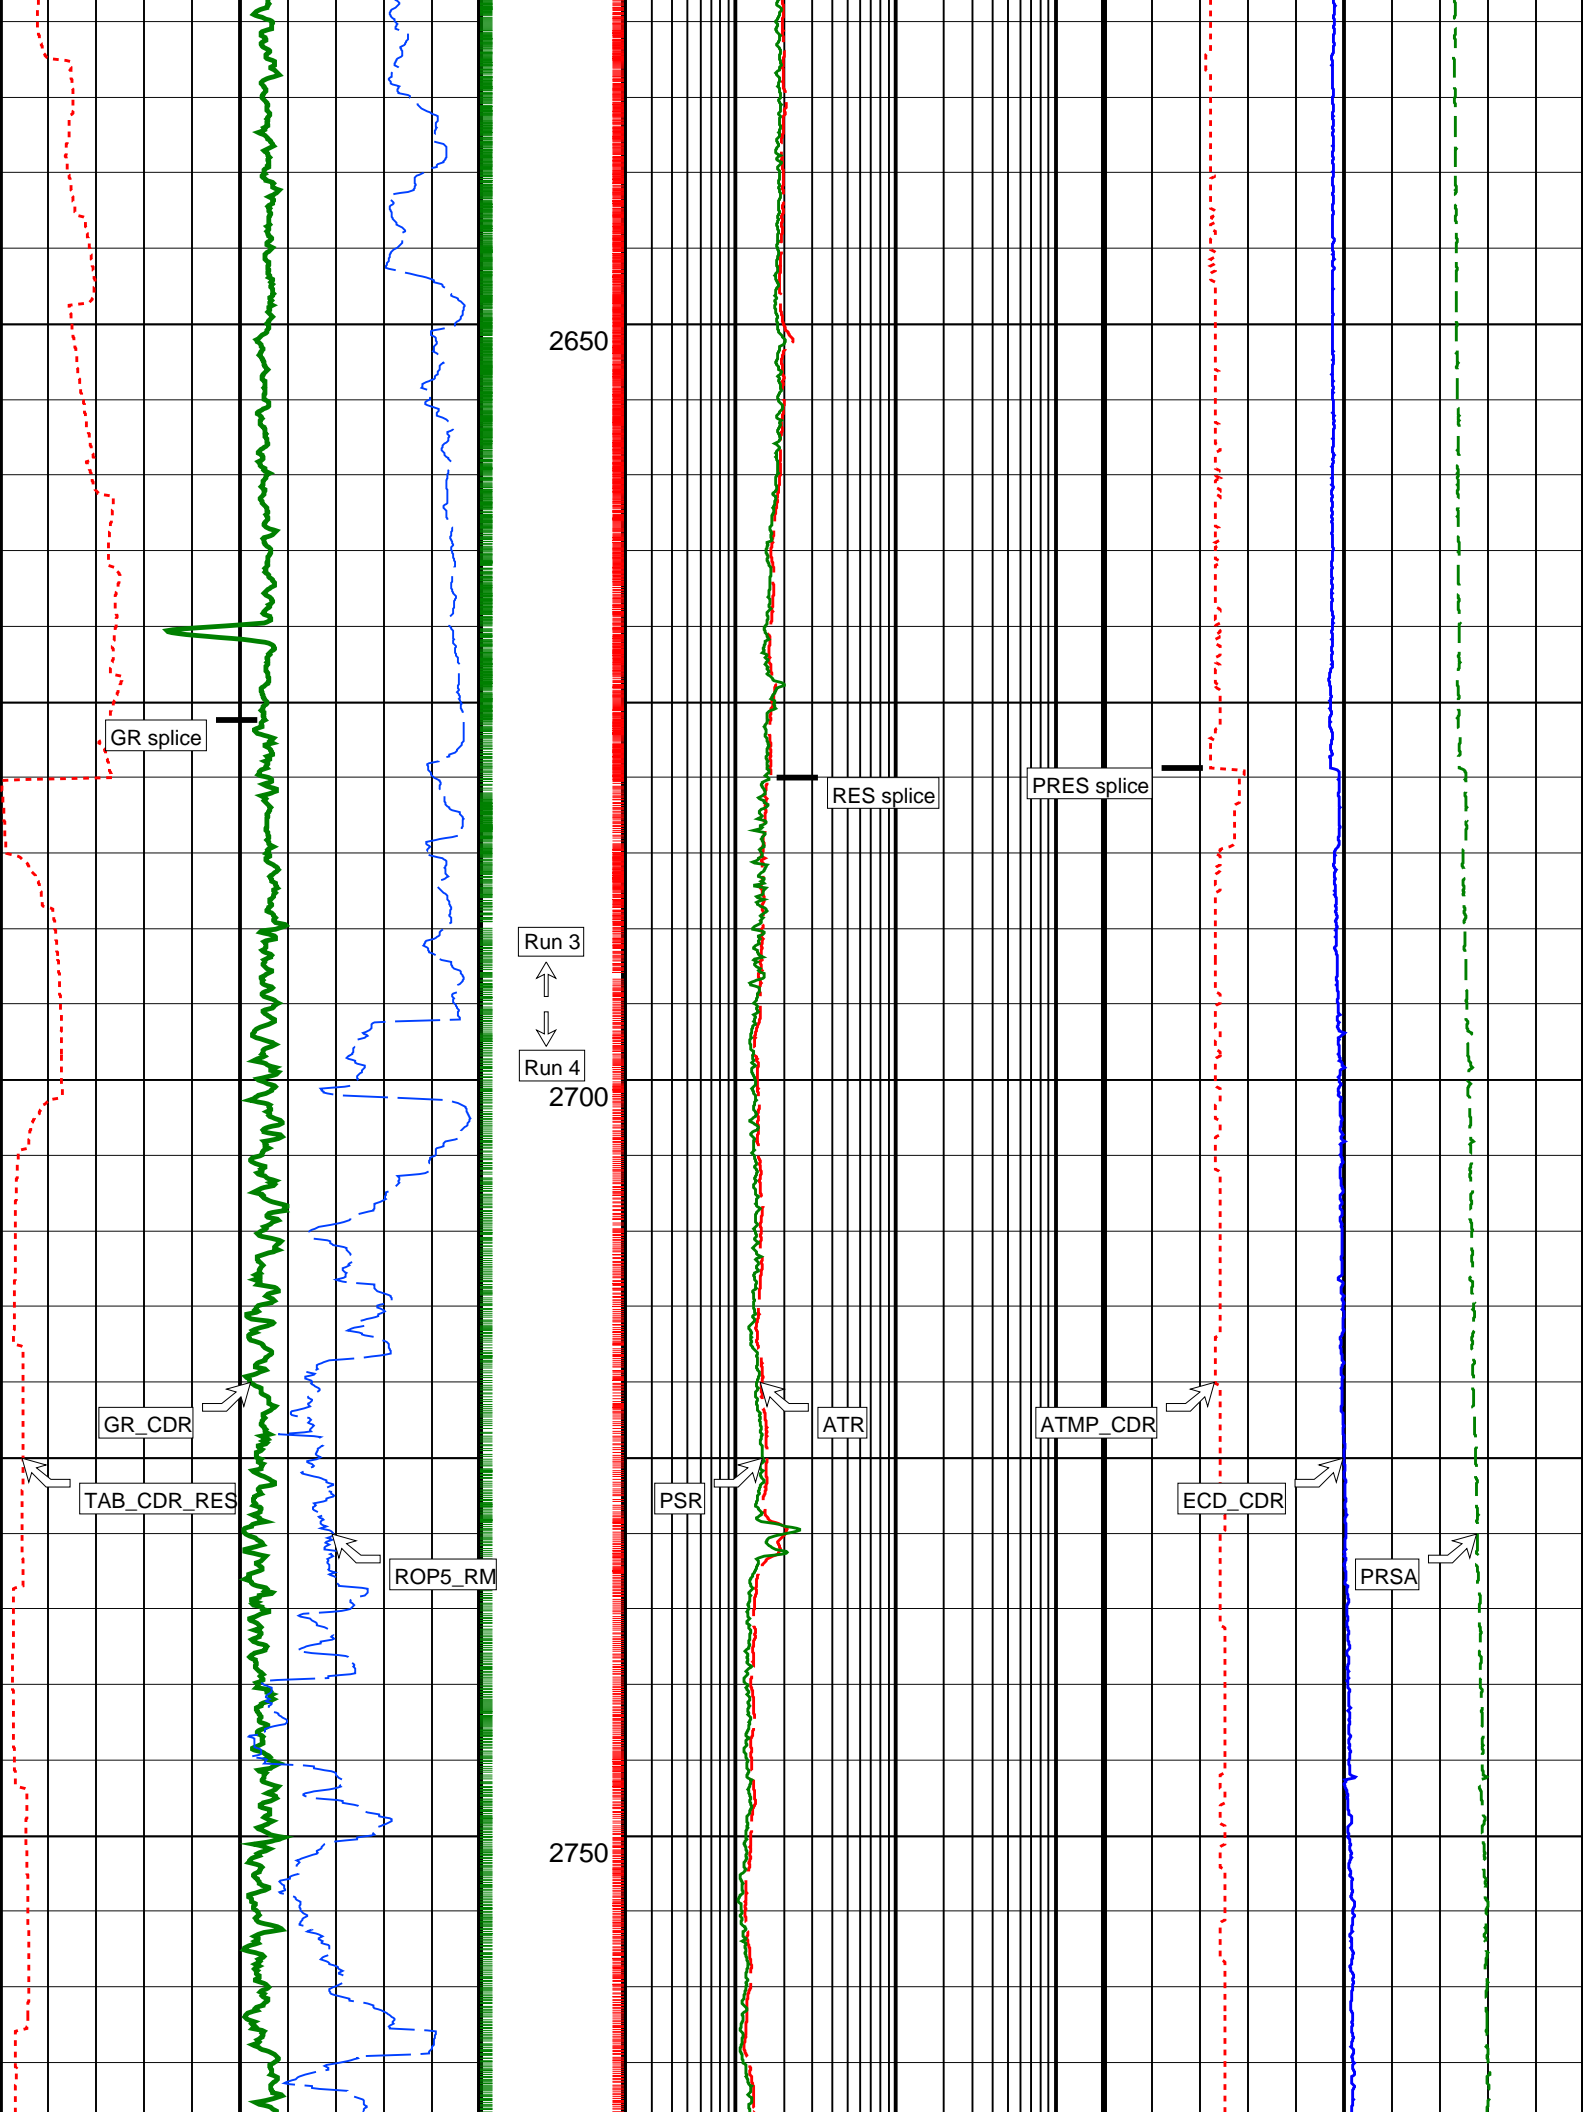


2650

Run 3
↑

Run 4
↓

2700

2750

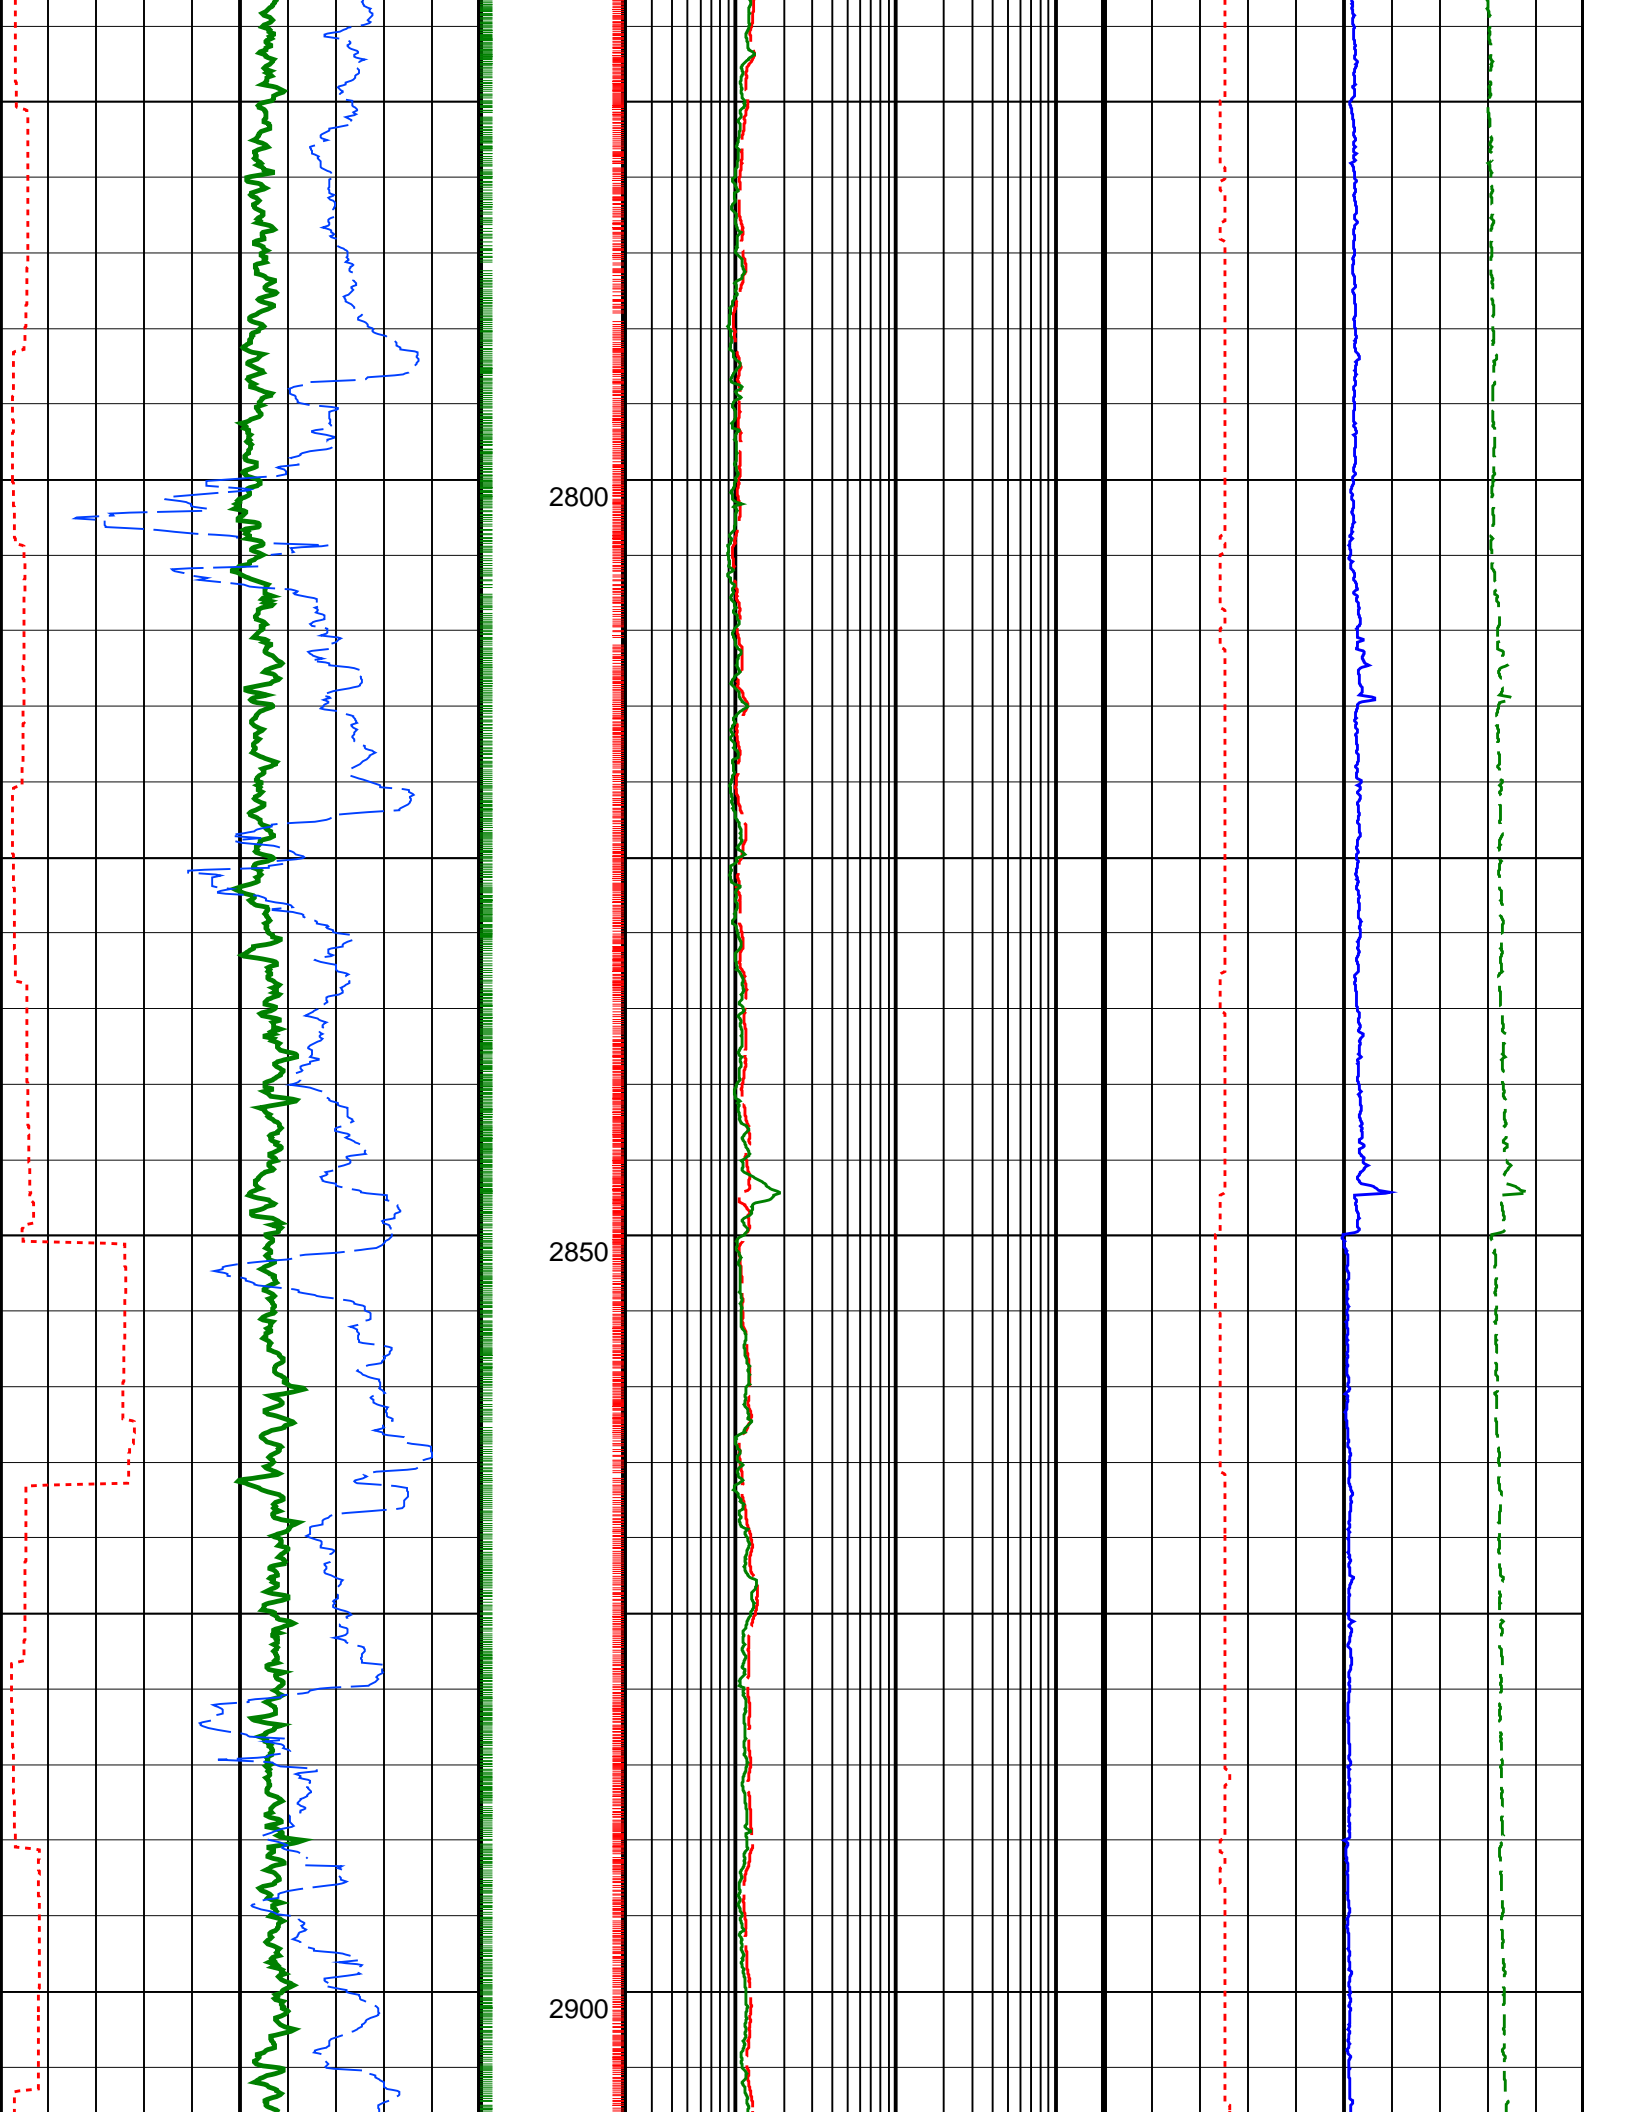

Master	3.290 (Minimum)	3.890 (Nominal)	4.490 (Maximum)	3.705	Master	3.290 (Minimum)	3.890 (Nominal)	4.490 (Maximum)	3.932	Master	3.790 (Minimum)	3.890 (Nominal)	3.990 (Maximum)	3.818
--------	--------------------	--------------------	--------------------	-------	--------	--------------------	--------------------	--------------------	-------	--------	--------------------	--------------------	--------------------	-------

Master: 2-Oct-2004 8:36														
9.50-in. Compensated Dual Resistivity Calibration														
Resistivity: Air														
Phase	Phase shift down	DEG	Value	Phase	Phase shift up	DEG	Value	Phase	BHC phase shift	DEG	Value			
Master			0.1082	Master			0.09295	Master			0.1006			
	-2.400 (Minimum)	0.1000 (Nominal)	2.600 (Maximum)		-2.400 (Minimum)	0.1000 (Nominal)	2.600 (Maximum)		-0.9000 (Minimum)	0.1000 (Nominal)	1.100 (Maximum)			

Master: 2-Oct-2004 7:55															
9.50-in. Compensated Dual Resistivity Calibration															
Gamma Ray: Blanket															
Phase	Gain										Value				
Master											0.9923				
	0.8000 (Minimum)	1.000 (Nominal)										1.200 (Maximum)			

8.25-in. Compensated Dual Resistivity / Equipment Identification													
Primary Equipment:													
Tool Name and Serial Number				CDR8 - AA				8001					
Gamma Ray Type				Plat - GR									
Calibration Status				-									

Master: 3-Nov-2004 2:01														
8.25-in. Compensated Dual Resistivity Calibration														
Resistivity: Air														
Phase	Attenuation down	DB	Value	Phase	Attenuation up	DB	Value	Phase	BHC attenuation	DB	Value			
Master			4.993	Master			4.928	Master			4.960			
	4.400 (Minimum)	5.000 (Nominal)	5.600 (Maximum)		4.400 (Minimum)	5.000 (Nominal)	5.600 (Maximum)		4.900 (Minimum)	5.000 (Nominal)	5.100 (Maximum)			

Master: 3-Nov-2004 2:01														
8.25-in. Compensated Dual Resistivity Calibration														
Resistivity: Air														
Phase	Phase shift down	DEG	Value	Phase	Phase shift up	DEG	Value	Phase	BHC phase shift	DEG	Value			
Master			-0.2902	Master			0.6567	Master			0.1833			
	-2.400 (Minimum)	0.1000 (Nominal)	2.600 (Maximum)		-2.400 (Minimum)	0.1000 (Nominal)	2.600 (Maximum)		-0.9000 (Minimum)	0.1000 (Nominal)	1.100 (Maximum)			

Master: 3-Nov-2004 4:17															
8.25-in. Compensated Dual Resistivity Calibration															
Gamma Ray: Blanket															
Phase	Gain										Value				
Master											0.8570				
	0.8000 (Minimum)	1.000 (Nominal)										1.200 (Maximum)			

SCHLUMBERGER

Survey report

Client.....: SANTOS - INPEX - UNOCAL
Field.....: Amrit

Well.....: Amrit-1 Spud date.....: 20-Nov-2004
API number.....: Last survey date.....: 07-Dec-04
Engineer.....: D.Borges, L.Watson, O.Radicevic Total accepted surveys...: 44
MD of first survey.....: 0.00 m

RIG.....: Jack Bates MD of last survey.....: 2979.00 m

----- Survey calculation methods-----
 Method for positions.....: Minimum curvature
 Method for DLS.....: Mason & Taylor
 ----- Depth reference -----
 Permanent datum.....: LAT
 Depth reference.....: Driller's Pipe Tally
 GL above permanent.....: -1396.00 m
 KB above permanent.....: Top Drive
 DF above permanent.....: 29.00 m
 ----- Vertical section origin-----
 Latitude (+N/S-).....: 0.00 m
 Departure (+E/W-).....: 0.00 m
 ----- Platform reference point-----
 Latitude (+N/S-).....: 0.00 m
 Departure (+E/W-).....: 0.00 m
 ----- Geomagnetic data -----
 Magnetic model.....: BGM version 2004
 Magnetic date.....: 20-Nov-2004
 Magnetic field strength...: 1221.99 HCNT
 Magnetic dec (+E/W-).....: -----
 Magnetic dip.....: -70.25 degrees
 ----- MWD survey Reference Criteria -----
 Reference G.....: 1000.09 mGal
 Reference H.....: 1221.99 HCNT
 Reference Dip.....: -70.25 degrees
 Tolerance of G.....: (+/-)
 Tolerance of H.....: (+/-) 6.00 HCNT
 Tolerance of Dip.....: (+/-) 0.45 degrees
 ----- Corrections -----
 Magnetic dec (+E/W-).....: 10.48 degrees
 Grid convergence (+E/W-): -0.46 degrees
 Total az corr (+E/W-)....: 10.94 degrees
 Azimuth from Vsect Origin to target: 0.00 degrees (Total az corr = magnetic dec - grid conv)
 Survey Correction Type ...:
 I=Sag Corrected Inclination
 M=Schlumberger Magnetic Correction
 S=Shell Magnetic Correction
 F=Failed Axis Correction
 R=Magnetic Resonance Tool Correction
 D=Dmag Magnetic Correction

[(c)2004 IDEAL ID9_1C_01]
 SCHLUMBERGER Survey Report

Seq #	Measured depth (m)	Incl angle (deg)	Azimuth angle (deg)	Course length (m)	TVD depth (m)	Vertical section (m)	Displ +N/S- (m)	Displ +E/W- (m)	Total displ (m)	At Azim (deg)	DLS (deg/10m)	Srvy type	Tool Corr
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	TIP	None	
2	1425.49	0.59	234.33	1425.49	1425.46	-4.28	-4.28	-5.96	7.34	234.33	0.00	MWD	None
3	1454.01	1.07	295.89	28.52	1453.98	-4.25	-4.25	-6.32	7.62	236.09	0.33	MWD	None
4	1487.29	0.97	129.33	33.28	1487.26	-4.29	-4.29	-6.38	7.69	236.08	0.61	MWD	None
5	1510.95	0.86	56.64	23.66	1510.92	-4.32	-4.32	-6.08	7.46	234.60	0.46	MWD	None
6	1539.34	0.80	303.78	28.39	1539.31	-4.09	-4.09	-6.07	7.32	235.99	0.49	MWD	None
7	1568.02	0.85	315.97	28.68	1567.98	-3.83	-3.83	-6.38	7.44	239.03	0.06	MWD	None
8	1595.59	0.53	308.57	27.57	1595.55	-3.60	-3.60	-6.62	7.54	241.45	0.12	MWD	None
9	1624.12	0.56	304.38	28.53	1624.08	-3.44	-3.44	-6.84	7.66	243.29	0.02	MWD	None
10	1653.18	0.34	298.89	29.06	1653.14	-3.32	-3.32	-7.03	7.78	244.73	0.08	MWD	None
11	1681.34	0.26	305.03	28.16	1681.30	-3.24	-3.24	-7.16	7.86	245.63	0.03	MWD	None
12	1709.52	0.31	319.56	28.18	1709.48	-3.15	-3.15	-7.26	7.91	246.56	0.03	MWD	None
13	1737.89	0.40	311.67	28.37	1737.85	-3.02	-3.02	-7.38	7.98	247.73	0.04	MWD	None
14	1766.33	0.35	299.78	28.44	1766.29	-2.92	-2.92	-7.53	8.08	248.85	0.03	MWD	None
15	1809.32	0.26	261.27	42.99	1809.28	-2.86	-2.86	-7.74	8.26	249.70	0.05	MWD	None
16	1849.73	0.23	231.00	40.41	1849.69	-2.93	-2.93	-7.90	8.42	249.65	0.03	MWD	None
17	1878.02	0.37	193.70	28.29	1877.98	-3.05	-3.05	-7.96	8.53	249.02	0.08	MWD	None
18	1908.10	0.34	223.98	30.08	1908.06	-3.21	-3.21	-8.05	8.67	248.24	0.06	MWD	None
19	1935.76	0.18	265.57	27.66	1935.72	-3.28	-3.28	-8.15	8.78	248.11	0.09	MWD	None
20	1963.97	0.17	252.91	28.21	1963.92	-3.29	-3.29	-8.23	8.87	248.21	0.01	MWD	None
21	1991.95	0.12	204.40	27.98	1991.90	-3.33	-3.33	-8.29	8.93	248.11	0.05	MWD	None
22	2020.87	0.20	231.00	28.92	2020.82	-3.39	-3.39	-8.34	9.00	247.88	0.04	MWD	None
23	2049.42	0.23	223.20	28.55	2049.37	-3.46	-3.46	-8.41	9.10	247.64	0.01	MWD	None
24	2077.78	0.26	214.74	28.36	2077.73	-3.56	-3.56	-8.49	9.21	247.27	0.02	MWD	None
25	2105.32	0.33	183.75	27.54	2105.27	-3.69	-3.69	-8.53	9.29	246.63	0.06	MWD	None
26	2134.71	0.29	176.46	29.39	2134.66	-3.85	-3.85	-8.53	9.36	245.74	0.02	MWD	None
27	2162.92	0.22	203.34	28.21	2162.87	-3.97	-3.97	-8.55	9.42	245.11	0.05	MWD	None
28	2192.60	0.14	180.37	29.68	2192.55	-4.06	-4.06	-8.57	9.48	244.68	0.04	MWD	None
29	2220.68	0.29	203.20	28.08	2220.63	-4.15	-4.15	-8.60	9.55	244.21	0.06	MWD	None
30	2248.46	0.15	220.05	27.78	2248.41	-4.25	-4.25	-8.65	9.64	243.85	0.05	MWD	None
31	2277.42	0.31	183.89	28.96	2277.37	-4.35	-4.35	-8.68	9.71	243.36	0.07	MWD	None
32	2306.21	0.34	216.07	28.79	2306.16	-4.50	-4.50	-8.74	9.83	242.74	0.06	MWD	None
33	2334.13	0.40	185.07	27.92	2334.08	-4.67	-4.67	-8.79	9.95	242.05	0.07	MWD	None
34	2361.66	0.37	221.08	27.53	2361.61	-4.83	-4.83	-8.86	10.09	241.42	0.09	MWD	None
35	2390.55	0.33	232.85	28.89	2390.50	-4.95	-4.95	-8.99	10.26	241.17	0.03	MWD	None
36	2419.57	0.32	200.20	29.02	2419.52	-5.08	-5.08	-9.08	10.40	240.81	0.06	MWD	None
37	2433.15	0.24	208.59	13.58	2433.10	-5.14	-5.14	-9.11	10.46	240.59	0.07	MWD	None
38	2476.28	0.50	232.35	43.13	2476.23	-5.33	-5.33	-9.30	10.72	240.19	0.07	MWD	None
39	2534.29	0.33	216.60	58.01	2534.24	-5.62	-5.62	-9.60	11.13	239.67	0.04	MWD	None
40	2649.13	0.37	195.11	114.84	2649.07	-6.24	-6.24	-9.90	11.70	237.76	0.01	MWD	None
41	2762.85	0.23	199.79	113.72	2762.79	-6.81	-6.81	-10.07	12.16	235.92	0.01	MWD	None
42	2878.16	0.23	190.81	115.31	2878.10	-7.26	-7.26	-10.19	12.51	234.55	0.00	MWD	None
43	2950.00	0.26	140.59	71.84	2949.94	-7.52	-7.52	-10.11	12.61	233.35	0.03	MWD	None
44	2979.00	0.26	140.59	29.00	2978.94	-7.63	-7.63	-10.03	12.60	232.76	0.00	Proj. to TD	

Company: SANTOS – INPEX – UNOCAL

Well: Amrit-1

Field: Exploration

Rig: Jack Bates **VIC-P-52**

State: Victoria



CDR – Resistivity
1:500 Measured Depth
Recorded Mode Data