


RAY 3300 / 1700 DE-MULTIPLEXED TAPE  
 16 BIT BINARY WORD  
 9 TRACK - IBM COMPATIBLE

SEE NOTE 1

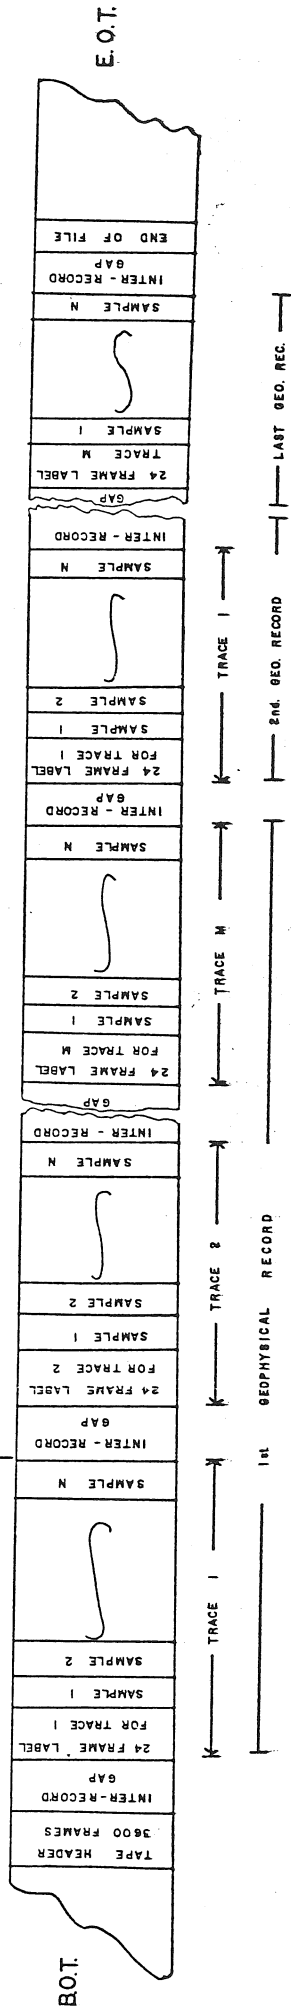

BIT CONFIGURATION

TRACE TYPE	TRACE NUMBER	LINE NUMBER	SHOT POINT NUMBER	REEL NUMBER	DIGITAL REC. NUMBER	DATA SAMPLE NO. 1	DATA SAMPLE NO. 2
P	1	1	1	1	1	1	1
P	2	2	2	2	2	2	2
P	3	3	3	3	3	3	3
P	4	4	4	4	4	4	4
P	5	5	5	5	5	5	5
P	6	6	6	6	6	6	6
P	7	7	7	7	7	7	7
P	8	8	8	8	8	8	8
P	9	9	9	9	9	9	9
P	10	10	10	10	10	10	10
P	11	11	11	11	11	11	11
P	12	12	12	12	12	12	12
P	13	13	13	13	13	13	13
P	14	14	14	14	14	14	14
P	15	15	15	15	15	15	15
P	16	16	16	16	16	16	16
P	17	17	17	17	17	17	17
P	18	18	18	18	18	18	18
P	19	19	19	19	19	19	19
P	20	20	20	20	20	20	20
P	21	21	21	21	21	21	21
P	22	22	22	22	22	22	22
P	23	23	23	23	23	23	23
P	24	24	24	24	24	24	24
P	25	25	25	25	25	25	25
P	26	26	26	26	26	26	26
P	27	27	27	27	27	27	27
P	28	28	28	28	28	28	28
P	29	29	29	29	29	29	29
P	30	30	30	30	30	30	30
P	31	31	31	31	31	31	31
P	32	32	32	32	32	32	32
P	33	33	33	33	33	33	33
P	34	34	34	34	34	34	34
P	35	35	35	35	35	35	35
P	36	36	36	36	36	36	36
P	37	37	37	37	37	37	37
P	38	38	38	38	38	38	38
P	39	39	39	39	39	39	39
P	40	40	40	40	40	40	40
P	41	41	41	41	41	41	41
P	42	42	42	42	42	42	42
P	43	43	43	43	43	43	43
P	44	44	44	44	44	44	44
P	45	45	45	45	45	45	45
P	46	46	46	46	46	46	46
P	47	47	47	47	47	47	47
P	48	48	48	48	48	48	48
P	49	49	49	49	49	49	49
P	50	50	50	50	50	50	50
P	51	51	51	51	51	51	51
P	52	52	52	52	52	52	52

TAPE HEADER: HEADER IS MIXED BINARY AND EBCDIC. TWO EBCDIC CHARACTERS / WORD. ONE EBCDIC CHARACTER / FRAME.

DATA: BITS IN THE INDICATED POSITIONS REPRESENT THE INDICATED POWERS OF 2 - BINARY RECORDING. HIGH ORDER BIT IS A SIGN BIT. DATA IS RECORDED IN 2'S COMPLEMENT, ODD PARITY.

NOTE 1: 3300 PROCESSED DATA CONTAINS A 52 BYTE TRAILER LABEL AT THE END OF EACH TRACE

PS009075