



G F E Resources Ltd

DEPT. NAT. RES & ENV

PE900923

WELL COMPLETION REPORT

DUNBAR-1

PPL1

OTWAY BASIN, VICTORIA

TEXT, APPENDICES & ENCLOSURES

January, 1996

**WCR
DUNBAR-1
W1119**

31 JAN 1996

PETROLEUM DIVISION

GFE RESOURCES LTD

PPL1

OTWAY BASIN, VICTORIA

DUNBAR-1

WELL COMPLETION REPORT

submitted

January, 1996

CONTENTS

	<i>Page</i>
TEXT	
1. INTRODUCTION	1
1.1 Reasons For Drilling	1
1.2 Main Results	1
2. WELL HISTORY	2
2.1 Location	2
2.2 General Data	2
2.3 Drilling Data	2
2.3.1 <i>Drilling Contractor</i>	2
2.3.2 <i>Drilling Rig</i>	2
2.3.3 <i>Casing and Cementing Details</i>	2
2.3.4 <i>Drilling Fluid</i>	4
2.3.5 <i>Drilling Bits</i>	4
2.3.6 <i>Water Supply</i>	4
2.3.7 <i>Drilling History</i>	5
2.4 Formation Sampling and Testing	7
2.4.1 <i>Cuttings</i>	7
2.4.2 <i>Cores</i>	7
2.4.2.1 Conventional Cores	7
2.4.2.2 Sidewall Cores	7
2.4.3 <i>Testing</i>	7
2.4.3.1 Drill Stem Testing	7
2.4.3.2 Wireline Formation Testing	9
2.4.4 <i>Sample Analyses</i>	9
2.5 Logging and Surveys	9
2.5.1 <i>Mud Logging</i>	9
2.5.2 <i>Wireline Logging</i>	9
2.5.3 <i>Deviation Surveys</i>	10
2.5.4 <i>Velocity Survey</i>	10

3.	GEOLOGY	11
3.1	Stratigraphy	11
3.2	Lithology	12
3.2.1	<i>Heytesbury Group</i>	12
3.2.1.1	Port Campbell Limestone	12
3.2.1.2	Gellibrand Marl	12
3.2.1.3	Clifton Formation	12
3.2.2	<i>Nirranda Group</i>	12
3.2.2.1	Narrawaturk Marl	13
3.2.2.2	Mepunga Formation	13
3.2.3	<i>Wangerrip Group</i>	13
3.2.3.1	Dilwyn Formation	13
3.2.3.2	Pember Mudstone	13
3.2.3.3	Pebble Point Formation	14
3.2.3.4	"K-T" Shale	14
3.2.4	<i>Sherbrook Group</i>	14
3.2.4.1	Paaratte Formation	14
3.2.4.2	Skull Creek Mudstone	15
3.2.4.3	Nullawarre Greensand	15
3.2.4.4	Belfast Mudstone	15
3.2.4.5	Waarre Formation	15
3.2.4.5.1	Unit D	15
3.2.4.5.2	Unit C	16
3.2.4.5.3	Unit B	16
3.2.4.5.4	Unit A	16
3.2.5	<i>Otway Group</i>	16
3.2.5.1	Eumeralla Formation	16
3.3	Hydrocarbon Indications While Drilling	17
3.3.1	<i>Mud Gas</i>	17
3.3.2	<i>Fluorescence</i>	17
3.3.2.1	Cuttings	17
3.3.2.2	Sidewall Cores	17
3.4	Geochemistry	18
3.5	Palynology	18
3.6	Structure	18
3.7	Log Analysis	19
4.	CONCLUSIONS	21
5.	IMPLICATIONS	21

TABLES

1.	Bit Record	6
2.	TOTCO Deviation Surveys	10
3.	Formation Tops and Thicknesses	11
4.	Predicted vs Actual Formation tops	18
5.	Log Analysis Results - Waarre Formation	20

FIGURES

1.	Location Map
2.	Otway Basin generalised stratigraphy
3.	Drilling Progress Chart
4.	RFT Pressure Plot

APPENDICES

1.	Rig Specifications
2.	Drilling Fluid Recap
3.	Daily Report Summary of Drilling Operations
4.	A Cuttings Descriptions B Daily Report Lithological Descriptions
5.	Sidewall Core Descriptions
6.	Drill Stem Test Data (DST-1) & Gas Sample Analysis
7.	RFT Pressure Test Report Sheet
8.	Velocity Survey
9.	Geochemistry Report
10.	Palynology Report

ENCLOSURES

1	Composite Log	1:1000
2	Formation Evaluation Log (Mud Log)	1:500
3	Gas Ratio Analysis Log	1:1000
4	Log Analysis	1:500

1. INTRODUCTION

1.1 Reasons For Drilling

Dunbar-1 is an exploration well located in the northwest of PPL1 Otway Basin, Victoria, approximately 1.6 kilometres from Port Campbell-3 and 2.5 kilometres north of the commercial gas discovery Wallaby Creek-1 (Figure 1).

The well is situated at the northwestern end of a west-northwest trending tilted horst block in the Port Campbell Embayment, which has fault-dependant closure with the crest situated adjacent to the major north-bounding fault.

The primary objective in Dunbar-1 was the Waarre Formation (Figure 2), which was interpreted to be over 100m thick at the well location.

Lateral seal was the dominant risk associated with the prospect since the throw at the crest could have been sufficient to place the top of the reservoir against the Nullawarre Greensand equivalent. To the south and southeast of Dunbar-1 the Nullawarre Greensand equivalent dominantly comprises silty claystones with only occasional very fine sandstone interbeds up to four metres thick, but to the east and north it is thicker and coarser, and thus less likely to be an effective seal.

Hydrocarbon charge was considered low risk due to the numerous hydrocarbon intersections in the region. It was proposed to continue the well about 200 metres below the target horizon to investigate the interpreted spill-point depth into adjacent structures.

1.2 Main Results

Dunbar-1 spudded on 9 March, 1995 and was drilled to a total depth of 1758.0 mKB in 10 days.

Log analysis evaluation and RFT pressure measurements indicate a gas zone in the Waarre Formation at the top of Unit 'C'. The gross hydrocarbon column comprises the interval 1481.8-1485.0 (1399.1-1402.3 mSS) mKB and is 3.2 m thick. Water saturations increase below 1485.0 mKB suggesting a transition zone down to 1488.5 mKB (1405.8 mSS) The zone was not tested. Deep resistivity values drop considerably below 1488.5 mKB and are indicative of a water zone underneath the gas.

A second gas zone is present in the Waarre Formation, Unit 'A', between 1533.0-1543.0 mKB (mSS). Below this depth the section comprises predominantly non-net claystones and, therefore, a GWC could not be identified. Gas is indicated by DST results, logs, high mud gas readings and RFT pressure data.

Two Drill Stem Tests were conducted over the same interval, 1526.0 - 1557.0 mKB, within the lower interpreted hydrocarbon zone. DST-1 failed due to plugging. DST-2 also partially failed due to plugging, but flowed gas at an unstabilised rate of 750 MCFD and recovered 40 m of viscous mud with condensate/oil.

It is thought that the Unit 'A' sand is in a separate system to the unit 'C' sand above.

An attempt was made to run 7" casing down to the Waarre gas zones, but the casing became stuck and Dunbar-1 had to be suspended with casing cemented down to 1209.83 mKB. The rig was released on 1 April, 1995.

Surface Casing

Size: 9⁵/₈"

Weight & Grade: 18 Joints 36 lb/ft Buttress K55
7 Joints 43.5 lb/ft Buttress K55

Centralisers: 308m, 287m, 276m and 264m

Float Collar: 299.77m

Shoe: 311.93m

Hole Depth: 317.0m

Cement: 393 sacks Class "A" neat cement

Method: Single plug displacement (top plug only)

Equipment: Dowell/Schlumberger

Production Casing

Size: 7"

Weight & Grade: 12 Joints 23 lb/ft STC J55
75 Joints 26 lb/ft LTC N80
15 Joints 26 lb/ft LTC K55

Centralisers: 1207m, 1162m, 1127m, 1093m, 1081m,
1070m, 1058m, 1046m, 1034m, 1022m,
1010m, 998m, 973m, 937m, 901m, 865m,
829m, 793m and 721m.

Float Collar: 1196.98m

Shoe: 1209.83m

Hole Depth: 1758.0m

Cement: 447 bbls 2% Gel class "G" cement and
31.4 bbls Class "G" neat cement

Method: Top and bottom plug displacement method

Equipment: Dowell/Schlumberger

Cement plugs

Plug No.1

Interval: 1610-1440m
Cement: 240 sacks class "G" cement
Method: Balanced
Tested: Tagged at 1437m

Plug No.2

Interval: 1240-1180m
Method: Balanced
Tested: Tagged at 1178m
Pressure tested to 500 PSI

Surface Plug

Top flange and bull plug installed on 7" casing

2.3.4 *Drilling Fluid*

The drilling fluid program used was that designed and recommended by M-I Australia Pty. Ltd. after consultation with GFE representatives. The well was spudded with drill water and relied on native clays for viscosity. Excessive rheology from the Gellibrand Marl caused mud ring problems on three occasions whilst drilling. After running the surface casing the shoe track was drilled out with water and whilst drilling 5 metres of new hole prior to running the FIT the hole was displaced to a PHPA mud. Drilling of the 8¹/₂" hole section proceeded with a Drill water/PHPA/PAC R mud system which was maintained to total depth. On every wiper and bit trip, tight hole necessitated considerable time to be spent reaming. Excessive filter cake build up also appeared primarily to cause the plugging of the DST tool on both drill stem test attempts. On running the 7" production casing this became irretrievably stuck and was cemented in place at 1209 metres. Details of the mud system used and assessment of its performance are contained in the Drilling Fluid Recap (Appendix 2).

2.3.5 *Drilling Bits*

Three new drilling bits and two re-runs were used during the drilling of Dunbar-1, and a record is shown in Table 1.

2.3.6 *Water Supply*

Drilling water was obtained from a domestic water main and trucked to a pit dug at the wellsite.

2.3.7 *Drilling History*

The following summary of operations and the drilling progress chart (Figure 3) for Dunbar-1 are based on tour sheets and daily drilling reports. A more detailed account can be found in the compilation of the operations summaries from daily drilling reports in Appendix 3.

A 16" conductor pipe was cemented at 5 metres (GL) prior to rig up. Dunbar-1 was spudded at 1700 hours on March 9, 1995 with a 12¹/₄" bit. Drilling 12¹/₄" hole continued with surveys until 317m (9⁵/₈" casing depth) without problems except for mud rings occurring at 263m, 291m, 310m, and after a wiper trip at 317 metres. The 9⁵/₈" casing was run to 311.93 metres but during cementing the cement unit was unable to mix continuously and maintain slurry weight so after 1 hour and only 35bbls of slurry pumped the cement was circulated to surface and dumped. The cement unit was repaired and the 9⁵/₈" casing was cemented in place without problems. After waiting on the cement to set, the BOP's were installed and pressure tested. An 8¹/₂" bit and drilling assembly was used to drill 5m of new hole whereupon a formation integrity test was conducted (equivalent mud weight of 22.89ppg).

Drilling of 8¹/₂" hole then continued with surveys to 856m with the only drilling problems encountered being from balling clays causing an inability of the shakers to cope with the mud flow. At 856m a wiper trip was run which encountered severe tight hole problems. After reaming all tight hole sections drilling of 8¹/₂" hole with surveys continued to 1287m where another wiper trip was conducted. This wiper trip also encountered tight hole which was subsequently reamed on the way back to bottom. Drilling 8¹/₂" hole with surveys then continued to 1507m where the bit was tripped due to high torque. On the trip out severe tight hole was again encountered. The bit was found to be 1/2" undergauge. After changing bits and picking up a junk-sub the 8¹/₂" drilling assembly was run back in hole reaming all tight hole sections on the way in. Drilling 8¹/₂" hole then continued to 1557m where drilling ceased to conduct a drill stem test. After conditioning the hole and working all tight hole sections Drill Stem Test-1 was run over the interval 1526 to 1557m. However on retrieving the test tool it was found to be plugged. The hole was then conditioned and Drill Stem Test-2 was run over the same interval (1526 to 1557m). Drilling of 8¹/₂" hole with surveys then continued to 1758m (Total Depth).

After conditioning the hole and reaming all tight hole sections BPB were rigged up and the wireline logging suite run. After completion of the wireline logging suite with clean-out trips as necessary, 7" production casing was run but at a depth of 1245m this became stuck - after freeing the 7" casing it again hung up and was unable to pass 1253m. At this point an attempt was made to retrieve the casing to surface however at 1210m the casing became irretrievable stuck. The 7" casing was then cemented in place at 1210m. After changing the 7" casing rams to 3¹/₂" pipe rams, a 3¹/₂" drill string was picked up with a 6" BHA. The cement shoe track was drilled with the 6" assembly and was then used to run to total depth (1758m) and the hole circulated clean. The 6" assembly was subsequently tripped out and the drill string run back open ended to set cement plugs. Plug-1 was tagged and plug-2 in the bottom of the 7" casing tagged and pressure tested. The 3¹/₂" drill string was layed out, the BOP's removed and a new top flange and bull plug installed. The rig was released at 2400 hrs on April 1, 1995.

TABLE I

BIT RECORD

Rig: Century Rig 11
Reached T.D.: 2100hrs 19/3/95

GFE Rep.: Ken Smith
Spud: 1700hrs 9/3/95

Well: Dunbar-1
Permit: PPL1

No.	Size (inch)	Make	Type	Jets	Serial	Depth Out (m)	Mtrs Drtd	Hours	Ave Rate (m/hr)	Accum Drig Hours	Wt. on bit (000lbs)	RPM	Vert Dev (°)	Pump Press (psi)	GPM	Mud			IADC Dull. Grade					Remarks			
																V/S	P/P/PP	I	O	L	B	G	O				
1RR	12½	Varel	L-114 1x16	2x20	22776	317	307	12½	24.5	12½	5/20	90/12 0	1/8	900	450	9.1	45	13/20	1	1	2	1/16			T/D		
2	8½	HTC	ATJ05	3x11	L03W Y	1507	1190	60	20	72.5	20/25	95/11 0	1°	1200	275	93	46	25/24									
Lead Cone: All gauge row broken, 1 inner row insert broken Brg loose seal N/E																											
2nd Cone: All gauge row, 7 inner row, and 1 nose row broken - brg loose seal - non effective																											
3rd Cone: All gauge row, all inner row bearing loose & seal non-effective (stab 3/8 under gauge - 7/8 under gauge)																											
3	8½	HTC	ATJ05	3x11	V79BV	1557	50	4	12.5	76.5	25	90/11 0	1°	1200	275	9.3	52	26/36	1	1	1	1	1			Test	
2nd cone: 1 chipped in Middle Row, 2nd cone: 2 broken insert in Middle Row																											
3RR	8½	HTC	ATJ05	3x11	V79BV	1758	201 (251)	15 (19)	13.4	91.5	25	110	1°	1200	275	9.3	42	16/14	1	1	2	1/16				T/D	
Lead Cone: 1 insert chipped in 2nd row																											
2nd Cone: 1 insert chipped in Nose Row																											
3rd Cone: 1 insert chipped in Gauge row and 1 insert broken in Middle Row.																											
4	6	SEC	6S4				1748	91.5	20.2																		
Average Penetration: W/C 813724 (Comment)																											

2.4 Formation Sampling And Testing

2.4.1 *Cuttings*

Cuttings samples were collected at five-metre intervals from 6 metres to 1758 metres (T.D.) and subdivided into sets as follows;

- 1 set of unwashed and air-dried samples in calico bags 6 - 1758 metres
- 3 sets of washed and dried samples in plastic bags 6 - 1758 metres
- 1 set of washed and dried samples in Samplex trays 6 - 1758 metres

One set of washed and dried samples was subsequently made available to the Department of Energy and Minerals (Petroleum Division) sample store. The remaining samples were retained by GFE Resources Ltd.

Lithological descriptions of cuttings by the wellsite geologist are provided in Appendix 4A, and a compilation of the lithological descriptions from daily reports issued during the drilling can be found in Appendix 4B.

2.4.2 *Cores*

2.4.2.1 Conventional Core

No conventional cores were cut in Dunbar-1.

2.4.2.2 Sidewall Cores

A total of 24 sidewall cores were attempted (Appendix 5), of which 20 were recovered.

All recovered sidewall core samples were checked for lithology and hydrocarbon shows.

2.4.3 *Testing*

2.4.3.1 Drill Stem Testing

Two Drill Stem Tests (DST's) were conducted in Dunbar-1, as outlined below.

DST-1 was a conventional dual-packer, bottom-hole test conducted on 17 March 1995 over the interval 1526.0-1557.0 metres (driller's depth) to evaluate the top of the Waarre Formation Unit A sandstone. The Drill Stem Test failed due to plugging and recovered 3 m of rathole mud.

After drilling through a predominantly shaly interval (Waarre Formation Unit B) with Total Gas readings ranging 10-11 units, a peak of 821 units was recorded at 1523 metres followed by 510 units down to 1545 metres then decreasing to 35 units by 1557 metres. This gas increase coincided with a lithology change from a shale to a dominantly fine grained sandstone and a rate of penetration (ROP) increase from 10-15 metres/hour to 30-60 metres/hour. These observations suggested probable gas saturation associated with probable good porosity, so the decision to conduct a DST was made.

The tool was opened at 0801 hours for a six-minute Pre-Flow, with both the manifold and the bubble hose closed. During this period no visible pressure increase occurred. After the test tool was closed in at 0807 hours the bubble hose was opened with a very weak air blow. The tool was reopened at 0852 hours after a 45 minutes initial shut-in period with both the manifold and bubble hose closed. After five minutes into the final flow period and no surface pressure indications were present, the bubble hose was opened but was dead. To remove doubt about correct tool functioning the test tool was closed at 0909 hours after a final flow period of 17 minutes. The tool was re-opened at 0912 hours but the blow remained dead until the tool was closed at 0942 hours. The tool was then shut-in for 30 minutes before the test interval was equalised with the annulus and the tool pulled free.

Total fluid recovered was 3 metres of rathole mud. The test was deemed a failure due to plugging at perforations externally and in the hydraulic tool internally.

After the failure of DST-1 due to plugging, it was decided a second attempt at testing the Waarre Formation Unit A was warranted.

DST-2 was a conventional dual-packer, bottom-hole test conducted on 18 March 1995 over the interval 1526.0-1557.0 metres (driller's depth). The DST partially failed due to plugging. It flowed gas to surface at an un stabilised rate of 750 MCFD. It recovered 40 m viscous mud cut with condensate/oil.)

The tool was opened at 1128 hours for a five-minute Pre-Flow, with both the manifold and the bubble hose closed. During this period the pressure increased to 9 PSI. After the tool was closed in at 1133 hours the manifold was opened to allow the pressure to bleed off in preparation for the final flow period. The tool was reopened at 1233 hours after a 60 minute initial shut-in period with the manifold closed but the bubble hose open. A strong air blow was evident. The manifold was opened through a 1/2" choke at 1234 hours and the pressure increased to 5 PSI by 1238 hours then began to gradually decrease. Gas reached surface at 1238 hours. The manifold was closed at 1244 hours to allow the pressure to build up for a gas sample. By 1313 hours with the manifold closed the pressure had built up 20 PSI when the manifold was opened. The pressure decreased to 6.5 PSI by 1318 hours when the manifold was again closed to allow pressure to build up for an alternative sample. By 1320 hours the pressure had built up to 20 PSI when the manifold was opened through a 1/2" choke. The pressure began to build rapidly so at 1324 hours the manifold choke was changed to 1" to stimulate clean-up. The flowing pressure stabilised at 50 PSI by 1329 hours when the choke was changed back to a 1/2". The flowing pressure then increased to its maximum of 105 PSI at 1333 hours but thereafter steadily decreased to 10 PSI by the time the test tool was closed at 1433 hours, after a total final flow time of 120 minutes. The tool was then shut-in for 90 minutes before the test interval was equalised with the annulus and the tool pulled free.

Total fluid recovered was 40 metres of highly viscous mud cut with condensate/light oil. The test was deemed a failure due to plugging at perforations externally and in the hydraulic tool internally similar to that which occurred in DST-1.

Due to positive identification of pore fluid type and good permeability due to referencing the build-up the decision was made not to repeat the test.

The Drill Stem Test report and results of analysis carried out on gas samples are found in Appendix 6.

2.4.3.2 Wireline Formation Testing

Repeat Formation Test (RFT) pressure readings were carried out in Dunbar-1 and the results listed in Appendix 7. The pressure vs depth plot is found in Figure 6. The interpretation of the plot is found under section 4. An attempt was made to take a sample at 1486.0 m but it failed due to seal failure.

2.5 Logging And Surveys

2.5.1 Mud Logging

A standard skid-mounted unit equipped for continuous recording of depth, rate of penetration (ROP), mud gas, pump rate and mud volume data, as well as intermittent mud and cuttings gas (blender) analysis was operative from spud until the well was plugged and suspended. The Formation Evaluation Log (i.e., "Mud Log") at 1:500 scale is provided in Enclosure 2, and a Gas Ratio Analysis Log at 1:1000 scale is provided in Enclosure 3.

2.5.2 Wireline Logging

Wireline logging was performed by BPB using a standard truck-mounted unit. Only one logging suite was carried out (at total depth) and comprised the following:-

Run	Tool String	Interval (mKB)	BHT (°C)	Hours since circulation stopped	Comments
1	Array Induction - Microlaterolog - Sonic-SP-GR-CALI	1754.0-312.0	58	6.5	GR to surface
2	Acoustic Imaging Tool	1737.0-1355.0	N/A	12.0	
3	Compensated Neutron - Photodensity - GR	1748.0-800.0	64	21.0	
4	Repeat Formation Sampler	1644.5-1482.2	N/A		39 tests attempted
5	Velocity Survey	T.D - Surface	N/A		Run by Velocity Data
6	Sidewall Cores		N/A		24 attempted, 20 recovered

Hole Size Logged: 8.5"

The mud properties during logging were as follows:

Mud Type	PHPA/PAC
Density (ppg)	9.3
Viscosity (sec)	4.0
pH	8.6
Fluid Loss (cc)	6.8
Rm @ Temp	2.71 @ 19.6 °C
Rmf @ Temp	2.56 @ 21.2 °C
Rmc @ Temp	3.33 @ 22.2 °C

2.5.3 Deviation Surveys

Totco deviation surveys were carried out periodically throughout the drilling of Dunbar-1, with results as shown in Table 2. Using this data a maximum radius of deviation was calculated by summing the products of the component of horizontal shift [$interval\ length \times \sin(deviation\ angle)$] for each interval. This indicates that the Waarre Formation primary objective was intersected within a 16 -metre radius of the surface location and the bottom hole location was within a 18-metre radius, which equates to an overall deviation of no more than one degree.

TABLE 2

DUNBAR-1 HOLE DEVIATION								
Depth (m)	Interval (m)	Angle (m)	Sin(angle)	Horizontal distance (m)	Total horizontal (m)	cos(angle)	Vertical distance (m)	Total vertical distance (m)
0								
11	11	0	0.00	0.00	0.00	1.00	11.00	11.00
30	19	0	0.00	0.00	0.00	1.00	19.00	30.00
84	54	0	0.00	0.00	0.00	1.00	54.00	84.00
129	45	0.5	0.01	0.39	0.39	1.00	45.99	129.00
193	64	0	0.00	0.00	0.39	1.00	64.00	193.00
250	57	0.125	0.00	0.12	0.52	1.00	57.00	250.00
442	192	0	0.00	0.00	0.52	1.00	192.00	442.00
626	184	0.5	0.01	1.61	2.12	1.00	183.99	625.99
814	188	0	0.00	0.00	2.12	1.00	188.00	813.99
1015	201	0.25	0.00	0.88	3.00	1.00	201.00	1014.99
1217	202	1.25	0.02	4.41	7.14	1.00	201.95	1216.94
1417	200	1	0.02	3.49	10.90	1.00	199.97	1416.91
1619	202	1.5	0.03	5.29	16.18	1.00	201.93	1618.84
1744	125	1	0.02	2.18	18.37	1.00	124.98	1743.82
			Totals	18.37			1743.82	

2.5.4 Velocity Survey

A Velocity Survey (WST-Checkshot) was carried out by Velocity Data. This report is found in Appendix 8.

3. GEOLOGY

3.1 Stratigraphy

The section penetrated in Dunbar-1 is interpreted to have formation tops as shown in Table 3 based on consideration of rate of penetration, cuttings descriptions, palynological analyses and wireline logs. Unless stated otherwise, depths mentioned in this report will be referenced on the well datum, the kelly bushing (KB).

TABLE 3

DUNBAR-1 FORMATION TOPS AND THICKNESSES

Stratigraphic Unit	Depth		Thickness
	(mKB)	(mSS)	(m)
Heytesbury Group	5.7	+77.0	420.3
Port Campbell Limestone	5.7	+77.0	118.3
Gellibrand Marl	124.0	-41.3	291.0
Clifton Formation	415.0	-332.3	11.0
Nirranda Group	426.0	-343.3	136.0
Narrawaturk Marl	426.0	-343.3	86.0
Mepunga Formation	512.0	-429.3	50.0
Wangerrip Group	562.0	-479.3	317.0
Dilwyn Formation	562.0	-479.3	200.0
Pember Mudstone	762.0	-679.3	60.0
Pebble Point Formation	822.0	-739.3	43.0
K-T Shale	865.0	-782.3	14.0
Sherbrook Group	879.0	-796.3	816.2
Paaratte Formation	879.0	-796.3	356.0
Skull Creek Mudstone	1235.0	-1152.3	114.0
Nullawarre Greensand (equiv.)	absent	-	0.0
Belfast Mudstone	1405.5	-1322.8	72.5
Waarre Formation	1478.0	-1395.3	217.3
Unit D †	1478.0	-1395.3	3.8
Unit C	1481.8	-1399.1	19.2
Unit B	1501.0	-1418.3	31.5
Unit A	1532.5	-1449.8	15.6
Otway Group	1548.1	-1465.4	209.9+
Eumeralla Formation	1548.1	-1465.4	209.9+
Total Depth (Driller)	1758.0	-1675.3	

† Also known as the Flaxman Formation

3.2 Lithological Description

The following is a summary of the lithological units observed in Dunbar-1 compiled from the descriptions by the wellsite geologist (Appendix 4), as well as the Mud Log (Enclosure 2), and sidewall core descriptions (Appendix 5).

3.2.1 *Heytesbury Group (Surface - 426.0 metres)*

3.2.1.1 Port Campbell Limestone (Surface - 124.0 metres)

Calcarenite: orange, very fine to fine grained, sucrosic texture, common shell fragments and foraminifer, common red brown iron oxide rich calcilutite, friable, good visual porosity. By 50m gradually becoming very light grey, fine grained, trace fossil fragments including bivalves, gastropods, foraminifer, sponge spicules and echinoid spines, slightly argillaceous, trace glauconite, trace medium grey marl, friable, poor visual porosity. With minor interbedded

Marl: medium grey, very calcareous grading to calcilutite, firm, non-fissile.

3.2.1.2 Gellibrand Marl (124.0 - 415.0 metres)

Marl: medium grey with increasing medium green grey below 205m, occasionally medium brown grey, in general becoming less calcareous with depth, abundant fossil fragments including bivalves, gastropods, foraminifer, bryozoa, sponge spicules and echinoid spines, rare glauconite, rare dispersed quartz sand grains, trace pyrite occasionally as fossil replacement, rare micromica in part, very soft, sticky, non-fissile.

3.2.1.3 Clifton Formation (415.0 - 426.0 metres)

Calcarenite: orange brown, very fine to very coarse grained, abundant dark brown iron oxide pellets, abundant light to medium orange brown iron oxide stained bryozoa, trace to common shell fragments, echinoid spines and sponge spicules, common brown iron oxide stained very fine to very coarse frosted subrounded to well rounded quartz grains, weak cryptocrystalline calcareous cement, friable to moderately hard, poor inferred porosity. Grading with depth to off white to light yellow to orange to brown, occasionally yellow green, often very lutitic, common bryozoa fragments, trace foraminifer, echinoid spines, sponge spicules and shell fragments, trace dark brown very fine to occasionally very coarse iron oxide pellets, trace brown very fine to occasionally very coarse iron oxide stained frosted subrounded to well rounded quartz grains, friable, very poor visual porosity. With minor interbedded

Marl: medium to dark brown, trace to common medium grey to medium green grey, common bryozoa, trace shell fragments, foraminifer, echinoid spines and sponge spicules, common pyrite, trace dark green to black glauconite, common very fine clear quartz grains, very soft, sticky, non-fissile.

3.2.2 *Nirranda Group (426.0 - 562.0 metres)*

3.2.2.1 Narrawaturk Marl (426.0 - 512.0 metres)

Marl: medium to dark brown, common medium grey, trace medium green grey, common bryozoa, trace shell fragments, foraminifer, echinoid spines and sponge spicules, common pyrite grading to marcasite, trace dark green to black glauconite, common very fine clear quartz grains, very soft, sticky, non-fissile.

3.2.2.2 Mepunga Formation (512.0 - 562.0 metres)

Sandstone: medium brown, very fine to grit, dominantly medium, very poorly sorted, subangular to rounded, weak calcareous cement, weak silica cement, abundant white calcilutite matrix in part, abundant medium to dark brown argillaceous and silt matrix, strong brown stain on quartz grains, common glauconite, friable, very poor inferred porosity. With depth grading to

Sandstone: medium brown, very fine to very coarse, dominantly fine to medium, angular to rounded, dominantly subrounded, poorly sorted, weak silica and calcareous cements, abundant medium brown to dark brown argillaceous and silt matrix (matrix supported grading to arenaceous claystone), weak to strong brown stain on quartz grains, trace dark brown iron oxide pellets, trace black lithics, friable, very poor visual porosity. Grading to

Claystone: medium to dark brown, non to occasionally very calcareous, very silty in part, abundant dispersed quartz grains in part grading to argillaceous sandstone, common glauconite, trace micromica, trace pyrite, soft, non-fissile.

3.2.3 Wangerrip Group (562.0 - 879.0 metres)

3.2.3.1 Dilwyn Formation (562.0 - 762.0 metres)

Sandstone: light brown grey, very fine to very coarse, dominantly coarse, subangular to subrounded, moderately sorted, weak silica cement, occasional strong dolomite cement towards base, abundant medium to dark brown argillaceous and silt matrix, trace white calcilutite matrix in part, clear to light orange brown stained quartz grains, trace pyrite, trace muscovite flakes, trace green grey cherty lithics, trace glauconite, friable, poor visual porosity. Grading to and occasionally interbedded with

Claystone: medium to dark brown, very silty, trace to abundant dispersed very fine to very coarse light brown stained quartz grains, trace pyrite grading to marcasite, trace medium brown cryptocrystalline dolomite increasing towards base, occasionally black and very carbonaceous, trace micromica, trace muscovite flakes, soft, very dispersive, non-fissile.

3.2.3.2 Pember Mudstone (762.0 - 822.0 metres)

Claystone: medium to dark brown, very silty, common to abundant dispersed very fine to fine quartz sand grains, trace dispersed medium to grit sized quartz sand grains, common pyrite, trace glauconite, trace fossil fragments, slightly calcareous in part, trace medium brown cryptocrystalline dolomite, trace black carbonaceous material, trace micromica, soft, very dispersive, non-fissile.

Occasionally grading to Sandstone: light brown, very fine to fine, occasional medium to grit sized grains, subangular to rounded, dominantly subrounded, poorly sorted, weak silica cement, rare brown dolomite and calcareous cements, abundant medium to dark brown argillaceous and silt matrix (matrix supported), rare green grey cherty lithics, trace muscovite flakes, friable, very poor visual porosity Below 810m the Pember becomes very sandy being:

Sandstone: medium brown, very fine to grit, dominantly very coarse, subangular to rounded, dominantly subrounded, very poorly sorted, occasional strong calcareous and medium brown cryptocrystalline dolomite cements, abundant medium brown argillaceous and silt matrix (matrix supported), trace brown stain on quartz grains, trace pyrite, friable, very poor visual porosity With minor interbedded and in part grading to

Claystone: medium brown, very silty, common to abundant dispersed very fine to grit quartz sand grains, common pyrite, trace glauconite, trace fossil fragments, slightly calcareous in part, trace medium brown cryptocrystalline dolomite, trace black carbonaceous material, trace micromica, soft, very dispersive, non-fissile.

3.2.3.3 Pebble Point Formation (822.0 - 879.0 metres)

Sandstone: light brown, very fine to grit, dominantly very coarse, subangular to subrounded, very poorly sorted, weak silica cement, trace to common medium brown argillaceous and silt matrix, trace white argillaceous matrix, trace to common yellow to brown quartz grains, trace green clay lithics, friable, fair visual porosity. Grading in part to and occasionally interbedded with

Claystone: medium to dark brown, very silty, occasionally iron oxide rich, abundant dispersed very fine to grit quartz sand grains, common pyrite, trace glauconite, slightly calcareous in part, trace black carbonaceous material, soft, very dispersive, non-fissile.

3.2.3.4 K-T Shale (865.0 - 879.0 metres)

Claystone: medium to dark brown, silty, abundant quartz grains, soft, dispersive.

3.2.4 *Sherbrook Group* (879.0 - 1477.9 metres)

3.2.4.1 Paaratte Formation (879.0 - 1235.0 metres)

Sandstone: very light orange grey, very fine to pebble, dominantly coarse to very coarse in general gradually becoming finer grained with depth, subangular to subrounded, moderately to well sorted, weak silica cement, trace medium brown argillaceous and silt matrix, common yellow quartz grains, common grey green and trace red cherty lithics, trace pyrite, friable, fair to good visual porosity. With depth gradually grading to

Sandstone: light grey, very fine to grit, dominantly fine, subangular, poorly sorted, moderate silica cement, weak light brown dolomite cement in part, common to abundant white to light brown argillaceous matrix, abundant medium grey argillaceous and silt matrix in part, trace grey green and red lithics, trace black coal detritus, trace pyrite often associated with coal detritus, friable to moderately hard, poor visual porosity, grading to;

Sandstone: off white to light grey to light brown, very fine to dominantly fine, subangular, well sorted, strong dolomite cement in part, moderate silica cement, abundant white argillaceous matrix, common very fine partially altered feldspar grains, trace black carbonaceous flecks, rare pyrite, trace very fine muscovite flakes, moderately hard, very poor visual porosity grading to and interbedded with

Claystone: light to dark grey, dominantly medium grey, often light grey and very silty, abundant dispersed very fine to fine quartz and altered feldspar grains in part, common dispersed medium to grit quartz sand grains in part, trace pyrite, trace black coal detritus, trace medium brown cryptocrystalline dolomite, trace to common micromica, firm, very dispersive, slightly subfissile.

3.2.4.2 Skull Creek Mudstone (1235.0 - 1349.0 metres)

Claystone: medium to dark grey, occasionally medium to dark brown grey, very silty, common dispersed very fine to fine quartz and partially altered feldspar grains, common pyrite, trace medium brown cryptocrystalline dolomite, trace black carbonaceous flecks, trace micromica, firm, very dispersive, slightly subfissile. With minor interlaminated

Sandstone: off white to very light grey, very fine to fine, occasional medium to very coarse grains, subangular, moderately sorted, moderate to strong silica cement, trace strong dolomite cement, common to abundant white argillaceous matrix, occasionally abundant medium grey argillaceous and silt matrix, trace very fine to fine grey and rare red lithics, common very fine to fine partially altered feldspar grains, trace black carbonaceous flecks, trace very fine light green glauconite, moderately hard, very poor visual porosity. With from 1308 to 1309.5m. and 1316 to 1317.5m.

Sandstone: off white to light grey, very fine to fine, subangular, well sorted, strong silica and calcareous cements, common white argillaceous matrix in part, common light green lithics, trace biotite and muscovite, trace very fine black carbonaceous grains, very hard, no visual porosity.

3.2.4.3 Nullawarre Greensand (equivalent) (absent)

This unit is absent due to faulting

3.2.4.4 Belfast Mudstone (1405.5 - 1477.9m)

Claystone: dark grey, occasionally very dark grey and very carbonaceous, trace to common glauconite increasing with depth, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace to occasionally common medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.

3.2.4.5 Waarre Formation (1478.0 - 1548.1 metres)

3.2.4.5.1 Unit D (1478.0 - 1481.8 metres)

Limestone: very light brown, lutitic to cryptocrystalline, trace glauconite, hard, no visual porosity. Intermixed with minor;

Claystone: medium to dark brown grey, dark grey, occasionally very dark grey and very carbonaceous, trace to common glauconite increasing with depth, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace to occasionally common medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.

3.2.4.5.2 Unit C (1481.8 - 1501.0 metres)

Sandstone: light grey, very fine to grit, dominantly very coarse, angular to subangular, poorly sorted, weak silica cement, trace white argillaceous matrix, trace black coal detritus, trace pyrite, friable, good inferred porosity.

3.2.4.5.3 Unit B (1501.0 - 1532.5 metres)

Sandstone: light grey, very fine to very coarse, dominantly coarse, angular to subangular, poorly sorted, weak silica cement, trace weak calcareous cement, trace to occasionally abundant white argillaceous matrix, trace black carbonaceous detritus, trace pyrite, friable, good inferred porosity. Interbedded with

Claystone: medium to dark grey, moderately silty, moderately carbonaceous, trace black coal flecks, trace pyrite, trace very fine dispersed quartz and altered feldspar grains in part, trace to common micromica, firm, very dispersive, slightly subfissile.

3.2.4.5.4 Unit A (1532.5 - 1548.1 metres)

Sandstone: off white to very light grey, very fine to medium, occasional coarse to very coarse grains, dominantly fine, angular to subangular, poor to moderate sorting, weak silica cement, abundant white argillaceous matrix, in part matrix supported, trace to common grey, green, red and brown lithics, trace muscovite and brown mica flakes, trace black coal detritus, trace pyrite, friable, very poor to poor visual porosity. Grading with depth to

Sandstone: light green grey, very fine to coarse, trace very coarse to grit grains, dominantly fine to medium, subangular, moderately sorted, weak silica cement, trace to abundant white argillaceous matrix, common green and brown lithics, trace black carbonaceous detritus, friable, poor visual porosity. Grading in part to

Claystone: (kaolinite) off white, abundant dispersed very fine to fine quartz and lithic sand grains in part, soft, sticky, non-fissile.

3.2.5 *Otway Group (1548.1 - 1758.0 metres)*

3.2.5.1 Eumeralla Formation (1548.1- 1758.0 metres)

Sandstone: light to medium green grey, very fine to coarse, dominantly medium, subangular, moderately sorted, weak silica cement, occasional moderate calcareous cement, common to dominantly abundant white argillaceous matrix, abundant green to grey to black lithics, common brown to red lithics, common to abundant altered feldspar grains, trace black coaly detritus, trace brown and green mica flakes, rare pyrite, friable, very poor visual porosity. Interbedded with and in part grading to

Claystone: light to medium grey, light to medium brown grey, light to medium green grey, slightly to occasionally very silty, common black carbonaceous flecks and black coal detritus, trace brown mica flakes, trace pyrite, nil to occasionally common very fine partially altered feldspar grains, trace micromica, firm, very dispersive, slightly subfissile.

3.3 Hydrocarbon Indications

3.3.1 *Mud Gas*

There was no gas recorded down to 1245 mKB. Between 1245 and 1350 mKB gas consisted of background methane only (C₁).

Between 1350 mKB and the top of the Waarre Formation at 1477.9 mKB gas was background C₁ and C₂, with total gas at around 0.1%.

Waarre Formation

A gas peak with up to 5% total gas and C₁ to C₃ was recorded between the top of this unit at 1478.0 and 1490.0 mKB.

Background gas predominated below 1490.0 mKB, but at 1532.0 mKB, coinciding with the top of Unit 'A' gas reading increased very significantly to more than 10% total gas with gas composition of C₁ to C₃. The high gas readings persisted down to 1548.0 mKB (Top Eumeralla).

Eumeralla Formation

There were no significant gas peaks within the Eumeralla Formation, and gas was mostly background comprising C₁ to C₃.

3.3.2 *Fluorescence*

Cuttings samples and sidewall cores were routinely inspected for shows with the following results;

3.3.2.1 Cuttings

Oil fluorescence was observed in the Waarre Unit C across the interval 1487.5 to 1489 metres with the sandstone having trace dull blue-white fluorescence associated only with the rock flour giving a weak blue-white crush cut and also in the Waarre Unit A at a depth of 1544 metres with a trace of the sandstone having a dull blue-white fluorescence giving a very dull blue crush cut. Apart from these two occurrences no other oil fluorescence was observed from cuttings during the drilling of Dunbar-1.

3.3.2.2 Sidewall Cores

No oil fluorescence was observed in any sidewall cores from Dunbar-1.

3.4 Geochemistry

A mud/oil sample from DST-2 was sent to Geotech in Perth for geochemical analysis. The worked performed comprised GC and branched/cyclic GC-MS analysis. Results of the analysis are contained in Appendix 9. The sample chamber sample was sent to Amdel for analysis and their report is contained in the same Appendix 9.

3.5 Palynology

Fourteen sidewall core samples were analysed in Dunbar-1 with the focus of the palynological investigation concentrated on the Waarre Formation and Belfast Mudstone.

The investigation was conducted by Alan Partridge of Biostrata Pty Ltd. The report is contained in Appendix 10.

3.6 Structure

The following table 4 shows the predicted versus actual formation tops encountered in the well.

Table 4

Predicted vs Actual Formation Tops

Stratigraphic Unit	Predicted Depth (mKB)	Actual Depth (mKB)	+/- (m)
Port Campbell Limestone/			
Gellibrand Marl	6	5.7	+0.3
Clifton Formation	401	415.0	-14.0
Mepunga Formation	484	512.0	-28.0
Dilwyn Formation	551	562.0	-11.0
Pebble Point Formation	812	822.0	-10.0
Paaratte Formation	887	879.0	+8.0
Skull Creek Mudstone	1246	1235.0	+11.0
Nullawarre Equiv.	ABS	ABS	-
Belfast Mudstone	1357	1405.5	+48.5
Waarre Fm. (Top Porosity)	1482	1478.0	+4.0
Eumeralla Formation	1583	1548.1	+34.9
T.D.	1728	1758.0	-30.0

Generally horizon tops came in close to prediction.

The Waarre Formation had a minor gas column in the Unit C sand with a definite water contact. The inference from this is that the northern fault leaks at just below the top of the Waarre in Dunbar across into the Nullawarre Greensand.

The Unit A sand in the lower Waarre Formation appeared to contain gas with no observed water contact. Although not conclusive it is thought that the Unit A sand is in a separate system to the Unit C sand above it and probably contains a commercial reserve of gas.

3.7 Log Analysis

Log analysis was performed only over the primary objective, the Waarre Formation and parts of the underlying Eumeralla Formation. All other formations lacked any hydrocarbon indications and were interpreted as water wet.

Log analysis was performed using Croker Data Processing PETROLOG software.

The Caliper log shows that over the analysed interval the hole is in good condition. All logs are also reading adequately.

Waarre Formation

The Waarre Formation Unit 'D' developed between 1477.9 - 1481.8 mKB is not a reservoir and consists of sandy claystone.

Unit 'C' and 'B' (1481.8 - 1532.5 mKB) comprise light grey, fine to grit, dominantly very coarse sandstones interbedded with claystone. The sandstones are angular to subangular, poorly sorted, with trace of argillaceous matrix and very good visual porosity.

Unit 'A' (1532.5 - 1548.1 mKB) comprises a reservoir sandstone described as light green grey, dominantly fine to medium, subangular, moderately sorted, with trace to abundant argillaceous matrix, common green and brown lithics and poor visual porosity. The logs response over this zone is atypical, and this sand might constitute a transition between the Eumeralla and the Waarre Formation. The sandstone displays high gamma ray values, PEF of around 3.2 and higher density than the sandstones above. Indeed, the log response of Unit 'A' is very similar to the underlying Eumeralla Sandstones.

A Drill Stem Test conducted over Unit 'A' flowed gas to surface at an unstabilised rate of 750 MCFD. A second gas zone was suspected at the top of Unit 'C' where there was high gas recorded while drilling.

Results of this log evaluation have indicated:

1. High gas saturations at the top of unit 'C' in good agreement with the high gas recorded while drilling.
2. Gas saturations of around 50% in Unit 'A'. The calculated gas saturations appear to be too low considering the flow of gas in DST-1. The reasons of why log analysis cannot calculate higher gas saturations are not readily apparent but it could be due to:
 - * Uncertain a, m, n
 - * Complex lithology
 - * Conductive clays within the formation

Formation water resistivity was calculated from the Rwa method in the clean, water sand at around 1517.0 m. A value of 0.126 ohmm was obtained at formation temperature, which is around 31,000 ppm salinity. This salinity was applied to the entire Waarre Formation.

Results of the log analysis are presented in Table 5 and Enclosure 4.

- * The Eumeralla Formation was found to be water wet with minor residual hydrocarbons (Enclosure 4).

Table 5

Log Analysis Results - Waarre Formation

Top Waarre = Top Unit 'D' 1477.9 mKB

Top Porosity = Top Unit 'C' 1481.8 mKB

1. UNITS 'C' and 'B'

Sand 1 1481.8 - 1501.0 mKB

	Total Interval (m)	Gross Sand (m)	Net Sand (m)	Net Pay (m)	ϕ_E	Ave Sw	Ave V_{cL}	Comments
1481.8-1485	3.2	3.2	3.0	3.0	0.24	0.70	0.03	Gas Zone
1485.0-1485.7	0.7	-	-	-	-	-	-	Argillaceous
1485.7-1488.5	2.8	2.5	2.45	2.45?	0.22	0.45	0.03	Transition Zone
Summary	6.7	5.7	5.45	5.45?	0.23	0.60	0.03	
1488.5-1491.0	1.5	2.5	2.50		0.23	0.75	0.05	Water
1491.0-1501.0	10.0	8.55	5.15		0.24	0.93	0.16	Water

Sand 2 1507.0 - 1519.0 mKB

	12.0	12.0	12.0	-	0.23	0.94	0.07	Water - Minor Residual Hydrocarbons
--	------	------	------	---	------	------	------	-------------------------------------

2. UNIT 'A'

Sand 3 1533.0 - 1543.0 mKB

1533.0-1537.0	4.0	3.75	3.75	3.75	0.21	0.47	0.17	Tested Gas
1537.0-1538.0	1.0	1.00	0.05	0.05	0.19	0.49	0.27	Tested Gas
1538.0-1543.0	5.0	3.70	3.70	3.70	0.21	0.49	0.15	Tested Gas
Summary	10.0	8.45	7.50	7.50	0.21	0.48	0.16	

4. CONCLUSIONS

- * The Waarre formation contains two gas accumulations.
- * The first accumulation in Unit 'C' comprises a minimum 3.2 m gross interval between 1481.8-1485.0 mKB (1404.8-1408.0 mSS). Below 1485.0 mKB there appears to be a transition zone down to 1488.5 mKB. Water saturations are very high below 1488.5 mKB indicating a water zone.
- * The second accumulation, in Unit 'A', comprises the interval 1533.0-1543.0 mKB (1456.0-1466.0 mSS) and is 10 m thick. A gas/water contact (GWC) could not be identified because the section becomes shaly below 1543.0 mKB.
- * The accumulation in Unit 'A' highlights the good sealing potential of intra-Waarre claystone.
- * The two gas accumulations are not in communication as suggested by the water zone separating them.
- * The gas-water contact identified in Unit 'C' suggests cross-fault leakage into the Nullawarre Greensand.

5. IMPLICATIONS

The failed completion of Dunbar-1 as a result of the 7" production casing becoming irretrievably stuck at 1209.83 mKB provides a clear indication that future drilling in the area requires a more detailed assessment of the factors affecting borehole condition, such as design of mud systems and casing points.

PE907919

This is an enclosure indicator page.
The enclosure PE907919 is enclosed within the
container PE900923 at this location in this
document.

The enclosure PE907919 has the following characteristics:


- ITEM_BARCODE = PE907919
- CONTAINER_BARCODE = PE900923
 - NAME = Well Location Map
 - BASIN = OTWAY
 - PERMIT = PPL/1
 - TYPE = WELL
 - SUBTYPE = MAP
- DESCRIPTION = Well Location Map (enclosure from Well
Completion Report) for Dunbar-1
- REMARKS =
- DATE_CREATED =
- DATE_RECEIVED = 31/01/96
 - W_NO = W1119
 - WELL_NAME = Dunbar-1
 - CONTRACTOR =
 - CLIENT_OP_CO = GFE Resources

(Inserted by DNRE - Vic Govt Mines Dept)

LOCATION MAP

Scale 1:100,000

0 10 km

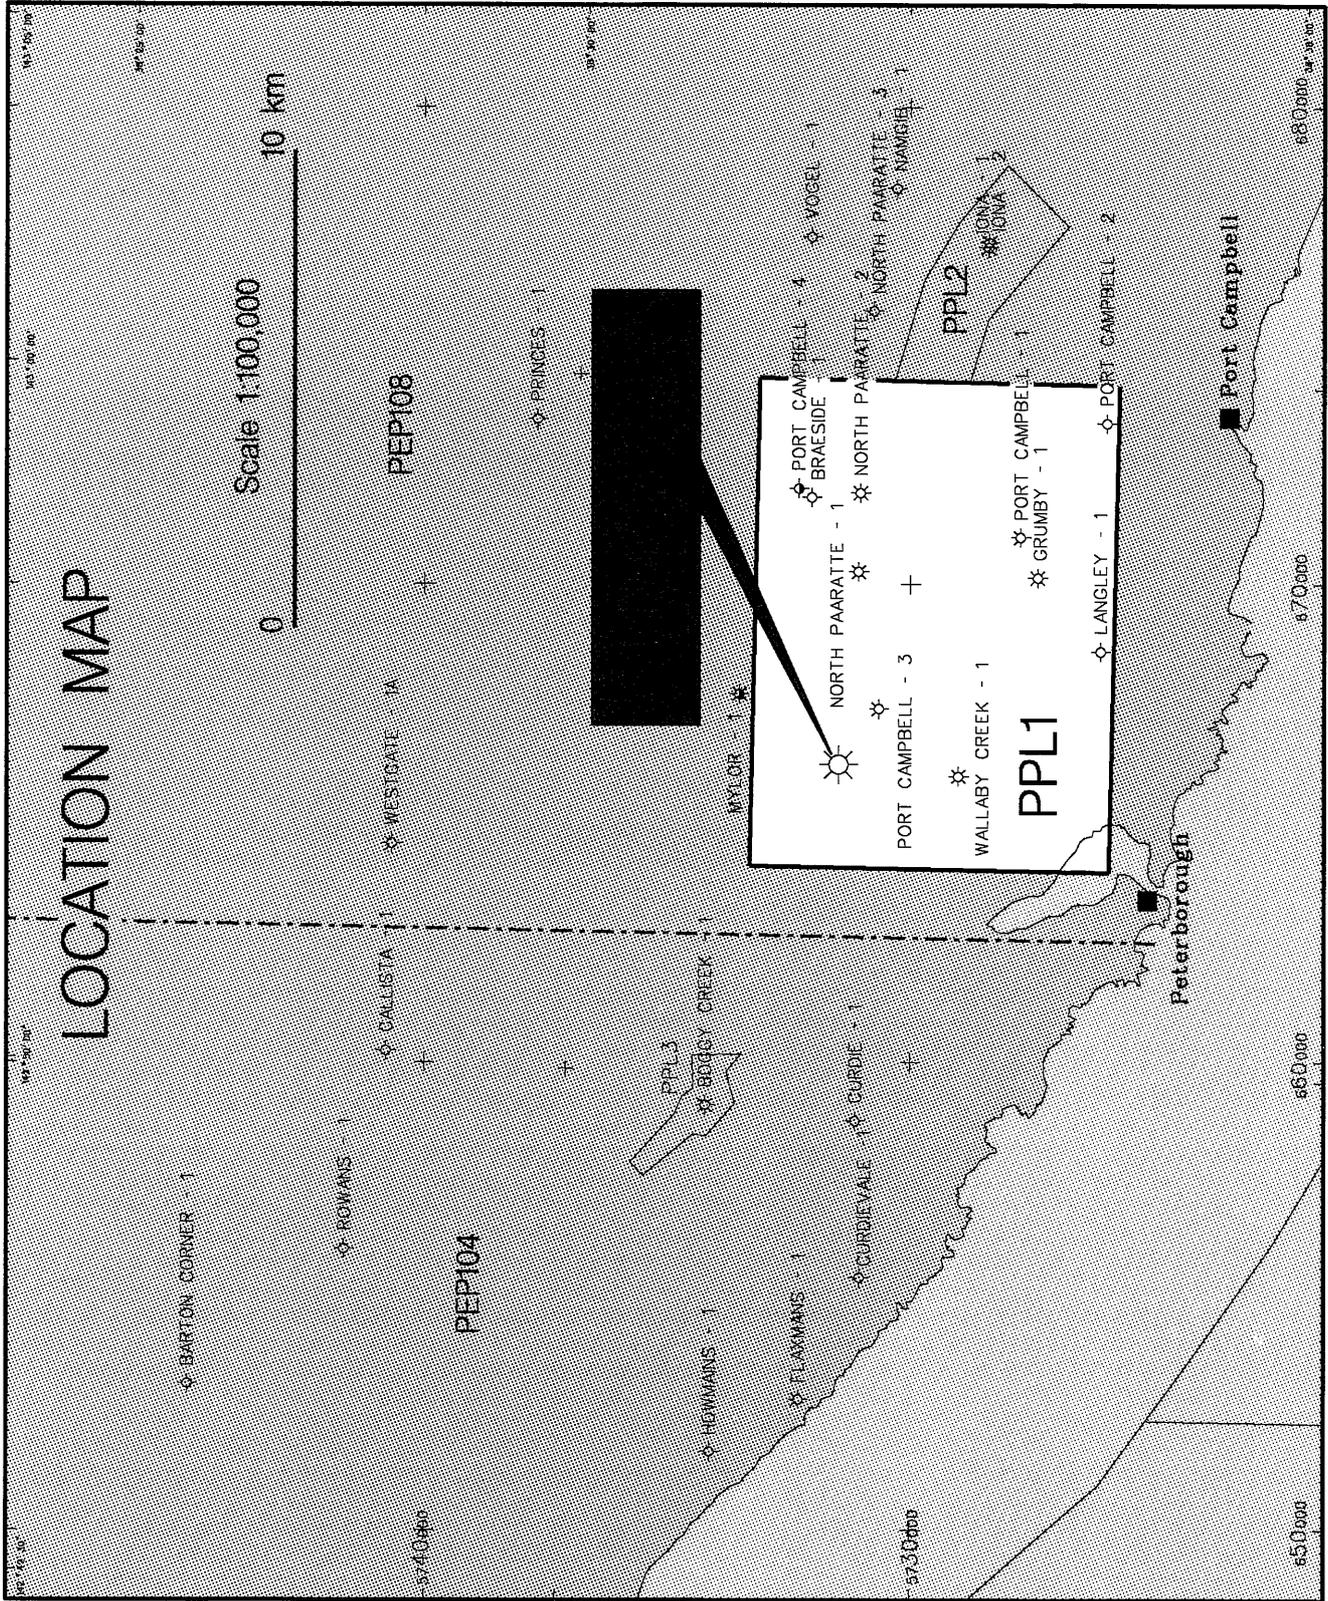

DEPT. NAT. RES & ENV
PE907919

PE907920

This is an enclosure indicator page.
The enclosure PE907920 is enclosed within the
container PE900923 at this location in this
document.

The enclosure PE907920 has the following characteristics:

ITEM_BARCODE = PE907920
CONTAINER_BARCODE = PE900923
 NAME = Stratigraphic Table
 BASIN = OTWAY
 PERMIT = PPL/1
 TYPE = WELL
 SUBTYPE = STRAT_COLUMN
DESCRIPTION = Onshore/Offshore Operational
 Stratigraphic Table (enclosure from
 Well Completion Report) for Dunbar-1
REMARKS =
DATE_CREATED =
DATE_RECEIVED = 31/01/96
 W_NO = W1119
 WELL_NAME = Dunbar-1
CONTRACTOR = Cultus Petroleum NL
CLIENT_OP_CO = GFE Resources

(Inserted by DNRE - Vic Govt Mines Dept)



OFFSHORE-ONSHORE OPERATIONAL STRATIGRAPHIC TABLE

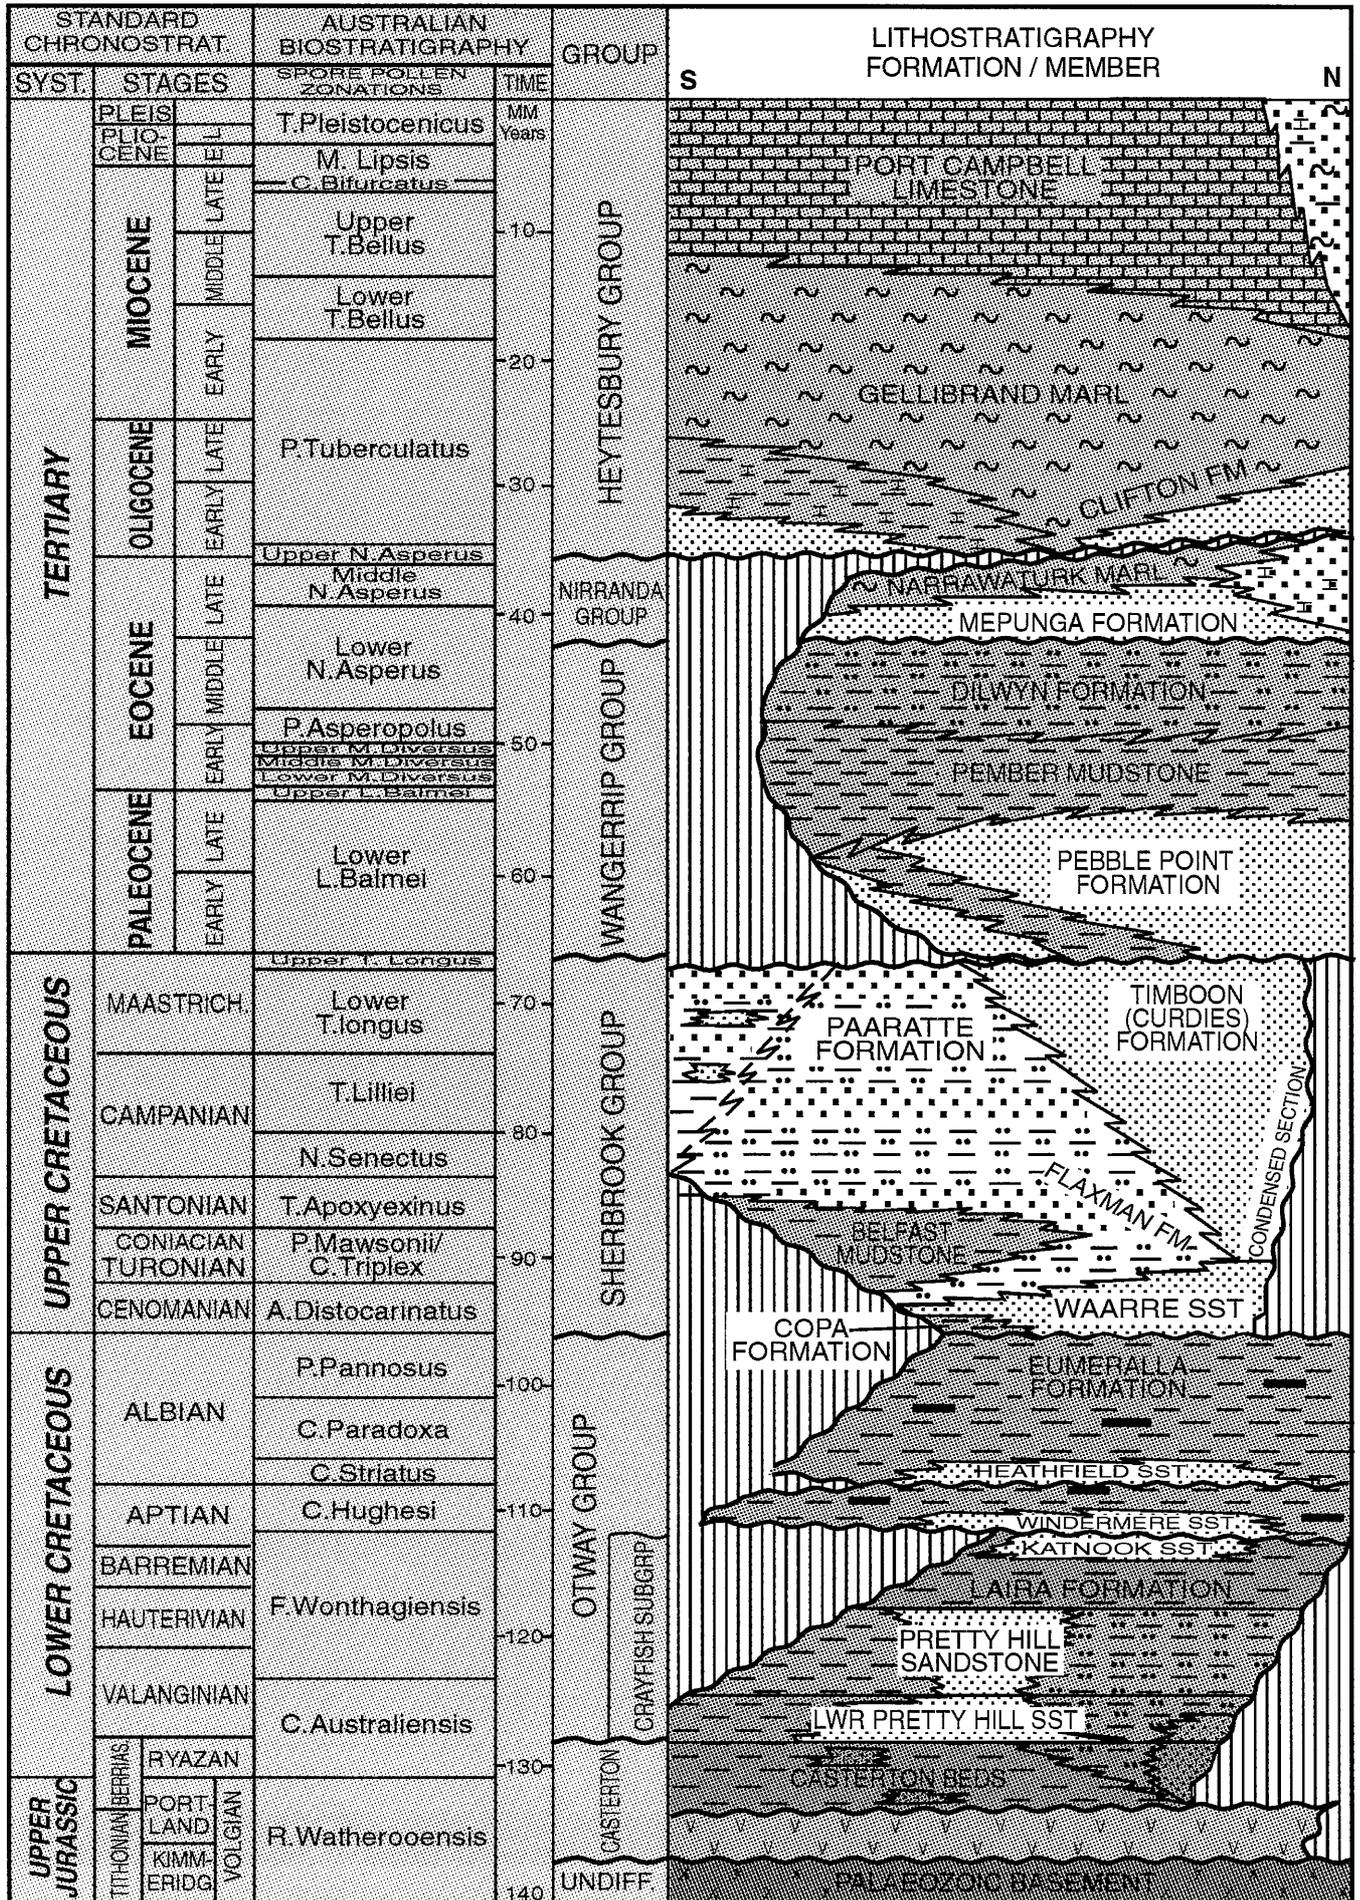


FIGURE 2

GFE Resources Ltd
DUNBAR-1

Drilling Progress Curve


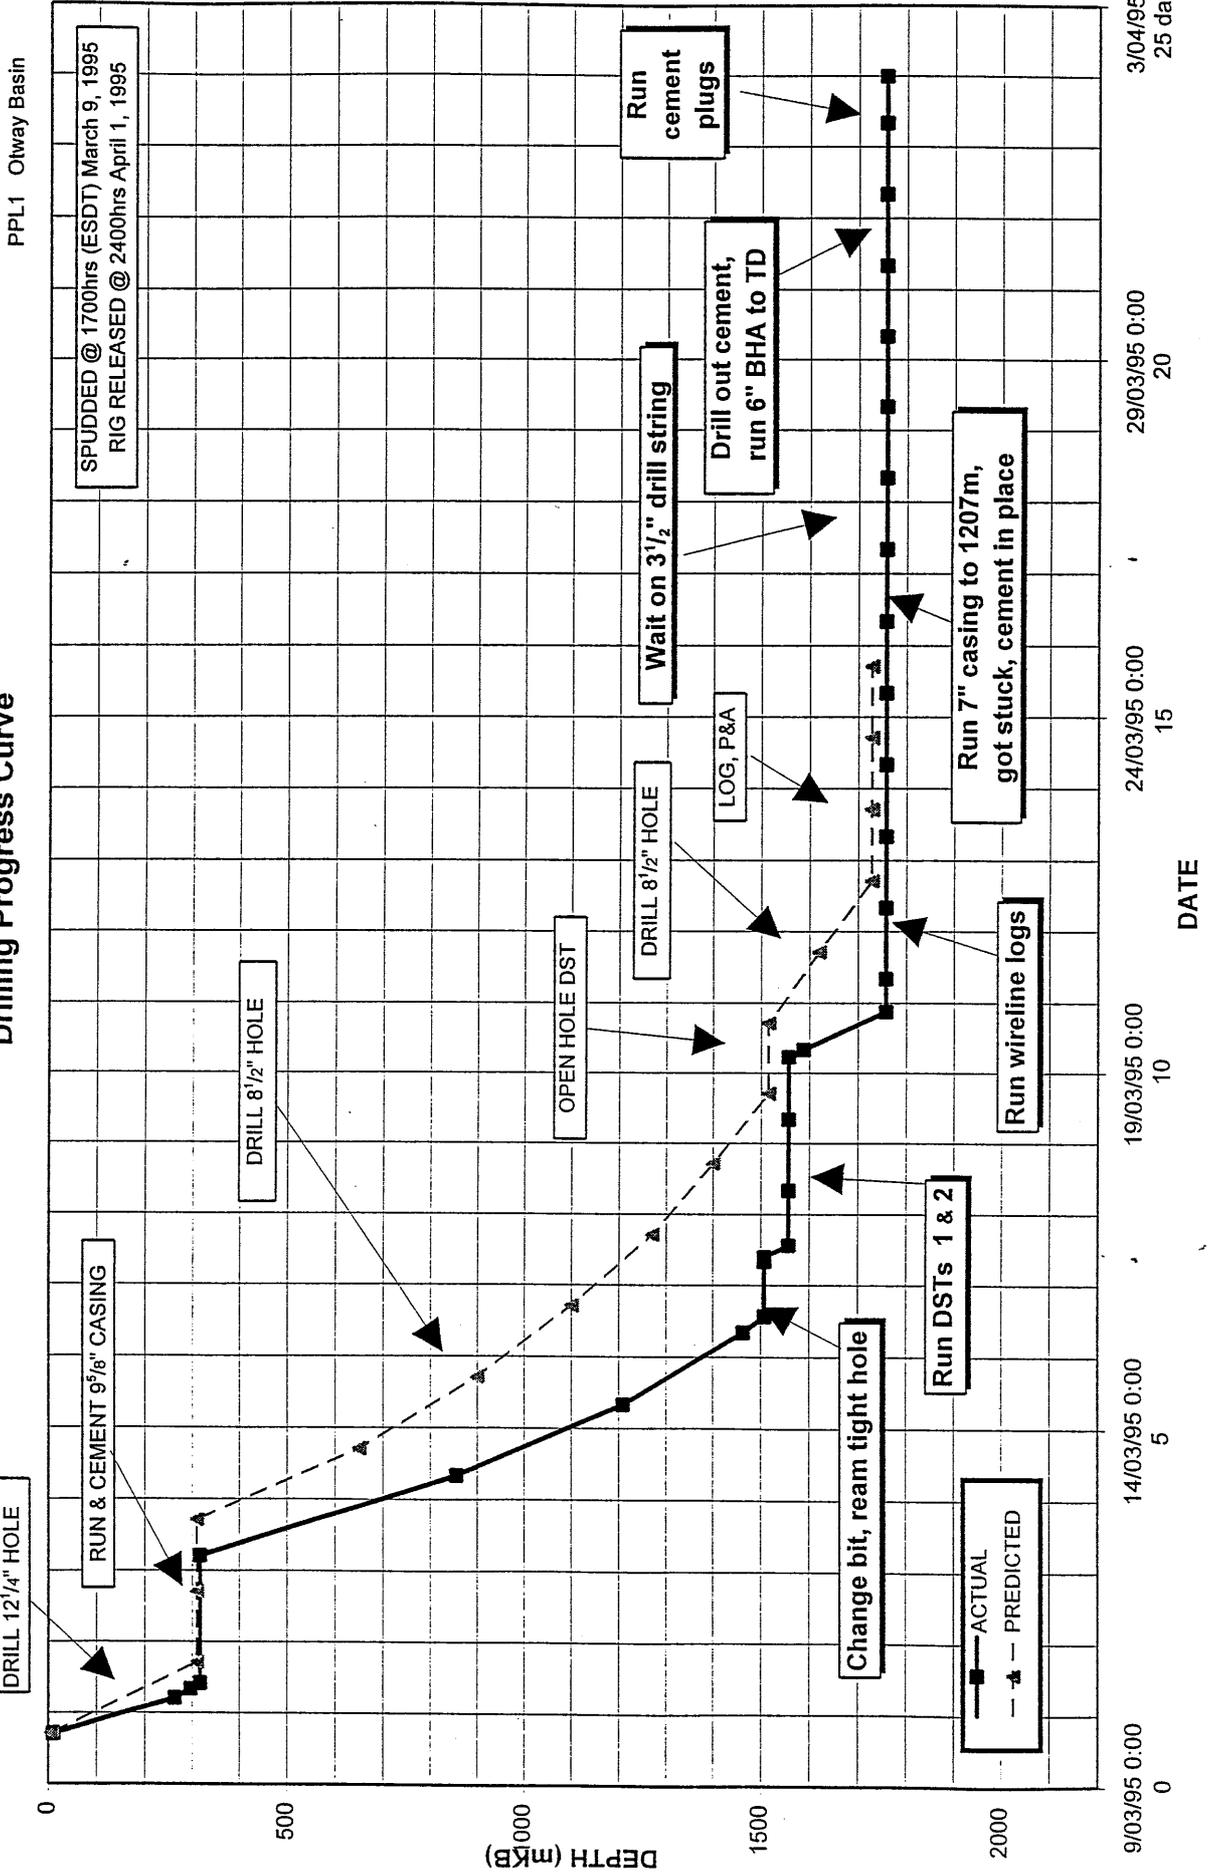


FIGURE 3

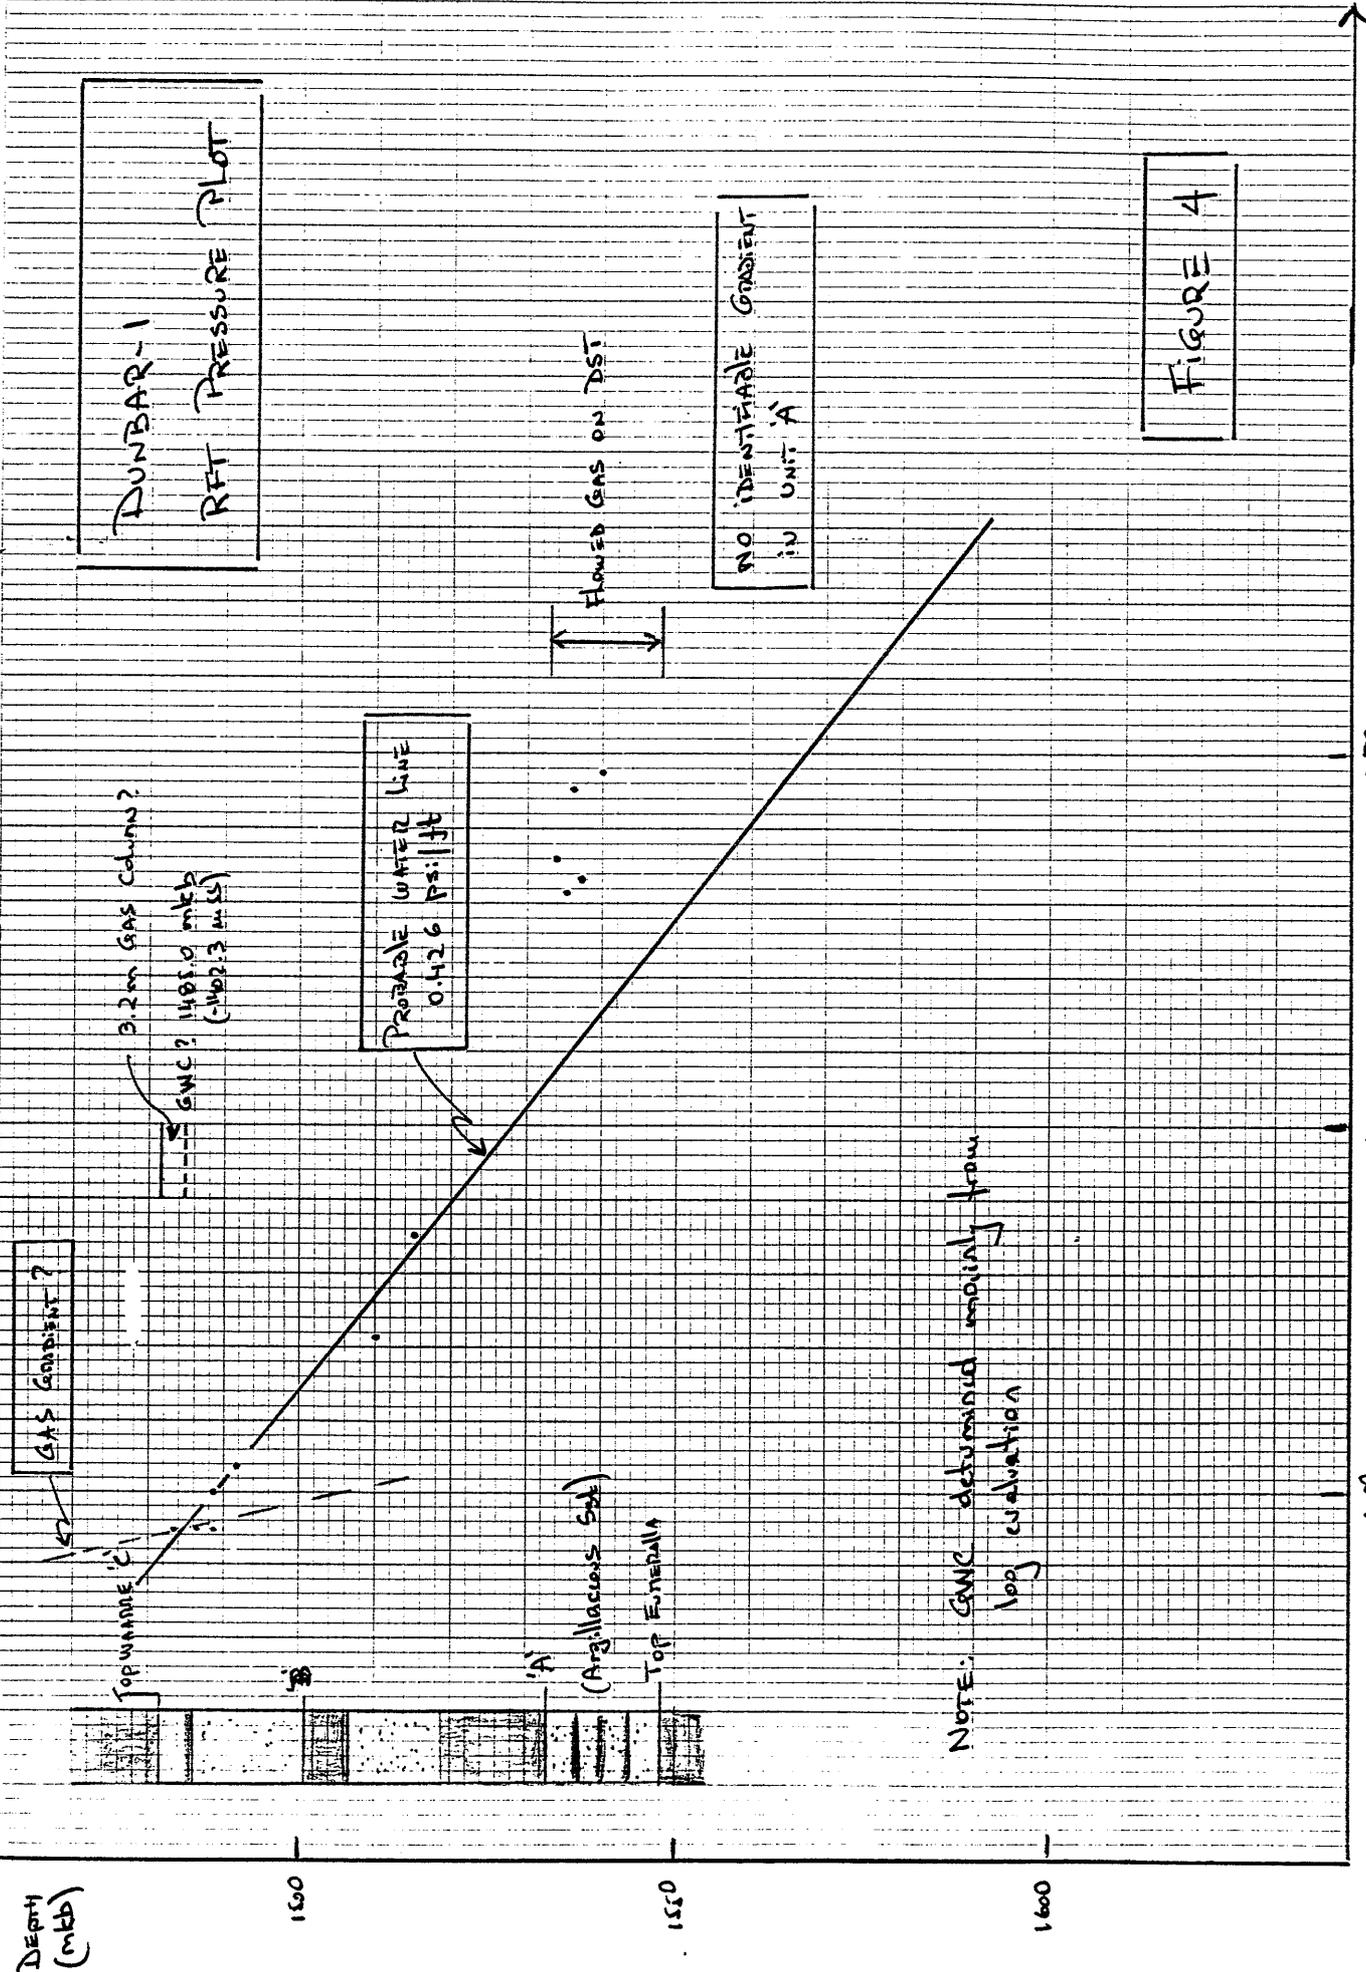

APPENDIX

1

APPENDIX 1

RIG SPECIFICATIONS

INVENTORY - RIG #11

CARRIER	Cooper LTO 750 Carrier with triple front and rear axles 54000lb front and 70000lb rear. All necessary highway equipment. Unit levelled with hydraulic jacks when stationary.
SUBSTRUCTURE	17' floor height - 14' below table beams with plates in base.
DRAWWORKS	Cooper 750 H.P. Drawworks. 42" x 12" main drum with Fawick 28VC 1000 clutch and 3000 metres $\frac{9}{16}$ " sandline. Driven by 2 each Cat D3406TA Diesel Engines.
ROTARY TABLE	National Rotary Table Model C-175.
DERRICK	Cooper Derrick Model 118-365. Ground height 118'. Maximum rated static hook load 350000 lbs with 10 lines. Mast raised, lowered and telescoped hydraulically.
CROWN BLOCK	Cooper Crown Block with 4 working sheaves. Fast line sheave and dead line sheave. All grooved for 1- $\frac{1}{8}$ " line. Sandline sheave grooved for $\frac{9}{16}$ " line.
HOOK BLOCK	National Hook Block Model 435 G-175. 175 ton capacity. 4-35" sheaves grooved for 1- $\frac{1}{8}$ " line.
SWIVEL	P-200 National.
KELLY SPINNER	Foster Model K-77
SLUSH PUMPS	No. 1: National 8-P-80 Slush Pump. 6 $\frac{1}{4}$ " x 8 $\frac{1}{2}$ " Triplex single acting driven by Cat. D398TA Diesel Engine. No. 2: National 7-P-50 Slush Pump driven by Cat D379TA Diesel Engine.
PULSATION DAMPENER	1 each Hydril Pulsation Dampener type K20-3000.
MUD SYSTEM	2 x 300 bbl tanks incorporating 80 bbl pill tank and 40 bbl trip tank.
SHAKERS	Triton NNF Screening Machine (Linear Motion).
DEGASSER	Drilco Atmospheric Degasser Standard Pit. 7 $\frac{1}{2}$ H.P. 60 Hz 230v.
DESANDER	Demco Model 122. Two, 12" cone with Warman 6" x 4" Centrifugal pump driven by 50 H.P. Electric Motor.

DESILTER	Pioneer Economaster Model T12-E4. 12 x 4" cones with Warman 6" x 4" Centrifugal pump, driven by a 50 H.P. Electric Motor.
MUD MIXING PUMP	Warman 6" x 4" Centrifugal pump driven by a 50 H.P. Electric Motor.
MUD AGITATORS	4 only Brandt Mud Agitator Model MA 7.5.
B.O.P'S & ACCUMULATOR	10" x 3000 P.S.I. Shaffer Double Gate B.O.P. with 2 ³ / ₈ ", 2 ⁷ / ₈ ", 3 ¹ / ₂ ", 4 ¹ / ₂ ", 5 ¹ / ₂ ", 7" and Blind. 10" x 3000 P.S.I. Hydril GK Annular B.O.P. Koomey B.O.P. Control Unit. Accumulator Unit Model 100-11S.
CHOKE MANIFOLD	Cameron 5000 psi.
SPOOL	10" x 3000 x 10" x 3000 Flanged Drilling Spool with 3" x 3000 flanged choke and kill outlets.
INSTRUMENTATION	Martin-Decker 6 pen Record-O-Graph Martin-Decker Weight Indicator Type F.S. Martin-Decker Mud Pressure Gauge Martin-Decker Rotary R.P.M. Indicator Martin-Decker Stroke Indicator (2 off) Martin-Decker Rota Torque Indicator Martin-Decker Tong Torque Indicator Martin-Decker Mud Flow Sensor Martin-Decker Mud Flow Fill System Martin-Decker Mud Volume Totaliser (M.V.T.)
AUTOMATIC DRILLER	Satellite Automatic Driller Model SA100-50-1500.
WIRELINE STRIPPER	Guiberson Oil Saver Type H-4.
SURVEY UNIT	Totco 8 Deg Recorder.
MUD LAB	Baroid Rig Laboratory Model 821.
KELLY	5 ¹ / ₄ " HEX Kelly. 2 ¹³ / ₁₆ " I.D. x 40' long with 6 ⁵ / ₈ " API Reg. L.H. Box up 4" I.F. Pin down.
UPPER KELLY VALVE	Upper Kelly Cock. 10000 test 6 ⁵ / ₈ " API Reg. L.H. Connections.
LOWER KELLY VALVE	Hydril Kelly Guard. 4 ¹ / ₄ " - 10000 P.S.I. 4" I.F. Pin and Box.
KELLY DRIVE BUSHING	Varco Type 4 KRS Kelly Drive Bushing.
DRILL PIPE	7000' Drill Pipe 4 ¹ / ₂ " O.D. 16.60 lb. Grade E Range 2 with 4" I.F. x 18 degree taper tool joints.
DRILL COLLARS	20 each Drill Collars 6 ¹ / ₄ " O.D. slick 2 ¹³ / ₁₆ " I.D. x 30' long with 4 ¹ / ₂ " XH pin and box connections.

FISHING TOOLS	To suit pipe, collars and tubing.
SUBSTITUTES	To suit drill string.
HANDLING TOOLS	Farr Hydraulic Power Tongs, 13 ³ / ₈ " Varco SSW-10 spinning wrench. Manual tongs, elevators and slips to handle pipe, collars, casing and tubing.
WELDING EQUIPMENT	Lincoln Electric Welder Model 400AS.
AIR COMPRESSORS	Sullair compressor Package Model 10-30.
AC GENERATOR	2 each Caterpillar 3408TA AC Generator model SR-4. 1800 rpm 60 hz 275 kw.
FUEL TANKS	2 each 10,000 litre - Skid Mounted.
WATER TANK	400 bbl tank with two Warman 3 x 2 pumps driven by 24 hp electric motors.
PIPE RACKS	5 sets 30 feet in length.
CATWALKS	2 piece Catwalk drill pipe construction 42" height.
RADIO	Codan Mobile Transceiver.
TRANSPORTATION	International 530 Payloader. Toyota 4 x 4 Pickup. Toyota 4 x 4 Crew Vehicle.
RIG ACCOMMODATION	2 Skid Mounted Toolpusher/Company Man Units.

CAMP

1- Camp Generator House 31' long x 10' wide skid mounted complete with 2 -3304 T 80 Kw, 50 Hz, 200 - 400 volt generators, camp distribution panel. 6,794 litres fuel storage, 12,000 litres fresh water storage and 24,000 litres shower water storage.

1 Kitchen/Dining Room	40' x 10' x 10'
1 Recreation Room	40' x 10' x 10'
1 Ablution/Laundry	40' x 10' x 10'
3 12 Man Bunkhouses	40' x 10' x 10'
1 Cooler/Freezer	20' x 8' x 8'

APPENDIX

2

APPENDIX 2

DRILLING FLUID RECAP

M-I Drilling Fluids LLC.



FDC4

DRILLING FLUIDS DATA MANAGEMENT SYSTEM

**GFE RESOURCES
DUNBAR 1
PPL 1
OTWAY BASIN**

RECEIVED

01 APR 2005

1738

RESOURCES LTD



M-I Drilling Fluids L.L.C.

F D C 4
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Field/Area : PPL 1
 Description : EXPLORATION
 Location : OTWAY BASIN
 Warehouse : ADELAIDE
 Contractor : CENTURY DRILLING 11

Spud Date : 03/09/95
 TD Date : 04/01/95
 Loc Code : VICTORIA
 Dist Engr : BLAIR JACK
 Safes Engr : PAUL MARSHALL
 Sales Engr :
 Well Number : G0003

Comments : ALL REPORTS TO 24:00 HRS AS PER THE IADC REPORT. WELL PLUGGED & SUSPENDED

Type	Size in	Depth m	TVD m	Hole in	MaxMW lb/gal	Mud 1	Mud 2	Drilling Problem	Days	Cost
Casing	9.625	312	312	12.250	9.3	FW NATIVE W/SWEEPS		NO PROBLEMS	3	403
Casing	7.000	1209	1209	8.500	9.4	FW POLYPLUS		RUNNING CSG TO BTM	19	14525
OpenH		1758	1758	6.000	9.3	FW POLYPLUS		NO PROBLEMS	2	2029

Depth: 1758 m TVD : 1758 m Water Depth: m Drilling Days: 24 Total Mud Cost: 16957

GEE RESOURCES

WELL : DUNBAR 1

- 1. INTRODUCTION**
- 2. DISCUSSION BY INTERVAL**
- 3. DAILY DISCUSSION REPORT**
- 4. PRODUCT USAGE BY INTERVAL**
- 5. DAILY VOLUME SUMMARY SHEETS**
- 6. TOTAL MATERIAL CONSUMPTION**
- 7. HYDRAULICS**
- 8. GRAPHS**
- 9. BIT RECORD**
- 10. WEEKLY INVENTORY SHEETS**
- 11. DAILY RECAP**
- 12. DAILY CHEMICAL ADDITIONS**
- 13. DAILY MUD REPORTS**

M-I AUSTRALIA PTY LTD

SECTION 1

INTRODUCTION

M-I AUSTRALIA PTY LTD

M-I Australia Pty. Ltd.

INTRODUCTION:


GFE Resources exploration well, Dunbar 1, was spudded by Century rig 11 at 1700 hours on 9 March 1995. The well was located in the Otway basin in permit PPL-1 onshore SW coast of Victoria. The primary objective was the Waarre sandstone at 1477 meters.

The well was drilled to a total depth of 1758 meters in 24 drilling days without significant drilling or mud problems. The 7" casing, however, was not able to pass 1209 meters and was cemented, some 540 meters high. Problems were also encountered with the first of two DSTs and the RFT log run. Observations and specific recommendations are made at the conclusion of this report. P & A operations commenced once 3.5" drill pipe was located and arrived on location. The rig was released on 1 April 1995, 24 days since spud date.

The geological formation tops as supplied by the wellsite geologist were:

Age	Formation	Depth (meters)
Tertiary	Port Campbell	6
	Gellibrand Marl	124
	Clifton Calcarenite	415
	Narrawaturk Marl	426
	Mepunga - sandy claystone	512
	Dilwyn - Sandstone interbed claystone	562
Late Cretaceous	Pember Claystone	763
	Pebble Point	810
	Paaratte Sandstone	879
	Skull Creek Mudstone	1245
	Nullawarre Greensand	absent
	Belfast Mudstone	1352
	Warre Formation	1477
Early Cretaceous	Eumeralla Formation	1548

SECTION 2

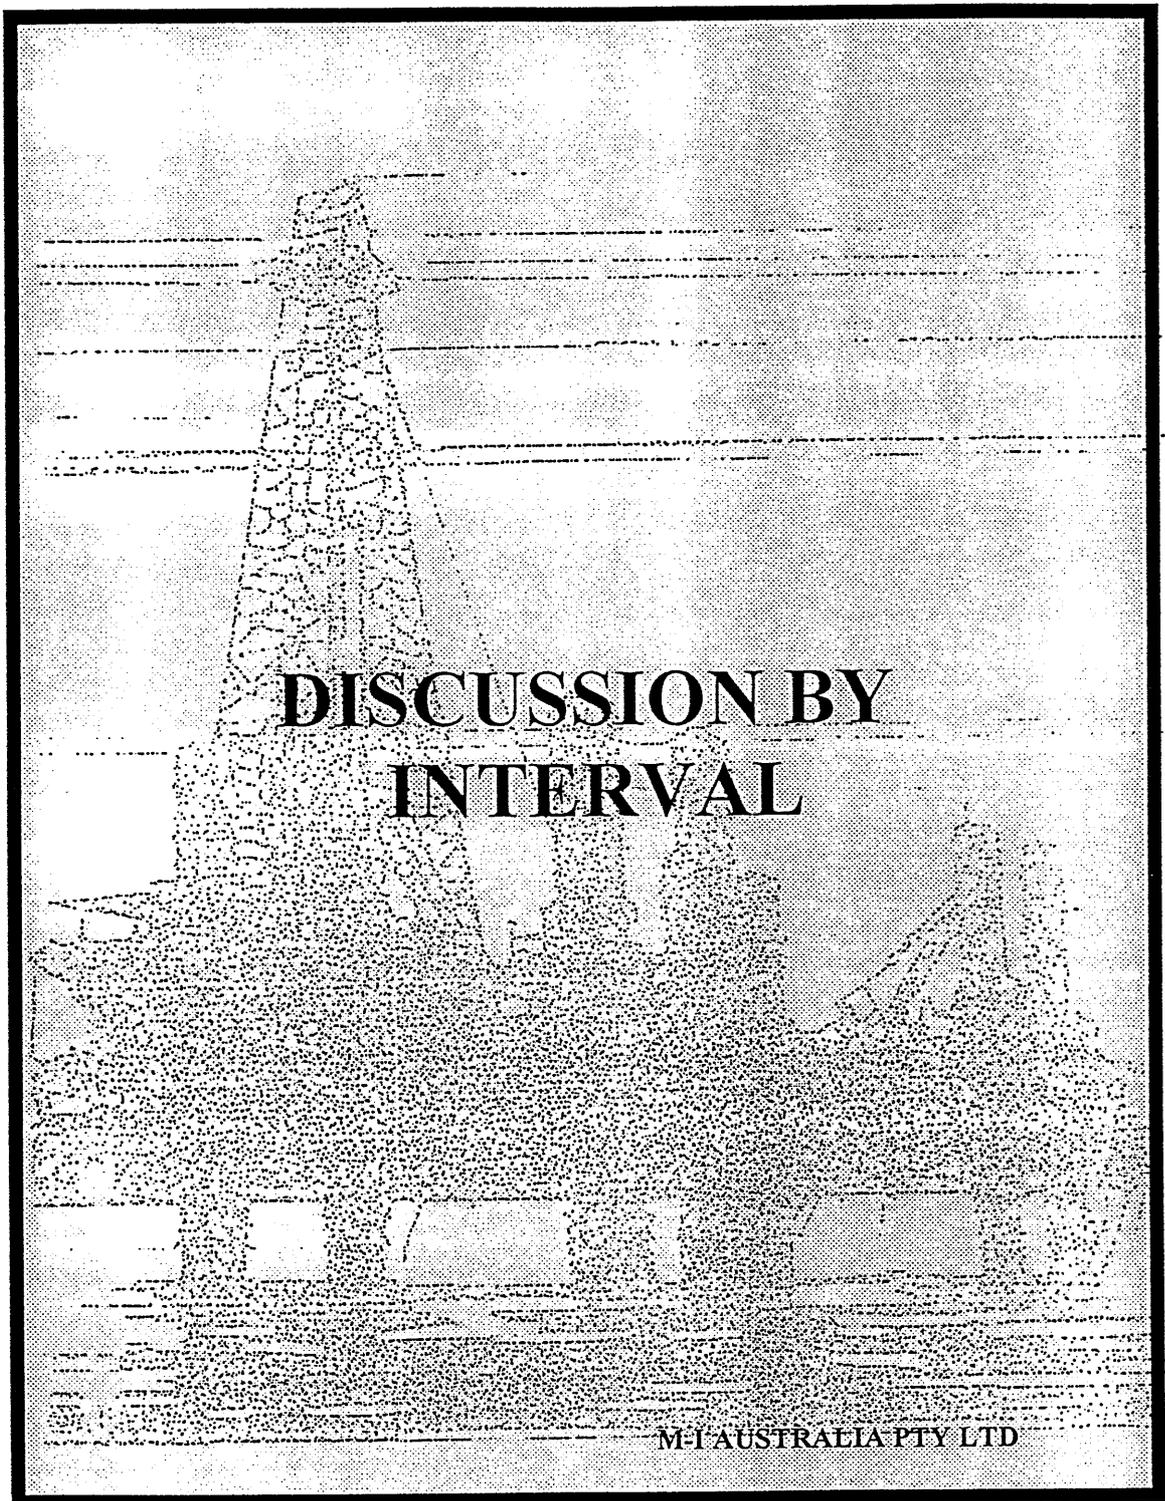

**DISCUSSION BY
INTERVAL**

M-I AUSTRALIA PTY LTD

M-I Australia Pty. Ltd.

Interval	0 - 317 Meters	12.1/4" Hole	9.5/8" Casing
----------	----------------	--------------	---------------

MUD TYPE : DRILLWATER NATIVE CLAY

HOLE PROBLEMS : NONE

MUD PROPERTIES :

Mud Weight	:	9.1 - 9.3 ppg
Funnel Viscosity	:	45 - 55 sec/qt
Weight Loss	:	n/c

OPERATIONS:

The hole was spudded with a 12.1/4" bit and 6.1/4" and 8" DCs and drilled to an interval total depth of 317 meters in 20 hours drilling time. Deviation surveys were taken at approximately 50 meter intervals, with a maximum of 1° recorded. At total depth a wiper trip was made and revealed 1 meter fill. The hole was circulated clean and 9.5/8" casing run to 312 meters and cemented. Cement was displaced with drillwater.

MUD:

The well was spudded with drillwater and for hole cleaning, relied on the reactive clays particularly the Gellibr and Marl, to build sufficient viscosity. The need to flocculate the system with Lime never arose. Continued dumping and fresh water dilution (sump water was used when it became available) to control high rheology was necessary. Within 6 hours the native clay content of the system had risen to a level that would not allow the proposed addition of KCl without an unacceptable viscosity increase. High viscosity PHG sweeps were only deemed necessary on two occasions prior to surveys. The development of mud rings and their obstruction of the flowline interrupted drilling on three occasions between 263 meters and 317 meters. Failure to introduce KCl into the system at the outset of drilling may have been a factor in allowing the mud rings to develop to the extent that required physical of the flowline. However, since treatment of this system is solely by means of dump and dilute, continuous large scale additions of KCl would be required. The resultant unmanageable increase in viscosity might still not be avoided.

M-I Australia Pty. Ltd.

Interval	317 - 1758 Meters	8.1/2" Hole	7" Casing
----------	-------------------	-------------	-----------

MUD TYPE : FRESHWATER/PHPA

HOLE PROBLEMS : UNABLE TO RUN 7" CASING TO BOTTOM

MUD PROPERTIES :

Mud Weight	:	8.6 - 9.4 ppg
Funnel Viscosity	:	38 - 47 sec/qt
PV	:	14 - 26 cp
Yield Point	:	9 - 26 lb/100 sq ft
MBT	:	7.5 - 12.5 ppb equivalent
PHPA	:	1.0 - 1.5 ppb

OPERATIONS:

An 8.1/2" drilling assembly (6.1/4" DC on 4.1/2" DP) was run to bottom and tagged cement at 294 meters. Cement, shoe track and rathole were drilled out with drill water and 5 meters new hole drilled while displacing to PHPA mud. A FIT was performed - 22.9 ppg mud weight equivalent- and drilling of reactive marls and sandy claystone commenced. Significant shaker losses resulted while drilling this top section even at controlled and moderate rates of penetration in the range of 20 - 25 meters/hour. Wiper trips at 856 meters and 1287 meters revealed a consistently tight hole that required extensive washing and working out and reaming back to bottom. There appeared to be no consistent tight zones. On each leg of each trip gauge and under gauge hole was recorded at differing depths, 18 meters and 7 meters of fill respectively were recorded. A bit trip at 1507 meters revealed a severely undergauge bit and stabilizer. On pulling out, tight hole from 1331 - 1082 meters required working and washing and again running back to bottom consistent reaming between 920 -1507 meters was necessary. Drilling proceeded to 1557 meters, exposing the Waare formation to DST #1. The zone was tested from between 1557 and 1526 meters. After a slight initial pressure abruptly stopped, the test tool was pulled to reveal most of the ports blocked by small Paaratte sandstone cutting. A bit was run to bottom and, but for 3 meters of fill, the hole was otherwise in good condition. A high vis sweep was circulated without noticeable increase in cuttings at the shaker. A second DST over the same interval, recorded an initial pressure build of 9 psi before a 1 hour shut in. Pressure built to 105 psi and gas flowed before once again partial blockage of the tool was indicated .

M-I Australia Pty. Ltd.

Interval	317 - 1758 Meters	8.1/2" Hole	7" Casing
----------	-------------------	-------------	-----------

On surface the test tool again revealed the ports obstructed with wall coating and sandstone cuttings. A final wiper trip at total depth - 1758 meters, required only light reaming from 1533 - 1648 meters and washing 7 meters to bottom. The hole was circulated clean and was shown on the trip out to be free of any tight spots. A comprehensive suite of logs, including velocity, RFT and side wall cores, commenced requiring 7 runs and an RFT rerun, over four days. The failure of the RFT rerun was attributed to excessive borehole accumulation of mud and cuttings. On completion of logging 7" casing was run and after 30 hours working and washing eventually cemented at 1209 meters. It is assumed that centralisers and scratchers on the first joint of casing collapsed onto each other and prevented movement up or down by more than the length of a joint. Operations ceased for four days at this point while waiting for 3.1/2" drill pipe. On its arrival cement was drilled out and P & A procedures. The cement and shoe track were drilled out and cement plug #1 set over the Waarre sandstone from 1610 - 1440 meters. A second plug was set at the shoe and the hole displaced to inhibited mud. Operations ceased on 1 April.

MUD:

A drillwater/PHPA/PAC R system was prepared with additional filtrate control provided by CMC low viscosity. Initially it contained 1.6 ppb of each polymer with the intention of introducing 5 ppb PHG once drilling commenced. Native clays, however provided yield and gel strength sufficient for good hole cleaning and suspension and with no apparent reason to provide additional yield and the system remained basically a PHPA/PAC - native clay one. PHPA was maintained by means of whole mud premixes. The mud proved remarkably stable and responsive to dilution and treatment and exhibited excellent rheology, gel properties and filtrate control. After four days logging the system required only minor dilution to maintain programmed properties. Dilution of the system was reduced by 50% over the programmed estimate and total cost - excluding Barite - halved. Down hole losses and regular use of solids control equipment accounted for the unprogrammed use of Barite amounting to a cost of \$ 4,131.00.

OBSERVATIONS AND RECOMMENDATIONS:

It was noted throughout the 8.1/2" section, that despite maintaining an adequate PHPA concentration, cuttings at the shaker did not exhibit the discrete, hard brittle preserved quality usually associated with a well maintained PHPA system. Rather they appeared as well sorted (fine grained up to 0.5 cm) poorly defined agglomerations bound in a PHPA matrix. This did, however, reveal a 'dry' quality once squeezed. This cuttings quality says more about the formation than the level of PHPA in the system. The formation is recognized as young or immature having not suffered the slow depositional de-watering which is evident in most other areas of familiarity and as such results in the lack of cuttings integrity described.


M-I Australia Pty. Ltd.

Interval	317 - 1758 Meters	8.1/2" Hole	7" Casing
----------	-------------------	-------------	-----------

The failure of DST #1 and the premature pulling of the test tool in DST #2 was at least in part due to a build up of mud and fine cuttings lining the wellbore. This should be seen as something different to filter cake and was most likely due to the gentle hydraulics regime used throughout the 8.1/2" section. Typical pump output was in the order of 250 - 275 gpm. Only occasionally was it 300 gpm and never while drilling. Drill pipe/open hole annular velocities ranged from between 36 - 40 m/min. These rates, low by most standards, may not have been sufficient to scourer the borehole of polymer/cutting build up. The development of a wellbore coating was inferred from the caliper logs which showed a consistently under gauge wellbore exhibiting high energy absorption. The dense mud and cuttings that coated the DST tool and blocked the ports (the same is later inferred on the sidewall cores) was this wellbore coating with very fine - coarse ex situ cuttings from, amongst others, the Belfast and Paaratte formations. What was most obvious from examining the test tool was the individual Paaratte sandstone clasts (semi rounded chips) that neatly sat in the ports of the tool.

A revised hydraulics program may be necessary for future wells drilled in the region using a PHPA system.

SECTION 3

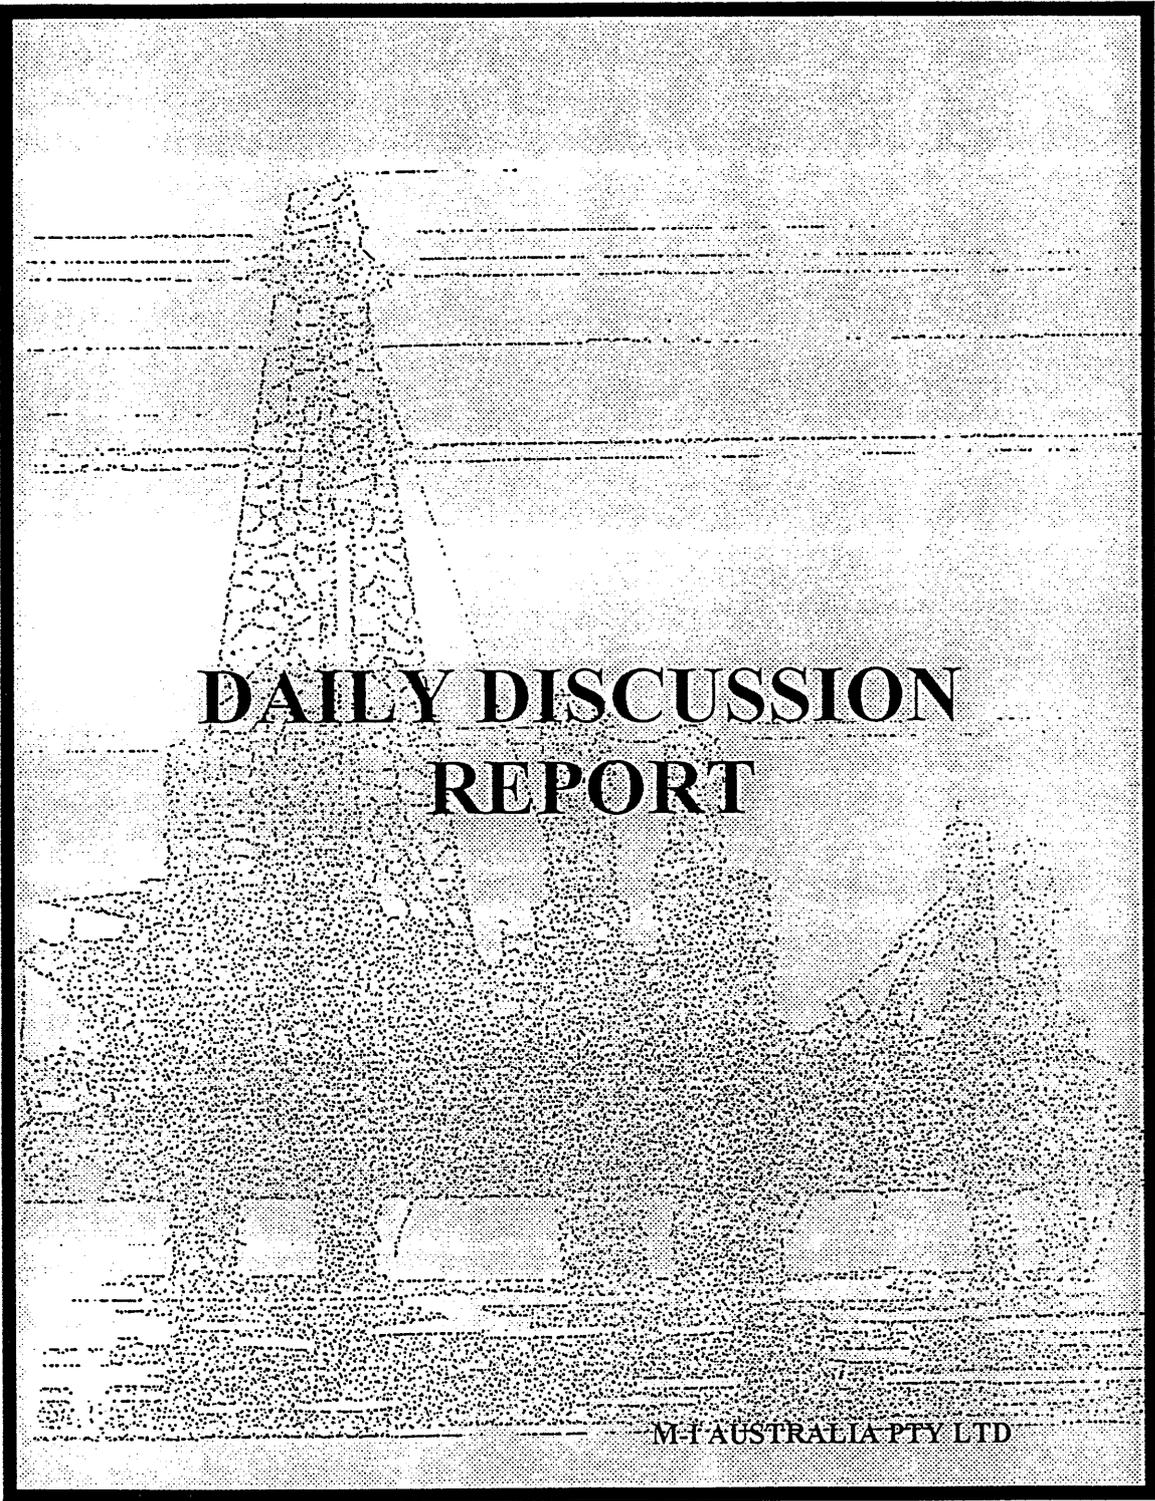

**DAILY DISCUSSION
REPORT**

M-F AUSTRALIA PTY LTD

===== M-I DRILLING FLUIDS DAILY DISCUSSION =====

Operator : GFE RESOURCES Contractor : CENTURY DRILLING 11 Description : EXPLORATION Page: 1
 Well Name : DUNBAR 1 Field/Area : PPL 1 Location : OTWAY BASIN Well: G0003

Date : 09/03/95 Depth : 115.0 Day : 1
 Continue to rig up. Spud Dunbar 1 at 1700 hrs on 9 March 1995 and drill
 12.1/4" hole to 115m, sweeping hole with Hi Vis PHG on surveys.

Date : 10/03/95 Depth : 317.0 Day : 2
 Drill 12.1/4" hole from 115-317m TD. Severe build up of mud rings at 263m,
 291m and 310m required the flow line to be cleared of mud cake. Performed
 wiper trip with 1m fill on bottom. Circulate and clear flow line. POOH and rig
 up to run casing. Run casing and prepare to cement.

Date : 11/03/95 Depth : 317.0 Day : 3
 Cement 9.5/8" casing and displace with drill water-WOC. Nipple BOP's function
 and pressure test. Pick up BHA and prepare to run in hole with 8.1/2" drilling
 assembly.

Date : 12/03/95 Depth : 693.0 Day : 4
 RIH and tag cement at 294m. Drill out cement, float, shoetrack and 5m new
 hole. Perform FIT, mud wt equiv = 22.9 ppg. Drill 8.1/2" hole from 322m-349m.
 POOH and add stabilizer to BHA. RIH and drill from 349-387m. Clear shakers and
 clear header box of clay "boulders". Drill from 387m-406m. Clear header box
 and sand trap. Drill 406-693m with surveys. Max dev 0.5 deg.

Date : 13/03/95 Depth : 1047.0 Day : 5
 Drill from 693m-856m. Circulate B/U and POOH for wiper trip. P/U kelly and
 circulate out tight hole from 579m-531m. Continue to POOH tight from
 512m-378m. RIH and ream from 531m to bottom with 18m fill. Continue to drill
 from 856m-1047m.

Date : 14/03/95 Depth : 1382.0 Day : 6
 Drill 8.5" hole from 1047m-1230m & survey. Maximum deviation = 1.25 deg. Drill
 to 1287m and POOH for wiper trip to 576m. Work tight hole from 1095-847m,
 790-770m & 713-675m. RIH and ream from 1255-1287m. 7m fill. Drill ahead to
 1382m.

Date : 15/03/95 Depth : 1507.0 Day : 7
 Drill 8.5" hole from 1382-1507m. Survey (1deg) and POOH for bit change. Work
 pipe from 1331-1082m. M/U junk sub and new bit and RIH. Precautionary ream
 under gauge hole from 660-683m, 756-780m & 813-875m.

===== M-I DRILLING FLUIDS DAILY DISCUSSION =====

Operator : GFE RESOURCES Contractor : CENTURY DRILLING 11 Description : EXPLORATION Page: 2
 Well Name : DUNBAR 1 Field/Area : PPL 1 Location : OTWAY BASIN Well: G0003
 =====

Date : 16/03/95 Depth : 1557.0 Day : 8
 Continue to RIH and ream under gauge hole. Ream from 920-971m, 1016-1061m, 1192-1248m and 1283-1507m. Circulate and pull back to 785m for wiper trip. Work tight hole from 1340-1168m. RIH-hole good 5m. Fill. Pull back 3 stands circulate bottoms up and RIH. Spot Hi Vis mud over 50m hole and POOH to run test tool.

Date : 17/03/95 Depth : 1557.0 Day : 9
 Continue POOH. Make-up and RIH with test tool. DST #1 ? failure. POOH and lay out test tool-tool blocked. Make-up BHA and RIH-wash from 1533m to bottom-3m. fill. Circulate on bottom, pull 3 stands and continue to circulate and dilute mud. Maintain mud weight = 9.3 ppg with Barite. Run to bottom-no fill,pumpP Hi Vis pill and circulate out - no increase cuttings over shaker.

Date : 18/03/95 Depth : 1557.0 Day : 10
 Perform wiper trip. POOH for DST. Conduct DST #2. Build to 9 psi. Close tool for 1 hr. Flow well. Pull free-hole good. Recover sample and lay out test tool. Test BOPs. Prepare to make up BHA and RIH.

Date : 19/03/95 Depth : 1758.0 Day : 11
 RIH with BHA, break circulation at 1533m and wash and ream to bottom-1.5m. Fill drill 8.5" hole from 1557-1758m. Survey -1.5 deg. Circulate bottoms up and POOH for wiper trip.

Date : 20/03/95 Depth : 1758.0 Day : 12
 RIH for wiper trip. Ream tight hole f/1533-1648m 7m fill. Circulate hole clean and POOH. Hole good. Rig up and log. Run log #1, 2 & 3.

Date : 21/03/95 Depth : 1758.0 Day : 13
 Continue to run log #3. Rig down and RIH to 1741m. Wash to bottom-4m fill. Circulate hole clean-increased hole losses. POOH and rig up to run log #4 RFT/GR and log #5-VEL.

Date : 22/03/95 Depth : 1758.0 Day : 14
 Continue log run #5. R/U and run log #6. Rig down BPB and pick up BHA. RIH-3m fill-circulate hole clean and POOH on wiper trip to 1176m. RIH-1.5m fill. Circulate bottoms up. Pump slug and POOH to continue logging. Rig up and run log #7-RFT/CR.

Date : 23/03/95 Depth : 1758.0 Day : 15
 Continue to run log #7-RFT. Pull blocked RFT tool to surface. Re-run log #7. Rig down BPB. Pick up 8.5" drilling assembly and RIH to 1755.5-2.5m fill. Wash to bottom and circulate hole.

===== M-I DRILLING FLUIDS DAILY DISCUSSION =====

Operator : GFE RESOURCES Contractor : CENTURY DRILLING 11 Description : EXPLORATION Page: 3
 Well Name : DUNBAR 1 Field/Area : PPL 1 Location : OTWAY BASIN Well: G0003
 =====

Date : 24/03/95 Depth : 1758.0 Day : 16

Continue to circulate hole clean, pump slug and POOH. Lay down DP and drilling assembly. Rig up and run 7" casing. Casing held up at 1130 m. Rig up and circulate hole. Circulates freely. Work and circulate casing from 1123-1130m.

Date : 25/03/95 Depth : 1758.0 Day : 17

Continue to run casing. Circulate and work stuck casing from 1148-1153m. LayAY out 4 joints and continue to wash and work. Pick up 1 joint and work 1097-1108m.

Date : 26/03/95 Depth : 1758.0 Day : 18

Rig up cement head and circulate 260 GPM at 1097m. Pump cement and displace with water and dump returns. Nipple down BOPs, cut casing, nipple up and test. Wait on 3.5" drill pipe to drill out and set cement plugs.

Date : 27/03/95 Depth : 1758.0 Day : 19

Wait on cement. Pressure test casing. Wait on 3.5" drill pipe.

Date : 28/03/95 Depth : 1758.0 Day : 20

Wait on 3.5" drill pipe. Service rig.

Date : 29/03/95 Depth : 1758.0 Day : 21

Wait on 3.5" drill pipe. Service rig.

Date : 30/03/95 Depth : 1758.0 Day : 22

Test BOPs. Pick up 4.75" DCs, make-up 6" bit and RIH with 3.5" DP. Tag cement at 1102m. Drill out cement and shoe track from 1102-1196m.


Date : 31/03/95 Depth : 1758.0 Day : 23

Continue to drill out shoe track. RIH to 1265m, 1302m & 1758m. Circulate and flow check each stage. POOH and lay out DC. RIH O/E to 1610m and pump cement plug #1 from 1610 -1440m. POOH 12 stands and WOC. RIH and tag cement at 1437m. Circulate and lay out DP.

Date : 01/04/95 Depth : 1758.0 Day : 24

Rig up and set cement plug #2 from 1240-1189m. Pull 5 stands and WOC. RIH and tag cement at 1178m. Circulate and pressure test plug to 500 psi. Minimize pit volume and circulate inhibited mud. POOH and lay out drill pipe. P & A complete. Rig down.

SECTION 4

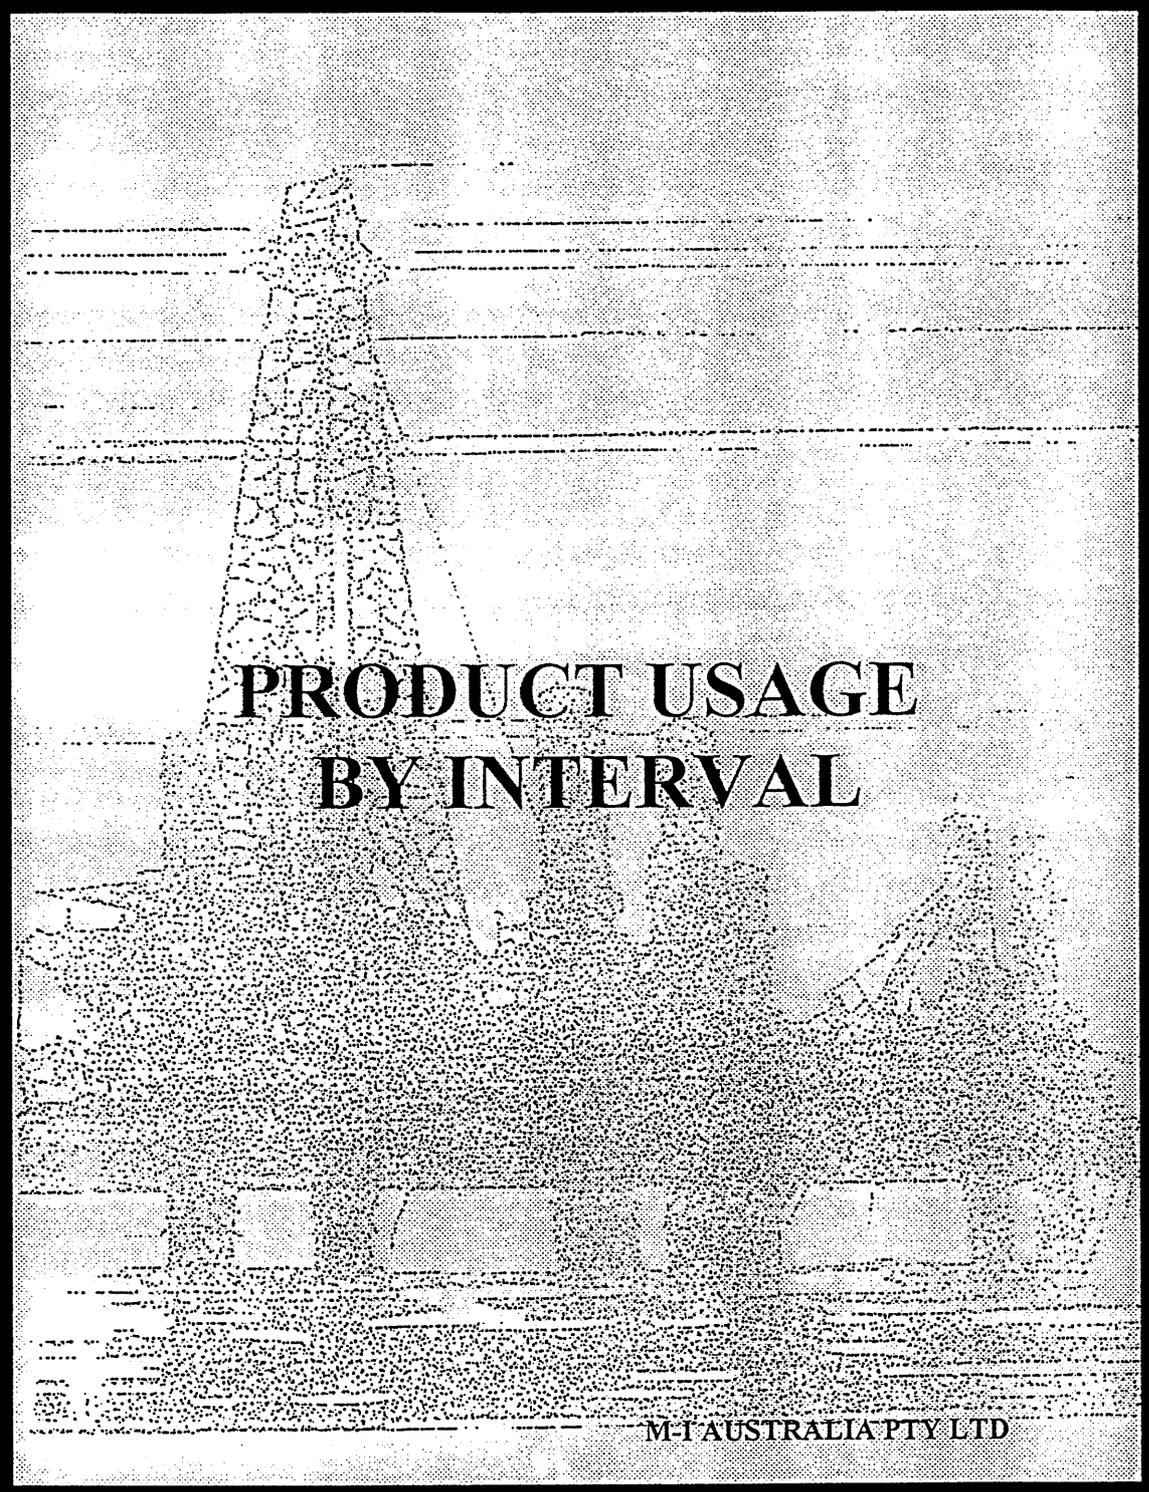

**PRODUCT USAGE
BY INTERVAL**

M-I AUSTRALIA PTY LTD

M-I DRILLING FLUIDS PRODUCT SUMMARY

Operator: GFE RESOURCES

Contractor: CENTURY DRILLING 11

Description: EXPLORATION

Well Name: DUNBAR 1

Field/Area: PPL 1

Location: OTWAY BASIN

SUMMARY OF PRODUCT USAGE FOR INTERVAL FROM 08/03/95 - 10/03/95, 0 - 317.0 m

	12.1/4" Hole		9.5/8" Casing		
WATER-BASE PROD	SIZE	AMOUNT	UNIT COST	PROD COST	
Calcium Chloride	25 KG SX	1	17.80	17.80	
Caustic Soda	25 KG SX	1	22.35	22.35	
Lime	40 KG SX	2	6.00	12.00	
M-I Gel	25 KG SX	28	9.44	264.32	
Potassm Chloride	25 KG SX	4	11.46	45.84	
Spersene CF	50 LB SX	1	40.55	40.55	
*** INTERVAL WATER-BASE MUD COST TOTAL =				402.86	
*** TOTAL MUD COST FOR INTERVAL =				402.86	

M-I Drilling Fluids L.L.C.

DRILLING FLUIDS DATA MANAGEMENT SYSTEM

G0003

April 12, 1995

Total Meters Drilled : 317 Meters
Cost per Meter : \$1.27

Total Days on Interval : 3 Days
Cost per Day : \$134.29

Total Barrels Mixed : 690 bbls
Cost per Barrel : \$0.58

Dilution Rate : 2.17 bbl/mtr

M-I DRILLING FLUIDS PRODUCT SUMMARY

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DUNBAR 1

Field/Area : PPL 1

Location : OTWAY BASIN

BREAKDOWN OF COST BY PRODUCT GROUP 08/03/95 - 10/03/95, 0 - 317.0 m

	12.1/4" Hole	9.5/8" Casing	% Total
		<u>Cost</u>	
WATER BASE MUD PRODUCTS			
1 - BENTONITE		264.32	65.6
2 - SALTS		63.64	15.8
3 - THINNERS		40.55	10.1
4 - ALKALIES		34.35	8.5
WATER BASE MUD TOTAL COST		402.86	100.0

M-I DRILLING FLUIDS PRODUCT SUMMARY

Operator: GFE RESOURCES

Contractor: CENTURY DRILLING 11

Description: EXPLORATION

Well Name: DUNBAR 1

Field/Area: PPL 1

Location: OTWAY BASIN

SUMMARY OF PRODUCT USAGE FOR INTERVAL FROM 11/03/95 - 29/03/95, 317.0 - 1758.0 m

WATER-BASE PROD	8.1/2" Hole		7" Casing	
	SIZE	AMOUNT	UNIT COST	PROD COST
Bacban	6 LB JUG	1	109.34	109.34
CMC TG LV	25 KG SX	22	61.23	1347.06
Caustic Soda	25 KG SX	9	22.35	201.15
M-I Bar	25 KG SX	564	5.53	3118.92
M-I Gel	25 KG SX	38	9.44	358.72
OS-1	25 KG SX	13	50.95	662.35
Polypac R	25 KG SX	20	131.74	2634.80
Polyplus Powder	25 KG SX	35	173.25	6063.75
Soda Ash	40 KG SX	2	14.31	28.62
*** INTERVAL WATER-BASE MUD COST TOTAL =				14,524.71
*** TOTAL MUD COST FOR INTERVAL =				14,524.71

M-I Drilling Fluids L.L.C.

DRILLING FLUIDS DATA MANAGEMENT SYSTEM

G0003

April 12, 1995

Total Meters Drilled : 1,441 Meters
Cost per Meter : \$10.08

Total Days on Interval : 19 Days
Cost per Day : \$764.46

Total Barrels Mixed : 2,001 bbls
Cost per Barrel : \$7.26

Dilution Rate : 1.39 bbl/mtr

M-I DRILLING FLUIDS PRODUCT SUMMARY

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DUNBAR 1

Field/Area : PPL 1

Location : OTWAY BASIN

BREAKDOWN OF COST BY PRODUCT GROUP 11/03/95 - 29/03/95, 317.0 - 1758.0 m

	8.1/2" Hole	7" Casing	% Total
		<u>Cost</u>	
WATER BASE MUD PRODUCTS			
1 - WEIGHT MATERIAL		3,118.92	21.5
2 - BENTONITE		358.72	2.5
3 - VISCOSIFIERS		3,981.86	27.4
4 - ENCAPSULATORS		6,063.75	41.7
5 - ALKALIES		229.77	1.6
6 - MISC		771.69	5.3
WATER BASE MUD TOTAL COST		14,524.71	100.0

M-I DRILLING FLUIDS PRODUCT SUMMARY

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DUNBAR 1

Field/Area : PPL 1

Location : OTWAY BASIN

SUMMARY OF PRODUCT USAGE FOR INTERVAL FROM 30/03/95 - 01/04/95, 1758.0 - 1758.0 m

Completion

WATER-BASE PROD	SIZE	AMOUNT	UNIT COST	PROD COST
Bachan	6 LB JUG	1	109.34	109.34
Conqor 303	25 LT DM	10	51.27	512.70
M-I Bar	25 KG SX	183	5.53	1011.99
Polypac R	25 KG SX	3	131.74	395.22

*** INTERVAL WATER-BASE MUD COST TOTAL = 2,029.25

*** TOTAL MUD COST FOR INTERVAL = 2,029.25

M-I DRILLING FLUIDS PRODUCT SUMMARY

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DUNBAR 1


Field/Area : PPL 1

Location : OTWAY BASIN

BREAKDOWN OF COST BY PRODUCT GROUP 30/03/95 - 01/04/95, 1758.0 - 1758.0 m

	Completion	Cost	% Total
WATER BASE MUD PRODUCTS			
1 - WEIGHT MATERIAL		1,011.99	49.9
2 - VISCOSIFIERS		395.22	19.5
3 - MISC		622.04	30.7
WATER BASE MUD TOTAL COST		2,029.25	100.0

SECTION 5

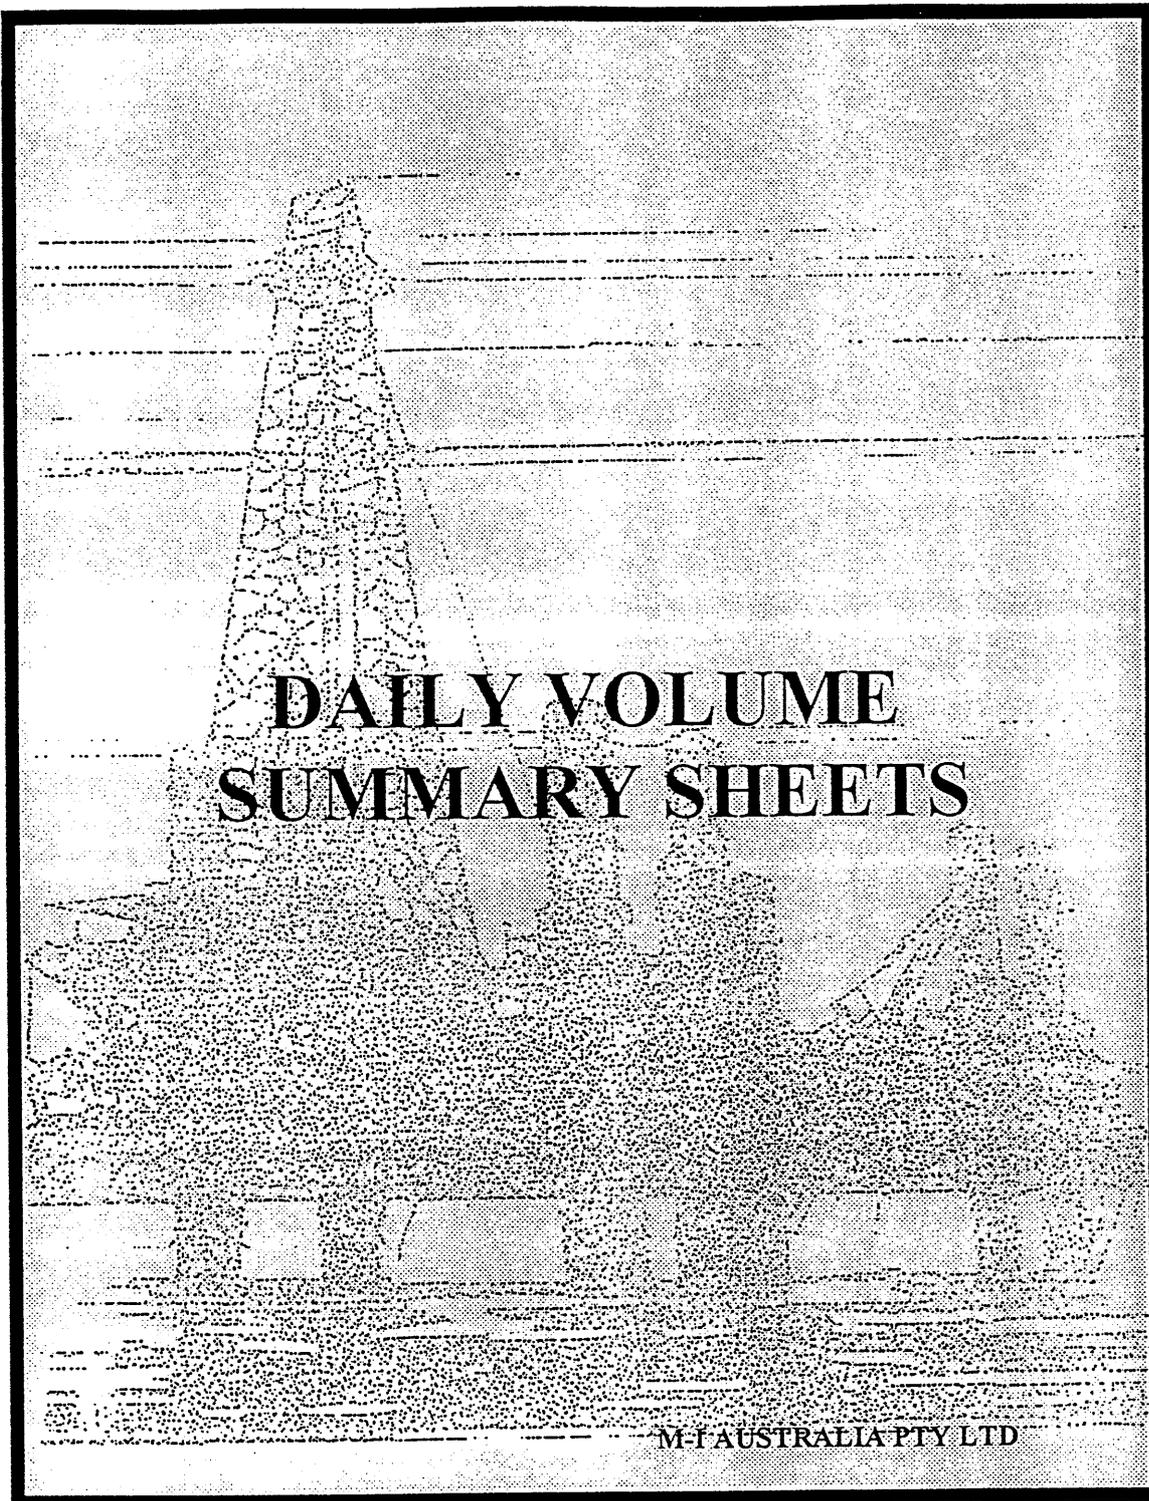

**DAILY VOLUME
SUMMARY SHEETS**

M-F AUSTRALIA PTY LTD


12.1/4" Hole

Date	Mud Volume Status					Mud Volume Built					Mud Volume Lost						
	Depth	Hole	Surf Active	Res	Total Vol	Water	Mud Built	Inc from Barite	Daily Total	Cum Built	Solids Equip	Surf Losses	Mud Dumped	Hole	Casing Plugs	Daily Total	Cummul Lost
1995																	
9-Mar	115	105	270	50	425	575	50		625	625		45	155			200	200
10-Mar	317	127	243	50	420	65			65	690		30	40			70	270
11-Mar	317				0				0	690			420			420	690

8.1/2" Hole

Date	Mud Volume Status					Mud Volume Built					Mud Volume Lost						
	Depth	Hole	Surf Active	Res	Total Vol	Water	Mud Built	Inc from Barite	Daily Total	Cum Built	Solids Equip	Surf Losses	Dump	Hole	Casing Plugs	Daily Total	Cummul Lost
1995																	
11-Mar	317			305	305		305		305	305						0	0
12-Mar	693	136	226	120	482	140	400		540	845	60	180	123			363	363
13-Mar	1047	213	220	140	573		186		186	1031	15	30	25	25		95	458
14-Mar	1382	281	247	50	578		100		100	1131	25	15	25	30		95	553
15-Mar	1507	305	275	150	730		210		210	1341	20	20	18			58	611
16-Mar	1557	317	270	110	697				0	1341	12	5	16			33	644
17-Mar	1557	317	192	207	716	102		8	110	1451		31	60			91	735
18-Mar	1557	362	140	185	687				0	1451		17		12		29	764
19-Mar	1758	358	268	40	666	106		4	110	1561	41	30	60			131	895
20-Mar	1758	408	197		605				0	1561			31	30		61	956
21-Mar	1758	408	163		571	40	74	1	75	1636		10		99		109	1065
22-Mar	1758	408	140	120	668		135	5	140	1776		13		30		43	1108
23-Mar	1758	358	136	146	640	40			40	1816	15	17		36		68	1176
24-Mar	1758	371	138	116	625	40			40	1856	15	10		30		55	1231
25-Mar	1758	372	160	50	582	30			30	1886	31	6		36		73	1304
26-Mar	1758	152	163	130	445				0	1886			137			137	1441
27-Jan	1758	152	163	130	445				0	1886						0	1441
28-Mar	1758	152	163	130	445				0	1886						0	1441
29-Mar	1758	152	163	130	445				0	1886						0	1441
30-Mar	1758	244	166	50	460	15	36	4	55	1941		30	10		40	1481	
31-Mar	1758	203	116	105	424		60		60	2001		30		31	35	96	1577
1-Apr	1758	148			148				0	2001			230		46	276	1853

SECTION 6

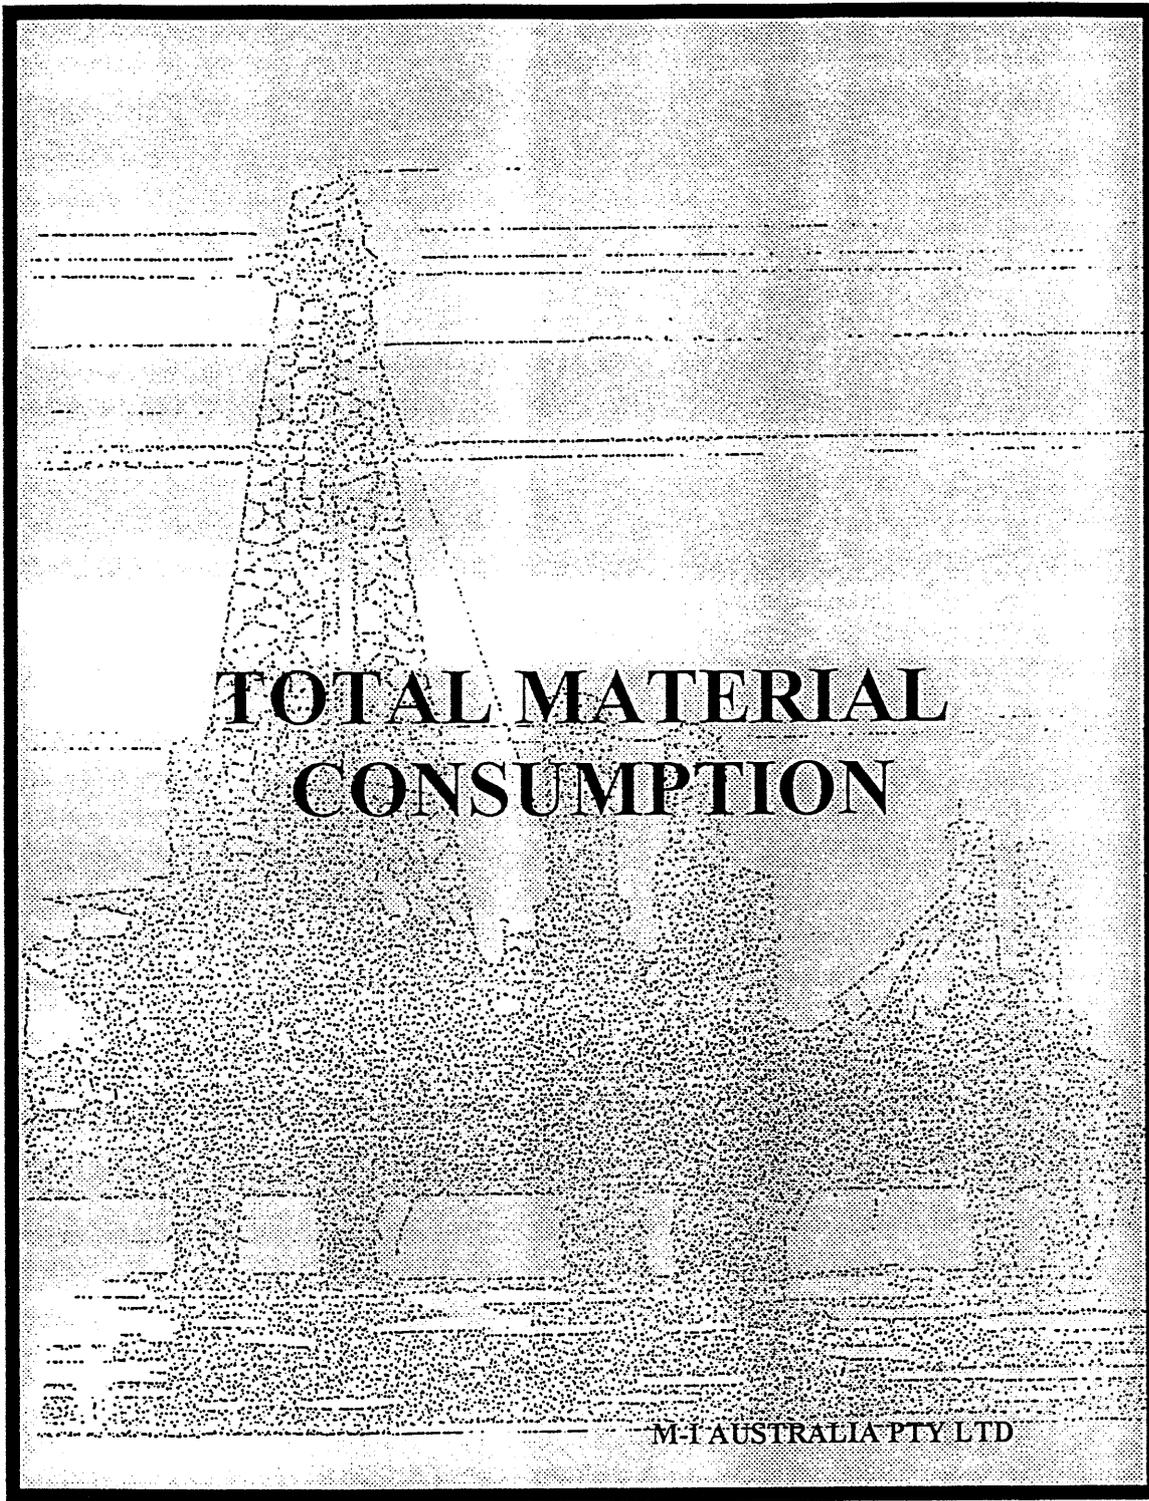

**TOTAL MATERIAL
CONSUMPTION**

M-I AUSTRALIA PTY LTD

M-I DRILLING FLUIDS PRODUCT SUMMARY

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DUNBAR 1

Field/Area : PPL 1

Location : OTWAY BASIN

SUMMARY OF PRODUCT USAGE FOR INTERVAL FROM 08/03/95 - 01/04/95, 0 - 1758.0 m

WATER-BASE PROD	SIZE	AMOUNT	UNIT COST	PROD COST
Bacban	6 LB JUG	2	109.34	218.68
CMC TG LV	25 KG SX	22	61.23	1347.06
Calcium Chloride	25 KG SX	1	17.80	17.80
Caustic Soda	25 KG SX	10	22.35	223.50
Conqor 303	25 LT DM	10	51.27	512.70
Lime	40 KG SX	2	6.00	12.00
M-I Bar	25 KG SX	747	5.53	4130.91
M-I Gel	25 KG SX	66	9.44	623.04
OS-1	25 KG SX	13	50.95	662.35
Polypac R	25 KG SX	23	131.74	3030.02
Polyplus Powder	25 KG SX	35	173.25	6063.75
Potassm Chloride	25 KG SX	4	11.46	45.84
Soda Ash	40 KG SX	2	14.31	28.62
Spersene CF	50 LB SX	1	40.55	40.55

*** INTERVAL WATER-BASE MUD COST TOTAL = 16,956.82

*** TOTAL MUD COST FOR INTERVAL = 16,956.82

M-I DRILLING FLUIDS PRODUCT SUMMARY

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DUNBAR 1

Field/Area : PPL 1

Location : OTWAY BASIN

BREAKDOWN OF COST BY PRODUCT GROUP 08/03/95 - 01/04/95, 0 - 1758.0 m

WATER BASE MUD PRODUCTS	Cost	% Total
1 - WEIGHT MATERIAL	4,130.91	24.4
2 - BENTONITE	623.04	3.7
3 - VISCOSIFIERS	4,377.08	25.8
4 - SALTS	63.64	0.4
5 - THINNERS	40.55	0.2
6 - ENCAPSULATORS	6,063.75	35.8
7 - ALKALIES	264.12	1.6
8 - MISC	1,393.73	8.2
WATER BASE MUD TOTAL COST	16,956.82	100.0

M-I DRILLING FLUIDS PRODUCT SUMMARY

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DUNBAR.1

Field/Area : PPL 1

Location : OTWAY BASIN

BREAKDOWN OF PRODUCT USAGE BY GROUP 08/03/95 - 01/04/95, 0 - 1758.0 m

WATER BASE MUD

PRODUCT CATEGORY

PRODUCTS USED

WEIGHT MATERIAL

M-I Bar

BENTONITE

M-I Gel

VISCOSIFIERS

CMC TG LV

Polypac R

SALTS

Calcium Chloride

Potassm Chloride

THINNERS

Spersene CF

ENCAPSULATORS

Polyplus Powder

ALKALIES

Caustic Soda

Lime

Soda Ash

MISC

Bacban

Conqor 303


OS-1



Operator : GFE RESOURCES
Well Name : DUNBAR 1
Description : EXPLORATION
Field/Area : PPL 1
Location : OTWAY BASIN

**COST
ANALYSIS**

BREAKDOWN OF COST BY PRODUCT GROUP 08/03/95 - 01/04/95, 0 - 1758.0 m

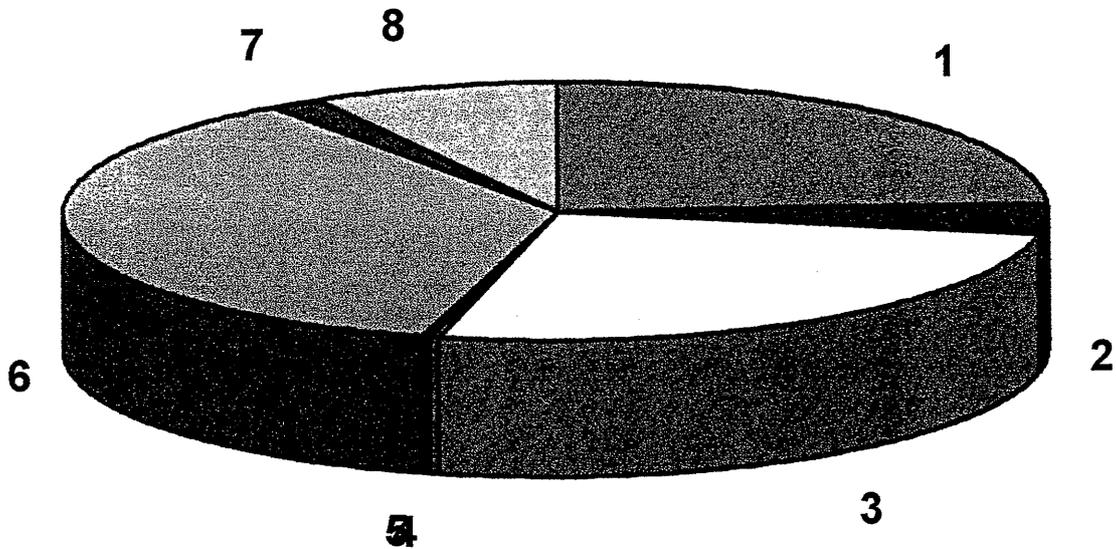


WATER BASE MUD PRODUCTS	Cost	% Total
1 - WEIGHT MATERIAL	4,130.91	24.4
2 - BENTONITE	623.04	3.7
3 - VISCOSIFIERS	4,377.08	25.8
4 - SALTS	63.64	0.4
5 - THINNERS	40.55	0.2
6 - ENCAPSULATORS	6,063.75	35.8
7 - ALKALIES	264.12	1.6
8 - MISC	1,393.73	8.2
WATER BASE MUD TOTAL COST	16,956.82	100.0



Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Description : EXPLORATION
 Field/Area : PPL 1
 Location : OTWAY BASIN


**COST
 ANALYSIS**

BREAKDOWN OF COST BY PRODUCT GROUP 08/03/95 - 01/04/95, 0 - 1758.0 m

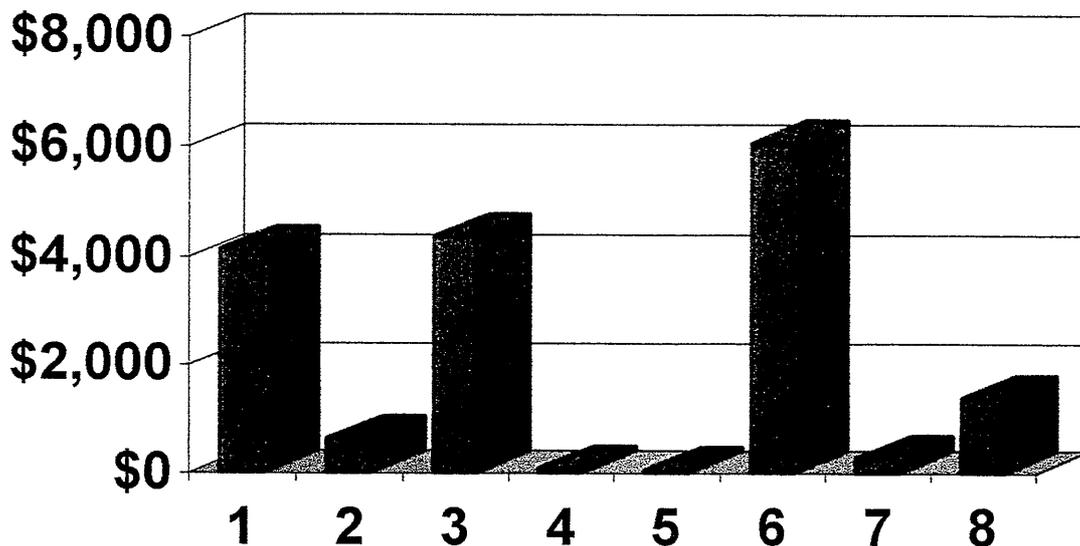

WATER BASE MUD PRODUCTS	Cost	% Total
1 - WEIGHT MATERIAL	4,130.91	24.4
2 - BENTONITE	623.04	3.7
3 - VISCOSIFIERS	4,377.08	25.8
4 - SALTS	63.64	0.4
5 - THINNERS	40.55	0.2
6 - ENCAPSULATORS	6,063.75	35.8
7 - ALKALIES	264.12	1.6
8 - MISC	1,393.73	8.2
WATER BASE MUD TOTAL COST	16,956.82	100.0

SECTION 7

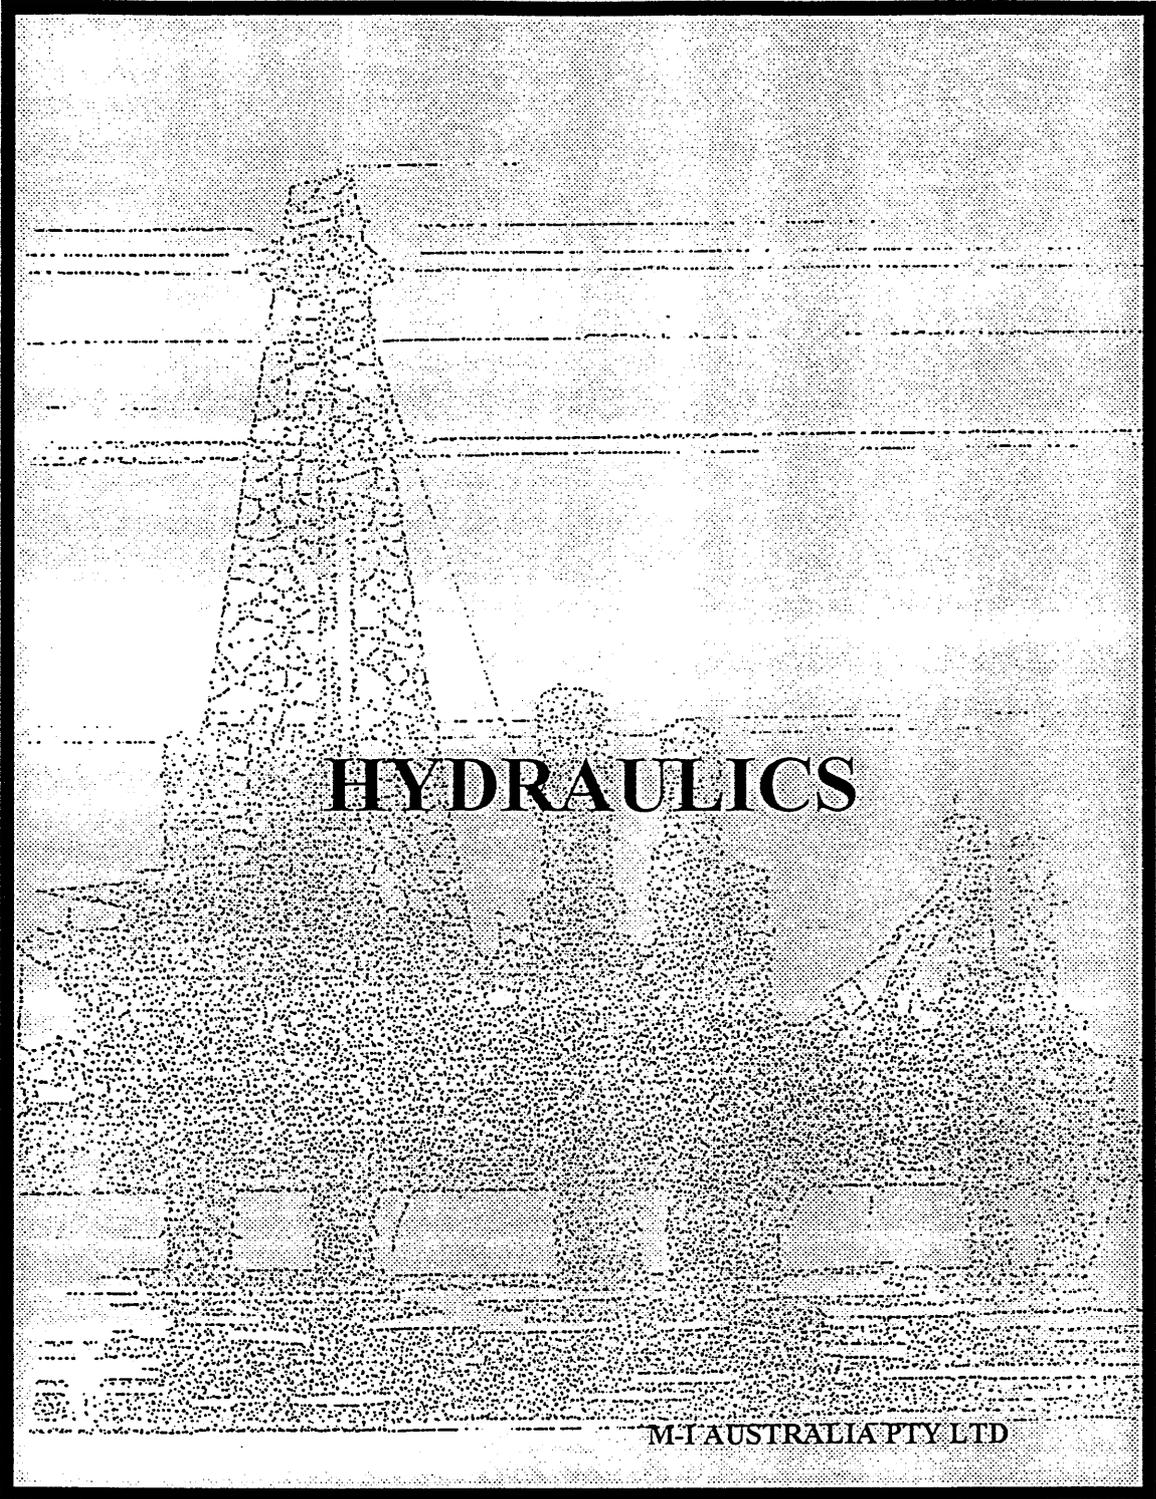

M-I AUSTRALIA PTY LTD

M-I DRILLING FLUIDS HYDRAULICS RECAP

Operator: GFE RESOURCES

Contractor: CENTURY DRILLING 11

Description: EXPLORATION

Well Name: DUNBAR 1

Field/Area: PFL 1

Location: OTWAY BASIN

	09/03/95	10/03/95	11/03/95	12/03/95	13/03/95	14/03/95	15/03/95	16/03/95	17/03/95
*Date	09/03/95	10/03/95	11/03/95	12/03/95	13/03/95	14/03/95	15/03/95	16/03/95	17/03/95
*Depth	115.0	317.0	317.0	693.0	1047.0	1382.0	1507.0	1557.0	1557.0
*Days Since Spud	1	2	3	4	5	6	7	8	9
*RHEOLOGICAL PROPERTIES									
Mud Wt -lb/gal	9.3	9.1	8.5	8.7	9.0	9.1	9.3	9.3	9.3
Plastic Visc -cps	10	13	41	17	17	18	24	22	18
Yield Point -lb/100ft2	24	20	65	23	21	21	24	22	19
3-rpm Rdg -Fann deg	4	5	6	3	2	2	3	3	2
np Value	0.372	0.479	0.471	0.511	0.533	0.547	0.585	0.585	0.572
Kp -lb-sec^n/100ft2	3.5715	1.7772	5.9786	1.7670	1.4593	1.3720	1.3369	1.2255	1.1179
na Value	0.465	0.410	0.624	0.562	0.639	0.645	0.602	0.583	0.634
Ka -lb-sec^n/100ft2	2.0000	2.7343	2.3151	1.2789	0.7521	0.7452	1.1989	1.2364	0.7592
*FLOW DATA									
Flow Rate -gal/min	335	450	330	275	275	275	275	275	275
Pump Pressure -psi	625	900	1400	950	1100	1150	1220	1220	1200
Pump -hhp	122	236	270	152	176	185	196	196	193
*PRESSURE LOSSES									
Drill String -psi	***	***	196	156	208	255	287	301	283
Bit -psi	130	230	1100	780	810	820	840	840	840
Annulus -psi	***	***	72	47	52	66	94	92	70
Total System -psi	***	***	1368	983	1070	1141	1221	1233	1193
*BIT HYDRAULICS									
Nozzles -1/32 inch	18/20/20	18/20/20	11/11/11	11/11/11	11/11/11	11/11/11	11/11/11	11/11/11	11/11/11
Nozzles -1/32 inch	/ /	/ /	/ /	/ /	/ /	/ /	/ /	/ /	/ /
Bit Pressure -#	21	25	79	82	74	71	68	68	70
Bit -hhp	25	60	212	125	130	131	134	134	134
Bit HSI (Index)	0.20	0.50	3.70	2.20	2.30	2.30	2.40	2.40	2.40
Jet Velocity -m/sec	38.0	51.0	115.9	96.6	96.6	96.6	96.6	96.6	96.6
Impact Force -lbs	201	355	552	392	406	410	419	419	419
*DRILL COLLARS ANNULUS									
Velocity -m/min	***	***	74.3	61.9	61.9	61.9	61.9	61.9	61.9
Critical Vel -m/min	***	***	258.4	130.1	116.3	117.1	137.9	131.1	111.8
Reynolds Number	***	***	470	928	1100	1091	863	922	1160
Crit Re (Lam - Tran)	***	***	2616	2699	2594	2586	2645	2671	2602
*DRILL PIPE ANNULUS									
Velocity -m/min	***	***	44.7	37.3	37.3	37.3	37.3	37.3	37.3
Critical Vel -m/min	***	***	195.2	102.1	86.9	87.2	105.6	101.6	83.9
Reynolds Number	***	***	345	634	820	819	617	645	859
Crit Re (Lam - Tran)	***	***	2616	2699	2594	2586	2645	2671	2602
*HOLE CLEANING									
Slip Velocity -m/min	***	***	7.3	14.1	16.2	15.9	12.2	12.6	15.9
Rising Velocity -m/min	***	***	37.4	23.2	21.1	21.4	25.1	24.6	21.4
Lifting Capacity -#	***	***	84	62	57	57	67	66	57
Cuttings Conc -#	***	***	***	2.07	2.28	1.85	0.89	1.11	***
Penetration Rate -m/hr	9.6	28.0	***	22.0	22.0	18.1	10.2	12.5	***
*CASING SHOE PRESSURES									
ECD -lb/gal	***	***	9.8	8.9	9.2	9.3	9.6	9.6	9.5
ECD+Cuttings -lb/gal	***	***	***	9.2	9.5	9.5	9.7	9.7	***
*TOTAL DEPTH PRESSURES									
ECD -lb/gal	***	***	9.8	9.1	9.3	9.4	9.7	9.6	9.6
ECD+Cuttings -lb/gal	***	***	***	9.3	9.6	9.6	9.8	9.8	***

M-I Drilling Fluids LLC.

DRILLING FLUIDS DATA MANAGEMENT SYSTEM

G0003

April 12, 1995

M-I DRILLING FLUIDS HYDRAULICS RECAP

Operator: GFE RESOURCES

Contractor: CENTURY DRILLING 11

Description: EXPLORATION

Well Name: DUNBAR 1

Field/Area: PFL 1

Location: OTWAY BASIN

*Date	18/03/95	19/03/95	20/03/95	21/03/95	22/03/95	23/03/95	24/03/95	25/03/95	26/03/95
*Depth	1557.0	1758.0	1758.0	1758.0	1758.0	1758.0	1758.0	1758.0	1758.0
*Days Since Spud	10	11	12	13	14	15	16	17	18
*RHEOLOGICAL PROPERTIES									
Mud Wt -lb/gal	9.3	9.3	9.3	9.3	9.4	9.4	9.3	9.4	9.4
Plastic Visc -cps	18	17	16	16	20	23	14	16	19
Yield Point -lb/100ft2	21	15	12	15	15	18	11	12	12
3-rpm Rdg -Fann deg	2	3	2	3	2	2	2	2	2
np Value	0.547	0.614	0.652	0.600	0.652	0.642	0.641	0.652	0.689
Kp -lb-sec^n/100ft2	1.3720	0.7405	0.5133	0.7843	0.6416	0.7981	0.4894	0.5133	0.4496
na Value	0.645	0.514	0.573	0.507	0.622	0.656	0.548	0.573	0.595
Ka -lb-sec^n/100ft2	0.7452	1.3841	0.8380	1.3997	0.7743	0.7321	0.8723	0.8380	0.8083
*FLOW DATA									
Flow Rate -gal/min	0	275	0	300	250	275	275	160	0
Pump Pressure -psi	0	1220	0	800	600	700	700	200	0
Pump -hhp	***	196	***	140	88	112	112	19	***
*PRESSURE LOSSES									
Drill String -psi	***	308	***	346	280	340	294	***	***
Bit -psi	***	840	***	240	170	210	200	***	***
Annulus -psi	***	84	***	86	71	82	61	***	***
Total System -psi	***	1232	***	672	521	632	555	***	***
*BIT HYDRAULICS									
Nozzles -1/32 inch	11/11/11	11/11/11	11/11/11	11/17/18	11/17/18	11/17/18	11/17/18	/ /	/ /
Nozzles -1/32 inch	/ /	/ /	/ /	/ /	/ /	/ /	/ /	/ /	/ /
Bit Pressure -#	***	68	***	30	28	30	29	***	***
Bit -hhp	***	134	***	43	25	33	33	***	***
Bit HSI (Index)	***	2.40	***	0.80	0.40	0.60	0.60	***	***
Jet Velocity -m/sec	***	96.6	***	52.1	43.4	47.8	47.8	***	***
Impact Force -lbs	***	419	***	247	173	210	207	***	***
*DRILL COLLARS ANNULUS									
Velocity -m/min	***	61.9	***	67.5	56.3	61.9	61.9	***	***
Critical Vel -m/min	***	110.1	***	108.3	107.5	117.6	90.7	***	***
Reynolds Number	***	1176	***	1372	1072	1085	1562	***	***
Crit Re (Lam - Tran)	***	2766	***	2775	2619	2571	2719	***	***
*DRILL PIPE ANNULUS									
Velocity -m/min	***	37.3	***	40.7	33.9	37.3	37.3	***	***
Critical Vel -m/min	***	88.8	***	87.7	81.3	86.9	71.7	***	***
Reynolds Number	***	761	***	881	784	824	1051	***	***
Crit Re (Lam - Tran)	***	2766	***	2775	2619	2571	2719	***	***
*HOLE CLEANING									
Slip Velocity -m/min	***	14.7	***	15.0	16.2	15.0	19.7	***	***
Rising Velocity -m/min	***	22.6	***	25.7	17.7	22.3	17.6	***	***
Lifting Capacity -#	***	61	***	63	52	60	47	***	***
Cuttings Conc -#	***	1.30	***	***	***	***	***	***	***
Penetration Rate -m/hr	***	13.4	***	***	***	***	***	***	***
*CASING SHOE PRESSURES									
ECD -lb/gal	***	9.5	***	9.5	9.6	9.6	9.5	***	***
ECD+Cuttings -lb/gal	***	9.7	***	***	***	***	***	***	***
*TOTAL DEPTH PRESSURES									
ECD -lb/gal	***	9.6	***	9.6	9.6	9.7	9.5	***	***
ECD+Cuttings -lb/gal	***	9.7	***	***	***	***	***	***	***

M-I Drilling Fluids L.L.C.

DRILLING FLUIDS DATA MANAGEMENT SYSTEM

G0003

April 12, 1995

M-I DRILLING FLUIDS HYDRAULICS RECAP

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DUNBAR 1

Field/Area : PFL 1

Location : OTWAY BASIN

	27/03/95	28/03/95	29/03/95	30/03/95	31/03/95	01/04/95
*Date	27/03/95	28/03/95	29/03/95	30/03/95	31/03/95	01/04/95
*Depth	1758.0	1758.0	1758.0	1758.0	1758.0	1758.0
*Days Since Spud	19	20	21	22	23	24
*RHEOLOGICAL PROPERTIES						
Mud Wt -lb/gal	9.4	9.4	9.4	9.3	9.3	9.3
Plastic Visc -cps	20	19	20	14	19	20
Yield Point -lb/100ft2	11	11	11	10	10	10
3-rpm Rdg -Fann deg	2	2	2	2	2	2
np Value	0.718	0.707	0.718	0.663	0.727	0.737
Kp -lb-sec^n/100ft2	0.3763	0.3886	0.3763	0.4111	0.3333	0.3240
na Value	0.595	0.588	0.595	0.540	0.581	0.588
Ka -lb-sec^n/100ft2	0.8083	0.8178	0.8083	0.8850	0.8276	0.8178
*FLOW DATA						
Flow Rate -gal/min	0	0	0	250	0	0
Pump Pressure -psi	0	0	0	800	0	0
Pump -hhp	***	***	***	117	***	***
*PRESSURE LOSSES						
Drill String -psi	***	***	***	***	***	***
Bit -psi	***	***	***	***	***	***
Annulus -psi	***	***	***	***	***	***
Total System -psi	***	***	***	***	***	***
*BIT HYDRAULICS						
Nozzles -1/32 inch	/ /	/ /	/ /	/ /	/ /	/ /
Nozzles -1/32 inch	/ /	/ /	/ /	/ /	/ /	/ /
Bit Pressure -§	***	***	***	***	***	***
Bit -hhp	***	***	***	***	***	***
Bit HSI (Index)	***	***	***	***	***	***
Jet Velocity -m/sec	***	***	***	***	***	***
Impact Force -lbs	***	***	***	***	***	***
*DRILL COLLARS ANNULUS						
Velocity -m/min	***	***	***	139.0	***	***
Critical Vel -m/min	***	***	***	110.4	***	***
Reynolds Number	***	***	***	3824	***	***
Crit Re (Lam - Tran)	***	***	***	2731	***	***
*DRILL PIPE ANNULUS						
Velocity -m/min	***	***	***	68.7	***	***
Critical Vel -m/min	***	***	***	82.1	***	***
Reynolds Number	***	***	***	2103	***	***
Crit Re (Lam - Tran)	***	***	***	2731	***	***
*HOLE CLEANING						
Slip Velocity -m/min	***	***	***	19.9	***	***
Rising Velocity -m/min	***	***	***	48.8	***	***
Lifting Capacity -§	***	***	***	71	***	***
Cuttings Conc -§	***	***	***	***	***	***
Penetration Rate -m/hr	***	***	***	***	***	***
*CASING SHOE PRESSURES						
ECD -lb/gal	***	***	***	9.7	***	***
ECD+Cuttings -lb/gal	***	***	***	***	***	***
*TOTAL DEPTH PRESSURES						
ECD -lb/gal	***	***	***	9.9	***	***
ECD+Cuttings -lb/gal	***	***	***	***	***	***


M-I Drilling Fluids L.L.C.

DRILLING FLUIDS DATA MANAGEMENT SYSTEM

G0003

April 12, 1995

SECTION 8

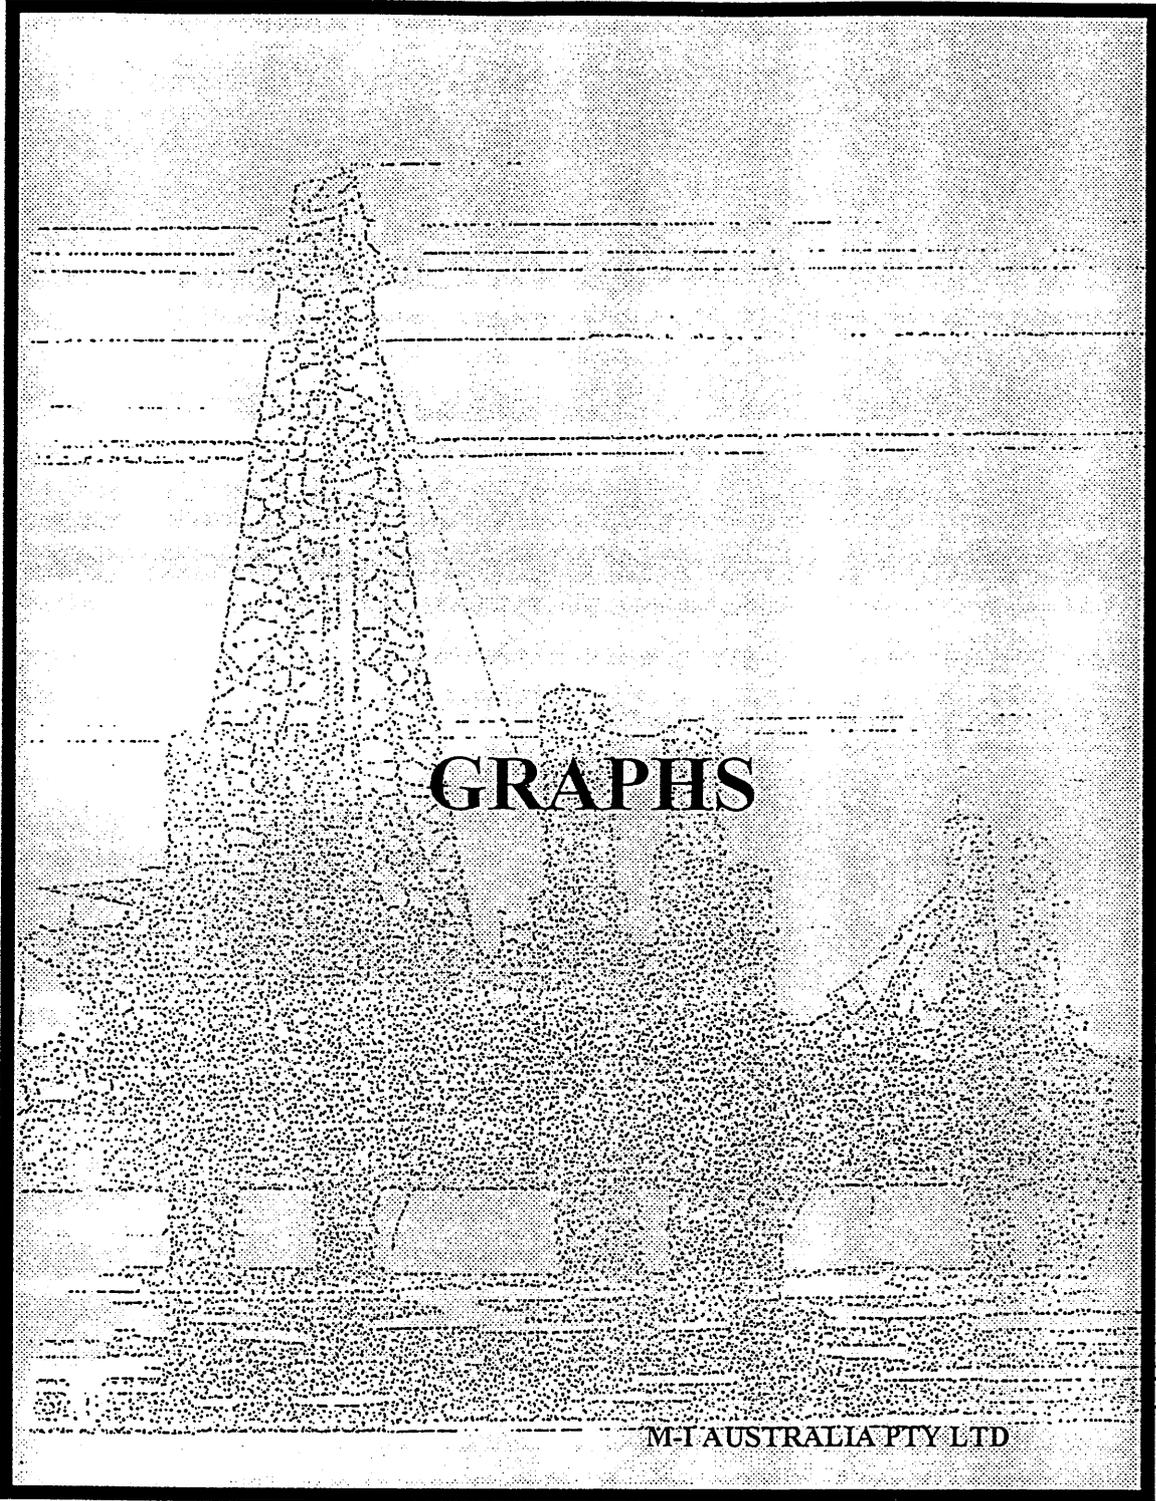


M-I AUSTRALIA PTY LTD



Operator : GFE RESOURCES
Well Name : DUNBAR 1
Legal : EXPLORATION
Field/Block : PPL 1
County/State : OTWAY BASIN


DRILLING FLUID PARAMETERS

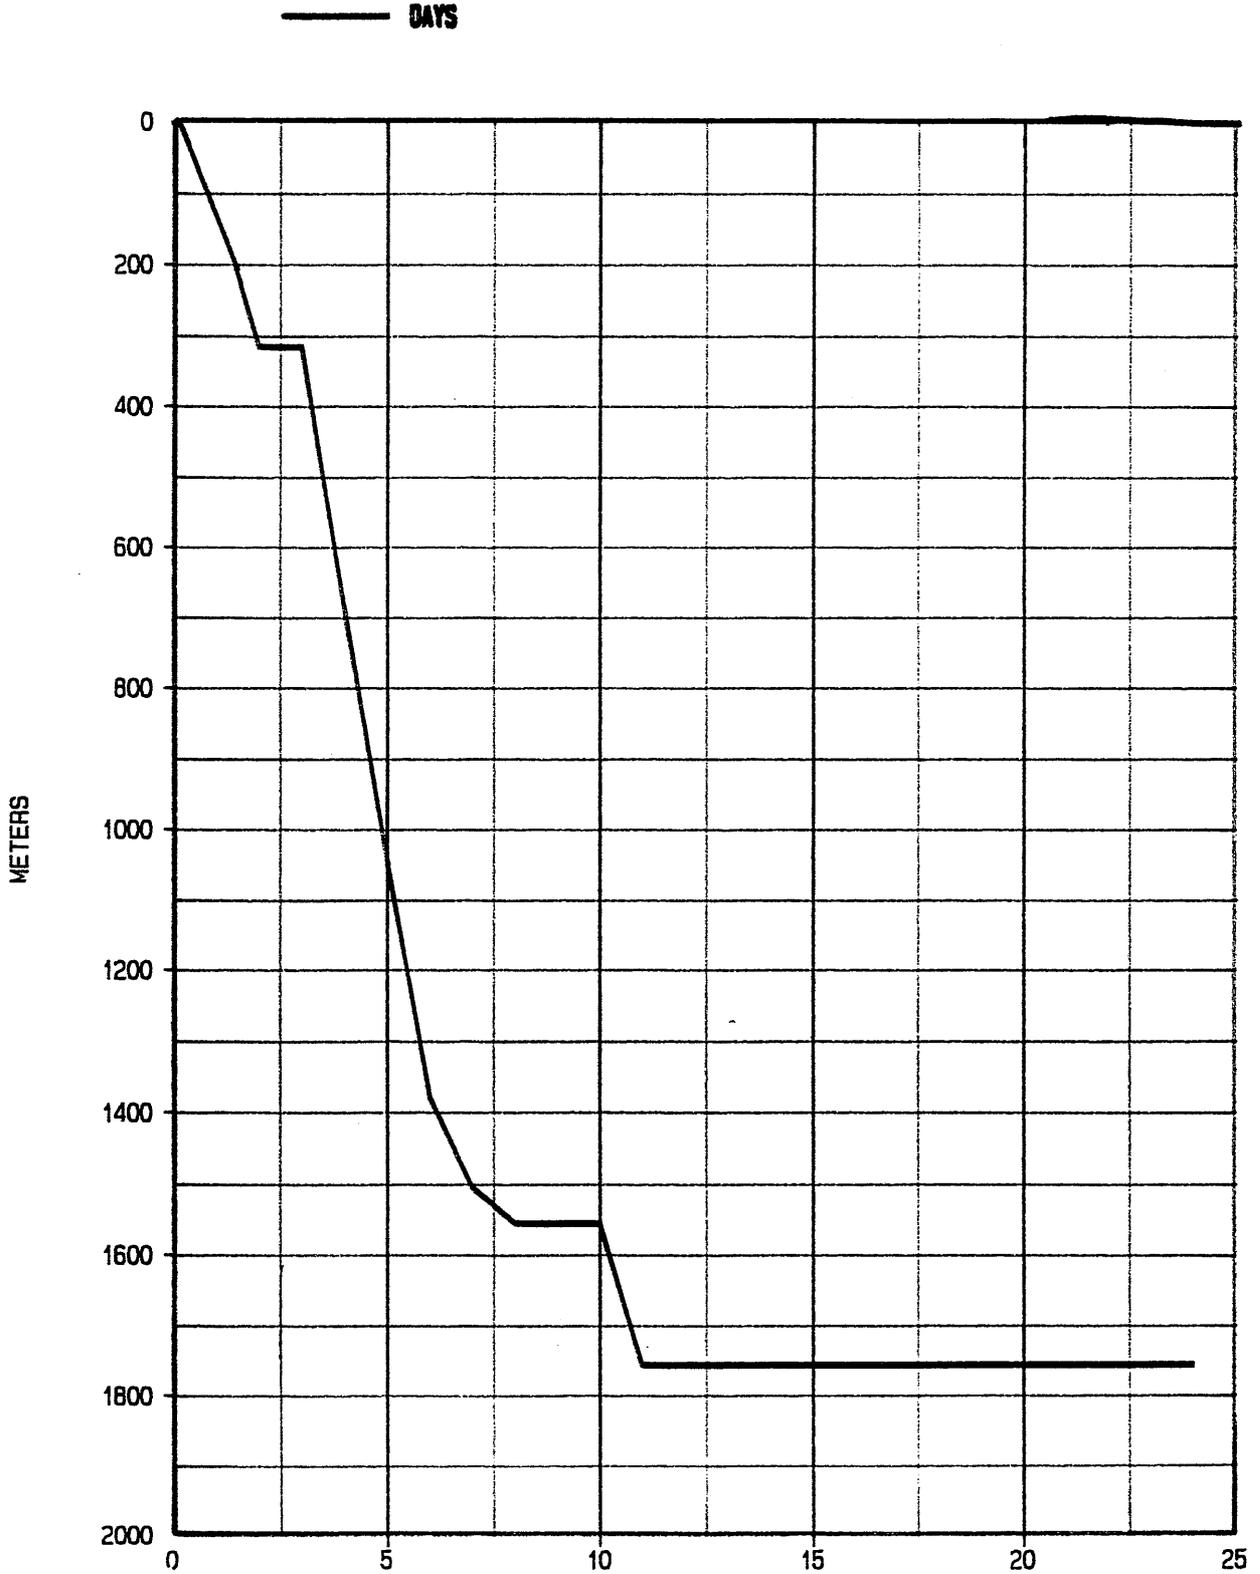



Operator : GFE RESOURCES
Well Name : DUNBAR 1
Legal : EXPLORATION
Field/Block : PPL 1
County/State : OTWAY BASIN

DRILLING FLUID PARAMETERS

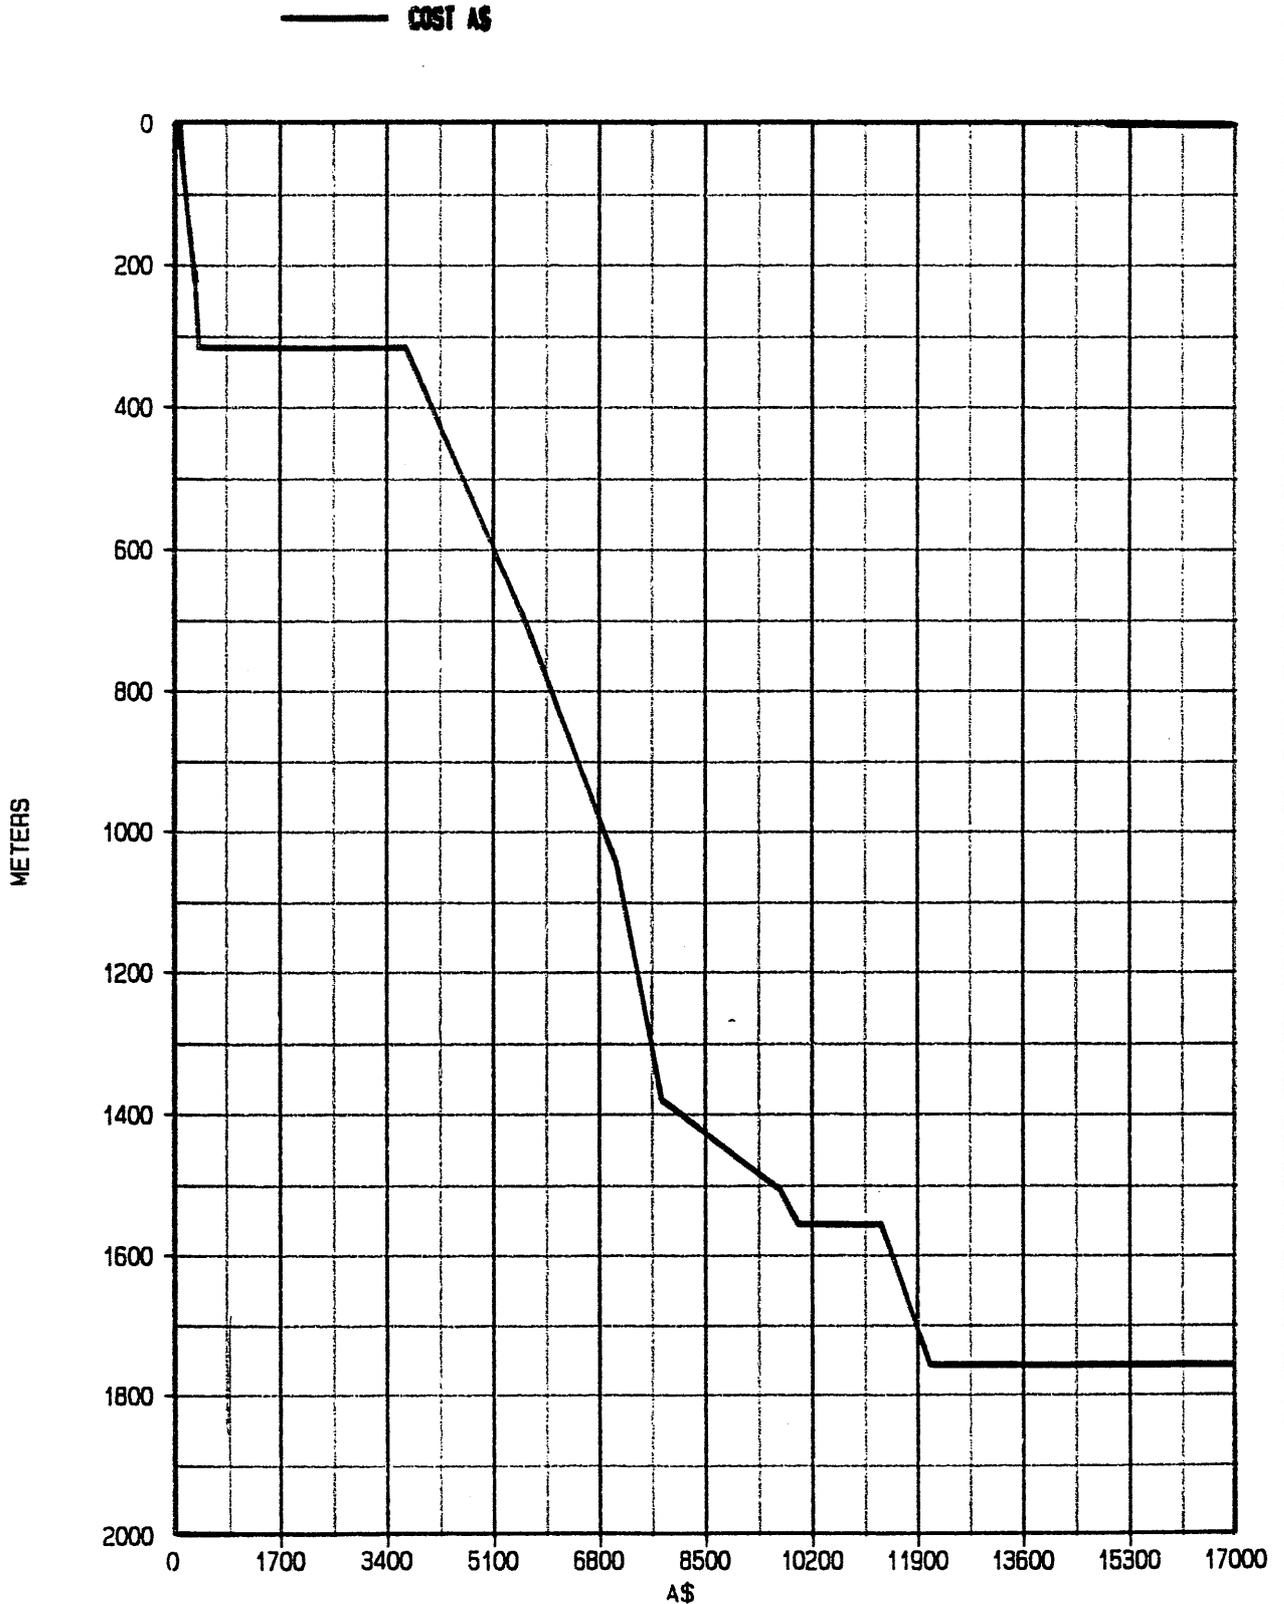




MEMBER/TMCO

Operator : GFE RESOURCES
Well Name : DUNBAR 1
Legal : EXPLORATION
Field/Block : PPL 1
County/State : OTWAY BASIN

DRILLING FLUID PARAMETERS

— MUD WEIGHT

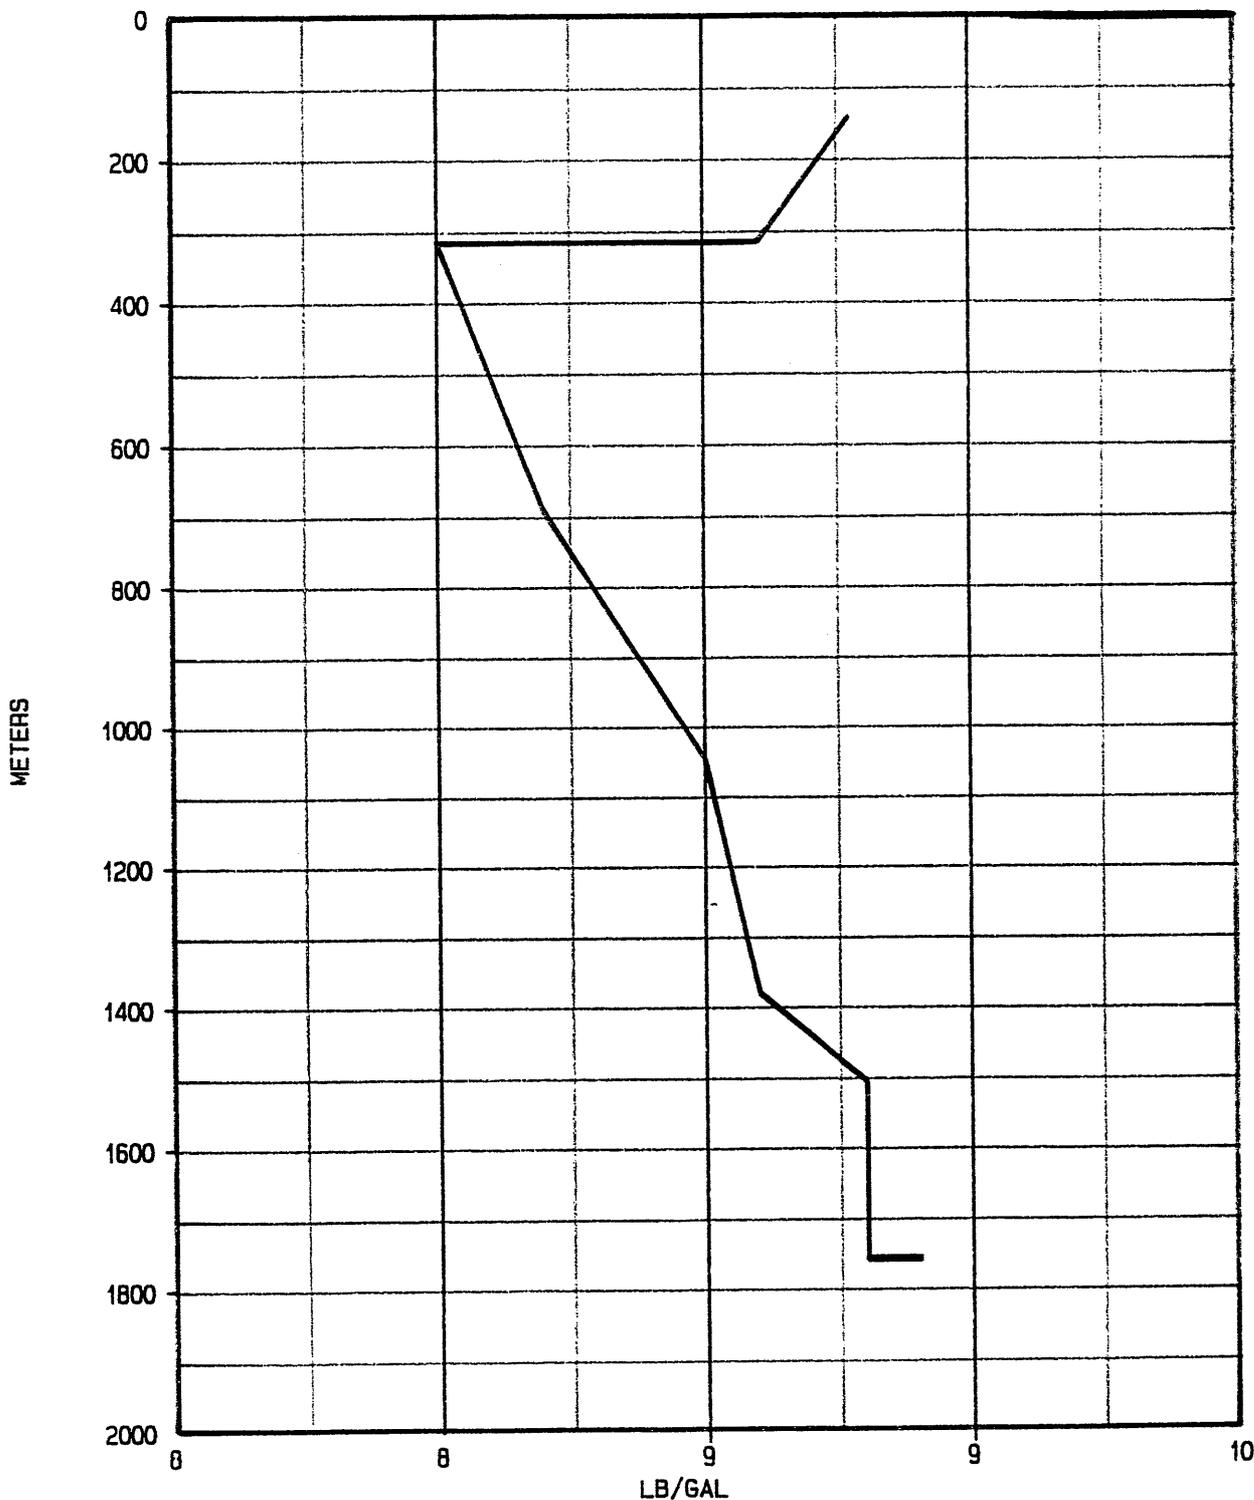




INTEGRATED/INCO


Operator : GFE RESOURCES
Well Name : DUNBAR 1
Legal : EXPLORATION
Field/Block : PPL 1
County/State : OTWAY BASIN

DRILLING FLUID PARAMETERS

— YIELD POINT
— FLUID LOSS

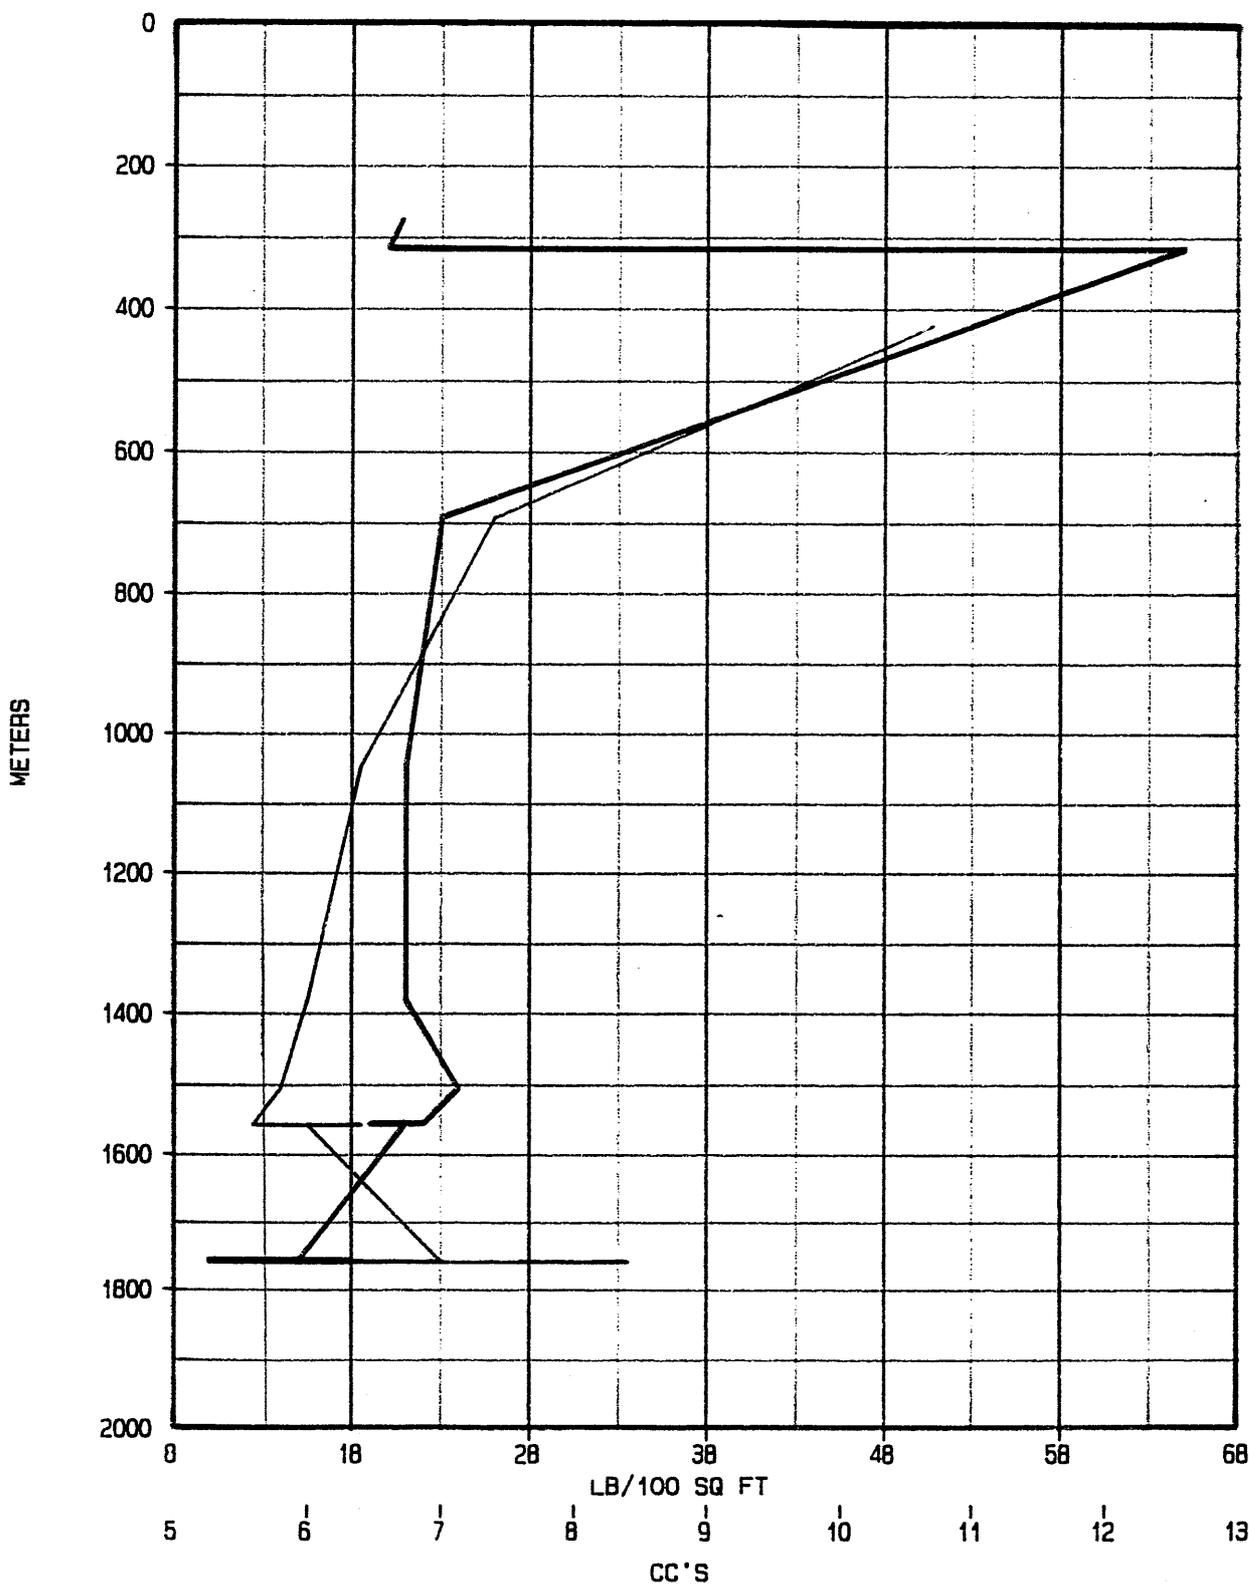

SECTION 9

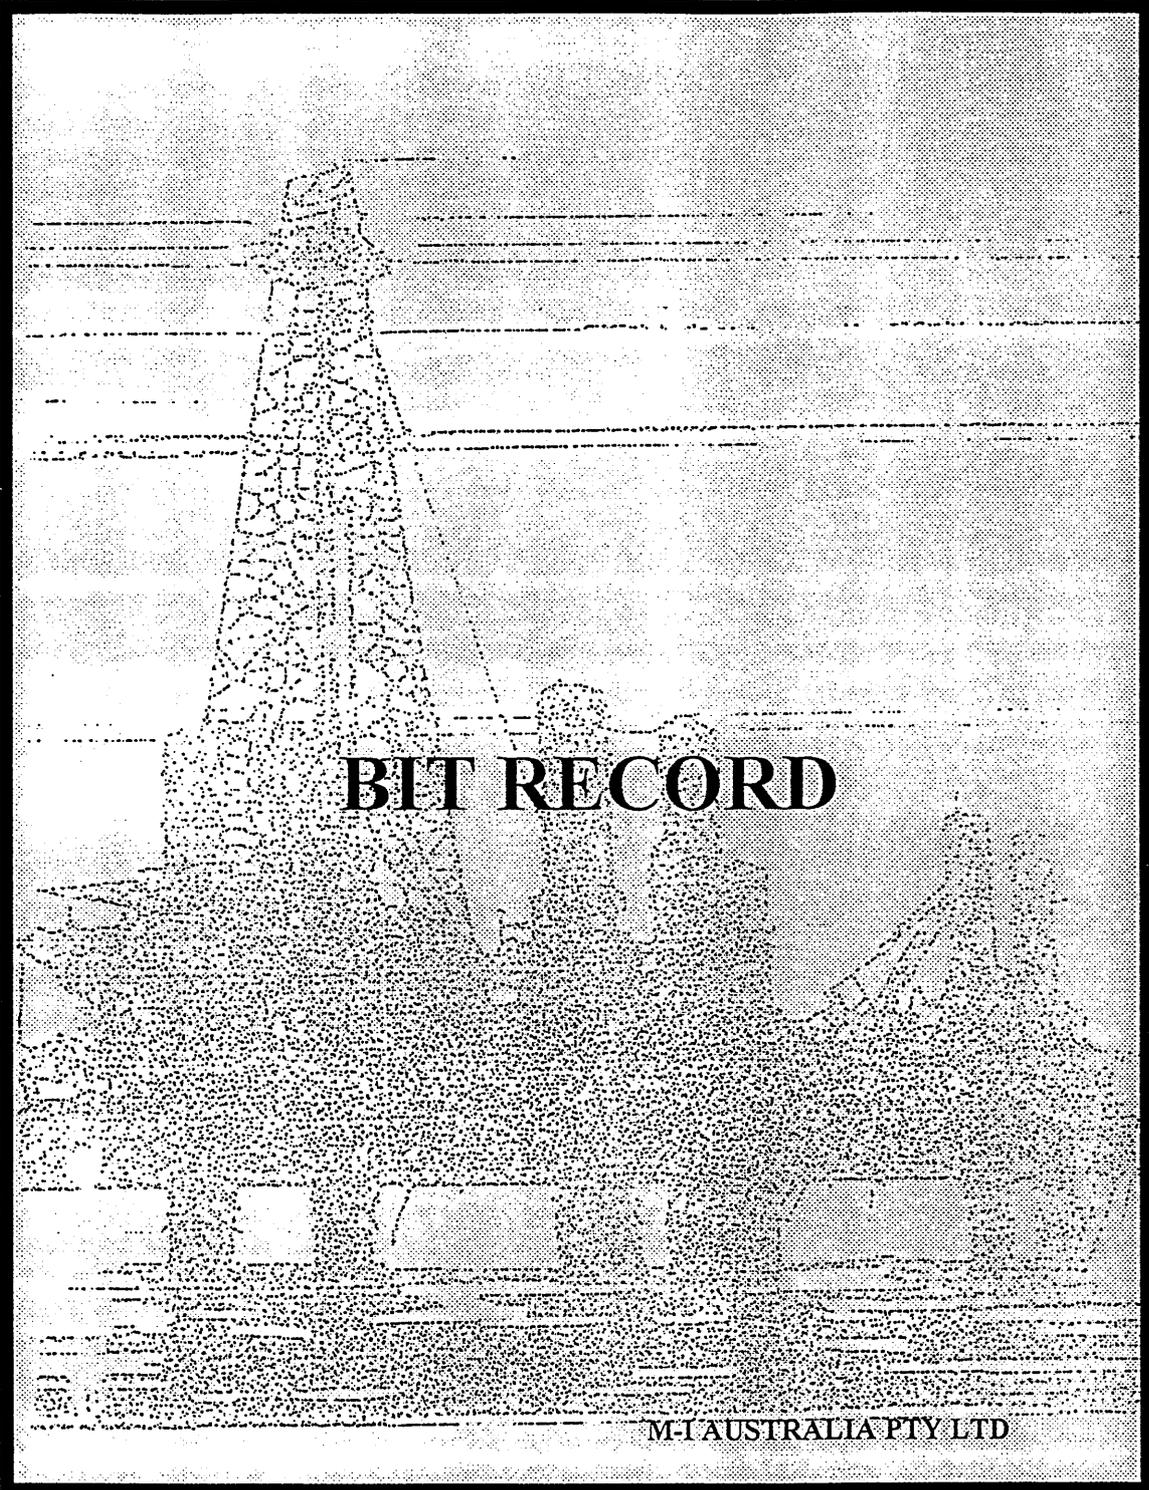


BIT RECORD

M-I AUSTRALIA PTY LTD

Contractor - Century Drilling Rig 11										Location - Otway Basin, Victoria										Well : Dunbar 1				
Operator : GFE Resources										Permit PPL-1										Engineer: Paul Marshall				
Pump Name	Size	Lamet Size/Stroke	Drill Collars OD x ID x Length	Pipe Drill	Tool Joint Type	Wt/ft	Pump Output bbls/STks	Date	Run No	Size	Make	Type	Jet Size	Depth Out	Meters Drilled	Hours Run	Wt on Bit	R.P.M	Pump Pressure	Vert Dev	STks/min	Ann Vel m/min	Condition T.B.G	
National	7-P-50	5.1/2 x 7.75	6.1/4, 2.25 x 162m	4.1/2	-	16.6	0.054																	
9-Mar	IRR	12.1/4	Varel	L114	2x20,1x18	317	307	12.1/2	20k	125	300	0	195	94	2-3-1/16									
11-Mar	2	8.1/2	HTC	AT05	3 x 11	1507	1190	60	25k	100	1220	1 deg	121	278	7-8-1/2									
13-Mar	3	8.1/2	HTC	AT05	3 x 11	1758	251	19	25k	110	1220	1 deg	121	130										
30-Mar	4RR	6	HIC	654	w/e	1758	Drill Cnt	8	20k	110	800		110	226										

SECTION 10

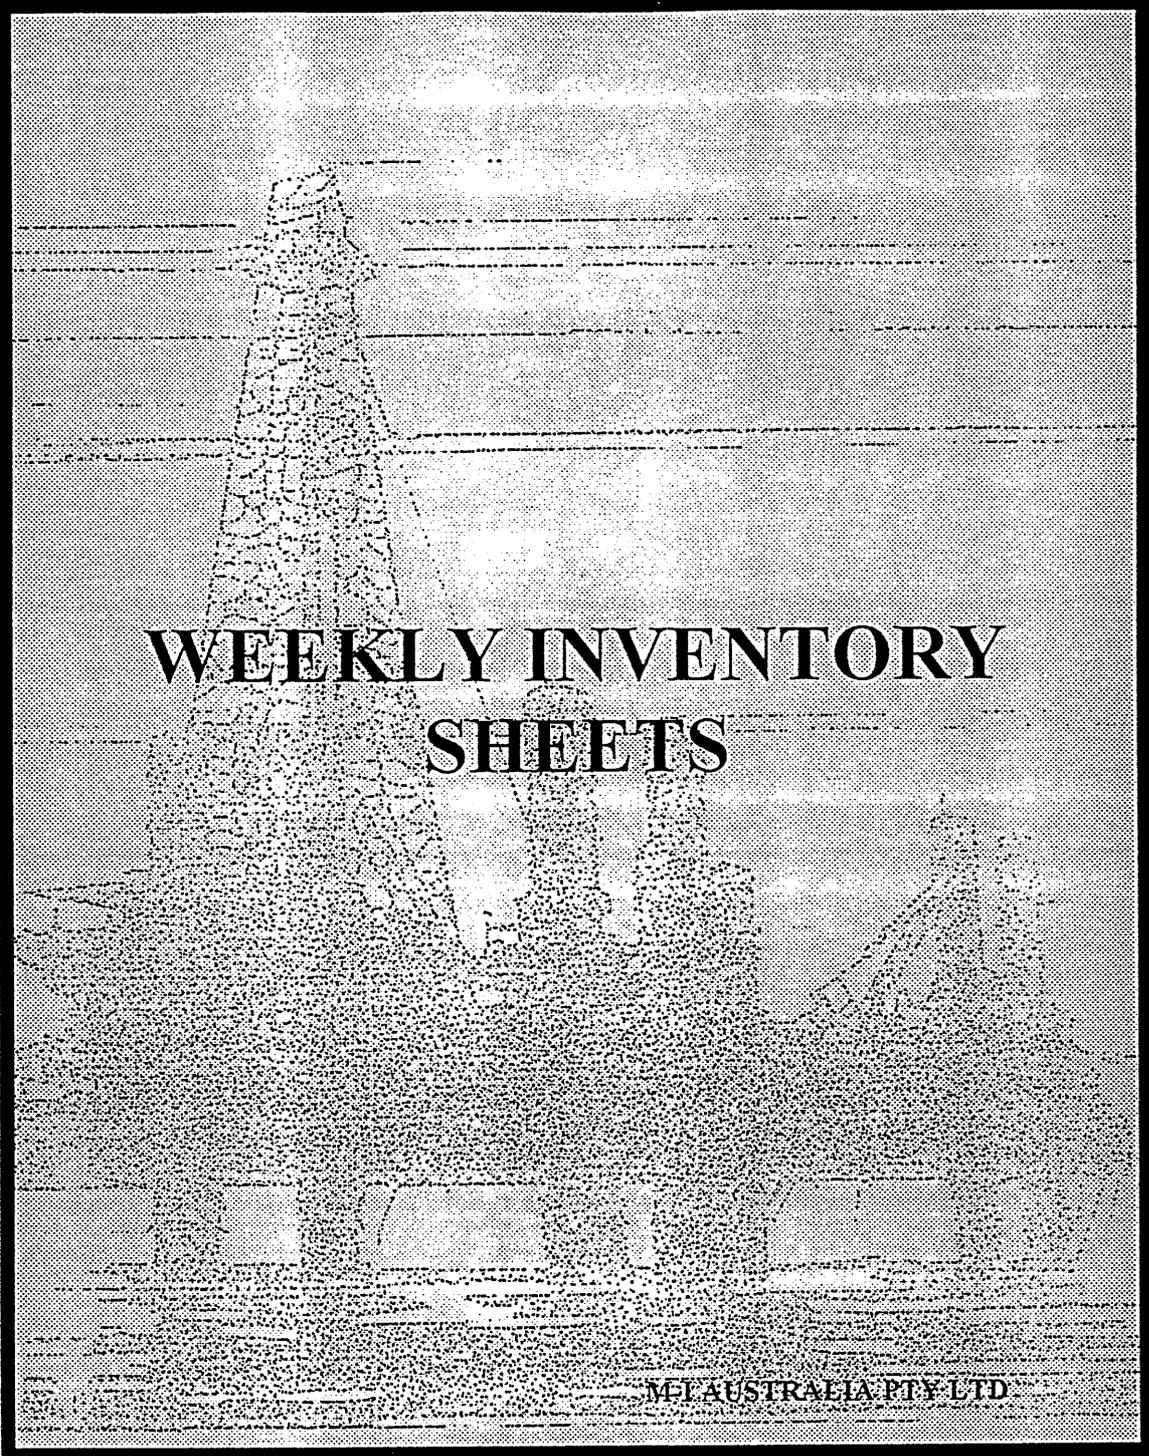


**WEEKLY INVENTORY
SHEETS**

MEL AUSTRALIA PTY LTD

DATE: 1995 15-Mar 16-Mar 17-Mar 18-Mar 19-Mar 20-Mar 21-Mar Total for Week

Product Name	Unit	15-Mar		16-Mar		17-Mar		18-Mar		19-Mar		20-Mar		21-Mar		Total for Week		
		Used	Bal	Used	Bal													
Barite	25 kg		907		907	208	699		699	99	600	40	560	40	520	0	387	520
M-I Gel	25 kg		224		224		224		224		224		224	9	215	0	9	215
KCl	25 kg		145		145		145		145		145		145		145	0	0	145
Polypac R	25 kg		80		80		78		78		78		78	2	76	0	4	76
CMCLV	25 kg	5	66		66		66		66		66		66		66	0	5	66
Polyplus	25 kg	9	32		32		32		32		32		32		32	0	9	32
Caustic Soda	25 kg		51		51		48		48	4	44		44	2	42	0	9	42
Soda Ash	25 kg		20		20		20		20		20		20	1	19	0	1	19
Sod Bicarbonate	25 kg		12		12		12		12		12		12		12	0	0	12
Sparsene	25 kg		16		16		16		16		16		16		16	0	0	16
Lime	20 kg		17		17		17		17		17		17		17	0	0	17
Calc Chloride	25 kg		39		39		39		39		39		39		39	0	0	39
OS-1	25 kg		14		14	1	11		11	3	8		8		8	0	6	8
Bacban III	6 lb		5		5		5		5		5		5		5	0	0	5
Conqor 303	25 lb		10		10		10		10		10		10		10	0	0	10
Defoam A	25 lb		5		5		5		5		5		5		5	0	0	5
Pipelax	205 lb		2		2		2		2		2		2		2	0	0	2
Mica Medium	50 lb		30		30		30		30		30		30		30	0	0	30
Kwikseal Med	40 lb		30		30		30		30		30		30		30	0	0	30

SECTION 11

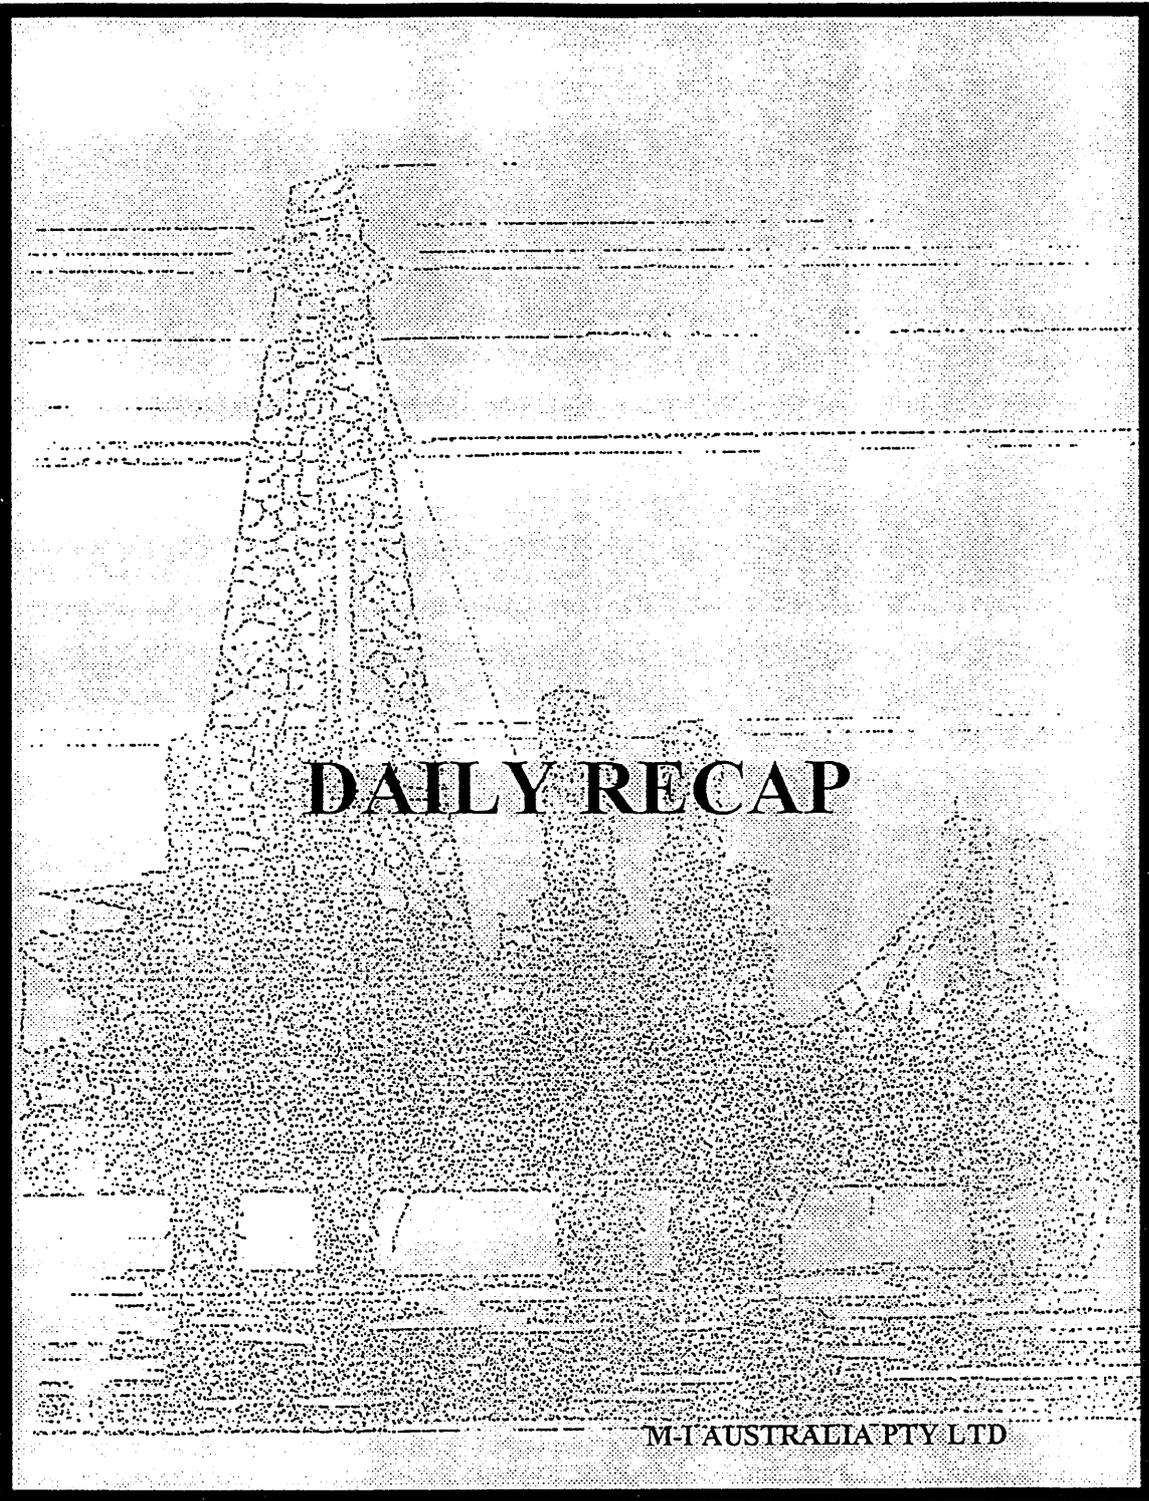

DAILY RECAP

M-I AUSTRALIA PTY LTD

M-I DRILLING FLUIDS RECAP

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DUNBAR 1

Field/Area : PFL 1

Location : OTWAY BASIN

Date - Day	09/03/95- 1	10/03/95- 2	11/03/95- 3	12/03/95- 4	13/03/95- 5	14/03/95- 6	15/03/95- 7
Depth/TVD -m	115.0 /115.0	317.0 /317.0	317.0 /317.0	693.0 /693.0	1047.0/1047.0	1382.0/1382.0	1507.0/1507.0
Activity	DRILLING	CEMENT CSG	RIH	DRILL 8.5"	DRILL 8.5"	DRILL 8.5"	RIH
Mud Type Code	208	208	206	206	206	206	206
Hole Size -in	12.25	12.25	8.5	8.5	8.5	8.5	8.5
Circ Volume -bbl	375	370	305	362	433	528	580
Flow Rate -gal/min	335	450	330	275	275	275	275
Circ Pressure -psi	625	900	1400	950	1100	1150	1220
Avg ROP -m/hr	9.6	28		22		18.1	10.2
Sample from	FL 24:00	PIT 23:00	PIT 23:00	FL 22:30	FL 23:00	FL 23:00	PIT 24:00
Flow Line Temp -^F	80			70	82	90	
Mud Wt -lb/gal	9.3	9.1	8.5	8.7	9	9.1	9.3
Funnel Vis -s/qt	45 @ 78 ^F	45 @ 50 ^F	120 @ 50 ^F	45 @ 68 ^F	42 @ 77 ^F	42 @ 80 ^F	46 @ 60 ^F
PV -cps	10 @ 75 ^F	13 @ 50 ^F	41 @ 50 ^F	17 @ 63 ^F	17 @ 65 ^F	18 @ 70 ^F	24 @ 60 ^F
YP/R3 -lb/100ft2	24 / 4	20 / 5	65 / 6	23 / 3	21 / 2	21 / 2	24 / 3
10s/10m Gel	6 / 30	10 / 34	10 / 17	4 / 10	3 / 8	3 / 8	4 / 10
API Filtrate -cm3			12	7.4	6.4	6	5.8
HTHP Filtrate -cm3							
Cake API/HT -1/32"	3 /	3 /	1 /	1 /	1 /	1 /	1 /
Fluids -tvol	3.5	5	1	3	5	5.5	7
/Water -tvol	/ 96.5	/ 95	/ 99	/ 97	/ 95	/ 94.5	/ 93
Sand -tvol	0.75	0.5	0	0.5	3	2	0.5
MBT -lb/bbl	22.5	17.5		7.5	9	9	10
pH	8.3 @ 70 ^F	8.5 @ 50 ^F	8.3 @ 50 ^F	8.5 @ 55 ^F	8.5 @ 60 ^F	8.3 @ 60 ^F	8.3 @ 60 ^F
Alkal Mud (Pm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Pf/Mf	0.0 / 0.4	0.05 / 0.2	0.05 / 0.1	0.05 / 0.1	0.05 / 0.2	0.05 / 0.3	0.05 / 0.2
Chlorides -mg/L	600	1000	500	800	700	800	800
Hardness (Ca)-mg/L	160	80	60	80	80	100	100
			1.4	1.1	1.3	1.3	1.44
					60	100	80
Daily Mud Cost -	287	116	3296	1875	1508	731	1865
Cumml Mud Cost -	287	403	3699	5574	7081	7812	9678
Sales Engineer	P.MARSHALL	P.MARSHALL	P.MARSHALL	P.MARSHALL	P.MARSHALL	P.MARSHALL	P.MARSHALL
Products Used	GEL 28 CAUS 1	KCL 4 SPCF 1 LIME 2 CACI 1	POLE 9 PACR 9 CMCL 9	POLE 9 PACR 1 CMCL 3	POLE 5 PACR 1 CMCL 5 OS-1 4	POLE 3 OS-1 2 BAC 1	POLE 9 CMCL 5

Remarks
 09/03 : Spud Dunbar 1 at 1700 hrs and drill 12.1/4" hole to 115m
 10/03 : Drill 12.1/4" hole f/115m-317m TD. Perform wiper trip. POOH. Run casing. Prepare to cement 9.5/8" casing.
 11/03 : Cement casing. WOC. Nipple up BOP's. Pick up BHA and prepare to run in hole with 8.1/2" drill assembly.
 12/03 : RIH and tag cement at 294m. Drill out and displace hole to PHEA system. Perform FIT and drill 8.5" hole f/322m- 69
 13/03 : Drill to 856m. POOH for wiper trip. Circ out tight hole f/579-531m. Cont POOH tight. RIH & Rream to bottom 18m FILL
 14/03 : Drill from 1047m-1230m. POOH for wiper trip. Work tight hole RIH & ream 1255m-1287m. 7M fill. Drill f/1287-1382m.
 15/03 : Drill from 1382m-1507m. POOH for bit change. M/U new bit and RIH.

M-I DRILLING FLUIDS RECAP

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DUNBAR 1

Field/Area : PFL 1

Location : OTWAY BASIN

Date - Day	16/03/95- 8	17/03/95- 9	18/03/95- 10	19/03/95- 11	20/03/95- 12	21/03/95- 13	22/03/95- 14
Depth/TVD -m	1557.0/1557.0	1557.0/1557.0	1557.0/1557.0	1758.0/1758.0	1758.0/1758.0	1758.0/1758.0	1758.0/1758.0
Activity	POH TO TEST	CIRCULATE	M/U BHA	W/TRIP	LOGGING	LOGGING	LOGGING
Mud Type Code	206	206	206	206	206	206	206
Hole Size -in	8.5	8.5	8.5	8.5	8.5	8.5	8.5
Circ Volume -bbl	587	509	502	1626	605	571	548
Flow Rate -gal/min	275	275		275		300	250
Circ Pressure -psi	1220	1200		1220		800	600
Avg ROP -m/hr	12.5			13.4			
Sample From	FL 20:00	FL 24:00	FL 23:30	FL 22:00	PIT 23:00	PIT 24:00	PIT 22:30
Flow Line Temp -^F	86	87		88			
Mud Wt -lb/gal	9.3	9.3	9.3	9.3	9.3	9.3	9.4
Funnel Vis -s/qt	48 @ 75 ^F	44 @ 85 ^F	46 @ 60 ^F	40 @ 85 ^F	40 @ 70 ^F	40 @ 70 ^F	42 @ 70 ^F
FV -cps	22 @ 70 ^F	18 @ 75 ^F	18 @ 57 ^F	17 @ 76 ^F	16 @ 65 ^F	16 @ 65 ^F	20 @ 65 ^F
YP/R3 -lb/100ft2	22 / 3	19 / 2	21 / 2	15 / 3	12 / 2	15 / 3	15 / 2
10s/10m Gel	4 / 14	3 / 10	4 / 10	4 / 10	3 / 13	4 / 12	4 / 13
API Filtrate -cm3	5.6	6.4	6	7	6.4	6.2	6.4
HTHP Filtrate -cm3							
Cake API/HT -1/32"	1 /	1 /	1 /	1 /	1 /	1 /	1 /
Clids -tvol	7	7	7	6.5	6.5	6.5	7
Oil/Water -tvol	/ 93	/ 93	/ 93	/ 93.5	/ 93.5	/ 93.5	/ 93
Sand -tvol	1	0.75	0.5	0.5	0.75	0.5	0.75
MBT -lb/bbl	10	12.5	12	10.5	11	11	11.5
pH	8.6 @ 60 ^F	8.3 @ 60 ^F	8.3 @ 55 ^F	8.6 @ 55 ^F	8.5 @ 55 ^F	8.6 @ 55 ^F	8.5 @ 55 ^F
Alkal Mud (Pm)	0.2	0.1	0.1	0.1	0.1	0.1	0.1
Pf/Mf	0.1 / 0.3	0.05 / 0.35	0.05 / 0.35	0.1 / 0.5	0.1 / 0.45	0.1 / 0.45	0.05 / 0.45
Chlorides -mg/L	800	750	800	750	7500	750	750
Hardness (Ca)-mg/L	80	80	80	60	60	60	60
PHPA	1.44	1.3	1.3	1.2	1.2	1.2	1.1
SULPHITE	100	60	50	120	100	100	80
Daily Mud Cost -	301	1333		790	221	629	1529
Cumml Mud Cost -	9979	11311	11311	12101	12322	12951	14480
Sales Engineer	P. MARSHALL						
Products Used	CAUS 3	PACR 1		CAUS 4	BAR 40	GEL 9	GEL 11
	PACR 1	OS-1 1		OS-1 3		CAUS 2	PACR 5
	OS-1 2	BAR 208		BAR 99		PACR 2	BAR 136
						BAR 40	SODA 1
						SODA 1	

Remarks

16/03 : Contin RIM & ream u/gauge hole. Drill f/1507-1557m. Circ and POOH for wiper trip. RIM-hole good-5m. Fill. POH to tes
 17/03 : Cont POOH. M/U and RIM w/ test tool. DST #1. POH & lay out T/T-tool blocked. RIM & circ and dilute. Pump Hi Vis & PO
 18/03 : Wiper trip. POOH. RIM for DST #2. Perform DST #2. Pull free hole good. Recover sample. Test BOPs. Prepare to RIM.
 19/03 : RIM w/ BHA. Break circ. @1533m and wash and ream to bottom- 1.5m fill. Drill f/1557-1758m. POOH for wiper trip.
 20/03 : RIM for wiper trip. Ream tight hole f/1533-1648m. 7m fill circulate hole clean and POOH. Hole good. Rig up and log.
 21/03 : Cont log run #3. RIM to 1741m. Wash to bottom-4m fill. Circ hole clean and POOH. Rig up and run logs #4 & 5.
 22/03 : Cont log run #5, run log #6. P/U BHA and RIM, circ and trip out to 1176m. RIM, circ & POOH to log. Run log #7

M-I DRILLING FLUIDS RECAP

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DUNBAR 1

Field/Area : PPL 1

Location : OTWAY BASIN

Date - Day	23/03/95- 15	24/03/95- 16	25/03/95- 17	26/03/95- 18	27/03/95- 19	28/03/95- 20	29/03/95- 21
Depth/TVD -m	1758.0/1758.0	1758.0/1758.0	1758.0/1758.0	1758.0/1758.0	1758.0/1758.0	1758.0/1758.0	1758.0/1758.0
Activity	CIRC	RUN CASING	WORK CASING	WAIT ON DP	WAIT ON DP	WAIT ON DP	WAIT ON DP
Mud Type Code	206	206	206	206	206	206	206
Hole Size -in	8.5	8.5	8.5	8.5	8.5	8.5	8.5
Circ Volume -bbl	494	509	532	315	315	315	
Flow Rate -gal/min	275	275	160				
Circ Pressure -psi	700	700	200				
Avg ROP -m/hr							
Sample From	FL 23:00	FL 23:00	FL 23:00	PIT 23:00	PIT 22:30	PIT 22:00	PIT 22:00
Flow Line Temp -°F	84	80	74				
Mud Wt -lb/gal	9.4	9.3	9.4	9.4	9.4	9.4	9.4
Funnel Vis -s/qt	44 @ 80 °F	39 @ 75 °F	39 @ 68 °F	40 @ 60 °F	39 @ 60 °F	40 @ 60 °F	40 @ 60 °F
FV -cps	23 @ 70 °F	14 @ 70 °F	16 @ 55 °F	19 @ 55 °F	20 @ 55 °F	19 @ 55 °F	20 @ 55 °F
YP/R3 -lb/100ft2	18 / 2	11 / 2	12 / 2	12 / 2	11 / 2	11 / 2	11 / 2
10s/10m Gel	3 / 12	3 / 10	3 / 10	3 / 9	3 / 9	3 / 11	3 / 10
API Filtrate -cm3	6.4	6.4	6.6	6.6	6.6	6.6	6.6
HTHP Filtrate -cm3							
Cake API/HT -1/32"	1 /	1 /	1 /	1 /	1 /	1 /	1 /
Clids -svol	7	6.5	7	7	7	7	7
Oil/Water -svol	/ 93	/ 93.5	/ 93	/ 93	/ 93	/ 93	/ 93
Sand -svol	0.75	0.5	0.5	0.5	0.5	0.25	0.25
MBT -lb/bbl	12	12	12.5	12.5	12.5	12.5	12.5
PH	8.5 @ 55 °F	8.7 @ 55 °F	8.5 @ 55 °F	8.5 @ 55 °F	8.3 @ 55 °F	8.5 @ 55 °F	8.5 @ 55 °F
Alkal Mud (Pm)	0.1	0.2	0.1	0.1	0.1	0.1	0.1
Pf/Mf	0.05 / 0.45	0.08 / 0.6	0.05 / 0.5	0.05 / 0.45	0.05 / 0.4	0.1 / 0.6	0.1 / 0.65
Chlorides -mg/L	750	750	750	750	750	750	750
Hardness (Ca)-mg/L	60	60	60	60	60	50	50
PHPA	1.1	1	1	1	1	1	1
SULPHITE	50	100	80	50	50	10	10
Daily Mud Cost -		353	94				
Cummil Mud Cost -	14480	14833	14928	14928	14928	14928	14928
Sales Engineer	P.MARSHALL	P.MARSHALL	P.MARSHALL	P.MARSHALL	P.MARSHALL	P.MARSHALL	P.MARSHALL
Products Used		GEL 8 OS-1 1 BAR 41	GEL 10				

Remarks
 23/03 : Continue log run#7. POOH w/blocked tool. Rerun log #7. POOH P/U 8.5" Drl Assy and RIH to 1755.5m. wash to bottom. Circ
 24/03 : Cont circ hole clean. Lay out DP & drill Assy. Rig up and run casing. Work and circ tight hole f/1123-1130m.
 25/03 : Cont to run casing. Circ & work stuck casing F/1148m. - 1153m. Lay out 4 JNTS, P/U 1 JNT. Cont to work f/1097-1108m
 26/03 : Rig up and cement 7" casing. Cut casing. Nipple down BOPS Nipple up and test. Wait on 3.5" drill pipe.
 27/03 : WOC. Pressure test casing. Wait on 3.5" drill pipe.
 28/03 : Wait on 3.5" drill pipe. Service rig.
 29/03 : Wait on drill 3.5" drill pipe.

M-I DRILLING FLUIDS RECAP

Operator : GFE RESOURCES

Contractor : CENTURY DRILLING 11

Description : EXPLORATION

Well Name : DONBAR 1


Field/Area : PFL 1

Location : OTWAY BASIN

Date - Day	30/03/95- 22	31/03/95- 23	01/04/95- 24
Depth/TVD -m	1758.0/1758.0	1758.0/1758.0	1758.0/1758.0
Activity	DRILL CMT	LAY OUT DP	RIG DOWN
Mud Type Code	206	206	206
Hole Size -in	6	6	6
Circ Volume -bbl	410	319	
Flow Rate -gal/min	250		
Circ Pressure -psi	800		
Avg ROP -m/hr			
Sample From	FL 23:00	PIT 24:00	FL 15:00
Flow Line Temp -°F	74		70
Mud Wt -lb/gal	9.3	9.3	9.3
Funnel Vis -s/qt	38 @ 70 °F	41 @ 70 °F	42 @ 70 °F
FV -cps	14 @ 65 °F	19 @ 65 °F	20 @ 65 °F
YP/R3 -lb/100ft ²	10 / 2	10 / 2	10 / 2
10s/10m Gel	2 / 9	2 / 9	2 / 9
API Filtrate -cm ³	8.4	7.6	7.6
HTHP Filtrate -cm ³			
Shake API/HT -1/32"	1 /	1 /	1 /
Solids -%vol	7	7	7
Oil/Water -%vol	/ 93	/ 93	/ 93
Sand -%vol	3	1.5	1.5
MST -lb/bbl	12	12.5	12.5
pH	12.5 @ 55 °F	13.5 @ 55 °F	12.5 @ 55 °F
Alkal Mud (Pm)	2.2	2	2
Ff/Mf	1.9 / 2.1	1.8 / 2.0	1.8 / 2.0
Chlorides -mg/L	750	750	750
Hardness (Ca)-mg/L	200	200	200
PHPA			0.9
SULPHITE	10	10	300
Daily Mud Cost -	833	574	622
Cummul Mud Cost -	15761	16335	16957
Sales Engineer	P.MARSHALL	P.MARSHALL	P.MARSHALL
Products Used	PACR 2	PACR 1	BAC 1
	BAR 103	BAR 80	CNQ3 10

Remarks
 30/03 : Test BOPs. P/U 4.75" DC,M/U bit and RIM with 3.5" DP.Tag cement at 1102m.Drill out cmt & shoe track f/1102-1196m.
 31/03 : Drill out shoe track.RIM to 1758m & circ POOH,lay out drl assy and RIM O/E to 1610m and set cmt plug #1.1610-1440
 01/04 : Rig up and set cement plug #2 f/1240-1180m. RIM and tag cmt @ 1178m circ and displace hole to inhibited mud.

SECTION 12

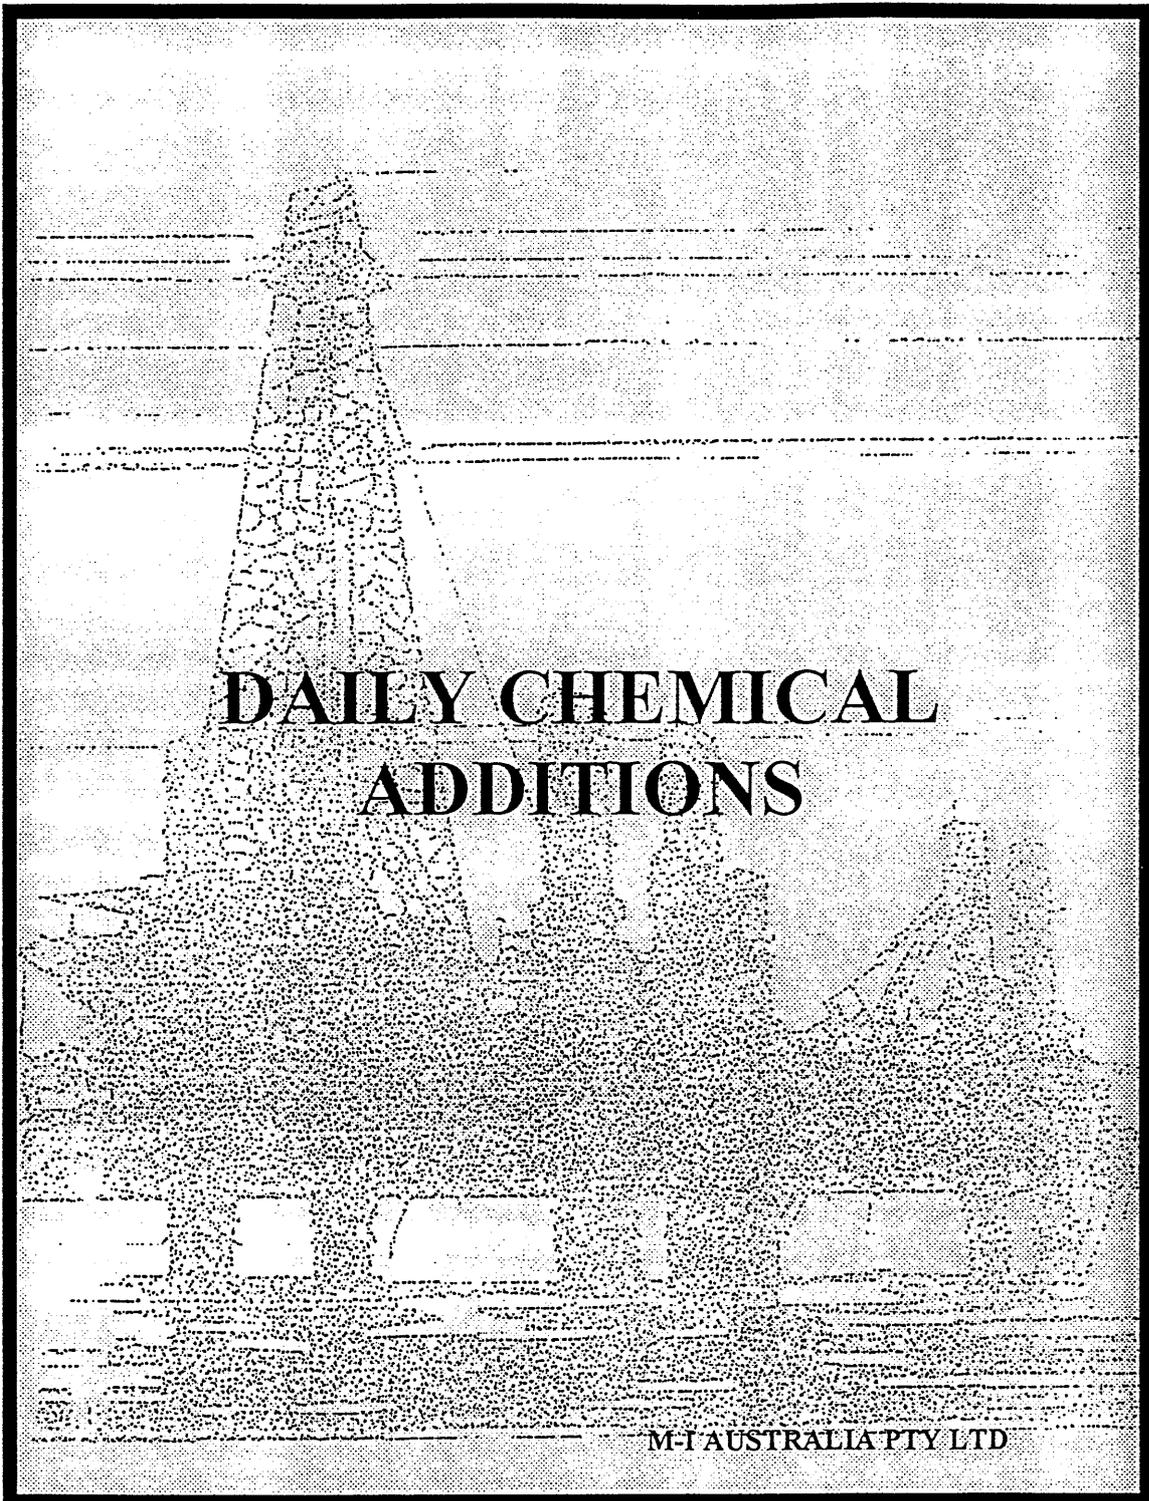

**DAILY CHEMICAL
ADDITIONS**

M-I AUSTRALIA PTY LTD

===== M-I DRILLING FLUIDS DAILY MUD ADDITIONS =====

Operator : GFE RESOURCES Contractor : CENTURY DRILLING 11 Description : EXPLORATION Page: 1
 Well Name : DUNBAR 1 Field/Area : PPL 1 Location : OTWAY BASIN Well: G0003

Date	09/03/95	10/03/95	11/03/95	12/03/95	13/03/95	14/03/95	15/03/95
Depth	-m: 115.0	317.0	317.0	693.0	1047.0	1382.0	1507.0
Daily Mud Cost	: 287	116	3296	1875	1508	731	1865
Cumulative Mud Cost	: 287	403	3699	5574	7081	7812	9678
Bacban 6 LB JU:						1	
CMC TG LV 25 KG S:			9	3	5		5
Calcium Chloride 25 KG S:		1					
Caustic Soda 25 KG S: 1							
Conqor 303 25 LT D:							
Lime 40 KG S:		2					
M-I Bar 25 KG S:							
M-I Gel 25 KG S: 28							
OS-1 25 KG S:					4	2	
Polypac R 25 KG S:			9	1	1		
Polypius Powder 25 KG S:			9	9	5	3	9
Potassm Chloride 25 KG S:		4					
Soda Ash 40 KG S:							
persene CF 50 LB S:		1					

===== M-I DRILLING FLUIDS DAILY MUD ADDITIONS =====

Operator : GFE RESOURCES Contractor : CENTURY DRILLING 11 Description : EXPLORATION Page: 2
 Well Name : DUNBAR 1 Field/Area : PPL 1 Location : OTWAY BASIN Well: G0003

Date	16/03/95	17/03/95	18/03/95	19/03/95	20/03/95	21/03/95	22/03/95
Depth -m:	1557.0	1557.0	1557.0	1758.0	1758.0	1758.0	1758.0
Daily Mud Cost	301	1333		790	221	629	1529
Cumulative Mud Cost	9979	11311	11311	12101	12322	12951	14480
Bacban 6 LB JU:							
CMC TG LV 25 KG S:							
Calcium Chloride 25 KG S:							
Caustic Soda 25 KG S: 3				4		2	
Conqor 303 25 LT D:							
Lime 40 KG S:							
M-I Bar 25 KG S:		208		99	40	40	136
M-I Gel 25 KG S:						9	11
OS-1 25 KG S: 2		1		3			
Polypac R 25 KG S: 1		1				2	5
Polyplus Powder 25 KG S:							
Potassm Chloride 25 KG S:							
Soda Ash 40 KG S:						1	1
Spersene CF 50 LB S:							

M-I Drilling Fluids Co

DRILLING FLUIDS DATA MANAGEMENT SYSTEM

12-04-95

===== M-I DRILLING FLUIDS DAILY MUD ADDITIONS =====

Operator : GFE RESOURCES Contractor : CENTURY DRILLING 11 Description : EXPLORATION Page: 3
 Well Name : DUNBAR 1 Field/Area : PPL 1 Location : OTWAY BASIN Well: G0003

Date	23/03/95	24/03/95	25/03/95	26/03/95	27/03/95	28/03/95	29/03/95
Depth -m:	1758.0	1758.0	1758.0	1758.0	1758.0	1758.0	1758.0
Daily Mud Cost :		353	94				
Cumulative Mud Cost :	14480	14833	14928	14928	14928	14928	14928
Bacban 6 LB JU:							
CMC TG LV 25 KG S:							
Calcium Chloride 25 KG S:							
Caustic Soda 25 KG S:							
Conqor 303 25 LT D:							
Lime 40 KG S:							
M-I Bar 25 KG S:		41					
M-I Gel 25 KG S:		8	10				
OS-1 25 KG S:		1					
Polypac R 25 KG S:							
Polyplus Powder 25 KG S:							
Potassm Chloride 25 KG S:							
Soda Ash 40 KG S:							
Spersene CF 50 LB S:							

===== M-I DRILLING FLUIDS DAILY MUD ADDITIONS =====

Operator : GFE RESOURCES
Well Name : DUNBAR 1

Contractor : CENTURY DRILLING 11
Field/Area : PPL 1

Description : EXPLORATION
Location : OTWAY BASIN

Page: 4
Well: G0003

Date	30/03/95	31/03/95	01/04/95
Depth	-m: 1758.0	1758.0	1758.0
Daily Mud Cost	: 833	574	622
Cumulative Mud Cost	: 15761	16335	16957
Bacban	6 LB JU:		1
CMC TG LV	25 KG S:		
Calcium Chloride	25 KG S:		
Caustic Soda	25 KG S:		
Conqor 303	25 LT D:		10
Lime	40 KG S:		
M-I Bar	25 KG S: 103	80	
M-I Gel	25 KG S:		
OS-1	25 KG S:		
Polypac R	25 KG S: 2	1	
Polyplus Powder	25 KG S:		
Potassm Chloride	25 KG S:		
Soda Ash	40 KG S:		
Spersene CF	50 LB S:		

===== M-I DRILLING FLUIDS PRODUCT SUMMARY =====

Operator : GFE RESOURCES Contractor : CENTURY DRILLING 11 Description : EXPLORATION Well: G0003
 Well Name : DUNBAR 1 Field/Area : PPL 1 Location : OTWAY BASIN

=====

SUMMARY OF PRODUCT USAGE FOR INTERVAL FROM 09/03/95 - 01/04/95, 115.0 m - 1758.0- m

WATER-BASE PROD	SIZE	AMOUNT
Bacban	6 LB JUG	2
CMC TG LV	25 KG SX	22
Calcium Chloride	25 KG SX	1
Caustic Soda	25 KG SX	10
Conqor 303	25 LT DM	10
Lime	40 KG SX	2
M-I Bar	25 KG SX	747
M-I Gel	25 KG SX	66
OS-1	25 KG SX	13
Polypac R	25 KG SX	23
Polyplus Powder	25 KG SX	35
Potassm Chloride	25 KG SX	4
Soda Ash	40 KG SX	2
Spersene CF	50 LB SX	1

=====


M-I Drilling Fluids Co

DRILLING FLUIDS DATA MANAGEMENT SYSTEM

12-04-95

=====

SECTION 13

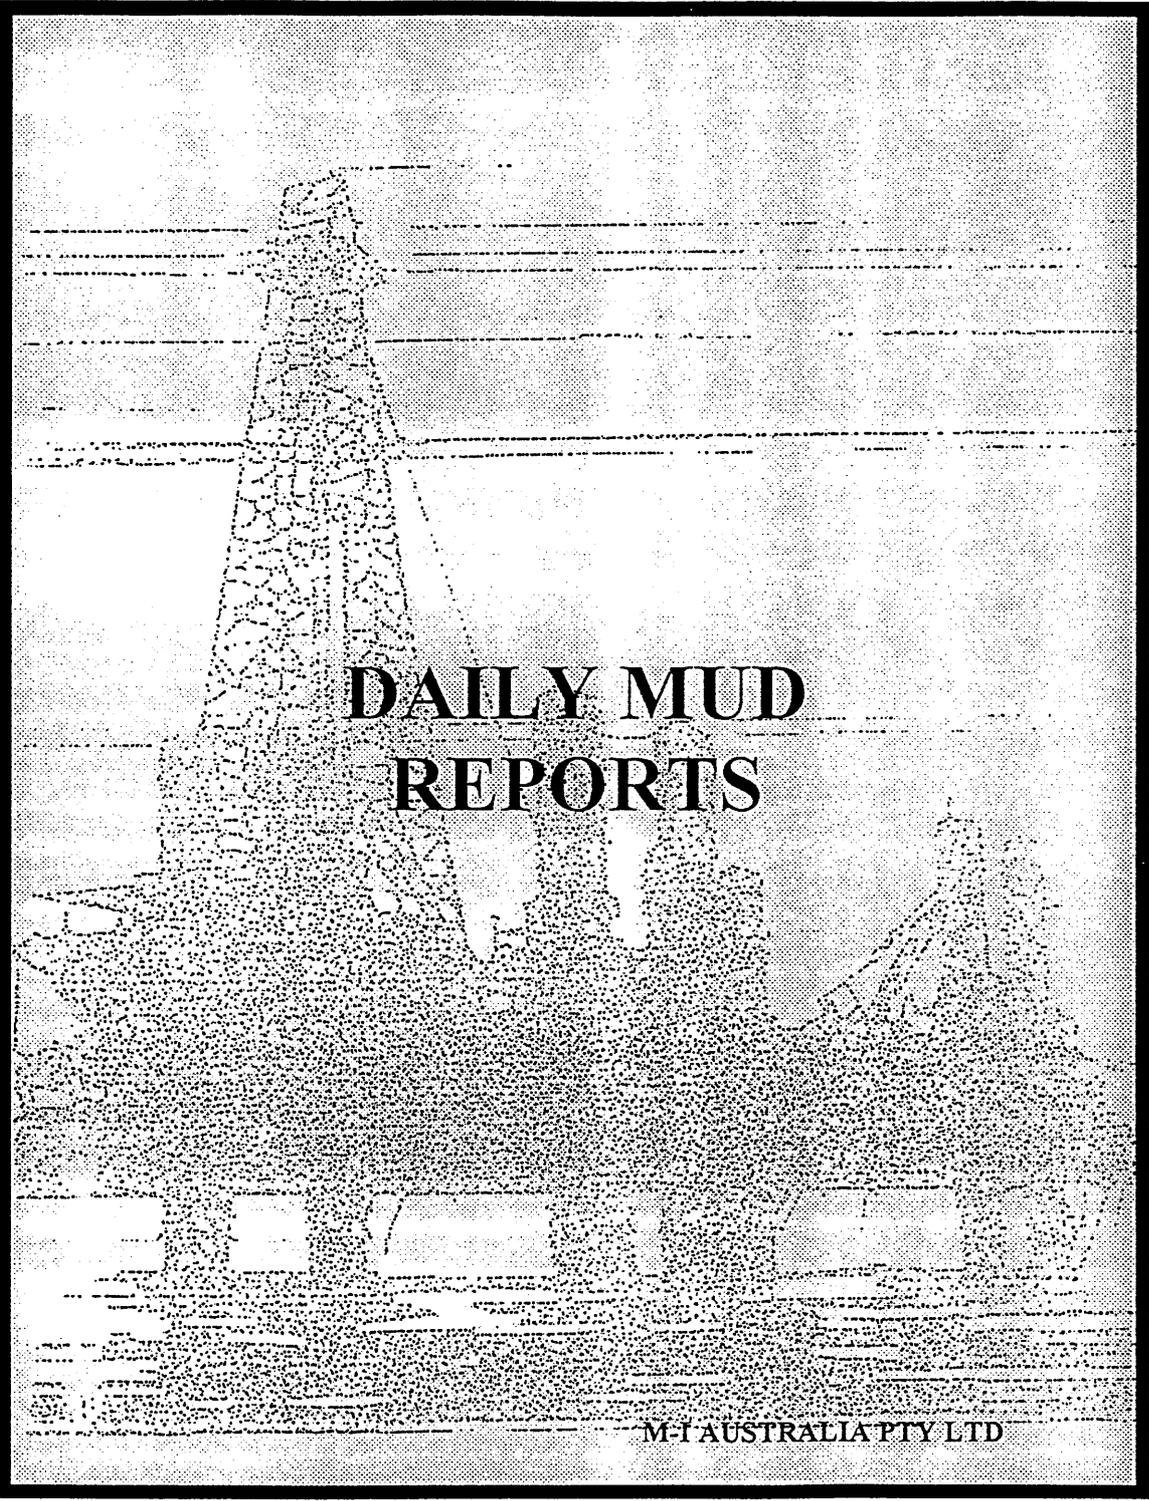

**DAILY MUD
REPORTS**

M-I AUSTRALIA PTY LTD

===== WATER BASE MUD REPORT - Day : 1 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

- -
 Well No. : G0003

Date : 09/03/95 Depth : 115.0 m
 Spud Date : 09/03/95 Activity : DRILLING

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 12.250 in	CASING	MUD VOLUME (bb1)
Nozzles:18/20/20/ / / 1/32"	Casing OD : in Liner OD : in	Hole Volume :
Drill Pipe 1 OD : 4.500 in Error m	Casing ID : in Liner ID : in	Pits Volume :
Drill Pipe 2 OD : 4.500 in 55.0 m	Casing TD : m Liner TD : m	Circulating Volume : 375
Drill Collar OD : 6.250 in 145.0 m	Casing TVD : m Liner TVD : m	Mud : FW NATIVE MUD

MUD PROPERTIES :

Sample From : FL 24:00
 Flow Line Temp : 80 ^F
 Depth/TVD -m : 115.0 / 115.0
 Mud Wt -lb/gal : 9.3
 Funnel Vis -s/qt : 45 @ 78 ^F
 Plastic Visc -cps : 10 @ 75 ^F
 YP/R3 -lb/100ft2 /deg : 24 / 4
 10s/10m Gel -lb/100ft2 : 6 / 30
 API F Loss -cc/30 min :
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 3
 Solids -%vol : 3.5
 Oil/Water -%vol : /96.5
 Sand -%vol : 0.75
 MBT -lb/bbl : 22.5
 pH : 8.3 @ 70 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.0 / 0.4
 Chlorides -mg/l : 600
 Hardness Ca : 160

np Value : 0.372
 Kp -lb-sec^n/100ft2 : 3.57151
 na Value : 0.465
 Ka -lb-sec^n/100ft2 : 1.99997

CIRCULATION DATA

Flow Rate -gal/min : 335
 DP Annular Vel -m/min :
 DC Annular Vel -m/min :
 DP Critical Vel -m/min :
 DC Critical Vel -m/min :
 Circ. Pressure -psi : 625
 Bottoms Up -min :
 Total Circ Time -min :

PRODUCTS USED LAST 24 HOURS

M-I Gel 25 KG S 28
 Caustic Soda 25 KG S 1

SOLIDS ANALYSIS (% / lb/bbl)

NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 7.2 / 66
 Bentonite : 1.9 / 17
 Drill Solids : 5.4 / 49
 Weight Material : N/A / N/A
 Chemical Conc : - / 0.0
 Inert/React : 1.93 Average SG : 2.60

SOLIDS EQUIPMENT Size Hours

Shaker #1 : 84 X 3 13
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12" 12
 Desilter : 12 X 4" 12
 Degasser :

MUD VOLUME ACCOUNTING bb1

Oil Added : DUMP :155
 Water Added :575 SURFACE :45
 Mud Built :50 TOTAL MUD :425
 Mud Received:
 Mud Disposed:200

Remarks :

Spud Dunbar 1 at 1700 hrs and drill 12.1/4" hole to 115m
 Continue to rig up. Spud Dunbar 1 at 1700 hrs on 9 March 1995 and drill
 12.1/4" hole to 115m, sweeping hole with Hi Vis PHG on surveys.

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE

Daily Cost : 287 Cumul Cost : 287

DRILLING MUD REPORT

OPERATOR



DRILLING MUD REPORT NO. 1

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA

DATE 10 MAR 19 95 DEPTH 115M
 SPUD DATE 9 MAR PRESENT ACTIVITY DRILL 12 1/4" HOLE

OPERATOR CFB RESOURCES

CONTRACTOR CENTURY

RIG NO. 11

REPORT FOR KEN SMITH

REPORT FOR

SECTION, TOWNSHIP, RANGE ONSHORE

WELL NAME AND NO. DUNBAR #1

FIELD OR BLOCK NO. PPL-1

COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN

STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING	MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	X	IN	ANNULAR VEL (ft/min)
<u>12 1/4</u>	<u>VAREL L114</u>	<u>2x18</u> <u>1x20</u>	in. @ ft.	<u>105</u>	<u>270</u>	<u>5.5</u>		<u>7.75</u>	
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL	ASSUMED EFF	CIRCULATION PRESSURE (psi)	DC
<u>4 1/2</u>			in. @ ft.	<u>375</u>		<u>NAT 6P 80</u>	<u>95</u>	<u>625</u>	
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bb/stk	stk/min	BOTTOMS UP (min) (strk)	
<u>4 1/2</u>	<u>HWDP</u>		in. @ ft.	<u>50</u>		<u>0.054/0.07</u>	<u>49/76</u>	<u>14 min</u>	
DRILL COLLAR SIZE	LENGTH	PRODUCTION OR LINER	MUD TYPE			bb/min	gal/min	TOTAL CIRC TIME (min) (strk)	
<u>6 1/8"</u>	<u>99m</u>	in. @ ft.	<u>NATIVE/SPUD</u>			<u>8.0</u>	<u>335</u>	<u>47 min</u>	

		MUD PROPERTIES		MUD PROPERTY SPECIFICATIONS		
Sample From	<input type="checkbox"/> FL <input type="checkbox"/> PIT	<input checked="" type="checkbox"/> FL <input type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE	
Time Sample Taken			<u>MIN.</u>	<u>35-45 cu/l</u>	<u>N/A</u>	
Flowline Temperature (°F)			<u>0600</u>	RECOMMENDED TOUR TREATMENT		
Depth (ft) (TVD)	<u>1</u>	ft)	<u>263</u>	<u>PROPOSE TO TREAT SYSTEM WITH</u>		
Weight (ppg)	<input checked="" type="checkbox"/>	(lb/cu ft) <input type="checkbox"/> (sp gr) <input type="checkbox"/>	<u>9.3</u>	<u>1% KCl & DILUTE WITH D/W AS</u>		
Funnel Viscosity (sec/qt) API @ °F			<u>45</u>	<u>REQ'D</u>		
Plastic Viscosity cp @ °F			<u>10</u>			
Yield Point (lb/100 ft²)			<u>24</u>			
Gel Strength (lb/100 ft²) 10 sec/10 min	<u>1</u>		<u>6130</u>			
Filtrate API (cm³/30 min)			<u>N/A</u>	REMARKS		
API HTHP Filtrate (cm³/30 min) @ °F			<u>-</u>			
Cake Thickness (32nd in. API/HTHP)	<u>1</u>		<u>31</u>	<u>SPUD WELL 1700HRS 9/3/95</u>		
Solids Content (% by Vol) <input type="checkbox"/> calculated <input type="checkbox"/> retort			<u>35</u>	<u>DRILL 12 1/4" HOLE TO 115M</u>		
Liquid Content (% by Vol) Oil/Water	<u>1</u>		<u>1965</u>			
Sand Content (% by Vol)			<u>0.75</u>	<u>- ALLOW FORMATION TO BUILD VISCOSITY</u>		
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud			<u>22.5</u>	<u>WITH HVIS SWEEPS ON SURVEYS</u>		
pH <input type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F			<u>8.3</u>	<u>-</u>		
Alkalinity Mud (P _m)						
Alkalinity Filtrate (P _f /M _f)	<u>1</u>		<u>1</u>			
Chloride (mg/L)			<u>600</u>			
Total Hardness as Calcium (mg/L)			<u>160</u>			

PRODUCT INVENTORY											SOLIDS EQUIPMENT	
STARTING INVENTORY												SHAKER #1 <u>1</u> mesh
RECEIVED												SHAKER #2 <u>1</u> mesh
USED LAST 24 hr	<u>47</u>	<u>1</u>										MUD CLEANER _____ mesh
CLOSING INVENTORY												CENTRIFUGE _____ hours
COST LAST 24 hr	<u>1.68</u>	<u>443</u>	<u>22.35</u>									DESANDER _____ hours
USED (from IADC)												DESILTER _____ hours

M-I REPRESENTATIVE PAUL MARSHALL PHONE _____ WAREHOUSE PHONE _____ DAILY COST \$ 466.03 CUMULATIVE COST \$ 466.03

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS				
Rig Up/Service	<u>7</u>	Water Added (bbl)		Low Gravity %		Zero Gel		Avg ROP		ECD @ _____
Drilling	<u>12.5</u>	Mud Built (bbl)		Low Gravity, ppb		n Factor		% Cutting		Leak Off @ _____
Reaming/Coring		Mud Received (bbl)		Bentonite %		k Factor		psi	%	hhp HSI Jet Vel
Circulating		Mud Disposed (bbl)		Bentonite, ppb		Bit Hydraulics				
Tripping				Drill Solids %		Annular Section	<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u> <u>5</u>
Survey	<u>1.0</u>			Drill Solids, ppb		Hole Size				
Logging				Shale CEC, ppb		Pipe OD				
Running Casing				D/B Ratio		Critical Velocity				
Testing		Starting Depth		High Gravity %		Annular Velocity				
Fishing		Ending Depth		High Gravity, ppb		Viscosity				
<u>RIG DOWN</u>	<u>3.5</u>	New Hole Vol. (bbl)				Annular Pressure				

===== WATER BASE MUD REPORT - Day : 2 =====

M-I Drilling Fluids Company - - Date : 10/03/95 Depth : 317.0 m
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM Well No. : G0003 Spud Date : 09/03/95 Activity : CEMENT CSG

Operator : GFE RESOURCES Contractor : CENTURY DRILLING 11 Description : EXPLORATION
 Well Name : DUNBAR 1 Field/Area : PPL 1 Location : OTWAY BASIN
 Report For: KEN SMITH

Bit : 12.250 in CASING MUD VOLUME (bb1)
 Nozzles: 18/20/20/ / / 1/32" Casing OD : in Liner OD : in Hole Volume :
 Drill Pipe 1 OD : 4.500 in 117 m Casing ID : in Liner ID : in Pits Volume :
 Drill Pipe 2 OD : 4.500 in 55.0 m Casing TD : m Liner TD : m Circulating Volume : 370
 Drill Collar OD : 6.250 in 145.0 m Casing TVD : m Liner TVD : m Mud : FW NATIVE MUD

MUD PROPERTIES :		CIRCULATION DATA		SOLIDS ANALYSIS (% / lb/bbl)		
Sample From	: PIT 23:00	Flow Rate	-gal/min : 450	NaCl	: 0.0 / 1	
Flow Line Temp	: ^F	DP Annular Vel	-m/min :	KCl	: 0.0 / 0	
Depth/TVD	-m : 317.0 / 317.0	DC Annular Vel	-m/min :	Low Gravity Solids	: 5.7 / 52	
Mud Wt	-lb/gal : 9.1	DP Critical Vel	-m/min :	Bentonite	: 1.5 / 13	
Funnel Vis	-s/qt : 45 @ 50 ^F	DC Critical Vel	-m/min :	Drill Solids	: 4.3 / 39	
Plastic Visc	-cps : 13 @ 50 ^F	Circ. Pressure	-psi : 900	Weight Material	: N/A / N/A	
YP/R3	-lb/100ft2 /deg : 20 / 5	Bottoms Up	-min :	Chemical Conc	: - / 0.0	
10s/10m Gel	-lb/100ft2 : 10 / 34	Total Circ Time	-min :	Inert/React	: 1.97 Average SG : 2.60	
API F Loss	-cc/30 min :	PRODUCTS USED LAST 24 HOURS Potassm Chloride 25 KG S 4 Spersene CF 50 LB S 1 Lime 40 KG S 2 Calcium Chloride 25 KG S 1		SOLIDS EQUIPMENT Size Hours		
HTHP F Loss	-cc/30 min : @ ^F			Shaker #1	: 84 X 3	12
Cake API/HT	-1/32" : 3			Shaker #2	:	
Solids	-%vol : 5			Shaker #3	:	
Oil/Water	-%vol : /95			Shaker #4	:	
Sand	-%vol : 0.5			Mud Cleaner	:	
MBT	-lb/bbl : 17.5			Centrifuge	:	
pH	: 8.5 @ 50 ^F			Desander	: 2 X 12"	10
Alkal Mud (Pm)	: 0.1			Desilter	: 12 X 4"	10
Pf/Mf	: 0.05/ 0.2			Degasser	:	
Chlorides	-mg/l : 1000	MUD VOLUME ACCOUNTING bbl				
Hardness Ca	: 80	Oil Added	: DUMP	: 40		
:	:	Water Added	: 65 SURFACE	: 30		
:	:	Mud Built	: TOTAL MUD	: 420		
:	:	Mud Received:				
np Value	: 0.479	Mud Disposed:	70			
Kp	-lb-sec^n/100ft2 : 1.77720					
na Value	: 0.410					
Ka	-lb-sec^n/100ft2 : 2.73433					

Remarks :
 Drill 12.1/4" hole f/115m-317m TD. Perform wiper trip. POOH. Run casing. Prepare to cement 9.5/8" casing.
 Drill 12.1/4" hole from 115-317m TD. Severe build up of mud rings at 263m, 291m and 310m required the flow line to be cleared of mud cake. Performed wiper trip with 1m fill on bottom. Circulate and clear flow line. POOH and rig up to run casing. Run casing and prepare to cement.

===== M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 116 Cumul Cost : 403 =====

DRILLING MUD REPORT

OPERATOR



Magco/IMCO A Dresser/Halliburton Company
P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 2
DATE 10 MAR 19 95 DEPTH 317M TD
SPUD DATE 9 MAR PRESENT ACTIVITY PREPARE TO CEMENT

OPERATOR G F E RESOURCES CONTRACTOR CENTURY RIG NO. 11
REPORT FOR KEN SMITH REPORT FOR ROGER BINDON SECTION, TOWNSHIP, RANGE ONSHORE
WELL NAME AND NO. DUNBAR #1 FIELD OR BLOCK NO. PPL-1 COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN STATE/PROVINCE VICTORIA

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA				
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	PUMP MAKE, MODEL	ASSUMED EFF.	ANNULAR VEL. (#/min)	DP	DC
			in. @ ft.	127	243	5 1/2 x 7.75	NAT 80 50	95 %	8.5	B5	128
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL		ASSUMED EFF.	CIRCULATION PRESSURE (psi)		
			in. @ ft.	370		NAT 80 50		95 %	900		
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bb/stk		slk/min	BOTTOMS UP (min) (strk)		
			in. @ ft.	50	8.7	0.054/0.702		99/76	12 min		
DRILL COLLAR SIZE	LENGTH	PRODUCTION OR LINER	MUD TYPE			bb/min		gal/min	TOTAL CIRC TIME (min) (strk)		
			NATIVE/SPUD			10.68		450			

MUD PROPERTIES		MUD PROPERTY SPECIFICATIONS		
Sample From	<input type="checkbox"/> FL <input type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE
Time Sample Taken		MIN	35-45 sec/91	N/C
Flowline Temperature (°F)		RECOMMENDED TOUR TREATMENT		

Depth (ft) (TVD)	317	ft	317M	- DILUTE WITH D/W AS REQ'D TO MAINTAIN VIS = 45-50
Weight (ppg)	9.1	(lb/cu ft)	9.1	- KCl ADDITIONS SUSPENDED DUE TO UNACCEPTABLE VISC INCR
Funnel Viscosity (sec/qt) API @ 52 °F	45		45	
Plastic Viscosity cp @ 50 °F	13		13	
Yield Point (lb/100 ft²)	20		20	
Gel Strength (lb/100 ft²) 10 sec/10 min	1		10/34	

FILTRATE API (cm³/30 min)		REMARKS	
API HTHP Filtrate (cm³/30 min) @ °F	-	DRILL F/115M - 263M - CLEAR FLOW LINE	
Cake Thickness (32nd in. API/HTHP)	1	31 - \$ CIRC OUT MUD RINGS	
Solids Content (% by Vol) calculated retort	5	DRILL F/263 - 291M - CLEAR FLOW LINE	
Liquid Content (% by Vol) Oil/Water	1	195 DRILL F/291 - 310M - CLEAR FLOWLINE OF MUD RINGS	
Sand Content (% by Vol)	0.5	DRILL 310M - 317M - TD - CIRCULATE	
Methylene Blue Capacity (lb/bbl equiv)	17.5	HOLE CLEAN - MAX DEV - 1/3°	
pH Strip Meter @ °F	8.3	POOH FOR WIPER TRIP	
Alkalinity Mud (P _m)	0.05	RIN - 1M FILL - CIRC B/W - CLEAR	
Alkalinity Filtrate (P _f /M _f)	1	0.05/0.2	
Chloride (mg/L)	1000	FLOW LINE OF MUD CAKE & JET CELLAR	
Total Hardness as Calcium (mg/L)	80	POOH TO RUN 9 5/8" CASING	
		RIG UP AND RUN CASING	
		RIG UP AND PREPARE TO CEMENT CSG	

N.B. * INDICATES DAMAGED UNUSABLE STOCK

PRODUCT INVENTORY	GEL	BENTONITE	KCl	PACR	CMC	LV	CAUSTIC SODA	SOD. CARB.	SPERMIN	LIME	CL. CHLORIDE	OS-1	POLY PLUS	DACBAN	WOOD	303	WELFA	MICA	KSEALM	SOLIDS EQUIPMENT	
STARTING INVENTORY	109	907	149	59	88	51	12	17	20	40	20	-	6	10	5	2	30	30	SHAKER #1	3 x 84	mesh
RECEIVED	96	!																	SHAKER #2		mesh
USED LAST 24 hr			4					*	1	* 2	* 1								MUD CLEANER		mesh
CLOSING INVENTORY	205	907	145	59	88	51	12	16	18	39	20	-	6	10	5	2	30	30	CENTRIFUGE		hours
COST LAST 24 hr			4584					4055	12.00	17.80									DESANDER		hours
USED (from IADC)																			DESILTER		hours

M-I REPRESENTATIVE PAUL MARSHALL PHONE 09 3254822 WAREHOUSE PHONE _____ DAILY COST \$ 116.19 CUMULATIVE COST \$ 582.22

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service		Water Added (bbl)	65	Low Gravity %	5.1	Zero Gel	5	Avg ROP	28	ECD @ _____		
Drilling	7.0	Mud Built (bbl)		Low Gravity, ppb	463	n Factor	0.41	% Cutting		Leak Off @ _____		
Reaming/Coring		Mud Received (bbl)		Bentonite %	1.5	k Factor	2.73	psi	%	hph	HSI	Jet Vel
Circulating	1.5	Mud Disposed (bbl)	70	Bentonite, ppb	13.9	Bit Hydraulics	263	29	6.9	0.59	180	
Tripping	4.5	DUMP	40	Drill Solids %	3.6	Annular Section	1	2	3	4	5	
Survey	1.5	SURFACE	30	Drill Solids, ppb	32.4	Hole Size	12.25	12.25	12.25			
Logging		DRILL MUD	420	Shale CEC, ppb	-	Pipe OD	4.5	6.25	8.0			
Running Casing	4.0			D/B Ratio	1.65	Critical Velocity	289	309	337			
Testing		Starting Depth	115	High Gravity %	-	Annular Velocity	85	99	128			
Fishing		Ending Depth	317	High Gravity, ppb	-	Viscosity	190	149	105			
OTHER	5.5	New Hole Vol. (bbl)				Annular Pressure	0.8	1.2	0.3			

DRILLING MUD REPORT

OPERATOR



P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 3

DATE 11 MAR 19 95 DEPTH 317M

SPUD DATE 9 MAR PRESENT ACTIVITY R.I.H

OPERATOR GFE RESOURCES CONTRACTOR CENTURY RIG NO. 11

REPORT FOR KEN SMITH REPORT FOR ROGER BINDON SECTION, TOWNSHIP, RANGE ONSHORE

WELL NAME AND NO. DUNBAR #1 FIELD OR BLOCK NO. PPL-1 COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE <u>8 1/2</u>	TYPE <u>MUC163</u>	JET SIZE <u>3 x 11</u>	SURFACE <u>9 5/8 in. @ 312 ft</u>		HOLE <u>70 1/2 O/W</u>	PITS	PUMP SIZE <u>5 1/2</u>	X IN. <u>7.75</u>	ANNULAR VEL (ft/min)	<u>214(65)</u>
DRILL PIPE SIZE <u>4 1/2</u>	TYPE <u>166</u>	LENGTH	INTERMEDIATE		TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL <u>NAT TP 50</u>	ASSUMED EFF. <u>95</u>	CIRCULATION PRESSURE (psi)	<u>1400</u>
DRILL PIPE SIZE <u>4 1/2</u>	TYPE <u>HWDP</u>	LENGTH <u>55M</u>	INTERMEDIATE		IN STORAGE <u>305</u>	WEIGHT	bbbl/stk <u>0.054/0.072</u>	stk/min <u>110</u>	BOTTOMS UP (min) (strk)	<u>10</u>
DRILL COLLAR SIZE <u>6 1/4</u>	LENGTH <u>162M</u>	PRODUCTION OR LINER	MUD TYPE <u>PHDA/PAC</u>		MUD TYPE		bbbl/min <u>6.93</u>	gal/min <u>290</u>	TOTAL CIRC TIME (min) (strk)	<u>49</u>

		MUD PROPERTIES		MUD PROPERTY SPECIFICATIONS		
Sample From	<input type="checkbox"/> FL <input checked="" type="checkbox"/> PIT	<input checked="" type="checkbox"/> FL <input type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE	
Time Sample Taken	<u>23:00</u>	<u>05:30</u>	<u>2.92 ppq</u>	<u>35-42 sec/gt</u>	<u>8.0 cc</u>	
Flowline Temperature (°F)		<u>27</u>	RECOMMENDED TREATMENT			
Depth (ft) (TVD <u>1</u> ft)	<u>317M</u>	<u>348</u>	- DUMP & CLEAN ALL PITS, SERVICE			
Weight <input checked="" type="checkbox"/> (ppg) <input type="checkbox"/> (lb/cu ft) <input type="checkbox"/> (sp gr)	<u>8.5</u>	<u>8.6</u>	- SHAKER AND REPLACE SCREENS			
Funnel Viscosity (sec/qt) API @ °F	<u>120</u>	<u>45</u>	- PREPARE PHDA/PAC/CMCLV DISPL			
Plastic Viscosity cp @ °F	<u>41</u>	<u>22</u>	SYSTEM - & SHEAR THROUGH SCE			
Yield Point (lb/100 ft²)	<u>65</u>	<u>25</u>	- PROPOSE TO PREP. PHG & BLEED INTO			
Gel Strength (lb/100 ft²) 10 sec/10 min	<u>10/17</u>	<u>3/5</u>	SYSTEM ONCE CIRC. COMMENCED.			
Filtrate API (cm³/30 min)	<u>12.0</u>	<u>10.0</u>	REMARKS			
API HTHP Filtrate (cm³/30 min) @ °F	-	-	CEMENT CASING + DISPL WITH O/W			
Cake Thickness (32nd in. API/HTHP)	<u>11</u>	<u>11</u>	NOC.			
Solids Content (% by Vol) <input checked="" type="checkbox"/> calculated <input type="checkbox"/> retort	<u>1</u>	<u>2</u>	NIPPLE UP BOP, - FUCTION + PRESS. TEST			
Liquid Content (% by Vol) Oil/Water	<u>199</u>	<u>198</u>	P/U NEW BHA.			
Sand Content (% by Vol)	-	<u>TR</u>	PREPARE TO RIH WITH 8 1/2" DRL ASSY			
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	<u>0.0</u>	<u>0.0</u>				
pH <input checked="" type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	<u>8.3</u>	<u>8.3</u>				
Alkalinity Mud (P _m)	<u>0.05</u>	<u>0.05</u>				
Alkalinity Filtrate (P _f /M _f)	<u>0.05/0.1</u>	<u>0.05/0.1</u>				
Chloride (mg/L)	<u>500</u>	<u>600</u>				
Total Hardness as Calcium (mg/L)	<u>60</u>	<u>60</u>				
	<u>PHDA ppb</u>	<u>1.4</u>				

PRODUCT INVENTORY	GEL	POW	PAC	CMCLV	SOLIDS EQUIPMENT					
STARTING INVENTORY	<u>205</u>	-	<u>59</u>	<u>88</u>	SHAKER #1	<u>3</u>	<u>x 84</u>	mesh		
RECEIVED		<u>67</u>	<u>32</u>		SHAKER #2			mesh		
USED LAST 24 hr		<u>9</u>	<u>9</u>	<u>9</u>	MUD CLEANER			mesh		
CLOSING INVENTORY	<u>205</u>	<u>58</u>	<u>82</u>	<u>79</u>	CENTRIFUGE			hours		
COST LAST 24 hr		<u>.25</u>	<u>.66</u>	<u>0.1</u>	DESANDER	<u>0</u>		hours		
USED (from IADC)		<u>1539</u>	<u>1185</u>	<u>551</u>	DESILTER	<u>0</u>		hours		

M-I REPRESENTATIVE PAUL MARSHALL PHONE 09 3254822 WAREHOUSE PHONE _____ DAILY COST \$ 3295.98 CUMULATIVE COST \$ 3878.20

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)	MUD VOLUME ACCOUNTING	SOLIDS ANALYSIS	MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	Water Added (bbl)	Low Gravity %	Zero Gel	<u>2</u>	Avg ROP	ECD @ _____			
Drilling	Mud Built (bbl) <u>305</u>	Low Gravity, ppb	n Factor	<u>0.68</u>	% Cutting	Leak Off @ _____			
Reaming/Coring	Mud Received (bbl)	Bentonite %	k Factor	<u>6.70</u>	psi	%	hhp	HSI	Jet Vel
Circulating	Mud Disposed (bbl) <u>420</u>	Bentonite, ppb	Bit Hydraulics	<u>859</u>	<u>61</u>	<u>145</u>	<u>2.56</u>	<u>334</u>	<u>(102)</u>
Tripping	<u>DUMP</u> <u>420</u>	Drill Solids %	Annular Section	<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>	
Survey		Drill Solids, ppb	Hole Size	<u>8.68</u>	<u>8.5</u>	<u>8.68</u>			
Logging		Shale CEC, ppb	Pipe OD	<u>4.5</u>	<u>6.25</u>	<u>6.25</u>			
Running Casing/CM <u>8.0</u>	TOTAL MUD <u>305</u>	D/B Ratio	Critical Velocity	<u>324</u>	<u>448</u>	<u>430</u>			
Testing BOP <u>2.5</u>	Starting Depth	High Gravity %	Annular Velocity	<u>1.37</u>	<u>214</u>	<u>196</u>			
Fishing	Ending Depth	High Gravity, ppb	Viscosity	<u>83.5</u>	<u>60.5</u>	<u>63.8</u>			
BOP <u>10.0</u>	New Hole Vol. (bbl)		Annular Pressure	<u>2.2</u>	<u>1.7</u>	<u>4.9</u>			

===== WATER BASE MUD REPORT - Day : 4 =====

M-I Drilling Fluids Company - - Date : 12/03/95 Depth : 693.0 m
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM Well No. : G0003 Spud Date : 09/03/95 Activity : DRILL 8.5"

Operator : GFE RESOURCES Contractor : CENTURY DRILLING 11 Description : EXPLORATION
 Well Name : DUNBAR 1 Field/Area : PPL 1 Location : OTWAY BASIN
 Report For: KEN SMITH

Bit : 8.500 in	CASING	MUD VOLUME (bb1)
Nozzles:11/11/11/ / / 1/32"	Casing OD : 9.625 in Liner OD : in	Hole Volume : 137
Drill Pipe 1 OD : 4.500 in 476 m	Casing ID : 8.680 in Liner ID : in	Pits Volume : 225
Drill Pipe 2 OD : 4.500 in 55.0 m	Casing TD : 312.0 m Liner TD : m	Circulating Volume : 362
Drill Collar OD : 6.250 in 162.0 m	Casing TVD : 312.0 m Liner TVD : m	Mud : FW POLYMER

MUD PROPERTIES :	CIRCULATION DATA	SOLIDS ANALYSIS (% / lb/bbl)
Sample From : FL 22:30	Flow Rate -gal/min : 275	NaCl : 0.0 / 0
Flow Line Temp : 70 ^F	DP Annular Vel -m/min : 39.5	KCl : 0.0 / 0
Depth/TVD -m : 693.0 / 693.0	DC Annular Vel -m/min : 61.9	Low Gravity Solids : 2.7 / 25
Mud Wt -lb/gal : 8.7	DP Critical Vel -m/min : 103.9	Bentonite : 0.7 / 6
Funnel Vis -s/qt : 45 @ 68 ^F	DC Critical Vel -m/min : 130.1	Drill Solids : 1.5 / 14
Plastic Visc -cps : 17 @ 63 ^F	Circ. Pressure -psi : 950	Weight Material : N/A / N/A
YP/R3 -lb/100ft2 /deg : 23 / 3	Bottoms Up -min : 16.6	Chemical Conc : - / 5.0
10s/10m Gel -lb/100ft2 : 4 / 10	Total Circ Time -min : 55.3	Inert/React : 1.63 Average SG : 2.60
API F Loss -cc/30 min : 7.4		
HTHP F Loss -cc/30 min : @ ^F	PRODUCTS USED LAST 24 HOURS	SOLIDS EQUIPMENT Size Hours
Cake API/HT -1/32" : 1	Polypus Powder 25 KG S 9	Shaker #1 : 2X50+84 18
Solids -%vol : 3	Polypac R 25 KG S 1	Shaker #2 :
Oil/Water -%vol : /97	CMC TG LV 25 KG S 3	Shaker #3 :
Sand -%vol : 0.5		Shaker #4 :
MBT -lb/bbl : 7.5		Mud Cleaner :
pH : 8.5 @ 55 ^F		Centrifuge :
Alkal Mud (Pm) : 0.1		Desander : 2 X 12" 14
Pf/Mf : 0.05/ 0.1		Desilter : 12 X 4" 8
Chlorides -mg/l : 800		Degasser :
Hardness Ca : 80		
PHPA : 1.1		
:		
:		
:		
np Value : 0.511		MUD VOLUME ACCOUNTING bb1
Kp -lb-sec^n/100ft2 : 1.76696		Oil Added : DUMP :123
na Value : 0.562		Water Added :140 SURFACE +SCE :240
Ka -lb-sec^n/100ft2 : 1.27888		Mud Built :400 TOTAL MUD :482
		Mud Received:
		Mud Disposed:363

Remarks :
 RIH and tag cement at 294m. Drill out and displace hole to PHPA system. Perform FIT and drill 8.5" hole f/322m- 693M
 RIH and tag cement at 294m. Drill out cement, float, shoetrack and 5m new
 hole. Perform FIT, mud wt equiv = 22.9 ppg. Drill 8.1/2" hole from 322m-349m.
 POOH and add stabilizer to BHA. RIH and drill from 349-387m. Clear shakers and
 clear header box of clay "boulders". Drill from 387m-406m. Clear header box
 and sand trap. Drill 406-693m with surveys. Max dev 0.5 deg.

===== M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 1875 Cumul Cost : 5574 =====

DRILLING MUD REPORT

RIG **4**



DRILLING MUD REPORT NO. **4**

DATE **12 MAR** 19 **95** DEPTH **693 m**

SPUD DATE **9 MAR** PRESENT ACTIVITY **DRILL 8 1/2" HOLE**

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA

OPERATOR **GFE RESOURCES** CONTRACTOR **CENTURY** RIG NO. **11**

REPORT FOR **KEN SMITH** REPORT FOR **ROGER BINDON** SECTION, TOWNSHIP, RANGE **OKSHORE**

WELL NAME AND NO. **DUNBAR # 1** FIELD OR BLOCK NO. **PPL-1** COUNTY, PARISH OR OFFSHORE AREA **OTWAY BASIN** STATE/PROVINCE **VICT**

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	IN	ANNULAR VEL (ft/min)	DP	DC
8 1/2	HTC	3x11	9 5/8 in. 0.312 m	136	226	5 1/2	7.75		40	61.8
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL	ASSUMED EFF	CIRCULATION PRESSURE (psi)		
4 1/2	16.6			362		WAT 8P80	95%	950		
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bb/stk	slk/min	BOTTOMS UP (min) (slk)		
4 1/2	HWDP	55 m		120	8.5	.052/.072	121/-	21--		
DRILL COLLAR SIZE	LENGTH	PRODUCTION OR LINER	MUD TYPE			6.55	275	TOTAL CIRC TIME (min) (slk)	55--	
6 1/4	162 m		PHPA/PAC							

MUD PROPERTIES			MUD PROPERTY SPECIFICATIONS		
Sample From	FL	PIT	WEIGHT	VISCOSITY	FILTRATE
Time Sample Taken	22:30	05:30	< 9.2 ppg	35-42 sec/100	8.00 cc
Flowline Temperature (°F)	70 (212)	74 (233)	RECOMMENDED TOUR TREATMENT		
Depth (ft) (TVD)	1	660	805	- MAINTAIN VOL & PHPA CONC. WITH PREMIX	
Weight (ppg)	8.7	8.8	- SEVERE SHAKER LOSSES UP TO 480M		
Funnel Viscosity (sec/qt) API @ °F	45	44	- PARTIALLY DUMP S/TRAP ON CONNECT.		
Plastic Viscosity cp @ °F	17	16	- RUN DESAND CONTIN. & DISILT INTERMITT.		
Yield Point (lb/100 ft²) 10 sec/10 min	23	20	REMARKS		
Filtrate API (cm³/30 min)	4	110	3	R.H. & TAG CMF @ 294 m	
API HTHP Filtrate (cm³/30 min) @ °F	7.4	7.0	DRILL OUT CAT FLOAT SHOE TRACK 5"		
Cake Thickness (32nd in. APV/HTHP)	1	1	NEW HOLE - DISBL TO PHPA MUD WHILE		
Solids Content (% by Vol) calculated	3	3	DRILLING OUT PERFORM FIT @ 22.9 ppg eqm.		
Liquid Content (% by Vol) Oil/Water	197	197	POOH - ADD STABILISER R.H. DRILL 8 1/2"		
Sand Content (% by Vol)	0.5	0.25	F/ 349 - 387 - CLEAR SHAKERS		
Methylene Blue Capacity	7.5	8.5	HEADIER OF CLAY BOUND D/S		
pH	8.5	8.5	DRILL F/ 387 - 406 - CLEAR SHAKERS		
Alkalinity Mud (P _m)	0.05	0.05	SURVEYS MAX DIV 0.5"		
Alkalinity Filtrate (P _f /M)	0.05/0.2	0.05/0.2	DISANDER 12.3 ppg U/FLOW 8.7 ppg O/FLOW 4.6 ppg		
Chloride (mg/L)	800	800	DISILTER 11.1 ppg U/FLOW 8.6 ppg O/FLOW 0.85 ppg		
Total Hardness as Calcium (mg/L)	80	80			
PHPA PPS	1.1	1.1			

PRODUCT INVENTORY	STARTING INVENTORY	RECEIVED	USED LAST 24 hr	CLOSING INVENTORY	COST LAST 24 hr	UNIT	PHONE	WAREHOUSE PHONE	DAILY COST	CUMULATIVE COST
8024	58		9	47	1559	25	093254822		\$ 1874.68	\$ 5752.88
8025	82		1	81	131	74				
8026	79		3	76	183	131				
8027						61.23				

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)	MUD VOLUME ACCOUNTING	SOLIDS ANALYSIS	MUD RHEOLOGY and HYDRAULICS							
			Zero Gel	Avg ROP	ECD @	n Factor	% Cutting	Leak Off @	k Factor	
Rig Up/Service	2.0	Water Added (bbl) 140	2.7	3						
Drilling	14.0	Mud Built (bbl) 400	24.7	0.56						
Reaming/Coring	0.5	Mud Received (bbl)	0.6	1.28						
Circulating	1.0	Mud Disposed (bbl) 363	5.8	782	89	125	221	317		
Tripping	3.5	DUMP 123	1.6	1	2	3	4	5		
Survey	1.5	SURE 180	14.9	8.68	8.5	8.5				
Logging		SEE 60		4.5	4.5	6.25				
Running Casing		TOTAL MUD 482	1.76	102	104	130				
Testing	1.5	Starting Depth 317		77	40	61.8				
Fishing		Ending Depth		95	97	58.2				
OTHER	0.0	New Hole Vol. (bbl)		4.0	2.4	7.8				

===== WATER BASE MUD REPORT - Day : 5 =====

M-I Drilling Fluids Company - - Date : 13/03/95 Depth : 1047.0 m
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM Well No. : G0003 Spud Date : 09/03/95 Activity : DRILL 8.5"

Operator : GFE RESOURCES Contractor : CENTURY DRILLING 11 Description : EXPLORATION
 Well Name : DUNBAR 1 Field/Area : PPL 1 Location : OTWAY BASIN
 Report For: KEN SMITH

Bit : 8.500 in CASING MUD VOLUME (bb1)
 Nozzles:11/11/11/ / / 1/32" Casing OD : 9.625 in Liner OD : in Hole Volume : 211
 Drill Pipe 1 OD : 4.500 in 830 m Casing ID : 8.680 in Liner ID : in Pits Volume : 222
 Drill Pipe 2 OD : 4.500 in 55.0 m Casing TD : 312.0 m Liner TD : m Circulating Volume : 433
 Drill Collar OD : 6.250 in 162.0 m Casing TVD : 312.0 m Liner TVD : m Mud : FW POLYMER

MUD PROPERTIES		CIRCULATION DATA		SOLIDS ANALYSIS (% / 1b/bb1)	
Sample From	: FL 23:00	Flow Rate	-gal/min : 275	NaCl	: 0.0 / 0
Flow Line Temp	: 82 ^F	DP Annular Vel	-m/min : 39.5	KCl	: 0.0 / 0
Depth/TVD	-m : 1047.0/1047.0	DC Annular Vel	-m/min : 61.9	Low Gravity Solids	: 5.0 / 45
Mud Wt	-lb/gal : 9.0	DP Critical Vel	-m/min : 88.7	Bentonite	: 0.6 / 5
Funnel Vis	-s/qt : 42 @ 77 ^F	DC Critical Vel	-m/min : 116.3	Drill Solids	: 3.9 / 35
Plastic Visc	-cps : 17 @ 65 ^F	Circ. Pressure	-psi : 1100	Weight Material	: N/A / N/A
YP/R3	-lb/100ft2 /deg : 21 / 2	Bottoms Up	-min : 25.5	Chemical Conc	: - / 5.0
10s/10m Gel	-lb/100ft2 : 3 / 8	Total Circ Time	-min : 66.1	Inert/React	: 3.48 Average SG : 2.60
API F Loss	-cc/30 min : 6.4	PRODUCTS USED LAST 24 HOURS		SOLIDS EQUIPMENT Size Hours	
HTHP F Loss	-cc/30 min : @ ^F			Shaker #1	: 2X50+84
Cake API/HT	-1/32" : 1	Polyplus Powder	25 KG S 5	Shaker #2	:
Solids	-%vol : 5	Polypac R	25 KG S 1	Shaker #3	:
Oil/Water	-%vol : /95	CMC TG LV	25 KG S 5	Shaker #4	:
Sand	-%vol : 3	OS-1	25 KG S 4	Mud Cleaner	:
MBT	-lb/bbl : 9.0			Centrifuge	:
pH	: 8.5 @ 60 ^F			Desander	: 2 X 12" 14
Alkal Mud (Pm)	: 0.1			Desilter	: 12 X 4" 14
Pf/Mf	: 0.05/ 0.2			Degasser	:
Chlorides	-mg/l : 700			MUD VOLUME ACCOUNTING bb1	
Hardness Ca	: 80			Oil Added	: DUMP+D/H :25
PHPA	: 1.3			Water Added	: SURFACE +SCE :70
SULPHITE	: 60			Mud Built	:186 TOTAL MUD :573
	:			Mud Received:	
np Value	: 0.533			Mud Disposed:	95
Kp	-lb-sec^n/100ft2 : 1.45926				
na Value	: 0.639				
Ka	-lb-sec^n/100ft2 : 0.75207				

Remarks :

Drill to 856m. POOH for wiper trip. Circ out tight hole f/579-531m. Cont POOH tight. RIH & Rream to bottom18mFILL
 Drill from 693m-856m. Circulate B/U and POOH for wiper trip. P/U kelly and circulate out tight hole from 579m-531m. Continue to POOH tight from 512m-378m. RIH and ream from 531m to bottom with 18m fill. Continue to drill from 856m-1047m.

===== M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 1508 Cumul Cost : 7081 =====

===== WATER BASE MUD REPORT - Day : 6 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

Well No. : G0003

Date : 14/03/95
 Spud Date : 09/03/95

Depth : 1382.0 m
 Activity : DRILL 8.5"

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in	CASING	MUD VOLUME (bb1)
Nozzles: 11/11/11/ / / 1/32"	Casing OD : 9.625 in Liner OD : in	Hole Volume : 283
Drill Pipe 1 OD : 4.500 in 1165 m	Casing ID : 8.680 in Liner ID : in	Pits Volume : 245
Drill Pipe 2 OD : 4.500 in 55.0 m	Casing TD : 312.0 m Liner TD : m	Circulating Volume : 528
Drill Collar OD : 6.250 in 162.0 m	Casing TVD : 312.0 m Liner TVD : m	Mud : FW POLYMER

MUD PROPERTIES :

Sample From : FL 23:00
 Flow Line Temp : 90 ^F
 Depth/TVD -m : 1382.0/1382.0
 Mud Wt -lb/gal : 9.1
 Funnel Vis -s/qt : 42 @ 80 ^F
 Plastic Visc -cps : 18 @ 70 ^F
 YP/R3 -lb/100ft2 /deg : 21 / 2
 10s/10m Gel -lb/100ft2 : 3 / 8
 API F Loss -cc/30 min : 6.0
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 5.5
 Oil/Water -%vol : /94.5
 Sand -%vol : 2
 MBT -lb/bbl : 9.0
 pH : 8.3 @ 60 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.05/ 0.3
 Chlorides -mg/l : 800
 Hardness Ca : 100
 PHPA : 1.3
 SULPHITE : 100

np Value : 0.547
 Kp -lb-sec^n/100ft2 : 1.37205
 na Value : 0.645
 Ka -lb-sec^n/100ft2 : 0.74518

CIRCULATION DATA

Flow Rate -gal/min : 275
 DP Annular Vel -m/min : 39.5
 DC Annular Vel -m/min : 61.9
 DP Critical Vel -m/min : 89.0
 DC Critical Vel -m/min : 117.1
 Circ. Pressure -psi : 1150
 Bottoms Up -min : 34.1
 Total Circ Time -min : 80.6

PRODUCTS USED LAST 24 HOURS

Polyplus Powder 25 KG S 3
 OS-1 25 KG S 2
 Bacban 6 LB JU 1

SOLIDS ANALYSIS (% / lb/bbl)

NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 5.7 / 52
 Bentonite : 0.5 / 4
 Drill Solids : 4.7 / 43
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 4.23 Average SG : 2.60

SOLIDS EQUIPMENT Size Hours

Shaker #1 : 3 X 50 24
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12" 18
 Desilter : 12 X 4" 4
 Degasser :

MUD VOLUME ACCOUNTING bb1

Oil Added : DUMP+D/H :55
 Water Added : SURFACE +SCE :40
 Mud Built :100 TOTAL MUD :578
 Mud Received:
 Mud Disposed:

Remarks :

Drill from 1047M-1230M. POOH for wiper trip. Work tight hole RIH & ream 1255M-1287M. 7M fill. Drill F/1287-1382M.
 Drill 8.5" hole from 1047m-1230m & survey. Maximum deviation = 1.25 deg. Drill to 1287m and POOH for wiper trip to 576m. Work tight hole from 1095-847m, 790-770m & 713-675m. RIH and ream from 1255-1287m. 7m fill. Drill ahead to 1382m.

=====

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 731 Cumul Cost : 7812

=====

DRILLING MUD REPORT

OPERATOR



Magcobar/IMCO A Dresser/Halliburton Company
P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. **6**
DATE **14 MAR 19 95** DEPTH **1382 M**
SPUD DATE **9 MAR** PRESENT ACTIVITY **DRILL 8 1/2"**

OPERATOR **GFE RESOURCES** CONTRACTOR **CENTURY** RIG NO. **11**
REPORT FOR **KEN SMITH** REPORT FOR **ROGER BINDON** SECTION, TOWNSHIP, RANGE **ONSHORE**
WELL NAME AND NO. **DUNBAR #1** FIELD OR BLOCK NO. **PAL-1** COUNTY, PARISH OR OFFSHORE **ARENOTWAY BASIN** STATE/PROVINCE **VICT.**

DRILLING ASSEMBLY			CASING SURFACE	MUD VOLUME (BBL)		CIRCULATION DATA		
BIT SIZE 8 1/2	TYPE NTE	JET SIZE 3 x 11	9 7/8 in. @ 312 m	HOLE 281	PITS 247	PUMP SIZE 5 1/2 x 7 1/2	ANNULAR VEL (ft/min) 8.5	ANNULAR VEL (m/min) DP 40 DC 62
DRILL PIPE SIZE 4 1/2	TYPE 166#	LENGTH 166#	INTERMEDIATE in. @	TOTAL CIRCULATING VOLUME 528		PUMP MAKE, MODEL NAT 7P50	ASSUMED EFF 95	CIRCULATION PRESSURE (psi) 1150
DRILL PIPE SIZE 4 1/2	TYPE 11WOP	LENGTH 55 M	INTERMEDIATE in. @	IN STORAGE 50	WEIGHT 8.5	bb/stk 0.054/0.072	slk/min 121	BOTTOMS UP (min) (strk) 43 min
DRILL COLLAR SIZE 6 1/4	LENGTH 162 M	PRODUCTION OR LINER in. @	MUD TYPE PHPA/PAC	MUD TYPE 6.53		gal/min 275	TOTAL CIRC TIME (min) (strk) 81 min	

MUD PROPERTIES			MUD PROPERTY SPECIFICATIONS		
Sample From	<input checked="" type="checkbox"/> FL <input type="checkbox"/> PIT	<input checked="" type="checkbox"/> FL <input type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE
Time Sample Taken	23:00	05:30	< 9.3 pp9	35.42 pp9	< 8.00 cc
Flowline Temperature (°F) (°C)	90 (32)	90 (32)	RECOMMENDED TOUR TREATMENT		
Depth (ft) (TVD) (ft)	1370	1440	- CONTIN TO RE-CYCLE SUMP WATER		
Weight (ppg) (lb/cu ft) (sp gr)	9.1	9.2	- MAINTAIN VOL & PHPA CONC WITH P/MIX		
Funnel Viscosity (sec/qt) API @ °F	42	47	- RUN D/SAND CONTIN & DUMP S/TRAP		
Plastic Viscosity cp @ °F	18	20	PARTIALLY ON CONN. CELLAR JETTING ACT.		
Yield Point (lb/100 ft²)	21	24	- MINOR LOSSES TO FORMATION CONTIN.		
Gel Strength (lb/100 ft²) 10 sec/10 min	318	3110	- RAISE MUD WT TO 9.2 PP9 WITH BARIUM		
Filtrate API (cm³/30 min)	6.0	6.0	IF NECC. BY TD. REMARKS		
API HTHP Filtrate (cm³/30 min) @ °F	-	-	- PRECAUTIONARY BACTERIACIDE TREATMENT.		
Cake Thickness (32nd in. API/HTHP)	11	11	- DRILL 8 1/2" F/ 1047m - 1230m - SURV = 1.25		
Solids Content (% by Vol) (calculated) (retort)	5.5	6.0	- DRILL TO 1287m CIRC 8/U + POOH FOR		
Liquid Content (% by Vol) Oil/Water	94.5	194.	WIDER TRID. TO 576m.		
Sand Content (% by Vol)	2	1+	WORK TIGHT HOLE 1095m - 847m		
Methylene Blue Capacity (lb/bbl equiv) (cm³/cm³ mud)	9.0	10.0	790m - 770m		
pH (Strip) (Meter) @ °F	8.3	8.3	713m - 675m		
Alkalinity Mud (P _m)	0.05	0.05	R/H + REAM F/ 1255m - 1287m 7m FILL		
Alkalinity Filtrate (P _f /M _f)	0.05/0.3	0.5/1.3	DRILL F/ 1287m - 1382m.		
Chloride (mg/L)	800	800			
Total Hardness as Calcium (mg/L)	100	100			
PHPA	1.40	1.3	D/SAND 14.2 pp9 U/EL 9.0 pp9 O/F 1.4 GPM		
SO₄	80	80	D/SILT 12.4 pp9 U/EL 9.0 pp9 O/F 0.8 GPM		
ENV	710⁶				

*NOTE - STOCK CORRECTION - CUMM \$ COST ADJUSTED

PRODUCT INVENTORY	DEL	POLY PLUS	OS-1	BAC BAN III	SOLIDS EQUIPMENT									
STARTING INVENTORY	205	44	16	6	SHAKER #1 3 x 50 mesh									
RECEIVED	19*	1			SHAKER #2 1 mesh									
USED LAST 24 hr		3	2	1	MUD CLEANER _____ mesh									
CLOSING INVENTORY	224	41	14	5	CENTRIFUGE _____ hours									
COST LAST 24 hr	36	75	90	34	DESANDER 18 hours									
USED (from IADC)	179	519	101	109	DESILTER 4 hours									

M-I REPRESENTATIVE **PAUL MARSHALL** PHONE **093254822** WAREHOUSE PHONE _____ DAILY COST **\$ 730.99** CUMULATIVE COST **\$ 7812.45**

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)	MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS				
	Rig Up/Service	Water Added (bbl)		Low Gravity %	5.7	Zero Gel	2	Avg ROP	18.1
Drilling	18.5	Mud Built (bbl)	100	Low Gravity, ppb	52.0	n Factor	0.55	% Cutting	Leak Off @ 317.22.9M
Reaming/Coring		Mud Received (bbl)		Bentonite %	0.5	k Factor	1.29	psi	% hhp HSI Jet Vel
Circulating	1.0	Mud Disposed (bbl)	95	Bentonite, ppb	4.1	Bit Hydraulics 818 71 131 2.31 97.			
Tripping	4.0	DUMP	25	Drill Solids %	4.8	Annular Section 1 2 3 4 5			
Survey	0.5	SURF + SCE	40	Drill Solids, ppb	43.9	Hole Size 8.68 8.5 8.5			
Logging		D/H	30	Shale CEC, ppb	-	Pipe OD 4.5 4.5 6.25			
Running Casing		TOTAL MUD	578	D/B Ratio	4.34	Critical Velocity 87 89 117			
Testing		Starting Depth	1047	High Gravity %	-	Annular Velocity 37 40 62			
Fishing		Ending Depth	1382	High Gravity, ppb	-	Viscosity 79 76 53			
		New Hole Vol. (bbl)	77			Annular Pressure 3.2 10.1 6.9			

===== WATER BASE MUD REPORT - Day : 7 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

Well No. : G0003

Date : 15/03/95
 Spud Date : 09/03/95

Depth : 1507.0 m
 Activity : RIH

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in	CASING	MUD VOLUME (bbl)
Nozzles: 11/11/11/ / / 1/32"	Casing OD : 9.625 in	Liner OD : in
Drill Pipe 1 OD : 4.500 in 1290 m	Casing ID : 8.680 in	Liner ID : in
Drill Pipe 2 OD : 4.500 in 55.0 m	Casing TD : 312.0 m	Liner TD : m
Drill Collar OD : 6.250 in 162.0 m	Casing TVD : 312.0 m	Liner TVD : m
		Hole Volume : 310
		Pits Volume : 270
		Circulating Volume : 580
		Mud : FW POLYMER

MUD PROPERTIES :

Sample From : PIT 24:00
 Flow Line Temp : ^F
 Depth/TVD -m : 1507.0/1507.0
 Mud Wt -lb/gal : 9.3
 Funnel Vis -s/qt : 46 @ 60 ^F
 Plastic Visc -cps : 24 @ 60 ^F
 SP/R3 -lb/100ft2 /deg : 24 / 3
 10s/10m Gel -lb/100ft2 : 4 / 10
 API F Loss -cc/30 min : 5.8
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 7
 Oil/Water -%vol : /93
 Sand -%vol : 0.5
 MBT -lb/bbl : 10.0
 pH : 8.3 @ 60 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.05/ 0.2
 Chlorides -mg/l : 800
 Hardness Ca : 100
 PHPA : 1.44
 SULPHITE : 80

np Value : 0.585
 Kp -lb-sec^n/100ft2 : 1.33695
 na Value : 0.602
 Ka -lb-sec^n/100ft2 : 1.19890

CIRCULATION DATA

Flow Rate -gal/min : 275
 DP Annular Vel -m/min : 39.5
 DC Annular Vel -m/min : 61.9
 DP Critical Vel -m/min : 107.6
 DC Critical Vel -m/min : 137.9
 Circ. Pressure -psi : 1220
 Bottoms Up -min : 37.3
 Total Circ Time -min : 88.6

PRODUCTS USED LAST 24 HOURS

Polypius Powder 25 KG S 9
 CMC TG LV 25 KG S 5

SOLIDS ANALYSIS (% / lb/bbl)

NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 7.2 / 66
 Bentonite : 0.4 / 4
 Drill Solids : 6.3 / 57
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 5.07 Average SG : 2.60

SOLIDS EQUIPMENT Size Hours

Shaker #1 : 3 X 50 15
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12" 12
 Desilter : 12 X 4" 12
 Degasser :

MUD VOLUME ACCOUNTING bbl

Oil Added : DUMP :18
 Water Added : SURFACE +SCE :40
 Mud Built :210 TOTAL MUD :730
 Mud Received:
 Mud Disposed:58

Remarks :

Drill from 1382m-1507m. POOH for bit change. M/U new bit and RIH.
 Drill 8.5" hole from 1382-1507m. Survey (1deg) and POOH for bit change. Work
 pipe from 1331-1082m. M/U junk sub and new bit and RIH. Precautionary ream
 under gauge hole from 660-683m, 756-780m & 813-875m.

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE

Daily Cost : 1865 Cumul Cost : 9678

DRILLING MUD REPORT

OPERATOR



Magobar/IMCO A Dresser/Halliburton Company

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 7

DATE 15 MAR 19 95 DEPTH 1507 m

SPUD DATE 9 MAR PRESENT ACTIVITY R I H

OPERATOR GFE RESOURCES

CONTRACTOR CENTURY

RIG NO. 11

REPORT FOR KIEN SMITH

REPORT FOR ROGER BINDON

SECTION, TOWNSHIP, RANGE ONSHORE

WELL NAME AND NO. DUNBAR #1

FIELD OR BLOCK NO. PPL-1

COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN

STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA				
BIT SIZE 8 1/2	TYPE HFC AT105	JET SIZE 3 x 11	SURFACE 9 5/8 in. @ 312 ft	HOLE 305	PITS 275	PUMP SIZE 5 1/2 x 7.75 6 8.5	ANNULAR VEL (ft/min)	IN. 7.75	DP 40	DC 62	
DRILL PIPE SIZE 4 1/2	TYPE 16.6#	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME 580		PUMP MAKE, MODEL WAT TP 50	ASSUMED EFF 95%	CIRCULATION PRESSURE (psi)	1220		
DRILL PIPE SIZE 4 1/2	TYPE HWDP	LENGTH 55m	INTERMEDIATE	IN STORAGE 150	WEIGHT 8.6	bbf/stk	stk/min	BOTTOMS UP (min) (strk)	47 min.		
DRILL COLLAR SIZE 6 1/4	LENGTH 162-		PRODUCTION OR LINER	MUD TYPE PHPA/PAC		0.054/0.072	121	TOTAL CIRC TIME (min) (strk)	89 min.		
						6.53	275				
						bbf/min	gal/min				

Sample From	MUD PROPERTIES		MUD PROPERTY SPECIFICATIONS		
	<input type="checkbox"/> FL. <input checked="" type="checkbox"/> PIT	<input checked="" type="checkbox"/> FL. <input type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE
Time Sample Taken	24.00	05.30	9.3 ppg	35-42 sec/qt	< 8.00
Flowline Temperature (°F)	-	86(30)	RECOMMENDED TOUR TREATMENT		

Depth (ft)	(TVD)	(ft)	Weight	Funnel Viscosity (sec/qt) API @ °F	Plastic Viscosity cp @ °F	Yield Point (lb/100 ft²)	Gel Strength (lb/100 ft²) 10 sec/10 min	Filtrate API (cm³/30 min)	API HTHP Filtrate (cm³/30 min) @ °F	Cake Thickness (32nd in. API/HTHP)	Solids Content (% by Vol) <input checked="" type="checkbox"/> calculated <input type="checkbox"/> retort	Liquid Content (% by Vol) Oil/Water	Sand Content (% by Vol)	Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	pH <input type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	Alkalinity Mud (P _m)	Alkalinity Filtrate (P _f /M _f)	Chloride (mg/L)	Total Hardness as Calcium (mg/L)
1507	1507	1507	9.3	46	24	24	410	5.8	-	11	7.0	193	0.5	10.0	8.3	0.05	0.05	800	100
			9.3	46	25	24	410	5.6	-	11	7.0	193	1.5	10.0	8.3	0.05	0.05	800	100

REMARKS	
DRILL F/1382m - 1507m - SURVEY 1°	
POOH FOR BIT CHANGE - WORK PIPE	
F/1331m - 1082m BREAK CIRC TO WASH	
STAB @ 1215m & 1082m	
M/U LUNK SUB + NEW BIT + R I H	
PRECAUTIONARY REAM F/ 660-668m	
UNDERGAUGE HOLE 756-780m	
813-875m	
0.600 - REAMING U/GAUGE HOLE	
D/SAND 12.4ppg U/F 9.3ppg O/F 0.8 GPM	
D/SILT 12.0ppg U/F 9.2ppg O/F 0.6 GPM	

PRODUCT INVENTORY	POLY PLUS	CMC	LV	SOLIDS EQUIPMENT																		
STARTING INVENTORY	41	71		SHAKER #1	3 x 50	mesh	SHAKER #2		mesh	MUD CLEANER		mesh	CENTRIFUGE		hours	DESANDER	12	hours	DESILTER	12	hours	
RECEIVED																						
USED LAST 24 hr	9	5																				
CLOSING INVENTORY	32	66																				
COST LAST 24 hr	1559	306																				
USED (from IADC)	173.25	61.23																				

M-I REPRESENTATIVE	PHONE	WAREHOUSE PHONE	DAILY COST	CUMULATIVE COST
PAUL MARSHALL	093254822		\$1865.40	\$9677.85

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)	MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS				
	Water Added (bbl)	Mud Built (bbl)	Low Gravity %	Low Gravity, ppb	Zero Gel	n Factor	Avg ROP	ECD @	Leak Off @
Rig Up/Service	2.0		7.2	65.7	2	0.58	10.2		317m = 22.9ppg
Drilling	13.0	210	0.4	3.5					
Reaming/Coring			6.4	58.2					
Circulating		58	3.5						
Tripping	8.5	DUMP 18	6.4						
Survey	0.5	SURF 20	58.2						
Logging		SCE 20							
Running Casing		TOTAL MUD 730	5.17						
Testing		Starting Depth 1382							
Fishing		Ending Depth 1507							
		New Hole Vol. (bbl) 29							

===== WATER BASE MUD REPORT - Day : 8 =====

M-I Drilling Fluids Company - - Date : 16/03/95 Depth : 1557.0 m
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM Well No. : G0003 Spud Date : 09/03/95 Activity : POH TO TEST

Operator : GFE RESOURCES Contractor : CENTURY DRILLING 11 Description : EXPLORATION
 Well Name : DUNBAR 1 Field/Area : PPL 1 Location : OTWAY BASIN
 Report For: KEN SMITH

Bit : 8.500 in CASING MUD VOLUME (bb1)
 Nozzles: 11/11/11/ / / 1/32" Casing OD : 9.625 in Liner OD : in Hole Volume : 320
 Drill Pipe 1 OD : 4.500 in 1340 m Casing ID : 8.680 in Liner ID : in Pits Volume : 267
 Drill Pipe 2 OD : 4.500 in 55.0 m Casing TD : 312.0 m Liner TD : m Circulating Volume : 587
 Drill Collar OD : 6.250 in 162.0 m Casing TVD : 312.0 m Liner TVD : m Mud : FW POLYMER

MUD PROPERTIES		CIRCULATION DATA		SOLIDS ANALYSIS (% / lb/bbl)	
Sample From	: FL 20:00	Flow Rate	-gal/min : 275	NaCl	: 0.0 / 0
Flow Line Temp	: 86 ^F	DP Annular Vel	-m/min : 39.5	KCl	: 0.0 / 0
Depth/TVD	-m : 1557.0/1557.0	DC Annular Vel	-m/min : 61.9	Low Gravity Solids	: 7.2 / 66
Mud Wt	-lb/gal : 9.3	DP Critical Vel	-m/min : 103.5	Bentonite	: 0.4 / 4
Funnel Vis	-s/qt : 48 @ 75 ^F	DC Critical Vel	-m/min : 131.1	Drill Solids	: 6.3 / 57
Plastic Visc	-cps : 22 @ 70 ^F	Circ. Pressure	-psi : 1220	Weight Material	: N/A / N/A
YP/R3	-lb/100ft2 / deg : 22 / 3	Bottoms Up	-min : 38.5	Chemical Conc	: - / 5.0
10s/10m Gel	-lb/100ft2 : 4 / 14	Total Circ Time	-min : 89.7	Inert/React	: 5.07 Average SG : 2.60
API F Loss	-cc/30 min : 5.6	PRODUCTS USED LAST 24 HOURS		SOLIDS EQUIPMENT Size Hours	
HTHP F Loss	-cc/30 min : @ ^F			Caustic Soda	25 KG S 3
Cake API/HT	-1/32" : 1	Polypac R	25 KG S 1	Shaker #2	:
Solids	-%vol : 7.0	OS-1	25 KG S 2	Shaker #3	:
Oil/Water	-%vol : /93			Shaker #4	:
Sand	-%vol : 1.0			Mud Cleaner	:
MBT	-lb/bbl : 10.0			Centrifuge	:
pH	: 8.6 @ 60 ^F			Desander	: 2 X 12" 15
Alkal Mud (Pm)	: 0.2			Desilter	: 12 X 4" 12
Pf/Mf	: 0.1 / 0.3			Degasser	: 4
Chlorides	-mg/l : 800			MUD VOLUME ACCOUNTING bb1	
Hardness Ca	: 80			Oil Added	: DUMP :16
PHPA	: 1.44			Water Added	: SURFACE +SCE :17
SULPHITE	: 100			Mud Built	: TOTAL MUD :697
	:			Mud Received:	
np Value	: 0.585			Mud Disposed:	33
Kp	-lb-sec^n/100ft2 : 1.22553				
na Value	: 0.583				
Ka	-lb-sec^n/100ft2 : 1.23643				

Remarks :

Contin RIH & ream u/gauge hole. Drill f/1507-1557m. Circ and POOH for wiper trip. RIH-hole good-5m. Fill. POH to test
 Continue to RIH and ream under gauge hole. Ream from 920-971m, 1016-1061m,
 1192-1248m and 1283-1507m. Circulate and pull back to 785m for wiper trip.
 Work tight hole from 1340-1168m. RIH-hole good 5m. Fill. Pull back 3 stands
 circulate bottoms up and RIH. Spot Hi Vis mud over 50m hole and POOH to run
 test tool.

===== M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 301 Cumul Cost : 9979 =====

DRILLING MUD REPORT

OPERATOR



P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 8

DATE 16 MAR 19 95

DEPTH 1557

SPUD DATE 9 MAR

PRESENT ACTIVITY
POOH TO TEST

OPERATOR GFE RESOURCES

CONTRACTOR CENTURY

RIG NO. 11

REPORT FOR KEN SMITH

REPORT FOR SEAN KELLY

SECTION, TOWNSHIP, RANGE

WELL NAME AND NO. DUNBAR #1

FIELD OR BLOCK NO. PPL-1

COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN

STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	X	IN.	ANNULAR VEL (ft/min)	
8 1/2	HIC	3x11	9 5/8 in. @ 312 m	317	270	5 1/2		7.75	DP 40	DC 62
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL	ASSUMED EFF	CIRCULATION PRESSURE (psi)		
4 1/2	16.6 gpt		in. @ ft	587		NAT 7050	95%	1220		
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bbbl/stk	stk/min	BOTTOMS UP (min) (strk)		
4 1/2	HWDP	55 m	in. @ ft	110	8.6	0.054	121	48 min		
DRILL COLLAR SIZE	LENGTH	PRODUCTION OR LINER	MUD TYPE	MUD TYPE		bbbl/min	gal/min	TOTAL CIRC TIME (min) (strk)		
6 1/4	162 m	in. @ ft	PHPA/PAC	PHPA/PAC		6.53	275	90 min		

MUD PROPERTIES				MUD PROPERTY SPECIFICATIONS			
Sample From	<input checked="" type="checkbox"/> FL	<input type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE		
Time Sample Taken	20:00	05:30	9.3 ppg	35-42 sec/100	5.7 cc		
Flowline Temperature (°F)	86 (30)			RECOMMENDED TOUR TREATMENT			
Depth (ft) (TVD)	1	ft	1557	1557	- RAISE PH WITH CAUSTIC		
Weight <input checked="" type="checkbox"/> (ppg)	<input type="checkbox"/> (lb/cu ft)	<input type="checkbox"/> (sp gr)	9.3	9.3+	- MAINTAIN SYSTEM WITH PREMIX		
Funnel Viscosity (sec/qt) API @ °F	48	52	- PREPARE HVIS PACR PILL TO SPOT ON BOTTOM				
Plastic Viscosity cp @ °F	22	26					
Yield Point (lb/100 ft²)	22	26					
Gel Strength (lb/100 ft²) 10 sec/10 min	414	614					
Filtrate API (cm³/30 min)	5.6	6.0	REMARKS				
API HTHP Filtrate (cm³/30 min) @ °F	-	-	CONTIN RIN + REAM U/GAUGE HOLE				
Cake Thickness (32nd in. API/HTHP)	11	11	REAM 920-971, 1016-1067m 1192-1248				
Solids Content (% by Vol) <input type="checkbox"/> calculated <input type="checkbox"/> retort	7	7.0	1283-1507m				
Liquid Content (% by Vol) Oil/Water	193	193	DRILL IE 1507m - 1557m				
Sand Content (% by Vol)	1	0.5	CIRC + PULL BACK TO 785m FOR WIDER				
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	10.0	10.0	WORK TIGHT HOLE 1340-1168m				
pH <input type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	8.6	8.5	RIN - HOLE GOOD 5m FILL				
Alkalinity Mud (F _m)	0.15	0.10	PULL BACK 3TDS, BREAK CIRC - CLEAN				
Alkalinity Filtrate (F _f /M _p)	110.3	110.3	UP HOLE & RIN - SPOT HVIS PILL				
Chloride (mg/L)	800	800	OVER 50m & POOH TO TEST				
Total Hardness as Calcium (mg/L)	80	80					
PHPA	1.44	1.44					
SO ₃ ²⁻	100	100					
ENV LC50	710 ⁶		B/SAND 14.4ppg U/F 9.3ppg O/F 0.25CPM				
			D/SILT 12.6ppg U/F 9.2ppg O/F 0.5CPM				

PRODUCT INVENTORY	POLY PLUS PACR				CAUSTIC SODA		OS-1		SOLIDS EQUIPMENT																	
	STARTING INVENTORY	32	80	51	14				SHAKER #1	3 x 50	mesh	SHAKER #2	1	mesh	MUD CLEANER		mesh	CENTRIFUGE		hours	DESANDER	15	hours	DESILTER	12	hours
USED LAST 24 hr		1	3	2																						
CLOSING INVENTORY	32	79	48	12																						
COST LAST 24 hr		131.74	67.05	85																						
USED (from IADC)		131.74	22.35	50.95																						

M-I REPRESENTATIVE	PHONE	WAREHOUSE PHONE	DAILY COST	CUMULATIVE COST
PAUL MARSHALL	093254822		\$ 300.69	\$ 9978.54

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	0.5	Water Added (bbl)		Low Gravity %	7.2	Zero Gel	3	Avg ROP	12.5	ECD @		
Drilling	4.0	Mud Built (bbl)		Low Gravity, ppb	65.7	n Factor	0.58	% Cutting		Leak Off @ 317m = 229ppm		
Reaming/Coring	9.0	Mud Received (bbl)		Bentonite %	0.4	k Factor	1.23	psi		hhp	HSI	Jet Vel
Circulating	2.5	Mud Disposed (bbl)	33	Bentonite, ppb	3.5	Bit Hydraulics		836	6.8	134	2.36	9.6
Tripping	8.0	DUMP	16	Drill Solids %	6.4	Annular Section		1	2	3	4	5
Survey		SURF	5	Drill Solids, ppb	58.2	Hole Size		8.68	8.5	8.5		
Logging		SCE	12	Shale CEC, ppb	-	Pipe OD		4.5	4.5	6.25		
Running Casing		TOTAL MUD	697	D/B Ratio	5.17	Critical Velocity		104	105	134		
Testing		Starting Depth	1507	High Gravity %	-	Annular Velocity		37	40	62		
Fishing		Ending Depth	1557	High Gravity, ppb	-	Viscosity		103	99	65		
		New Hole Vol. (bbl)	11			Annular Pressure		4.2	15.6	9.1		

===== WATER BASE MUD REPORT - Day : 9 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

Well No. : G0003

Date : 17/03/95
 Spud Date : 09/03/95

Depth : 1557.0 m
 Activity : CIRCULATE

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in	CASING	MUD VOLUME (bb1)
Nozzles:11/11/11/ / / 1/32"	Casing OD : 9.625 in	Hole Volume : 320
Drill Pipe 1 OD : 4.500 in 1340 m	Liner OD : in	Pits Volume : 189
Drill Pipe 2 OD : 4.500 in 55.0 m	Casing ID : 8.680 in	Circulating Volume : 509
Drill Collar OD : 6.250 in 162.0 m	Liner ID : in	Mud : FW POLYMER
	Casing TD : 312.0 m	
	Liner TD : m	
	Casing TVD : 312.0 m	
	Liner TVD : m	

MUD PROPERTIES :

Sample From : FL 24:00
 Flow Line Temp : 87 ^F
 Depth/TVD -m : 1557.0/1557.0
 Mud Wt -lb/gal : 9.3
 Funnel Vis -s/qt : 44 @ 85 ^F
 Plastic Visc -cps : 18 @ 75 ^F
 SP/R3 -lb/100ft2 /deg : 19 / 2
 10s/10m Gel -lb/100ft2 : 3 / 10
 API F Loss -cc/30 min : 6.4
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 7.0
 Oil/Water -%vol : /93
 Sand -%vol : 0.75
 MBT -lb/bbl : 12.5
 pH : 8.3 @ 60 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.05/ 0.35
 Chlorides -mg/l : 750
 Hardness Ca : 80
 PHPA : 1.3
 SULPHITE : 60

np Value : 0.572
 Kp -lb-sec^n/100ft2 : 1.11793
 na Value : 0.634
 Ka -lb-sec^n/100ft2 : 0.75921

CIRCULATION DATA

Flow Rate -gal/min : 275
 DP Annular Vel -m/min : 39.5
 DC Annular Vel -m/min : 61.9
 DP Critical Vel -m/min : 85.6
 DC Critical Vel -m/min : 111.8
 Circ. Pressure -psi : 1200
 Bottoms Up -min : 38.5
 Total Circ Time -min : 77.7

SOLIDS ANALYSIS (% / lb/bbl)

NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 7.2 / 66
 Bentonite : 0.7 / 6
 Drill Solids : 6.0 / 54
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 3.86 Average SG : 2.60

PRODUCTS USED LAST 24 HOURS

Polypac R 25 KG S 1
 OS-1 25 KG S 1
 M-I Bar 25 KG S 208

SOLIDS EQUIPMENT Size Hours

Shaker #1 : 3 X 50 10
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12"
 Desilter : 12 X 4"
 Degasser :

MUD VOLUME ACCOUNTING bb1

Oil Added : DUMP : 60
 Water Added : 110 SURFACE +SCE : 31
 Mud Built : TOTAL MUD : 716
 Mud Received:
 Mud Disposed:91

Remarks :

Cont POOH. M/U and RIH w/ test tool. DST #1.POH & lay out T/T-tool blocked.RIH & circ and dilute.Pump Hi Vis & POOH
 Continue POOH. Make-up and RIH with test tool. DST #1 ? failure. POOH and lay
 out test tool-tool blocked. Make-up BHA and RIH-wash from 1533m to bottom-3m.
 fill. Circulate on bottom, pull 3 stands and continue to circulate and dilute
 mud. Maintain mud weight = 9.3 ppg with Barite. Run to bottom-no fill,pumpP
 Hi Vis pill and circulate out - no increase cuttings over shaker.

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE

Daily Cost : 1333 Cumul Cost : 11311

DRILLING MUD REPORT

OPERATOR



P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 9

DATE 17 MAR 19 95 DEPTH 1557m

SPUD DATE 9 MAR PRESENT ACTIVITY CIRC

OPERATOR GFE RESOURCES

CONTRACTOR CENTURY

RIG NO. 11

REPORT FOR KEN SMITH

REPORT FOR SEAN KELLY

SECTION, TOWNSHIP, RANGE

WELL NAME AND NO. DUNBAR # 1

FIELD OR BLOCK NO. PPL-1

COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN

STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA				
BIT SIZE 8 1/2	TYPE HTC ATJOS	JET SIZE 3 x 11	SURFACE 9 5/8 in. @ 312 m	HOLE 317	PITS 192	PUMP SIZE 5 1/2	X IN. 7.75	ANNULAR VEL (ft/min) DP 40 DC 62			
DRILL PIPE SIZE 4 1/2	TYPE 16-6	LENGTH in. @	INTERMEDIATE ft.	TOTAL CIRCULATING VOLUME 509		PUMP MAKE, MODEL NAT 7P50	ASSUMED EFF 95 %	CIRCULATION PRESSURE (psi) 1200			
DRILL PIPE SIZE 4 1/2	TYPE HWDP	LENGTH 55m	INTERMEDIATE in. @	IN STORAGE 207	WEIGHT 9.3	bb/stk 0.054	stk/min 121	BOTTOMS UP (min) (strk) 48 min			
DRILL COLLAR SIZE 6 1/4	LENGTH 162-	PRODUCTION OR LINER in. @	MUD TYPE PHPA/PAC	MUD TYPE 6.53		bb/min 275	gal/min	TOTAL CIRC TIME (min) (strk) 90 min			

MUD PROPERTIES				MUD PROPERTY SPECIFICATIONS		
Sample From	<input checked="" type="checkbox"/> FL <input type="checkbox"/> PIT	<input type="checkbox"/> FL <input type="checkbox"/> PIT	WEIGHT 9.3 pp9	VISCOSITY 35-42 pa/ft	FILTRATE 5-7 cc	
Time Sample Taken	24:00	05:30	RECOMMENDED TREATMENT			
Flowing Temperature (°F)	87(30.5)					
Depth (ft) (TVD)	1	1557	1557	- CIRC. AND DILUTE SYSTEM WITH D/W		
Weight (ppg)	<input type="checkbox"/> (lb/cu ft)	<input type="checkbox"/> (sp gr)	9.3	9.3+	WHILE MAINTAINING WT = 9.3 PP9 WITH	
Funnel Viscosity (sec/qt) API @ 85 °F	44	46	BARITE			
Plastic Viscosity cp @ 75 °F	18	19	- PREPARE HVIS PAC PILL WITH WHICH			
Yield Point (lb/100 ft²)	19	20	TO SWEEP HOLE PRIOR TO WIDER TRIP.			
Gel Strength (lb/100 ft²) 10 sec/10 min	3110	3110	- REDUCE SURFACE ACTIVE VOL.			
Filtrate API (cm³/30 min)	6.4	6.2	REMARKS			
API HTHP Filtrate (cm³/30 min) @ °F	-	-	- CONTIN TO POOH. M/U AND RIH WITH			
Cake Thickness (32nd in. API/HTHP)	11	11	TEST TOOL.			
Solids Content (% by Vol) <input checked="" type="checkbox"/> calculated <input type="checkbox"/> retort	7.0	7.0	DST # 1 - ? FAILURE			
Liquid Content (% by Vol) Oil/Water	193	193	POOH & LAY OUT TEST TOOL - TOOL BLOCKED			
Sand Content (% by Vol)	0.75	0.5	M/U BHA + RIH - WASH F/1533 - 1557m			
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm² mud	12.5	12.5	- 3M FILL.			
pH <input type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	8.3	8.3	- CIRC ON BOTTOM, PULL 3 STDS + CONTIN			
Alkalinity Mud (P _m)	0.05	0.05	TO CIRC + DILUTE MUD. MAINTAIN			
Alkalinity Filtrate (P _f /M _f)	0.051-35	0.051-35	WT = 9.3 WITH BARITE			
Chloride (mg/L)	750	750	RUN TO BOTTOM (NO FILL)			
Total Hardness as Calcium (mg/L)	80	80	+ CIRC OUT - NO INCR. IN CUTTINGS.			
PHPA	1.3	1.3				
SO ₃	60	60				

PRODUCT INVENTORY	BARITE	OS-1	PAC R	SOLIDS EQUIPMENT									
STARTING INVENTORY	907	12	79	SHAKER #1 3 x 50 mesh									
RECEIVED				SHAKER #2 1 mesh									
USED LAST 24 hr	208	1	1	MUD CLEANER mesh									
CLOSING INVENTORY	699	11	78	CENTRIFUGE hours									
COST LAST 24 hr	1150	50.9	131.74	DESANDER - hours									
USED (from IADC)	5.53	50.9	131.74	DESILTER - hours									

M-I REPRESENTATIVE: PAUL MARSHALL PHONE: 093254822 WAREHOUSE PHONE: DAILY COST: \$1332.93 CUMULATIVE COST: \$11311.47

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	4.5	Water Added (bbl)	110	Low Gravity %	7.2	Zero Gel	2	Avg ROP	ECD @			
Drilling		Mud Built (bbl)		Low Gravity, ppb	65.7	n Factor	0.63	% Cutting	Leak Off @ 317m = 22.94			
Reaming/Coring		Mud Received (bbl)		Bentonite %	0.7	k Factor	0.75	psi	%	hhp	HSI	Jet Vel
Circulating	2.5	Mud Disposed (bbl)	91	Bentonite, ppb	6.3	Bit Hydraulics	836	68	134	236	96	
Tripping	13.0	DUMP	60	Drill Solids %	6.1	Annular Section	1	2	3	4	5	
Survey		SURFACE	31	Drill Solids, ppb	55.4	Hole Size	8.68	8.5	8.5			
Logging				Shale CEC, ppb	-	Pipe OD	4.5	4.5	6.25			
Running Casing		TOTAL MUD	716	D/B Ratio	3.94	Critical Velocity	84	86	162			
Testing DST	4.0	Starting Depth		High Gravity %	-	Annular Velocity	37	40	62			
Fishing		Ending Depth		High Gravity, ppb	-	Viscosity	77	74	51			
		New Hole Vol. (bbl)				Annular Pressure	3.1	11.8	7.2			

===== WATER BASE MUD REPORT - Day : 10 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

Well No. : G0003

Date : 18/03/95
 Spud Date : 09/03/95

Depth : 1557.0 m
 Activity : M/U BHA

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in	CASING	MUD VOLUME (bb1)
Nozzles:11/11/11/ / / 1/32"	Casing OD : 9.625 in	Liner OD : in
Drill Pipe 1 OD : 4.500 in 1340 m	Casing ID : 8.680 in	Liner ID : in
Drill Pipe 2 OD : 4.500 in 55.0 m	Casing TD : 312.0 m	Liner TD : m
Drill Collar OD : 6.250 in 162.0 m	Casing TVD : 312.0 m	Liner TVD : m
		Hole Volume : 320
		Pits Volume : 182
		Circulating Volume : 502
		Mud : FW POLYMER

MUD PROPERTIES :

Sample From : FL 23:30
 Flow Line Temp : ^F
 Depth/TVD -m : 1557.0/1557.0
 Mud Wt -lb/gal : 9.3
 Funnel Vis -s/qt : 46 @ 60 ^F
 Plastic Visc -cps : 18 @ 57 ^F
 P/R3 -lb/100ft2 /deg : 21 / 2
 10s/10m Gel -lb/100ft2 : 4 / 10
 API F Loss -cc/30 min : 6.0
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 7.0
 Oil/Water -%vol : /93
 Sand -%vol : 0.5
 MBT -lb/bbl : 12.0
 pH : 8.3 @ 55 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.05/ 0.35
 Chlorides -mg/l : 800
 Hardness Ca : 80
 PHPA : 1.3
 SULPHITE : 50

np Value : 0.547
 Kp -lb-sec^n/100ft2 : 1.37205
 na Value : 0.645
 Ka -lb-sec^n/100ft2 : 0.74518

CIRCULATION DATA

Flow Rate -gal/min :
 DP Annular Vel -m/min :
 DC Annular Vel -m/min :
 DP Critical Vel -m/min : 87.6
 DC Critical Vel -m/min : 115.2
 Circ. Pressure -psi :
 Bottoms Up -min :
 Total Circ Time -min :

PRODUCTS USED LAST 24 HOURS

SOLIDS ANALYSIS (% / lb/bbl)

NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 7.2 / 66
 Bentonite : 0.7 / 6
 Drill Solids : 6.0 / 55
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 4.06 Average SG : 2.60

SOLIDS EQUIPMENT Size Hours

Shaker #1 : 3 X 50 10
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12"
 Desilter : 12 X 4"
 Degasser :

MUD VOLUME ACCOUNTING bb1

Oil Added : D/H :12
 Water Added : SURFACE :17
 Mud Built : TOTAL MUD :687
 Mud Received:
 Mud Disposed:29

Remarks :

Wiper trip.POOH.RIH for DST #2. Perform DST #2. Pull free hole good. Recover sample. Test BOPs. Prepare to RIH.
 Perform wiper trip. POOH for DST. Conduct DST #2. Build to 9 psi. Close tool
 for 1 hr. Flow well. Pull free-hole good. Recover sample and lay out test
 tool. Test BOPs. Prepare to make up BHA and RIH.

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE

Daily Cost : 0 Cumul Cost : 11311

DRILLING MUD REPORT

OPERATOR



Magco/IMCO A Dresser/Halliburton Company

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 10

DATE 18 MAR 19 95

DEPTH 1557m

SPUD DATE 9 MAR

PRESENT ACTIVITY M/U BHA/TEST BOP

OPERATOR GFE

CONTRACTOR CENTURY

RIG NO. 11

REPORT FOR KEN SMITH

REPORT FOR SEAN KELLY

SECTION, TOWNSHIP, RANGE ONSHORE

WELL NAME AND NO. DUNBAR #1

FIELD OR BLOCK NO. PPL-1

COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN

STATE/PROVINCE VICT

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE 8 1/2	TYPE HTC	JET SIZE 3x11	SURFACE 9 5/8 in. @ 312 ft	HOLE 362	PITS 140	PUMP SIZE 5 1/2	X IN. 7.75	ANNULAR VEL (ft/min) DP	DC	
DRILL PIPE SIZE 4 1/2	TYPE 16.6	LENGTH	INTERMEDIATE in. @ ft	TOTAL CIRCULATING VOLUME 502		PUMP MAKE, MODEL NAT 7050	ASSUMED EFF 95%	CIRCULATION PRESSURE (psi) 1150		
DRILL PIPE SIZE 4 1/2	TYPE HWDP	LENGTH 55m	INTERMEDIATE in. @ ft	IN STORAGE 185	WEIGHT 9.3	bb/stk 0.054	stk/min 121	BOTTOMS UP (min) (strk)		
DRILL COLLAR SIZE 6 1/4	LENGTH 162m	PRODUCTION OR LINER	MUD TYPE PHPA/PAC	6.53		275		TOTAL CIRC TIME (min) (strk)		

MUD PROPERTIES			MUD PROPERTY SPECIFICATIONS		
Sample From	<input type="checkbox"/> FL <input checked="" type="checkbox"/> PIT	<input checked="" type="checkbox"/> FL <input type="checkbox"/> PIT	WEIGHT 9.3 ppg	VISCOSITY 35-42 sec/30	FILTRATE 5-7 cc
Time Sample Taken	23:30	05:30			

RECOMMENDED TOUR TREATMENT		
Depth (ft) (TVD)	1	1557
Weight (ppg)	9.3+	9.3
Funnel Viscosity (sec/qt) API @ °F	48	43
Plastic Viscosity cp @ °F	18	19
Yield Point (lb/100 ft²)	21	17
Gel Strength (lb/100 ft²) 10 sec/10 min	410	318
Filtrate API (cm³/30 min)	6.0	5.8

REMARKS		
API HTHP Filtrate (cm³/30 min) @ °F	-	-
Cake Thickness (32nd in. API/HTHP)	11	11
Solids Content (% by Vol) <input type="checkbox"/> calculated <input type="checkbox"/> retort	7	7
Liquid Content (% by Vol) Oil/Water	193	193
Sand Content (% by Vol)	0.5	0.5
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	12.0	12.0
pH <input type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	8.3	8.3
Alkalinity Mud (P _m)	0.05	0.05
Alkalinity Filtrate (P _f /M _f)	0.051035	0.051035
Chloride (mg/L)	800	800
Total Hardness as Calcium (mg/L)	80	80
PHPA	1.3	1.3
SO ₄ ²⁻	50	40

PRODUCT INVENTORY											SOLIDS EQUIPMENT	
STARTING INVENTORY												SHAKER #1 3 x 50 mesh
RECEIVED												SHAKER #2 1 mesh
USED LAST 24 hr												MUD CLEANER mesh
CLOSING INVENTORY												CENTRIFUGE hours
COST LAST 24 hr												DESANDER hours
USED (from IADC)												DESILTER hours

M-I REPRESENTATIVE PAUL MARSHALL	PHONE 093254822	WAREHOUSE PHONE	DAILY COST \$ 0.00	CUMULATIVE COST \$ 11311.47
-------------------------------------	--------------------	-----------------	-----------------------	--------------------------------

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	4.0	Water Added (bbl)		Low Gravity %	7.2	Zero Gel	2	Avg ROP		ECD @		
Drilling		Mud Built (bbl)		Low Gravity, ppb	65.7	n Factor	0.63	% Cutting		Leak Off @ 317.22-9m		
Reaming/Coring		Mud Received (bbl)		Bentonite %	0.7	k Factor	0.75	psi	%	hhp	HSI	Jet Vel
Circulating		Mud Disposed (bbl)	29	Bentonite, ppb	6.3	Bit Hydraulics	836	6.8	134	2.36	96	
Tripping	19.5	SURFACE	17	Drill Solids %	6.1	Annular Section	1	2	3	4	5	
Survey		D/H	12	Drill Solids, ppb	55.4	Hole Size	8.68	8.5	8.5			
Logging				Shale CEC, ppb	-	Pipe OD	4.5	4.5	6.25			
Running Casing		TOTAL	587	D/B Ratio	5.94	Critical Velocity	84	86	112			
Testing DST	6.5	Starting Depth		High Gravity %	-	Annular Velocity	37	40	62			
Fishing		Ending Depth		High Gravity, ppb	-	Viscosity	77	74	51			
		New Hole Vol. (bbl)				Annular Pressure	3.1	11.8	7.2			

===== WATER BASE MUD REPORT - Day : 11 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

Date : 19/03/95 Depth : 1758.0 m
 Well No. : G0003 Spud Date : 09/03/95 Activity : W/TRIP

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in	CASING	MUD VOLUME (bb1)
Nozzles:11/11/11/ / / 1/32"	Casing OD : 9.625 in Liner OD : in	Hole Volume : 363
Drill Pipe 1 OD : 4.500 in 1541 m	Casing ID : 8.680 in Liner ID : in	Pits Volume : 263
Drill Pipe 2 OD : 4.500 in 55.0 m	Casing TD : 312.0 m Liner TD : m	Circulating Volume : 626
Drill Collar OD : 6.250 in 162.0 m	Casing TVD : 312.0 m Liner TVD : m	Mud : FW POLYMER

MUD PROPERTIES :	CIRCULATION DATA	SOLIDS ANALYSIS (% / lb/bbl)
Sample From : FL 22:00	Flow Rate -gal/min : 275	NaCl : 0.0 / 0
Flow Line Temp : 88 ^F	DP Annular Vel -m/min : 39.5	KCl : 0.0 / 0
Depth/TVD -m : 1758.0/1758.0	DC Annular Vel -m/min : 61.9	Low Gravity Solids : 7.2 / 66
Mud Wt -lb/gal : 9.3	DP Critical Vel -m/min : 90.2	Bentonite : 0.5 / 4
Funnel Vis -s/qt : 40 @ 85 ^F	DC Critical Vel -m/min : 110.1	Drill Solids : 6.2 / 57
Plastic Visc -cps : 17 @ 76 ^F	Circ. Pressure -psi : 1220	Weight Material : N/A / N/A
FP/R3 -lb/100ft2 /deg : 15 / 3	Bottoms Up -min : 43.5	Chemical Conc : - / 5.0
10s/10m Gel -lb/100ft2 : 4 / 10	Total Circ Time -min : 95.6	Inert/React : 4.79 Average SG : 2.60
API F Loss -cc/30 min : 7.0		
HTHP F Loss -cc/30 min : @ ^F	PRODUCTS USED LAST 24 HOURS	SOLIDS EQUIPMENT Size Hours
Cake API/HT -1/32" : 1	Caustic Soda 25 KG S 4	Shaker #1 : 3 X 50 20
Solids -%vol : 6.5	OS-1 25 KG S 3	Shaker #2 :
Oil/Water -%vol : /93.5	M-I Bar 25 KG S 99	Shaker #3 :
Sand -%vol : 0.5		Shaker #4 :
MBT -lb/bbl : 10.5		Mud Cleaner :
pH : 8.6 @ 55 ^F		Centrifuge :
Alkal Mud (Pm) : 0.1		Desander : 2 X 12" 12
Pf/Mf : 0.1 / 0.5		Desilter : 12 X 4" 12
Chlorides -mg/l : 750		Degasser :
Hardness Ca : 60		
PHPA : 1.2		MUD VOLUME ACCOUNTING bbl
SULPHITE : 120		Oil Added : DUMP :60
:		Water Added :110 SURFACE+SCE :71
:		Mud Built : TOTAL MUD :666
np Value : 0.614		Mud Received:
Kp -lb-sec^n/100ft2 : 0.74047		Mud Disposed:131
na Value : 0.514		
Ka -lb-sec^n/100ft2 : 1.38406		

Remarks :
 RIH W/ BHA.Break circ.@1533m and wash and ream to bottom- 1.5m fill. Drill f/1557-1758m. POOH for wiper trip.
 RIH with BHA, break circulation at 1533m and wash and ream to bottom-1.5m.
 Fill drill 8.5" hole from 1557-1758m. Survey -1.5 deg. Circulate bottoms up
 and POOH for wiper trip.

===== M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 790 Cumul Cost : 12101 =====

DRILLING MUD REPORT

OPERATOR



Magco/Bar/IMCO A Dresser/Halliburton Company



DRILLING MUD REPORT NO. 11

DATE 19 MAR 19 95

DEPTH 1758 TD

SPUD DATE 9 MAR

PRESENT ACTIVITY WIPER TRIP

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA

OPERATOR GFE RESOURCES

CONTRACTOR CENTURY

RIG NO. 11

REPORT FOR KEN SMITH

REPORT FOR SEAN KELLY

SECTION, TOWNSHIP, RANGE ONSHORE

WELL NAME AND NO. DUNBAR #1

FIELD OR BLOCK NO. PPL-1

COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN

STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE 8 1/2	TYPE HTC A7705	JET SIZE 3 x 11	SURFACE 9 5/8 in. @ 312 ft	HOLE 358	PITS 268	PUMP SIZE 6 X 8.5 5 1/2 7.75	ANNULAR VEL (ft/min) DP 40 DC 62			
DRILL PIPE SIZE 4 1/2	TYPE 16.6	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME 626		PUMP MAKE, MODEL NAT 7P 50	ASSUMED EFF 95%	CIRCULATION PRESSURE (psi) 1220		
DRILL PIPE SIZE 4 1/2	TYPE HNDP	LENGTH 55m	INTERMEDIATE	IN STORAGE	WEIGHT	bb/stk 0.054/0.072	stk/min 93	BOTTOMS UP (min) (strk) 55 min.		
DRILL COLLAR SIZE 8 1/4	LENGTH 162m	PRODUCTION OR LINER	MUD TYPE PHPA/PAC	6.55		275		TOTAL CIRC TIME (min) (strk) 96 min.		

Sample From	MUD PROPERTIES		MUD PROPERTY SPECIFICATIONS		
	FL	PIT	WEIGHT	VISCOSITY	FILTRATE
Time Sample Taken	22:00	05:30	9.3 ppg	35-40 sec/pt	5-7 cc.
Flowline Temperature (°F) (°C)	88(31)		RECOMMENDED TOUR TREATMENT		
Depth (ft) (TVD)	1758	1758	- REDUCE DRILL SOLIDS BY O/W DILUTION		
Weight (ppg) (lb/cu ft) (sp gr)	9.3	9.3	- WHILE MAINTAINING WT = 9.3 WITH BARITE		
Funnel Viscosity (sec/qt) API @ 86 °F	40	42	- SYSTEM TREATED WITH CAUSTIC & OS-1		
Plastic Viscosity cp @ 68 °F	17	16	- RUN SOLIDS CONTROL EQUIP CONTIN.		
Yield Point (lb/100 ft²)	15	14			
Gel Strength (lb/100 ft²) 10 sec/10 min	410	31			
Filtrate API (cm³/30 min)	7.0	6.8	REMARKS		
API HTHP Filtrate (cm³/30 min) @ °F	-	-	- RIM WITH BHA - BREAK CIRC. @ 1533m		
Cake Thickness (32nd in. API/HTHP)	11	11	- WASH & REAM TO BOTTOM 1.5m FILL.		
Solids Content (% by Vol) (calculated) (retort)	6.5	6.5	- DRILL 8 1/2 F/1557m - 1758m.		
Liquid Content (% by Vol) Oil/Water	93.5	93.5	- CIRC. B/U AND POOH FOR WIPER TRIP.		
Sand Content (% by Vol)	0.5	0.5			
Methylene Blue Capacity (lb/bbl equiv) (cm³/m³ mud)	10.5	10.5			
pH (Strip) (Meter) @ °F	8.6	8.6			
Alkalinity Mud (P _m)	0.1	0.1			
Alkalinity Filtrate (P _f /M _f)	0.1/0.5	0.1/0.5			
Chloride (mg/L)	750	750			
Total Hardness as Calcium (mg/L)	60	60			
PHPA	1.2	1.2			
SO ₄	120	120			
DISAND. 12.7 ppg U/F 9.3 ppg O/F 0.4 GPM					
DISILT. 12.0 ppg U/F 9.2 ppg O/F 2.0 GPM.					

PRODUCT INVENTORY	CAUSTIC				SOLIDS EQUIPMENT					
	STARTING INVENTORY	RECEIVED	USED LAST 24 hr	CLOSING INVENTORY	SHAKER #1	SHAKER #2	MUD CLEANER	CENTRIFUGE	DESANDER	DESILTER
	699	48	11	8	3 x 50	1			12	12
	47	547	89	40						
	53	22	35	50						

M-I REPRESENTATIVE	PHONE	WAREHOUSE PHONE	DAILY COST	CUMULATIVE COST
PAUL MARSHALL	093254822		\$ 790.72	\$ 12102.19

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	1.5	Water Added (bbl)	140	Low Gravity %	6.3	Zero Gel	3	Avg ROP	13.4	ECD @		
Drilling	15.0	Mud Built (bbl)		Low Gravity, ppb	57.5	n Factor	0.54	% Cutting		Leak Off @	317-22 9 pps.	
Reaming/Coring		Mud Received (bbl)		Bentonite %	0.8	k Factor	1.38	psi	%	hhp	HSI	Jet Vel
Circulating	1.0	Mud Disposed (bbl)	101	Bentonite, ppb	7.4	Bit Hydraulics	836	68	134	2.36	97	
Tripping	6.0	SCE	41	Drill Solids %	5.1	Annular Section	1	2	3	4	5	
Survey	0.5	SURF	20	Drill Solids, ppb	46.1	Hole Size	8.68	8.5	8.5			
Logging		DUMP	40	Shale CEC, ppb	-	Pipe OD	4.5	4.5	6.25			
Running Casing		TOTAL MUD	626	D/B Ratio	3.28	Critical Velocity	89	90	110			
Testing		Starting Depth	1557	High Gravity %	0.5	Annular Velocity	37	40	62			
Fishing		Ending Depth	1758	High Gravity, ppb	6.7	Viscosity	84	80	49			
		New Hole Vol. (bbl)	46			Annular Pressure	3.5	15.6	7.1			

===== WATER BASE MUD REPORT - Day : 12 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

- - - - -
 Well No. : G0003 Spud Date : 09/03/95

Date : 20/03/95 Depth : 1758.0 m
 Activity : LOGGING

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in	CASING	MUD VOLUME (bb1)
Nozzles: 11/11/11/ / / 1/32"	Casing OD : 9.625 in Liner OD :	in Hole Volume : 363
Drill Pipe 1 OD : 4.500 in 1541 m	Casing ID : 8.680 in Liner ID :	in Pits Volume : 242
Drill Pipe 2 OD : 4.500 in 55.0 m	Casing TD : 312.0 m Liner TD :	m Circulating Volume : 605
Drill Collar OD : 6.250 in 162.0 m	Casing TVD : 312.0 m Liner TVD :	m Mud : FW POLYMER

MUD PROPERTIES :

Sample From : PIT 23:00
 Flow Line Temp : ^F
 Depth/TVD -m : 1758.0/1758.0
 Mud Wt -lb/gal : 9.3
 Funnel Vis -s/qt : 40 @ 70 ^F
 Plastic Visc -cps : 16 @ 65 ^F
 YP/R3 -lb/100ft2 /deg : 12 / 2
 10s/10m Gel -lb/100ft2 : 3 / 13
 API F Loss -cc/30 min : 6.4
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 6.5
 Oil/Water -%vol : /93.5
 Sand -%vol : 0.75
 MBT -lb/bbl : 11.0
 pH : 8.5 @ 55 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.1 / 0.45
 Chlorides -mg/l : 7500
 Hardness Ca : 60
 PHPA : 1.2
 SULPHITE : 100

np Value : 0.652
 Kp -lb-sec^n/100ft2 : 0.51331
 na Value : 0.573
 Ka -lb-sec^n/100ft2 : 0.83798

CIRCULATION DATA

Flow Rate -gal/min :
 DP Annular Vel -m/min :
 DC Annular Vel -m/min :
 DP Critical Vel -m/min : 76.3
 DC Critical Vel -m/min : 96.1
 Circ. Pressure -psi :
 Bottoms Up -min :
 Total Circ Time -min :

SOLIDS ANALYSIS (% / lb/bbl)

NaCl : 0.3 / 4
 KCl : 0.0 / 0
 Low Gravity Solids : 6.8 / 62
 Bentonite : 0.6 / 5
 Drill Solids : 5.6 / 51
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 4.14 Average SG : 2.60

PRODUCTS USED LAST 24 HOURS

M-I Bar 25 KG S 40

SOLIDS EQUIPMENT Size Hours

Shaker #1 : 3 X 50 5
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12"
 Desilter : 12 X 4"
 Degasser :

MUD VOLUME ACCOUNTING bbl

Oil Added : DUMP :31
 Water Added : D/HOLE :30
 Mud Built : TOTAL MUD :605
 Mud Received:
 Mud Disposed:61

Remarks :

RIH for wiper trip. Ream tight hole f/1533-1648m. 7m fill circulate hole clean and POOH. Hole good. Rig up and log.
 RIH for wiper trip. Ream tight hole f/1533-1648m 7m fill. Circulate hole clean and POOH. Hole good. Rig up and log. Run log #1, 2 & 3.

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE

Daily Cost : 221 Cumul Cost : 12322

DRILLING MUD REPORT

OPERATOR



Magcobar/IMCO A Dresser/Halliburton Company

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 12

DATE 20 MAR 19 95

DEPTH 1758m TD

SPUD DATE 9 MAR

PRESENT ACTIVITY LOGGING

OPERATOR GFE RESOURCES

CONTRACTOR CENTURY

RIG NO. 11

REPORT FOR KEN SMITH

REPORT FOR SEAN KELLY

SECTION, TOWNSHIP, RANGE ONSHORE

WELL NAME AND NO. DUNBAR #1

FIELD OR BLOCK NO. PPL-1

COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN

STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE 8 1/2	TYPE APIOS	JET SIZE 3 x 11	SURFACE 9 5/8 in. @ 312 m	HOLE 408	PITS 197	PUMP SIZE 6 1/2 x 8 1/2	ANNULAR VEL (ft/min) DP 36 DC 56			
DRILL PIPE SIZE 4 1/2	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME 605		PUMP MAKE, MODEL NAT 7P50	ASSUMED EFF 95%	CIRCULATION PRESSURE (psi) 1000		
DRILL PIPE SIZE 4 1/2	TYPE HWDP	LENGTH 55m	INTERMEDIATE	IN STORAGE	WEIGHT	bb/stk 0.054/0.072	stk/min 83	BOTTOMS UP (min) (strk) 68min		
DRILL COLLAR SIZE 6 1/4	LENGTH 162 -	PRODUCTION OR LINER	MUD TYPE PHPA/PAC			bb/min 6.0	gal/min 250	TOTAL CIRC TIME (min) (strk) 101 min		

Sample From	MUD PROPERTIES		MUD PROPERTY SPECIFICATIONS		
	<input type="checkbox"/> FL <input checked="" type="checkbox"/> PIT	<input type="checkbox"/> FL <input checked="" type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE
Time Sample Taken	22:30	05:30	9.3 ppg	35-42 sec/91	5-7 cc
Flowline Temperature (°F)	RECOMMENDED TOUR TREATMENT				
Depth (ft) (TVD)	1758	1758	- NO TREATMENT		
Weight (ppg)	9.3	9.3	- MIX SLUG		
Funnel Viscosity (sec/qt) API @ 70 °F	40	42	- LOOSING APPROX 2661/HR D/HOLE		
Plastic Viscosity cp @ 63 °F	16	20	WHILE LOGGING		
Yield Point (lb/100 ft²)	12	12			
Gel Strength (lb/100 ft²) 10 sec/10 min	3112	3113			
Filtrate API (cm³/30 min)	6.6	6.4	REMARKS		
API HTHP Filtrate (cm³/30 min) @ °F	-	-	RIH - REAM 1533m - 1648m. 7m FILL		
Cake Thickness (32nd in. API/HTHP)	11	11	CIRC HOLE CLEAN, SURVEY, PUMP SLUG		
Solids Content (% by Vol) <input type="checkbox"/> calculated <input type="checkbox"/> retort	6.5	6.5	# POOH - HOLE GOOD.		
Liquid Content (% by Vol) Oil/Water	93.5	93.5	RIG UP AND LOG.		
Sand Content (% by Vol)	0.75	0.75	RUN LOG #1, 2 & 3.		
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	11.0	11.0			
pH <input checked="" type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	8.5	8.5			
Alkalinity Mud (P _m)	0.1	0.1			
Alkalinity Filtrate (P _f /M _f)	0.110.45	0.11.45			
Chloride (mg/L)	750	750			
Total Hardness as Calcium (mg/L)	60	60			
PHPA	1.2	1.2			
SO ₃ ²⁻	100	100			

PRODUCT INVENTORY	SOLIDS EQUIPMENT											
	STARTING INVENTORY	RECEIVED	USED LAST 24 hr	CLOSING INVENTORY	COST LAST 24 hr	USED (from IADC)	SHAKER #1	SHAKER #2	MUD CLEANER	CENTRIFUGE	DESANDER	DESILTER
BARITE	600		40	560	221	5.53	3 x 50 mesh					

M-I REPRESENTATIVE PAUL MARSHALL PHONE 093254822 WAREHOUSE PHONE DAILY COST \$ 221.20 CUMULATIVE COST \$ 12323.39

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS					
Rig Up/Service	0.5	Water Added (bbl)		Low Gravity %	6.3	Zero Gel	2	Avg ROP	-	ECD @	
Drilling		Mud Built (bbl)		Low Gravity, ppb	57.5	n Factor	0.57	% Cutting	-	Leak Off @	317-22.9
Reaming/Coring	2.0	Mud Received (bbl)		Bentonite %	0.8	k Factor	0.84	psi	%	hhp	HSI
Circulating	1.5	Mud Disposed (bbl)	61	Bentonite, ppb	7.4	Bit Hydraulics	691	69	101	1.78	08
Tripping	3.0	D/HOLE	30	Drill Solids %	5.1	Annular Section	1	2	3	4	5
Survey	0.5	DUMP	31	Drill Solids, ppb	46.1	Hole Size	8.68	8.5	8.5	P	
Logging	16.5			Shale CEC, ppb	-	Pipe OD	4.5	4.5	6.25		
Running Casing		TOTAL MUD	605	D/B Ratio	3.28	Critical Velocity	75	76	96		
Testing		Starting Depth		High Gravity %	0.5	Annular Velocity	34	36	56		
Fishing		Ending Depth		High Gravity, ppb	6.7	Viscosity	68	65	42		
		New Hole Vol. (bbl)		Annular Pressure			2.6	11.4	5.5		

===== WATER BASE MUD REPORT - Day : 13 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

Date : 21/03/95 Depth : 1758.0 m
 Well No. : G0003 Spud Date : 09/03/95 Activity : LOGGING

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in	CASING	MUD VOLUME (bbl)
Nozzles:11/17/18/ / / 1/32"	Casing OD : 9.625 in Liner OD : in	Hole Volume : 363
Drill Pipe 1 OD : 4.500 in 1541 m	Casing ID : 8.680 in Liner ID : in	Pits Volume : 208
Drill Pipe 2 OD : 4.500 in 55.0 m	Casing TD : 312.0 m Liner TD : m	Circulating Volume : 571
Drill Collar OD : 6.250 in 162.0 m	Casing TVD : 312.0 m Liner TVD : m	Mud : FW POLYMER

MUD PROPERTIES :

Sample From : PIT 24:00
 Flow Line Temp : ^F
 Depth/TVD -m : 1758.0/1758.0
 Mud Wt -lb/gal : 9.3
 Funnel Vis -s/qt : 40 @ 70 ^F
 Plastic Visc -cps : 16 @ 65 ^F
 P/R3 -lb/100ft2 /deg : 15 / 3
 10s/10m Gel -lb/100ft2 : 4 / 12
 API F Loss -cc/30 min : 6.2
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 6.5
 Oil/Water -%vol : /93.5
 Sand -%vol : 0.5
 MBT -lb/bbl : 11.0
 pH : 8.6 @ 55 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.1 / 0.45
 Chlorides -mg/l : 750
 Hardness Ca : 60
 PHPA : 1.2
 SULPHITE : 100

np Value : 0.600
 Kp -lb-sec^n/100ft2 : 0.78428
 na Value : 0.507
 ka -lb-sec^n/100ft2 : 1.39972

CIRCULATION DATA

Flow Rate -gal/min : 300
 DP Annular Vel -m/min : 43.1
 DC Annular Vel -m/min : 67.5
 DP Critical Vel -m/min : 89.0
 DC Critical Vel -m/min : 108.3
 Circ. Pressure -psi : 800
 Bottoms Up -min : 39.9
 Total Circ Time -min : 79.9

SOLIDS ANALYSIS (% / lb/bbl)

NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 7.2 / 66
 Bentonite : 0.5 / 5
 Drill Solids : 6.1 / 56
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 4.52 Average SG : 2.60

PRODUCTS USED LAST 24 HOURS

M-I Gel 25 KG S 9
 Caustic Soda 25 KG S 2
 Polypac R 25 KG S 2
 M-I Bar 25 KG S 40
 Soda Ash 40 KG S 1

SOLIDS EQUIPMENT Size Hours

Shaker #1 : 3 X 50 2
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12"
 Desilter : 12 X 4"
 Degasser :

MUD VOLUME ACCOUNTING bbl

Oil Added : SURFACE :10
 Water Added : D/HOLE :99
 Mud Built :75 TOTAL MUD :571
 Mud Received:
 Mud Disposed:109

Remarks :

Cont log run #3. RIH to 1741m. Wash to bottom-4m fill. Circ hole clean and POOH. Rig up and run logs #4 & 5.
 Continue to run log #3. Rig down and RIH to 1741m. Wash to bottom-4m fill.
 Circulate hole clean-increased hole losses. POOH and rig up to run log #4
 RFT/GR and log #5-VEL.

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE

Daily Cost : 629 Cumul Cost : 12951

DRILLING MUD REPORT

OPERATOR



DRILLING MUD REPORT NO. 13

DATE 21 MAR 19 95 DEPTH 1758m

SPUD DATE 9 MAR PRESENT ACTIVITY LOGGING

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA

OPERATOR GFE RESOURCES CONTRACTOR CENTURY RIG NO. 11

REPORT FOR KEN SMITH REPORT FOR SEAN KELLY SECTION, TOWNSHIP, RANGE ONSHORE

WELL NAME AND NO. DUNBAR # 1 FIELD OR BLOCK NO. PPL-1 COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE <u>8 1/2</u>	TYPE <u>ATJ 05</u>	JET SIZE <u>1x11, 1x18, 1x17</u>	SURFACE <u>9 5/8 in. @ 312 m</u>	HOLE <u>408</u>	PITS <u>163</u>	PUMP SIZE <u>6" x 8 1/2"</u>	ANNULAR VEL (ft/min) <u>DP 43 DC 68</u>			
DRILL PIPE SIZE <u>4 1/2</u>	TYPE <u>HWDP</u>	LENGTH <u>55m</u>	INTERMEDIATE <u>in. @</u>	TOTAL CIRCULATING VOLUME <u>571</u>		PUMP MAKE, MODEL <u>NAT 8P80</u>	ASSUMED EFF <u>95%</u>	CIRCULATION PRESSURE (psi) <u>800</u>		
DRILL PIPE SIZE <u>4 1/2</u>	TYPE <u>HWDP</u>	LENGTH <u>55m</u>	INTERMEDIATE <u>in. @</u>	IN STORAGE	WEIGHT	bb/stk <u>0-054/0-072</u>	slk/min <u>100</u>	BOTTOMS UP (min) (strk) <u>57 min</u>		
DRILL COLLAR SIZE <u>6 1/4</u>	LENGTH <u>162m</u>	PRODUCTION OR LINER <u>in. @</u>	MUD TYPE <u>PHPA/PAC</u>			bb/min <u>0.72</u>	gal/min <u>300</u>	TOTAL CIRC TIME (min) (strk) <u>80 min</u>		

MUD PROPERTIES		MUD PROPERTY SPECIFICATIONS		
Sample From	<input type="checkbox"/> FL <input checked="" type="checkbox"/> PIT	WEIGHT <u>9.3 ppg</u>	VISCOSITY <u>35-42 cp @ 1</u>	FILTRATE <u>5-7 cc</u>
Time Sample Taken	<u>24:00 05:30</u>			

RECOMMENDED TOUR TREATMENT				
Depth (ft) (TVD)	<u>1</u>	ft)	<u>1758</u>	<u>1758</u>
Weight (ppg)	<input checked="" type="checkbox"/> (lb/cu ft)	<input type="checkbox"/> (sp gr)	<u>9.3</u>	<u>9.3</u>
Funnel Viscosity (sec/qt) API @ 70 °F	<u>40</u>		<u>38</u>	
Plastic Viscosity cp @ 64 °F	<u>16</u>		<u>17</u>	
Yield Point (lb/100 ft²)	<u>15</u>		<u>12</u>	
Gel Strength (lb/100 ft²) 10 sec/10 min	<u>4 112</u>		<u>3 113</u>	
Filtrate API (cm³/30 min)	<u>6.2</u>		<u>6.2</u>	

REMARKS				
API HTHP Filtrate (cm³/30 min) @ °F	<u>-</u>	<u>-</u>	<u>- CONTIN LOG RUN # 3 PDS</u>	
Cake Thickness (32nd in. API/HTHP)	<u>11</u>	<u>11</u>	<u>RIG DOWN & RIH TO 1741m - WASH TO BOTTOM - 4M FILL</u>	
Solids Content (% by Vol) <input checked="" type="checkbox"/> calculated <input type="checkbox"/> retort	<u>6.5</u>	<u>6.5</u>	<u>- CIRC. HOLE CLEAN - INCR. HOLE LOSSES</u>	
Liquid Content (% by Vol) Oil/Water	<u>93.5</u>	<u>93.5</u>	<u>- POOH, RIH UP & RUN LOG # 4 RFT/GR</u>	
Sand Content (% by Vol)	<u>0.5</u>	<u>0.5</u>	<u>- RIH UP & RUN LOG # 5 VEL.</u>	
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	<u>11.0</u>	<u>11.0</u>		
pH <input checked="" type="checkbox"/> Strip <input type="checkbox"/> Meter @ 50 °F	<u>8.6</u>	<u>8.5</u>		
Alkalinity Mud (P _m)	<u>0.1</u>	<u>0.05</u>		
Alkalinity Filtrate (P _f /M _f)	<u>0.11.45</u>	<u>0.05.45</u>		
Chloride (mg/L)	<u>750</u>	<u>750</u>		
Total Hardness as Calcium (mg/L)	<u>60</u>	<u>60</u>		
<u>PHPA</u>	<u>1.2</u>	<u>1.2</u>		
<u>SO₃</u>	<u>100</u>	<u>100</u>		

PRODUCT INVENTORY	BARITE	CEL	CAUSTIC	SODA	SODA ASH	PAC P.	SOLIDS EQUIPMENT				
STARTING INVENTORY	<u>560</u>	<u>224</u>	<u>44</u>	<u>20</u>	<u>78</u>		SHAKER #1	<u>3</u>	<u>x 50</u>	mesh	
RECEIVED							SHAKER #2	<u>1</u>		mesh	
USED LAST 24 hr	<u>40</u>	<u>9</u>	<u>2</u>	<u>1</u>	<u>2</u>		MUD CLEANER			mesh	
CLOSING INVENTORY	<u>520</u>	<u>215</u>	<u>42</u>	<u>19</u>	<u>76</u>		CENTRIFUGE			hours	
COST LAST 24 hr	<u>221</u>	<u>84.96</u>	<u>44.70</u>	<u>14.31</u>	<u>263</u>		DESANDER			hours	
USED (from IADC)	<u>5.53</u>	<u>9.44</u>	<u>22.35</u>	<u>14.31</u>	<u>131.74</u>		DESILTER			hours	

M-I REPRESENTATIVE PAUL MARSHALL PHONE 093254822 WAREHOUSE PHONE _____ DAILY COST \$ 628.65 CUMULATIVE COST \$ 12952.04

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	<u>1.5</u>	Water Added (bbl)		Low Gravity %	<u>6.3</u>	Zero Gel	<u>3</u>	Avg ROP	<u>-</u>	ECD @ _____		
Drilling		Mud Built (bbl)	<u>75</u>	Low Gravity, ppb	<u>57.5</u>	n Factor	<u>0.507</u>	% Cutting		Leak Off @ <u>317m - 22.9 pps</u>		
Reaming/Coring		Mud Received (bbl)		Bentonite %	<u>0.8</u>	k Factor	<u>1.40</u>	psi		hhp	HSI	Jet Vel
Circulating	<u>1.0</u>	Mud Disposed (bbl)	<u>109</u>	Bentonite, ppb	<u>7.4</u>	Bit Hydraulics	<u>243</u>	<u>30</u>	<u>43</u>	<u>0.75</u>	<u>52</u>	
Tripping	<u>6.0</u>	SURFACE	<u>10</u>	Drill Solids %	<u>5.1</u>	Annular Section	<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>	
Survey		D/HOLE	<u>99</u>	Drill Solids, ppb	<u>46.1</u>	Hole Size	<u>8.68</u>	<u>8.5</u>	<u>8.5</u>			
Logging	<u>15.5</u>			Shale CEC, ppb	<u>-</u>	Pipe OD	<u>4.5</u>	<u>4.5</u>	<u>6.25</u>			
Running Casing		TOTAL MUD	<u>571</u>	D/B Ratio	<u>3.28</u>	Critical Velocity	<u>88</u>	<u>89</u>	<u>108</u>			
Testing		Starting Depth		High Gravity %	<u>0.5</u>	Annular Velocity	<u>40.5</u>	<u>43</u>	<u>68</u>			
Fishing		Ending Depth		High Gravity, ppb	<u>6.7</u>	Viscosity	<u>79</u>	<u>75</u>	<u>45</u>			
		New Hole Vol. (bbl)				Annular Pressure						

===== WATER BASE MUD REPORT - Day : 14 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

- - -
 Well No. : G0003 Spud Date : 09/03/95

Date : 22/03/95 Depth : 1758.0 m
 Activity : LOGGING

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in	CASING	MUD VOLUME (bb1)
Nozzles:11/17/18/ / / 1/32"	Casing OD : 9.625 in Liner OD : in	Hole Volume : 363
Drill Pipe 1 OD : 4.500 in 1541 m	Casing ID : 8.680 in Liner ID : in	Pits Volume : 185
Drill Pipe 2 OD : 4.500 in 55.0 m	Casing TD : 312.0 m Liner TD : m	Circulating Volume : 548
Drill Collar OD : 6.250 in 162.0 m	Casing TVD : 312.0 m Liner TVD : m	Mud : FW POLYMER

MUD PROPERTIES :

Sample From : PIT 22:30
 Flow Line Temp : ^F
 Depth/TVD -m : 1758.0/1758.0
 Mud Wt -lb/gal : 9.4
 Funnel Vis -s/qt : 42 @ 70 ^F
 Plastic Visc -cps : 20 @ 65 ^F
 P/R3 -lb/100ft2 /deg : 15 / 2
 10s/10m Gel -lb/100ft2 : 4 / 13
 API F Loss -cc/30 min : 6.4
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 7
 Oil/Water -%vol : /93
 Sand -%vol : 0.75
 MBT -lb/bbl : 11.5
 pH : 8.5 @ 55 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.05/ 0.45
 Chlorides -mg/l : 750
 Hardness Ca : 60
 PHPA : 1.1
 SULPHITE : 80

np Value : 0.652
 Kp -lb-sec^n/100ft2 : 0.64163
 na Value : 0.622
 Ka -lb-sec^n/100ft2 : 0.77430

CIRCULATION DATA

Flow Rate -gal/min : 250
 DP Annular Vel -m/min : 35.9
 DC Annular Vel -m/min : 56.3
 DP Critical Vel -m/min : 83.0
 DC Critical Vel -m/min : 107.5
 Circ. Pressure -psi : 600
 Bottoms Up -min : 47.9
 Total Circ Time -min : 92.1

SOLIDS ANALYSIS (% / lb/bbl)

NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 8.0 / 73
 Bentonite : 0.5 / 4
 Drill Solids : 6.9 / 63
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 4.88 Average SG : 2.60

PRODUCTS USED LAST 24 HOURS

M-I Gel 25 KG S 11
 Polypac R 25 KG S 5
 M-I Bar 25 KG S 136
 Soda Ash 40 KG S 1

SOLIDS EQUIPMENT Size Hours

Shaker #1 : 3 X 50 6
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12"
 Desilter : 12 X 4"
 Degasser :

MUD VOLUME ACCOUNTING bbl

Oil Added : SURFACE :13
 Water Added : D/HOLE :30
 Mud Built :140 TOTAL MUD :668
 Mud Received:
 Mud Disposed:43

Remarks :

Cont log run #5, run log #6. P/U BHA and RIH, circ and trip out to 1176m. RIH, circ & POOH to log. Run log #7
 Continue log run #5. R/U and run log #6. Rig down BPB and pick up BHA. RIH-3m
 fill-circulate hole clean and POOH on wiper trip to 1176m. RIH-1.5m fill.
 Circulate bottoms up. Pump slug and POOH to continue logging. Rig up and run
 log #7-RFT/CR.

=====

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 1529 Cumul Cost : 14480

=====

23 MAR 1995

DRILLING MUD REPORT

OPERATOR



Magoobar/IMCO A Dresser/Halliburton Company



DRILLING MUD REPORT NO.

14

DATE 22 MAR 19 95

DEPTH 1758 M

SPUD DATE 9 MAR

PRESENT ACTIVITY LOGGING

OPERATOR GFE RESOURCES

CONTRACTOR CENTURY

RIG NO. 11

REPORT FOR KEN SMITH

REPORT FOR SEAN KELLY

SECTION, TOWNSHIP, RANGE ONSHORE

WELL NAME AND NO. DUNBAR #1

FIELD OR BLOCK NO. PPL-1

COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN

STATE/PROVINCE VICT

Table with columns: DRILLING ASSEMBLY, CASING, MUD VOLUME (BBL), CIRCULATION DATA. Includes rows for BIT SIZE, DRILL PIPE SIZE, DRILL COLLAR SIZE, etc.

MUD PROPERTIES and MUD PROPERTY SPECIFICATIONS table. Includes rows for Sample From, Time Sample Taken, Flowline Temperature, Funnel Viscosity, Plastic Viscosity, Yield Point, Gel Strength, etc.

PRODUCT INVENTORY table with columns for BARITE, GEL, SODIUM ASH, PACR and SOLIDS EQUIPMENT. Includes rows for STARTING INVENTORY, RECEIVED, USED LAST, CLOSING INVENTORY, COST LAST, USED (from IADC).

M-I REPRESENTATIVE PAUL MARSHALL, PHONE 093254822, WAREHOUSE PHONE, DAILY COST \$1528.93, CUMULATIVE COST \$14480.97

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

Summary table with columns: TIME DISTRIBUTION (hrs), MUD VOLUME ACCOUNTING, SOLIDS ANALYSIS, MUD RHEOLOGY and HYDRAULICS. Includes rows for Rig Up/Service, Drilling, Reaming/Coring, Circulating, Tripping, Survey, Logging, Running Casing, Testing, Fishing.

===== WATER BASE MUD REPORT - Day : 15 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

- - -
 Well No. : G0003 Spud Date : 09/03/95

Date : 23/03/95 Depth : 1758.0 m
 Activity : CIRC.

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in	CASING	MUD VOLUME (bb1)
Nozzles:11/17/18/ / / 1/32"	Casing OD : 9.625 in Liner OD : in	Hole Volume : 363
Drill Pipe 1 OD : 4.500 in 1541 m	Casing ID : 8.680 in Liner ID : in	Pits Volume : 131
Drill Pipe 2 OD : 4.500 in 55.0 m	Casing TD : 312.0 m Liner TD : m	Circulating Volume : 494
Drill Collar OD : 6.250 in 162.0 m	Casing TVD : 312.0 m Liner TVD : m	Mud : FW POLYMER

MUD PROPERTIES :

Sample From : FL 23:00
 Flow Line Temp : 84 ^F
 Depth/TVD -m : 1758.0/1758.0
 Mud Wt -lb/gal : 9.4
 Funnel Vis -s/qt : 44 @ 80 ^F
 Plastic Visc -cps : 23 @ 70 ^F
 YP/R3 -lb/100ft2 /deg : 18 / 2
 10s/10m Gel -lb/100ft2 : 3 / 12
 API F Loss -cc/30 min : 6.4
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 7
 Oil/Water -%vol : /93
 Sand -%vol : 0.75
 MBT -lb/bbl : 12.0
 pH : 8.5 @ 55 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.05/ 0.45
 Chlorides -mg/l : 750
 Hardness Ca : 60
 PHPA : 1.1
 SULPHITE : 50
 :
 :
 np Value : 0.642
 Kp -lb-sec^n/100ft2 : 0.79811
 na Value : 0.656
 Ka -lb-sec^n/100ft2 : 0.73210

CIRCULATION DATA

Flow Rate -gal/min : 275
 DP Annular Vel -m/min : 39.5
 DC Annular Vel -m/min : 61.9
 DP Critical Vel -m/min : 88.8
 DC Critical Vel -m/min : 117.6
 Circ. Pressure -psi : 700
 Bottoms Up -min : 43.5
 Total Circ Time -min : 75.4

SOLIDS ANALYSIS (% / lb/bbl)

NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 8.0 / 73
 Bentonite : 0.6 / 5
 Drill Solids : 6.9 / 63
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 4.63 Average SG : 2.60

PRODUCTS USED LAST 24 HOURS

SOLIDS EQUIPMENT Size Hours

Shaker #1 : 3 X 50 2
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12" 1
 Desilter : 12 X 4" 1
 Degasser :

MUD VOLUME ACCOUNTING bbl

Oil Added : SURFACE+SCE :32
 Water Added :40 D/HOLE :36
 Mud Built : TOTAL MUD :640
 Mud Received:
 Mud Disposed:68

Remarks :

Coneinue log run#7.POOH w/blocked tool.Rerun log #7.POOH P/U 8.5" Dr1 assy and RIH to 1755.5m.wash to bottom. Circ
 Continue to run log #7-RFT. Pull blocked RFT tool to surface. Re-run log #7.
 Rig down BPB. Pick up 8.5" drilling assembly and RIH to 1755.5-2.5m fill.
 Wash to bottom and circulate hole.

=====

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 0 Cumul Cost : 14480

=====

DRILLING MUD REPORT

OPERATOR



Magobar/IMCO A Dresser/Halliburton Company



DRILLING MUD REPORT NO. 15

DATE 23 MAR 19 95

DEPTH 1758M

SPUD DATE 9 MAR

PRESENT ACTIVITY

CIRCULATE

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA

OPERATOR GFE RESOURCES

CONTRACTOR CENTURY

RIG NO. 11

REPORT FOR KEN SMITH

REPORT FOR SEAN KELLY

SECTION, TOWNSHIP, RANGE ONSHORE

WELL NAME AND NO. DUNBAR # 1

FIELD OR BLOCK NO. PPL-1

COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN

STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE 8 1/2	TYPE NTC	JET SIZE 1 1/16	SURFACE 9 5/8 @ 312m	HOLE 358	PITS 136	PUMP SIZE 6 x 8.5 IN.	ANNULAR VEL. (ft/min) 5 1/2 x 7.75		DP 40	DC 62
DRILL PIPE SIZE 4 1/2	TYPE 166#	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME 494		PUMP MAKE, MODEL NAT 7P50	ASSUMED EFF 95%	CIRCULATION PRESSURE (psi) 700		
DRILL PIPE SIZE 4 1/2	TYPE HWOP	LENGTH 55m	INTERMEDIATE	IN STORAGE 145	WEIGHT 9.2	bb/stk 0.054/0.072	stk/min 121	BOTTOMS UP (min) (strk) 55min		
DRILL COLLAR SIZE 6 1/4	LENGTH 162m	PRODUCTION OR LINER	MUD TYPE DHDA/PAC	6.53		275 gal/min		TOTAL CIRC TIME (min) (strk) 76min		

MUD PROPERTIES		MUD PROPERTY SPECIFICATIONS		
Sample From	<input checked="" type="checkbox"/> F.L. <input type="checkbox"/> PIT	WEIGHT 9.3 ppg	VISCOSITY 35-42 sec/30	FILTRATE 5-7 cc
Time Sample Taken	24:00 05:30			

RECOMMENDED TOUR TREATMENT			
Flowline Temperature (°F) (°C)	84(29)	- NO TREATMENT.	
Depth (ft) (TVD)	1758 1758	- REDUCE MUD WT BY DILUTION &	
Weight (ppg)	9.44 9.3	CONTIN USE OF SCE WHILE CIRC.	
Funnel Viscosity (sec/qt) API @ 80 °F	44 39		
Plastic Viscosity cp @ 70 °F	23 15		
Yield Point (lb/100 ft²)	18 12		
Gel Strength (lb/100 ft²) 10 sec/10 min	312 319		

REMARKS			
API HTHP Filtrate (cm³/30 min) @ °F	-	- CONTIN LOG RUN # 7 RET/CR	
Cake Thickness (32nd in. API/HTHP)	11 11	RET TOOL BLOCKED - PULL TOOL TO SURF.	
Solids Content (% by Vol) <input type="checkbox"/> calculated <input type="checkbox"/> retort	7.0 6.5	- RE-RUN LOG # 7 - RIG DOWN B/P.	
Liquid Content (% by Vol) Oil/Water	93 93.5	P/U 8 1/2" DRILL ASSY. & RIN TO 1755.5	
Sand Content (% by Vol)	0.75 0.5	- 2.5M FILL. - CIRC & WASH TO	
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	12.0 11.5	BOTTOM. - CIRC HOLE	
pH <input type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	8.5 8.5		
Alkalinity Mud (P _m)	0.05 0.05		
Alkalinity Filtrate (P _f /M _f)	0.05145 0.05145		
Chloride (mg/L)	750 750		
Total Hardness as Calcium (mg/L)	60 60		
PHPA	1.1 1.1		
SO ₄	50 50		
DISAND 12.8 ppg U/F 9.4 ppg O/F 2 gpm DISILT 13.8 ppg U/F 7 gpm			

PRODUCT INVENTORY										SOLIDS EQUIPMENT		
STARTING INVENTORY										SHAKER #1	3 x 50	mesh
RECEIVED										SHAKER #2		mesh
USED LAST 24 hr										MUD CLEANER		mesh
CLOSING INVENTORY										CENTRIFUGE		hours
COST LAST 24 hr										DESANDER	1	hours
USED (from IADC)										DESILTER	1	hours

M-I REPRESENTATIVE	PHONE	WAREHOUSE PHONE	DAILY COST	CUMULATIVE COST
PAUL MARSHALL	093254822		\$ 0.00	\$ 14480.97

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)	MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	Water Added (bbl)	40	Low Gravity %	6.0	Zero Gel	2	Avg ROP	ECD @			
Drilling	Mud Built (bbl)		Low Gravity, ppb	54.3	n Factor	0.656	% Cutting	Leak Off @ 317m 22.9 ppg			
Reaming/Coring	Mud Received (bbl)		Bentonite %	0.9	k Factor	0.732	psi	%	hhp	HSI	Jet Vel
Circulating	Mud Disposed (bbl)	68	Bentonite, ppb	7.8	Bit Hydraulics	207	30	33	0.58	48	
Tripping		0/4	Drill Solids %	4.7	Annular Section	1	2	3	4	5	
Survey	SURF	17	Drill Solids, ppb	42.5	Hole Size	8.68	8.5	8.5			
Logging	SCE	15	Shale CEC, ppb		Pipe OD	4.5	4.5	6.25			
Running Casing	TOTAL MUD	640	D/B Ratio	3.02	Critical Velocity	87	89	118			
Testing	Starting Depth		High Gravity %	1.8	Annular Velocity	38	40	62			
Fishing	Ending Depth		High Gravity, ppb	14.8	Viscosity	90	85	55			
	New Hole Vol. (bbl)				Annular Pressure	3.3	15.0	7.1			

===== WATER BASE MUD REPORT - Day : 16 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

- - -
 Well No. : G0003 Spud Date : 09/03/95

Date : 24/03/95 Depth : 1758.0 m
 Activity : RUN CASING

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in CASING MUD VOLUME (bb1)
 Nozzles:11/17/18/ / / 1/32" Casing OD : 9.625 in Liner OD : in Hole Volume : 363
 Drill Pipe 1 OD : 4.500 in 1541 m Casing ID : 8.680 in Liner ID : in Pits Volume : 146
 Drill Pipe 2 OD : 4.500 in 55.0 m Casing TD : 312.0 m Liner TD : m Circulating Volume : 509
 Drill Collar OD : 6.250 in 162.0 m Casing TVD : 312.0 m Liner TVD : m Mud : FW POLYMER

MUD PROPERTIES :
 Sample From : FL 23:00
 Flow Line Temp : 80 ^F
 Depth/TVD -m : 1758.0/1758.0
 Mud Wt -lb/gal : 9.3
 Funnel Vis -s/qt : 39 @ 75 ^F
 Plastic Visc -cps : 14 @ 70 ^F
 P/R3 -lb/100ft2 /deg : 11 / 2
 10s/10m Gel -lb/100ft2 : 3 / 10
 API F Loss -cc/30 min : 6.4
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 6.5
 Oil/Water -%vol : /93.5
 Sand -%vol : 0.5
 MBT -lb/bbl : 12.0
 pH : 8.7 @ 55 ^F
 Alkal Mud (Pm) : 0.2
 Pf/Mf : 0.08/ 0.6
 Chlorides -mg/l : 750
 Hardness Ca : 60
 PHPA : 1.0
 SULPHITE : 100
 :
 :
 np Value : 0.641
 Kp -lb-sec^n/100ft2 : 0.48940
 na Value : 0.548
 Ka -lb-sec^n/100ft2 : 0.87230

CIRCULATION DATA
 Flow Rate -gal/min : 275
 DP Annular Vel -m/min : 39.5
 DC Annular Vel -m/min : 61.9
 DP Critical Vel -m/min : 73.0
 DC Critical Vel -m/min : 90.7
 Circ. Pressure -psi : 700
 Bottoms Up -min : 43.5
 Total Circ Time -min : 77.7

SOLIDS ANALYSIS (% / 1b/bbl)
 NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 7.2 / 66
 Bentonite : 0.6 / 6
 Drill Solids : 6.0 / 55
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 4.06 Average SG : 2.60

PRODUCTS USED LAST 24 HOURS
 M-I Gel 25 KG S 8
 OS-1 25 KG S 1
 M-I Bar 25 KG S 41

SOLIDS EQUIPMENT Size Hours
 Shaker #1 : 3 X 50 4
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12" 2
 Desilter : 12 X 4" 2
 Degasser :

MUD VOLUME ACCOUNTING bb1
 Oil Added : SURFACE+SCE :25
 Water Added :40 D/HOLE :30
 Mud Built : TOTAL MUD :625
 Mud Received:
 Mud Disposed:55

Remarks :
 Cont circ hole clean. Lay out DP & drill assy. Rig up and run casing. Work and circ tight hole f/1123-1130m.
 Continue to circulate hole clean, pump slug and POOH. Lay down DP and drilling assembly. Rig up and run 7" casing. Casing held up at 1130 m. Rig up and circulate hole. Circulates freely. Work and circulate casing from 1123-1130m.

===== M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 353 Cumul Cost : 14833 =====

DRILLING MUD REPORT

OPERATOR



Magcobar/IMCO A Dresser/Halliburton Company

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 16
 DATE 24 MAR 19 95 DEPTH 1758
 SPUD DATE 9 MAR PRESENT ACTIVITY RUN CASING

OPERATOR GFE RESOURCES CONTRACTOR CENTURY RIG NO. 11
 REPORT FOR KEN SMITH REPORT FOR SEAN KELLY SECTION, TOWNSHIP, RANGE ONSHORE
 WELL NAME AND NO. DUNBAR # 1 FIELD OR BLOCK NO. PPL-1 COUNTY, PARISH OR OFFSHORE AREA NOTWAY BASIN STATE/PROVINCE VICTORIA

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	X		ANNULAR VEL (ft/min)	
			<u>9 5/8 in. @ 312 m</u>	<u>371</u>	<u>138</u>	<u>6</u>	<u>8.5</u>	<u>5.5</u>	<u>7.75</u>	DP <u>40</u> DC <u>62</u>
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL	ASSUMED EFF	CIRCULATION PRESSURE (psi)		
			in. @ ft.	<u>509</u>		<u>NAT 7A 80</u>	<u>95</u>	<u>700</u>		
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bb/stk	stk/min	BOTTOMS UP (min) (strk)		
			in. @ ft.	<u>116</u>	<u>9.2</u>	<u>0.054/0.072</u>	<u>121</u>	<u>55 min</u>		
DRILL COLLAR SIZE	LENGTH	PRODUCTION OR LINER	MUD TYPE			bb/min	gal/min	TOTAL CIRC TIME (min) (strk)		
			<u>DHPA/PAC</u>			<u>6.53</u>	<u>275</u>	<u>76 min</u>		

MUD PROPERTIES			MUD PROPERTY SPECIFICATIONS		
Sample From	<input checked="" type="checkbox"/> FL <input type="checkbox"/> PIT	<input type="checkbox"/> FL <input checked="" type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE
Time Sample Taken	<u>23:00</u>	<u>06:30</u>	<u>9.3 pp9</u>	<u>35-42 sec/ppt</u>	<u>5-7 cc.</u>

RECOMMENDED TOUR TREATMENT					
Flowline Temperature (°F) (°C)	<u>80 (27)</u>				
Depth (ft) (TVD)	<u>1758</u>	<u>1758</u>	<u>- CONTIN. TO REDUCE MUD WT = 9.3 pp9 BY</u>		
Weight (ppg) (lb/cu ft) (sp gr)	<u>9.3</u>	<u>9.3+</u>	<u>D/W DILUTION & USE OF SCE.</u>		
Funnel Viscosity (sec/qt) API @ <u>75</u> °F	<u>39</u>	<u>41</u>	<u>- PREPARE 2% GEL CMT MIX WATER</u>		
Plastic Viscosity cp @ <u>70</u> °F	<u>14</u>	<u>18</u>	<u>- NO CHARGE FOR 1% NaOH - STOCK ADJ.</u>		
Yield Point (lb/100 ft²)	<u>11</u>	<u>12</u>			
Gel Strength (lb/100 ft²) 10 sec/10 min	<u>3110</u>	<u>3110</u>			

REMARKS					
API HTHP Filtrate (cm³/30 min) @ °F	<u>-</u>	<u>- CIRC, PUMP SLUG & POOH - LAY</u>			
Cake Thickness (32nd in. API/HTHP)	<u>11</u>	<u>11</u>	<u>DOWN DP & DRILL ASSY.</u>		
Solids Content (% by Vol) <input checked="" type="checkbox"/> calculated <input type="checkbox"/> retort	<u>6.5</u>	<u>6.5</u>	<u>- RIG UP & RUN 7" CASING</u>		
Liquid Content (% by Vol) Oil/Water	<u>93.5</u>	<u>93.5</u>	<u>- CASING STOOD UP @ 1130M - WORK &</u>		
Sand Content (% by Vol)	<u>0.5</u>	<u>0.5</u>	<u>CIRCULATE CASING 1123M - 1130M.</u>		
Methylene Blue Capacity (lb/bbl equiv) (cm³/cm³ mud)	<u>12.0</u>	<u>12.0</u>			
pH <input type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	<u>8.7</u>	<u>8.6</u>			
Alkalinity Mud (P _m)	<u>0.15</u>	<u>0.15</u>			
Alkalinity Filtrate (P _f /M _f)	<u>0810.6</u>	<u>081.6</u>			
Chloride (mg/L)	<u>750</u>	<u>750</u>			
Total Hardness as Calcium (mg/L)	<u>60</u>	<u>60</u>			
<u>DHPA</u>	<u>1.0</u>	<u>1.0</u>			
<u>SO₃</u>	<u>100</u>	<u>100</u>			
<u>D/SAND 12.1 pp9 U/F 9.3 pp9 O/F 2 GPM</u>					
<u>D/SILT 12.8 pp9 U/F 4 GPM.</u>					

PRODUCT INVENTORY	BARITE	GEL	OS-1	SOLIDS EQUIPMENT									
STARTING INVENTORY	<u>384</u>	<u>204</u>	<u>8</u>	SHAKER #1 <u>3</u> x <u>50</u> mesh									
RECEIVED				SHAKER #2 <u>1</u> mesh									
USED LAST 24 hr	<u>41</u>	<u>8</u>	<u>1</u>	MUD CLEANER _____ mesh									
CLOSING INVENTORY	<u>343</u>	<u>196</u>	<u>7</u>	CENTRIFUGE _____ hours									
COST LAST 24 hr	<u>73</u>	<u>7552</u>	<u>50.95</u>	DESANDER <u>2</u> hours									
USED (from IADC)	<u>5.53</u>	<u>9.44</u>	<u>50.95</u>	DESILTER <u>2</u> hours									

M-I REPRESENTATIVE PAUL MARSHALL PHONE 093254822 WAREHOUSE PHONE _____ DAILY COST \$ 353.20 CUMULATIVE COST \$ 14834.17

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)	MUD VOLUME ACCOUNTING	SOLIDS ANALYSIS	MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	<u>2.5</u>	Water Added (bbl) <u>40</u>	Low Gravity % <u>6.0</u>	Zero Gel <u>2</u>	Avg ROP <u>-</u>	ECD @ _____			
Drilling		Mud Built (bbl)	Low Gravity, ppb <u>54.3</u>	n Factor <u>0.656</u>	% Cutting	Leak Off @ <u>312m = 22.9 ft</u>			
Reaming/Coring		Mud Received (bbl)	Bentonite % <u>0.8</u>	k Factor <u>0.73</u>	psi	%			
Circulating	<u>4.0</u>	Mud Disposed (bbl) <u>55</u>	Bentonite, ppb <u>7.8</u>	Bit Hydraulics	<u>207</u>	<u>30</u>	<u>33</u>	<u>0.58</u>	<u>48</u>
Tripping	<u>8.0</u>	<u>D/HOLE</u> <u>30</u>	Drill Solids % <u>4.7</u>	Annular Section	<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>
Survey		<u>SURFACE</u> <u>10</u>	Drill Solids, ppb <u>42.5</u>	Hole Size	<u>8.68</u>	<u>8.5</u>	<u>8.5</u>		
Logging		<u>SCE</u> <u>15</u>	Shale CEC, ppb <u>-</u>	Pipe OD	<u>4.5</u>	<u>4.5</u>	<u>6.25</u>		
Running Casing	<u>9.5</u>	<u>TOTAL MUD</u> <u>625</u>	D/B Ratio <u>3.02</u>	Critical Velocity	<u>87</u>	<u>89</u>	<u>118</u>		
Testing		Starting Depth	High Gravity % <u>1.8</u>	Annular Velocity	<u>38</u>	<u>40</u>	<u>62</u>		
Fishing		Ending Depth	High Gravity, ppb <u>14.8</u>	Viscosity	<u>90</u>	<u>85</u>	<u>55</u>		
		New Hole Vol. (bbl)		Annular Pressure	<u>3.3</u>	<u>15.0</u>	<u>7.1</u>		

===== WATER BASE MUD REPORT - Day : 17 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

- - -
 Well No. : G0003 Spud Date : 09/03/95

Date : 25/03/95 Depth : 1758.0 m
 Activity : WORK CASING

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in CASING MUD VOLUME (bb1)
 Nozzles: / / / / / 1/32" Casing OD : 9.625 in Liner OD : in Hole Volume :
 Drill Pipe 1 OD : in 1758 m Casing ID : 8.680 in Liner ID : in Pits Volume :
 Drill Pipe 2 OD : in m Casing TD : 312.0 m Liner TD : m Circulating Volume : 532
 Drill Collar OD : in m Casing TVD : 312.0 m Liner TVD : m Mud : FW POLYMER

MUD PROPERTIES :
 Sample From : FL 23:00
 Flow Line Temp : 74 ^F
 Depth/TVD -m : 1758.0/1758.0
 Mud Wt -lb/gal : 9.4
 Funnel Vis -s/qt : 39 @ 68 ^F
 Plastic Visc -cps : 16 @ 55 ^F
 P/R3 -lb/100ft2 /deg : 12 / 2
 10s/10m Gel -lb/100ft2 : 3 / 10
 API F Loss -cc/30 min : 6.6
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 7.0
 Oil/Water -%vol : /93
 Sand -%vol : 0.5
 MBT -lb/bbl : 12.5
 pH : 8.5 @ 55 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.05/ 0.5
 Chlorides -mg/l : 750
 Hardness Ca : 60
 PHPA : 1.0
 SULPHITE : 80
 :
 :
 np Value : 0.652
 Kp -lb-sec^n/100ft2 : 0.51331
 na Value : 0.573
 Ka -lb-sec^n/100ft2 : 0.83798

CIRCULATION DATA
 Flow Rate -gal/min : 160
 DP Annular Vel -m/min :
 DC Annular Vel -m/min :
 DP Critical Vel -m/min :
 DC Critical Vel -m/min :
 Circ. Pressure -psi : 200
 Bottoms Up -min :
 Total Circ Time -min :

SOLIDS ANALYSIS (% / lb/bbl)
 NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 8.0 / 73
 Bentonite : 0.6 / 6
 Drill Solids : 6.8 / 62
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 4.41 Average SG : 2.60

PRODUCTS USED LAST 24 HOURS
 M-I Gel 25 KG S 10

SOLIDS EQUIPMENT Size Hours
 Shaker #1 : 3 X 50 24
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12" 4
 Desilter : 12 X 4" 4
 Degasser :

MUD VOLUME ACCOUNTING bb1
 Oil Added : SURFACE+SCE :37
 Water Added :30 D/HOLE :36
 Mud Built : TOTAL MUD :582
 Mud Received:
 Mud Disposed:73

Remarks :
 Cont to run casing. Circ & work stuck casing F/1148m.- 1153m.Lay out 4 JNTS,P/U 1 JNT.Cont to work f/1097-1108m
 Continue to run casing. Circulate and work stuck casing from 1148-1153m. LayAY
 out 4 joints and continue to wash and work. Pick up 1 joint and work
 1097-1108m.

===== M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 94 Cumul Cost : 14928 =====

DRILLING MUD REPORT

RIG



DRILLING MUD REPORT NO. 17

DATE 25 MAR 1995

DEPTH 1758 m

SPUD DATE 9 MAR

PRESNT ACTIVITY
CIRC & WORK CASING

OPERATOR
GFE RESOURCES

CONTRACTOR
CENTURY

RIG NO.
11

REPORT FOR
KEN SMITH

REPORT FOR
SEAN KELLY

SECTION, TOWNSHIP, RANGE
ONSHORE

WELL NAME AND NO.
DUNBAR #1

FIELD OR BLOCK NO.

COUNTY, PARISH OR OFFSHORE AREA
OTWAY BASIN

STATE/PROVINCE
VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	X B.5 TN.	ANNULAR VEL (ft/min)		
			<u>9 5/8 in. @ 312 m</u>	<u>372</u>	<u>160</u>	<u>6</u>	<u>5.5</u>	<u>7.75</u>	DP _____ DC _____	
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL	ASSUMED EFF	CIRCULATION PRESSURE (psi)		
			in. @ _____ ft.	<u>532</u>		<u>NAT 72 50</u>	<u>95</u>	<u>200-600</u>		
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bbl/stk	stk/min	BOTTOMS UP (min) (strk)		
			in. @ _____ ft.	<u>50</u>	<u>9.3</u>	<u>0.054/0.072</u>	<u>70</u>			
DRILL COLLAR SIZE	LENGTH		PRODUCTION OR LINER	MUD TYPE				TOTAL CIRC TIME (min) (strk)		
			in. @ _____ ft.	<u>RHHPA/RAC</u>		<u>3.78</u>	<u>160</u>			
						bbl/min	gal/min			

MUD PROPERTIES			MUD PROPERTY SPECIFICATIONS		
Sample From	<input checked="" type="checkbox"/> F.L. <input type="checkbox"/> PIT	<input type="checkbox"/> F.L. <input checked="" type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE
Time Sample Taken	<u>23:00</u>	<u>05:30</u>	<u>9.3 ppg</u>	<u>35-42 sec/91</u>	<u>5-7 cc</u>
Flowline Temperature (°F)	<u>74(23)</u>		RECOMMENDED TOUR TREATMENT		

Depth (ft) (TVD <u>1</u> ft)	<u>1758</u>	<u>1758</u>	- DILUTE WITH D/W AS REQD TO CONTROL WT & RHEOLOGY		
Weight <input type="checkbox"/> (ppg) <input type="checkbox"/> (lb/cu ft) <input type="checkbox"/> (sp gr)	<u>9.3+</u>	<u>9.4</u>			
Funnel Viscosity (sec/qt) API @ <u>68</u> °F	<u>39</u>	<u>39</u>	- COMMENCE PREP OF ADDITIONAL GEL BASED VOLUME		
Plastic Viscosity cp @ <u>55</u> °F	<u>16</u>	<u>18</u>			
Yield Point (lb/100 ft²)	<u>12</u>	<u>11</u>			
Gel Strength (lb/100 ft²) 10 sec/10 min	<u>3.10</u>	<u>2.19</u>			
Filtrate API (cm³/30 min)	<u>6.6</u>	<u>6.6</u>	REMARKS		

API HTHP Filtrate (cm³/30 min) @ _____ °F	-		- CONTIN TO CIRC & WORK CASING E/ 1149m - 1153m L/OUT 3 JOINTS		
Cake Thickness (32nd in. API/HTHP)	<u>1.1</u>	<u>1.1</u>	CONTIN TO CIRC & WORK L/OUT 1 JNT		
Solids Content (% by Vol) <input checked="" type="checkbox"/> calculated <input type="checkbox"/> retort	<u>7.0</u>	<u>7.0</u>	P/U 1 JOINT AND WORK 1097m - 1108m		
Liquid Content (% by Vol) Oil/Water	<u>93</u>	<u>93</u>			
Sand Content (% by Vol)	<u>0.5</u>	<u>0.5</u>			
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	<u>12.5</u>	<u>12.5</u>			
pH <input type="checkbox"/> Strip <input type="checkbox"/> Meter @ _____ °F	<u>8.5</u>	<u>8.5</u>			
Alkalinity Mud (P _m)	<u>0.10</u>	<u>0.10</u>			
Alkalinity Filtrate (P _f /M _f)	<u>051.50</u>	<u>051.50</u>			
Chloride (mg/L)	<u>750</u>	<u>750</u>			
Total Hardness as Calcium (mg/L)	<u>60</u>	<u>60</u>			
<u>RHHPA</u>	<u>1.0</u>	<u>1.0</u>			
<u>SO₄</u>	<u>80</u>	<u>80</u>			
			DISAND 10.9 U/F 9.3 O/F 29GPM		
			DISILT 11.4 U/F 3GPM		

PRODUCT INVENTORY											SOLIDS EQUIPMENT	
STARTING INVENTORY	<u>196</u>											SHAKER #1 <u>3 x 150</u> mesh
RECEIVED												SHAKER #2 _____ mesh
USED LAST 24 hr	<u>10</u>											MUD CLEANER _____ mesh
CLOSING INVENTORY	<u>186</u>											CENTRIFUGE _____ hours
COST LAST 24 hr	<u>94.40</u>											DESANDER <u>4</u> hours
USED (from IADC)	<u>9.44</u>											DESILTER <u>4</u> hours

M-I REPRESENTATIVE	PHONE	WAREHOUSE PHONE	DAILY COST	CUMULATIVE COST
<u>PAUL MARSHALL</u>	<u>09.3254822</u>		<u>\$ 94.40</u>	<u>\$ 14928.57</u>

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)	MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	Water Added (bbl)	<u>30</u>	Low Gravity %	<u>6.0</u>	Zero Gel		Avg ROP		ECD @ _____		
Drilling	Mud Built (bbl)		Low Gravity, ppb	<u>543</u>	n Factor		% Cutting		Leak Off @ _____		
Reaming/Coring	Mud Received (bbl)		Bentonite %	<u>0.9</u>	k Factor		psi	%	hhp	HSI	Jet Vel
Circulating	Mud Disposed (bbl)	<u>73</u>	Bentonite, ppb	<u>7.8</u>	Bit Hydraulics						
Tripping	<u>D/HOLE</u>	<u>36</u>	Drill Solids %	<u>4.7</u>	Annular Section	1	2	3	4	5	
Survey	<u>SCF</u>	<u>31</u>	Drill Solids, ppb	<u>42.5</u>	Hole Size						
Logging	<u>SURF.</u>	<u>6</u>	Shale CEC, ppb	-	Pipe OD						
Running Casing	<u>24.0</u>	<u>TOTAL MUD 582</u>	D/B Ratio	<u>3.02</u>	Critical Velocity						
Testing	Starting Depth		High Gravity %	<u>1.0</u>	Annular Velocity						
Fishing	Ending Depth		High Gravity, ppb	<u>14.8</u>	Viscosity						
	New Hole Vol. (bbl)				Annular Pressure						

===== WATER BASE MUD REPORT - Day : 18 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

- - -
 Well No. : G0003 Spud Date : 09/03/95

Date : 26/03/95 Depth : 1758.0 m
 Activity : WAIT ON DP

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in CASING MUD VOLUME (bbl)
 Nozzles: / / / / / 1/32" Casing OD : 9.625 in Liner OD : in Hole Volume :
 Drill Pipe 1 OD : in 1758 m Casing ID : 8.680 in Liner ID : in Pits Volume :
 Drill Pipe 2 OD : in m Casing TD : 312.0 m Liner TD : m Circulating Volume : 315
 Drill Collar OD : in m Casing TVD : 312.0 m Liner TVD : m Mud : FW POLYMER

MUD PROPERTIES :
 Sample From : PIT 23:00
 Flow Line Temp : ^F
 Depth/TVD -m : 1758.0/1758.0
 Mud Wt -lb/gal : 9.4
 Funnel Vis -s/qt : 40 @ 60 ^F
 Plastic Visc -cps : 19 @ 55 ^F
 P/R3 -lb/100ft2 /deg : 12 / 2
 10s/10m Gel -lb/100ft2 : 3 / 9
 API F Loss -cc/30 min : 6.6
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 7.0
 Oil/Water -%vol : /93
 Sand -%vol : 0.5
 MBT -lb/bbl : 12.5
 pH : 8.5 @ 55 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.05/ 0.45
 Chlorides -mg/l : 750
 Hardness Ca : 60
 PHPA : 1.0
 SULPHITE : 50
 :
 :
 np Value : 0.689
 Kp -lb-sec^n/100ft2 : 0.44963
 a Value : 0.595
 Ka -lb-sec^n/100ft2 : 0.80831

CIRCULATION DATA
 Flow Rate -gal/min :
 DP Annular Vel -m/min :
 DC Annular Vel -m/min :
 DP Critical Vel -m/min :
 DC Critical Vel -m/min :
 Circ. Pressure -psi :
 Bottoms Up -min :
 Total Circ Time -min :

PRODUCTS USED LAST 24 HOURS

SOLIDS ANALYSIS (% / lb/bbl)
 NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 8.0 / 73
 Bentonite : 0.6 / 6
 Drill Solids : 6.8 / 62
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 4.41 Average SG : 2.60

SOLIDS EQUIPMENT Size Hours
 Shaker #1 : 3 X 50 6
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12"
 Desilter : 12 X 4"
 Degasser :

MUD VOLUME ACCOUNTING bbl
 Oil Added : SURFACE+SCE :
 Water Added : DUMP :137
 Mud Built : TOTAL MUD :445
 Mud Received:
 Mud Disposed:137

Remarks :

Rig up and cement 7" casing. Cut casing. Nipple down BOPs Nipple up and test. Wait on 3.5" drill pipe.
 Rig up cement head and circulate 260 GPM at 1097m. Pump cement and displace
 with water and dump returns. Nipple down BOPs, cut casing, nipple up and test.
 Wait on 3.5" drill pipe to drill out and set cement plugs.

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE

Daily Cost : 0 Cumul Cost : 14928

DRILLING MUD REPORT

OPERATOR



Magcobar/IMCO A Dresser/Halliburton Company

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO.

18

DATE 26 MAR 19 95

DEPTH 1758 M

SPUD DATE 9 MAR

PRESENT ACTIVITY NIPPLE UP & TEST BOP

OPERATOR

GFE RESOURCES

CONTRACTOR

CENTURY

RIG NO.

11 SECTION, TOWNSHIP, RANGE ONSHORE

REPORT FOR

KEN SMITH

REPORT FOR

SEAN KELLY

WELL NAME AND NO.

DUNBAR # 1

FIELD OR BLOCK NO.

PPL-1

COUNTY, PARISH OR OFFSHORE AREA

NOTWAY BASIN

STATE/PROVINCE

VICT

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	X	ANNULAR VEL (ft/min)	DP	DC
			9 5/8 in. @ 312 ft.	152	163	6	8.5			
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL	ASSUMED EFF	CIRCULATION PRESSURE (psi)		
			in. @	315		NAT 3P 30	95 %	400		
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bbl/stk	stk/min	BOTTOMS UP (min) (strk)		
			in. @	130	8.8	0.054/0.072	115			
DRILL COLLAR SIZE	LENGTH	PRODUCTION OR LINER	MUD TYPE			bbl/min	gal/min	TOTAL CIRC TIME (min) (strk)		
			PHPA/PAC			6.21	260			

MUD PROPERTIES			MUD PROPERTY SPECIFICATIONS		
Sample From	<input type="checkbox"/> FL <input checked="" type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE	
Time Sample Taken	23:00	9.3 ppg	35-42 sec/91	5.7 cc	
Flowline Temperature (°F)		RECOMMENDED TOUR TREATMENT			
Depth (ft) (TVD)	1 M 1758	- NO TREATMENT.			
Weight (ppg)	9.4	- DISPL CMT WITH D/W + DUMP			
Funnel Viscosity (sec/qt) API @ 60 °F	40	137.661s RETURNS.			
Plastic Viscosity cp @ 55 °F	19				
Yield Point (lb/100 ft²)	12				
Gel Strength (lb/100 ft²) 10 sec/10 min	319 1				
Filtrate API (cm³/30 min)	6.6	REMARKS			
API HTHP Filtrate (cm³/30 min) @ °F	-	- RIG UP CEMENT HEAD & CIRC 260GPM @ 1097 M. PUMP CEMENT & DISPL. WITH WATER.			
Cake Thickness (32nd in. API/HTHP)	11 1	- NIPPLE DOWN BOP & CUT CASING			
Solids Content (% by Vol) <input type="checkbox"/> calculated <input type="checkbox"/> retort	7.0	- NIPPLE UP BOP.			
Liquid Content (% by Vol) Oil/Water	93 1	- WAIT ON 3 1/2" DP.			
Sand Content (% by Vol)	0.5				
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	12.5				
pH <input type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	8.5				
Alkalinity Mud (P _m)	0.10				
Alkalinity Filtrate (P _f /M _f)	0.07-45 1				
Chloride (mg/L)	750				
Total Hardness as Calcium (mg/L)	60				
PHPA	1.0				
SO ₄	50				

PRODUCT INVENTORY											SOLIDS EQUIPMENT	
STARTING INVENTORY												SHAKER #1 3 x 50 mesh
RECEIVED												SHAKER #2 1 mesh
USED LAST 24 hr												MUD CLEANER mesh
CLOSING INVENTORY												CENTRIFUGE hours
COST LAST 24 hr												DESANDER hours
USED (from IADC)												DESILTER hours

M-I REPRESENTATIVE	PHONE 09 3254822	WAREHOUSE PHONE	DAILY COST \$ 0.00	CUMULATIVE COST \$ 14928.57
PAUL MARSHALL.				

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	7.0	Water Added (bbl)		Low Gravity %	6.0	Zero Gel		Avg ROP		ECD @ _____		
Drilling		Mud Built (bbl)		Low Gravity, ppb	54.3	n Factor		% Cutting		Leak Off @ _____		
Reaming/Coring		Mud Received (bbl)		Bentonite %	0.9	k Factor		psi	%	hhp	HSI	Jet Vel
Circulating	2.0	Mud Disposed (bbl)	137	Bentonite, ppb	7.8	Bit Hydraulics						
Tripping		DUMP	137	Drill Solids %	4.7	Annular Section	1	2	3	4	5	
Survey				Drill Solids, ppb	42.5	Hole Size						
Logging				Shale CEC, ppb		Pipe OD						
Running Casing/CMT	3.0	TOTAL MUD	445	D/B Ratio	3.02	Critical Velocity						
Testing		Starting Depth		High Gravity %	1.0	Annular Velocity						
Fishing		Ending Depth		High Gravity, ppb	14.8	Viscosity						
BOPs	12.0	New Hole Vol. (bbl)				Annular Pressure						

===== WATER BASE MUD REPORT - Day : 19 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

- - -
 Well No. : G0003 Spud Date : 09/03/95

Date : 27/03/95 Depth : 1758.0 m
 Activity : WAIT ON DP

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in CASING MUD VOLUME (bb1)
 Nozzles: / / / / / 1/32" Casing OD : 7.000 in Liner OD : in Hole Volume :
 Drill Pipe 1 OD : in 1758 m Casing ID : 6.280 in Liner ID : in Pits Volume :
 Drill Pipe 2 OD : in m Casing TD : 1197.0m Liner TD : m Circulating Volume : 315
 Drill Collar OD : in m Casing TVD : 1197.0m Liner TVD : m Mud : FW POLYMER

MUD PROPERTIES :
 Sample From : PIT 22:30
 Flow Line Temp : ^F
 Depth/TVD -m : 1758.0/1758.0
 Mud Wt -lb/gal : 9.4
 Funnel Vis -s/qt : 39 @ 60 ^F
 Plastic Visc -cps : 20 @ 55 ^F
 YP/R3 -lb/100ft2 /deg : 11 / 2
 10s/10m Gel -lb/100ft2 : 3 / 9
 API F Loss -cc/30 min : 6.6
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 7.0
 Oil/Water -%vol : /93
 Sand -%vol : 0.5
 MBT -lb/bbl : 12.5
 pH : 8.3 @ 55 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.05/ 0.4
 Chlorides -mg/l : 750
 Hardness Ca : 60
 PHPA : 1.0
 SULPHITE : 50
 :
 :
 np Value : 0.718
 Kp -lb-sec^n/100ft2 : 0.37629
 na Value : 0.595
 Ka -lb-sec^n/100ft2 : 0.80831

CIRCULATION DATA
 Flow Rate -gal/min :
 DP Annular Vel -m/min :
 DC Annular Vel -m/min :
 DP Critical Vel -m/min :
 DC Critical Vel -m/min :
 Circ. Pressure -psi :
 Bottoms Up -min :
 Total Circ Time -min :

SOLIDS ANALYSIS (% / lb/bbl)
 NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 8.0 / 73
 Bentonite : 0.6 / 6
 Drill Solids : 6.8 / 62
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 4.41 Average SG : 2.60

PRODUCTS USED LAST 24 HOURS

SOLIDS EQUIPMENT Size Hours
 Shaker #1 : 3 X 50
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12"
 Desilter : 12 X 4"
 Degasser :

MUD VOLUME ACCOUNTING bbl
 Oil Added : SURFACE+SCE :
 Water Added : DUMP :
 Mud Built : TOTAL MUD : 445
 Mud Received:
 Mud Disposed:

Remarks :
 WOC. Pressure test casing. Wait on 3.5" drill pipe.
 Wait on cement. Pressure test casing. Wait on 3.5" drill pipe.

===== M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 0 Cumul Cost : 14928 =====

DRILLING MUD REPORT

OPERATOR



Magobar/IMCO A Dresser/Halliburton Company
P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 19
DATE 27 MAR 19 95 DEPTH 1758 M
SPUD DATE 9 MAR PRESENT ACTIVITY WAIT ON 3 1/2" DP

OPERATOR G.F.E. RESOURCES. CONTRACTOR CENTURY RIG NO. 11
REPORT FOR KEN SMITH. REPORT FOR SEAN KELLY SECTION, TOWNSHIP, RANGE ONSHORE
WELL NAME AND NO. DUNBAR #1 FIELD OR BLOCK NO. COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	X IN.		ANNULAR VEL (ft/min)	
			<u>9 5/8 in. @ 312 ft</u>	<u>152</u>	<u>163</u>	<u>6</u>	<u>8.5</u>		<u>5.5 - 7.75</u>	
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL	ASSUMED EFF		CIRCULATION PRESSURE (psi)	
			<u>7 in. @ 1197 ft</u>	<u>315</u>		<u>NAT 18 30</u>	<u>95</u>			
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bbl/stk		stk/min		BOTTOMS UP (min) (strk)
				<u>130</u>	<u>8.8</u>	<u>0.054/0.072</u>				
DRILL COLLAR SIZE	LENGTH	PRODUCTION OR LINER	MUD TYPE		bbl/min		gal/min		TOTAL CIRC TIME (min) (strk)	
			<u>PHDA/PACR.</u>							

Sample From	MUD PROPERTIES		WEIGHT	MUD PROPERTY SPECIFICATIONS	
	<input type="checkbox"/> F.L. <input checked="" type="checkbox"/> PIT	<input type="checkbox"/> F.L. <input type="checkbox"/> PIT		VISCOSITY	FILTRATE
Time Sample Taken	<u>22:30</u>		<u>9.3 ppb</u>	<u>35-42 sec/31</u>	<u>5.7 cc.</u>
Flowline Temperature (°F)	<u>-</u>		RECOMMENDED TOUR TREATMENT		

Depth (ft)	(TVD)	(ft)	Weight	Funnel Viscosity (sec/qt) API @ 60 °F	Plastic Viscosity cp @ 55 °F	Yield Point (lb/100 ft²)	Gel Strength (lb/100 ft²) 10 sec/10 min
<u>1758</u>			<u>9.4</u>	<u>39</u>	<u>20</u>	<u>11</u>	<u>319</u>
Weight (ppg)	(lb/cu ft)	(sp gr)	<u>9.4</u>				
Filtrate API (cm³/30 min)			<u>6.6</u>				

API HTHP Filtrate (cm³/30 min) @ °F	Cake Thickness (32nd in. API/HTHP)	Solids Content (% by Vol) <input type="checkbox"/> calculated <input type="checkbox"/> retort	Liquid Content (% by Vol) Oil/Water	Sand Content (% by Vol)	Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	pH <input checked="" type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	Alkalinity Mud (P _m)	Alkalinity Filtrate (P _f /M _f)	Chloride (mg/L)	Total Hardness as Calcium (mg/L)
<u>-</u>	<u>1.1</u>	<u>7.0</u>	<u>93</u>	<u>0.5</u>	<u>12.5</u>	<u>8.3</u>	<u>0.05</u>	<u>0.05/45</u>	<u>750</u>	<u>60</u>
									<u>PHDA</u>	<u>1.0</u>
									<u>SOI</u>	<u>50</u>

PRODUCT INVENTORY	SOLIDS EQUIPMENT									
STARTING INVENTORY	SHAKER #1 <u>3 x 50</u> mesh									
RECEIVED	SHAKER #2 <u>1</u> mesh									
USED LAST 24 hr	MUD CLEANER _____ mesh									
CLOSING INVENTORY	CENTRIFUGE _____ hours									
COST LAST 24 hr	DESANDER _____ hours									
USED (from IADC)	DESILTER _____ hours									

M-I REPRESENTATIVE PAUL MARSHALL PHONE 09 3254822 WAREHOUSE PHONE _____ DAILY COST \$ 0.00 CUMULATIVE COST \$ 14928.57

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	<u>12.0</u>	Water Added (bbl)		Low Gravity %	<u>6.0</u>	Zero Gel		Avg ROP		ECD @ _____		
Drilling		Mud Built (bbl)		Low Gravity, ppb	<u>54.3</u>	n Factor		% Cutting		Leak Off @ _____		
Reaming/Coring		Mud Received (bbl)		Bentonite %	<u>0.9</u>	k Factor		psi	%	hhp	HSI	Jet Vel
Circulating		Mud Disposed (bbl)		Bentonite, ppb	<u>7.8</u>	Bit Hydraulics						
Tripping				Drill Solids %	<u>4.7</u>	Annular Section	1	2	3	4	5	
Survey				Drill Solids, ppb	<u>42.5</u>	Hole Size						
Logging				Shale CEC, ppb	<u>-</u>	Pipe OD						
Running Casing		<u>TOTAL MUD 445</u>		D/B Ratio	<u>3.02</u>	Critical Velocity						
Testing		Starting Depth		High Gravity %	<u>1.0</u>	Annular Velocity						
Fishing		Ending Depth		High Gravity, ppb	<u>14.8</u>	Viscosity						
<u>NOC</u>	<u>12.0</u>	New Hole Vol. (bbl)				Annular Pressure						

===== WATER BASE MUD REPORT - Day : 20 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

- -
 Well No. : G0003

Date : 28/03/95
 Spud Date : 09/03/95

Depth : 1758.0 m
 Activity : WAIT ON DP

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 8.500 in	CASING	MUD VOLUME (bbl)
Nozzles: / / / / / 1/32"	Casing OD : 7.000 in	Liner OD : in
Drill Pipe 1 OD : in 1758 m	Casing ID : 6.280 in	Liner ID : in
Drill Pipe 2 OD : in m	Casing TD : 1197.0m	Liner TD : m
Drill Collar OD : in m	Casing TVD : 1197.0m	Liner TVD : m
		Hole Volume :
		Pits Volume :
		Circulating Volume : 315
		Mud : FW POLYMER

MUD PROPERTIES :

Sample From : PIT 22:00
 Flow Line Temp : ^F
 Depth/TVD -m : 1758.0/1758.0
 Mud Wt -lb/gal : 9.4
 Funnel Vis -s/qt : 40 @ 60 ^F
 Plastic Visc -cps : 19 @ 55 ^F
 P/R3 -lb/100ft2 /deg : 11 / 2
 10s/10m Gel -lb/100ft2 : 3 / 11
 API F Loss -cc/30 min : 6.6
 HTHP F Loss -cc/30 min : @ ^F
 Cake API/HT -1/32" : 1
 Solids -%vol : 7.0
 Oil/Water -%vol : /93
 Sand -%vol : 0.25
 MBT -lb/bbl : 12.5
 pH : 8.5 @ 55 ^F
 Alkal Mud (Pm) : 0.1
 Pf/Mf : 0.1 / 0.6
 Chlorides -mg/l : 750
 Hardness Ca : 50
 PHPA : 1.0
 SULPHITE : 10

np Value : 0.707
 Kp -lb-sec^n/100ft2 : 0.38856
 na Value : 0.588
 Ka -lb-sec^n/100ft2 : 0.81775

CIRCULATION DATA

Flow Rate -gal/min :
 DP Annular Vel -m/min :
 DC Annular Vel -m/min :
 DP Critical Vel -m/min :
 DC Critical Vel -m/min :
 Circ. Pressure -psi :
 Bottoms Up -min :
 Total Circ Time -min :

SOLIDS ANALYSIS (% / lb/bbl)

NaCl : 0.0 / 0
 KCl : 0.0 / 0
 Low Gravity Solids : 8.0 / 73
 Bentonite : 0.6 / 6
 Drill Solids : 6.8 / 62
 Weight Material : N/A / N/A
 Chemical Conc : - / 5.0
 Inert/React : 4.41 Average SG : 2.60

PRODUCTS USED LAST 24 HOURS

SOLIDS EQUIPMENT Size Hours

Shaker #1 : 3 X 50
 Shaker #2 :
 Shaker #3 :
 Shaker #4 :
 Mud Cleaner :
 Centrifuge :
 Desander : 2 X 12"
 Desilter : 12 X 4"
 Degasser :

MUD VOLUME ACCOUNTING bbl

Oil Added : SURFACE+SCE :
 Water Added : DUMP :
 Mud Built : TOTAL MUD : 445
 Mud Received:
 Mud Disposed:

Remarks :
 Wait on 3.5" drill pipe. Service rig.
 Wait on 3.5" drill pipe. Service rig.

===== M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 0 Cumul Cost : 14928 =====

DRILLING MUD REPORT

OPERATOR



DRILLING MUD REPORT NO. 20
DATE 28 MAR 19 95 DEPTH 1758m
SPUD DATE 9 MAR PRESENT ACTIVITY WAIT ON 3 1/2" DP

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA

OPERATOR GFE RESOURCES CONTRACTOR CENTURY RIG NO. 11
REPORT FOR KEN SMITH REPORT FOR SEAN KELLY SECTION, TOWNSHIP, RANGE ONSHORE
WELL NAME AND NO. DUNBAR #1 FIELD OR BLOCK NO. RPL-1 COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	ANNULAR VEL (ft/min)		CIRCULATION PRESSURE (psi)	
			<u>9 5/8 in. @ 312 ft</u>	<u>152 + WATER 163</u>		<u>6 X 8.5 IN.</u>	<u>5.5</u>	<u>7.75</u>	DP	DC
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL	ASSUMED EFF	CIRCULATION PRESSURE (psi)		
			<u>7 in. @ 1197 ft</u>	<u>315</u>		<u>NAT 7P50</u>	<u>95 %</u>			
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bbl/stk	stk/min		BOTTOMS UP (min) (strk)	
				<u>130</u>	<u>8.8</u>	<u>0.054/0.072</u>				
DRILL COLLAR SIZE	LENGTH	PRODUCTION OR LINER	MUD TYPE		bbl/min		gal/min		TOTAL CIRC TIME (min) (strk)	
			<u>PHDA/PAC R</u>							

MUD PROPERTIES			MUD PROPERTY SPECIFICATIONS		
Sample From	<input type="checkbox"/> F.L. <input checked="" type="checkbox"/> PIT	<input type="checkbox"/> F.L. <input type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE
Time Sample Taken	<u>22:00</u>		<u>9.3 ppq</u>	<u>35-42 mV</u>	<u>5-7 cc</u>
Flowline Temperature (°F)	RECOMMENDED TREATMENT				
Depth (ft) (TVD)	<u>1</u>	<u>1758</u>	<u>- NO TREATMENT</u>		
Weight (ppg)	<u>9.4</u>		<u>- CIRCULATE MUD TANKS</u>		
Funnel Viscosity (sec/qt) API @ °F	<u>40</u>				
Plastic Viscosity cp @ °F	<u>19</u>				
Yield Point (lb/100 ft²)	<u>11</u>				
Gel Strength (lb/100 ft²) 10 sec/10 min	<u>3.11</u>	<u>1</u>			
Filtrate API (cm³/30 min)	<u>6.6</u>		REMARKS		
API HTHP Filtrate (cm³/30 min) @ °F	<u>-</u>				
Cake Thickness (32nd in. API/HTHP)	<u>1.1</u>	<u>1</u>	<u>WAIT ON 3 1/2" DRILL PIPE.</u>		
Solids Content (% by Vol) <input type="checkbox"/> calculated <input type="checkbox"/> retort	<u>7.0</u>				
Liquid Content (% by Vol) Oil/Water	<u>93.0</u>	<u>1</u>			
Sand Content (% by Vol)	<u>0.25</u>				
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	<u>12.5</u>				
pH <input checked="" type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	<u>8.5</u>				
Alkalinity Mud (P _m)	<u>0.1</u>				
Alkalinity Filtrate (P _f /M _f)	<u>1.10.6</u>	<u>1</u>			
Chloride (mg/L)	<u>750</u>				
Total Hardness as Calcium (mg/L)	<u>50</u>				
<u>PHDA</u>	<u>1.0</u>				
<u>SO₄</u>	<u>10</u>				

PRODUCT INVENTORY											SOLIDS EQUIPMENT	
STARTING INVENTORY												SHAKER #1 <u>3 x 50</u> mesh
RECEIVED												SHAKER #2 <u>1</u> mesh
USED LAST 24 hr												MUD CLEANER _____ mesh
CLOSING INVENTORY												CENTRIFUGE _____ hours
COST LAST 24 hr												DESANDER <u>-</u> hours
USED (from IADC)												DESILTER <u>-</u> hours

M-I REPRESENTATIVE PAUL MARSHALL PHONE 093254822 WAREHOUSE PHONE _____ DAILY COST \$ 0.00 CUMULATIVE COST \$ 14928.57

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	<u>24.0</u>	Water Added (bbl)		Low Gravity %	<u>6.0</u>	Zero Gel		Avg ROP		ECD @ _____		
Drilling		Mud Built (bbl)		Low Gravity, ppb	<u>54.3</u>	n Factor		% Cutting		Leak Off @ _____		
Reaming/Coring		Mud Received (bbl)		Bentonite %	<u>0.9</u>	k Factor		psi	%	hhp	HSI	Jet Vel
Circulating		Mud Disposed (bbl)		Bentonite, ppb	<u>7.8</u>	Bit Hydraulics						
Tripping				Drill Solids %	<u>4.7</u>	Annular Section	1	2	3	4	5	
Survey				Drill Solids, ppb	<u>42.5</u>	Hole Size						
Logging				Shale CEC, ppb	<u>-</u>	Pipe OD						
Running Casing		<u>TOTAL MUD 445</u>		D/B Ratio	<u>3.02</u>	Critical Velocity						
Testing		Starting Depth		High Gravity %	<u>1.0</u>	Annular Velocity						
Fishing		Ending Depth		High Gravity, ppb	<u>14.8</u>	Viscosity						
		New Hole Vol. (bbl)				Annular Pressure						

DRILLING MUD REPORT

OPERATOR



Magcobar/IMCO A Dresser/Halliburton Company

P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 21

DATE 29 MAR 19 95 DEPTH 1758 m

SPUD DATE 9 MAR PRESENT ACTIVITY WAIT ON 3 1/2" DP

OPERATOR GFE RESOURCES

CONTRACTOR CENTURY

RIG NO. 11

REPORT FOR KEN SMITH

REPORT FOR SEAN KELLY

SECTION, TOWNSHIP, RANGE ONSHORE

WELL NAME AND NO. DUNBAR #1

FIELD OR BLOCK NO.

COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN

STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	ANNULAR VEL (ft/min)		DP	DC
			<u>9 5/8 in. @ 312 m</u>	<u>152+0/W 163</u>		<u>6 X 85 IN.</u>	<u>5.5 - 7.75</u>			
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL	ASSUMED EFF	CIRCULATION PRESSURE (psi)		
			<u>7 in. @ 1197 ft</u>	<u>315</u>		<u>NAT 4D 50</u>	<u>95 %</u>			
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bbl/stk	slk/min	BOTTOMS UP (min) (strk)		
				<u>130</u>	<u>8.8</u>	<u>0.054/0.072</u>				
DRILL COLLAR SIZE	LENGTH	PRODUCTION OR LINER	MUD TYPE			bbl/min	gal/min	TOTAL CIRC TIME (min) (strk)		
			<u>PHPA/PAC</u>							

MUD PROPERTIES			MUD PROPERTY SPECIFICATIONS		
Sample From	<input type="checkbox"/> FL <input checked="" type="checkbox"/> PIT	<input type="checkbox"/> FL <input type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE
Time Sample Taken	<u>22:00</u>		<u>9.3 pp9</u>	<u>35-42 sec/91</u>	<u>5-7 cc</u>
Flowline Temperature (°F)	RECOMMENDED TOUR TREATMENT				
Depth (ft) (TVD)	<u>1</u>	<u>1758</u>	<u>NO TREATMENT</u>		
Weight (<input checked="" type="checkbox"/> pp9) (<input type="checkbox"/> lb/cu ft) (<input type="checkbox"/> sp gr)	<u>9.4</u>		<u>- SERVICE DESILTER</u>		
Funnel Viscosity (sec/qt) API @ °F	<u>40</u>				
Plastic Viscosity cp @ °F	<u>20</u>				
Yield Point (lb/100 ft²)	<u>11</u>				
Gel Strength (lb/100 ft²) 10 sec/10 min	<u>3110</u>	<u>1</u>			
Filtrate API (cm³/30 min)	<u>6.6</u>		REMARKS		
API HTHP Filtrate (cm³/30 min) @ °F	<u>-</u>		<u>WAIT ON 3.5" DRILL PIPE</u>		
Cake Thickness (32nd in. API/HTHP)	<u>11</u>	<u>1</u>	<u>- SERVICE RIC</u>		
Solids Content (% by Vol) <input checked="" type="checkbox"/> calculated <input type="checkbox"/> retort	<u>7.0</u>				
Liquid Content (% by Vol) Oil/Water	<u>93</u>	<u>1</u>			
Sand Content (% by Vol)	<u>0.25</u>				
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	<u>12.5</u>				
pH <input type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	<u>8.5</u>				
Alkalinity Mud (P _m)	<u>0.1</u>				
Alkalinity Filtrate (P _f /M _f)	<u>0.110.65</u>	<u>1</u>			
Chloride (mg/L)	<u>750</u>				
Total Hardness as Calcium (mg/L)	<u>50</u>				
<u>PHPA</u>	<u>1.0</u>				
<u>SO₃</u>	<u>10</u>				

PRODUCT INVENTORY											SOLIDS EQUIPMENT	
STARTING INVENTORY												SHAKER #1 <u>3 X 50</u> mesh
RECEIVED												SHAKER #2 <u>1</u> mesh
USED LAST 24 hr												MUD CLEANER _____ mesh
CLOSING INVENTORY												CENTRIFUGE _____ hours
COST LAST 24 hr												DESANDER <u>-</u> hours
USED (from IADC)												DESILTER <u>-</u> hours

M-I REPRESENTATIVE	PHONE	WAREHOUSE PHONE	DAILY COST	CUMULATIVE COST
<u>PAUL MARSHALL</u>	<u>093254822</u>		<u>\$ 0.00</u>	<u>\$ 14928.57</u>

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS					
Rig Up/Service	<u>24.0</u>	Water Added (bbl)		Low Gravity %	<u>6.0</u>	Zero Gel		Avg ROP		ECD @ _____	
Drilling		Mud Built (bbl)		Low Gravity, ppb	<u>54.3</u>	n Factor		% Cutting		Leak Off @ _____	
Reaming/Coring		Mud Received (bbl)		Bentonite %	<u>0.9</u>	k Factor		psi	%	hhp HSI Jet Vel	
Circulating		Mud Disposed (bbl)		Bentonite, ppb	<u>7.8</u>	Bit Hydraulics					
Tripping				Drill Solids %	<u>4.7</u>	Annular Section	1	2	3	4	5
Survey				Drill Solids, ppb	<u>425</u>	Hole Size					
Logging				Shale CEC, ppb	<u>-</u>	Pipe OD					
Running Casing		TOTAL MUD	<u>445</u>	D/B Ratio	<u>3.02</u>	Critical Velocity					
Testing		Starting Depth		High Gravity %	<u>1.0</u>	Annular Velocity					
Fishing		Ending Depth		High Gravity, ppb	<u>14.8</u>	Viscosity					
		New Hole Vol. (bbl)				Annular Pressure					

===== WATER BASE MUD REPORT - Day : 22 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

Date : 30/03/95 Depth : 1758.0 m
 Well No. : G0003 Spud Date : 09/03/95 Activity : DRILL CMT

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 6.000 in	CASING	MUD VOLUME (bb1)
Nozzles: / / / / / 1/32"	Casing OD : 7.000 in Liner OD : in	Hole Volume : 184
Drill Pipe 1 OD : 3.500 in 1619 m	Casing ID : 6.280 in Liner ID : in	Pits Volume : 226
Drill Pipe 2 OD : in m	Casing TD : 1209.0m Liner TD : m	Circulating Volume : 410
Drill Collar OD : 4.750 in 139.0 m	Casing TVD : 1209.0m Liner TVD : m	Mud : FW POLYMER

MUD PROPERTIES	CIRCULATION DATA	SOLIDS ANALYSIS (% / lb/bbl)
Sample From : FL 23:00	Flow Rate -gal/min : 250	NaCl : 0.0 / 0
Flow Line Temp : 74 ^F	DP Annular Vel -m/min : 78.6	KCl : 0.0 / 0
Depth/TVD -m : 1758.0/1758.0	DC Annular Vel -m/min : 139.0	Low Gravity Solids : 7.2 / 66
Mud Wt -lb/gal : 9.3	DP Critical Vel -m/min : 85.4	Bentonite : 0.6 / 6
Funnel Vis -s/qt : 38 @ 70 ^F	DC Critical Vel -m/min : 110.4	Drill Solids : 6.0 / 55
Elastic Visc -cps : 14 @ 65 ^F	Circ. Pressure -psi : 800	Weight Material : N/A / N/A
FP/R3 -lb/100ft2 /deg : 10 / 2	Bottoms Up -min : 23.9	Chemical Conc : - / 5.0
10s/10m Gel -lb/100ft2 : 2 / 9	Total Circ Time -min : 68.9	Inert/React : 4.06 Average SG : 2.60
API F Loss -cc/30 min : 8.4		
HTHP F Loss -cc/30 min : @ ^F	PRODUCTS USED LAST 24 HOURS	SOLIDS EQUIPMENT Size Hours
Cake API/HT -1/32" : 1	Polypac R 25 KG S 2	Shaker #1 : 3 X 50 6
Solids -%vol : 7.0	M-I Bar 25 KG S 103	Shaker #2 :
Oil/Water -%vol : /93		Shaker #3 :
Sand -%vol : 3		Shaker #4 :
MBT -lb/bbl : 12.0		Mud Cleaner :
pH : 12.5 @ 55 ^F		Centrifuge :
Alkal Mud (Pm) : 2.2		Desander : 2 X 12"
Pf/Mf : 1.9 / 2.1		Desilter : 12 X 4"
Chlorides -mg/l : 750		Degasser :
Hardness Ca : 200		
PHPA :		MUD VOLUME ACCOUNTING bb1
SULPHITE : 10		Oil Added : SURFACE+SCE :30
		Water Added :15 DUMP :10
		Mud Built :40 TOTAL MUD :460
np Value : 0.663		Mud Received:
Kp -lb-sec^n/100ft2 : 0.41111		Mud Disposed:40
pa Value : 0.540		
Ka -lb-sec^n/100ft2 : 0.88501		

Remarks :
 Test BOPs. P/U 4.75" DC,M/U bit and RIH with 3.5" DP.Tag cement at 1102m.Drill out cmt & shoe track f/1102-1196m.
 Test BOPs. Pick up 4.75" DCs, make-up 6" bit and RIH with 3.5" DP. Tag cement at 1102m. Drill out cement and shoe track from 1102-1196m.

===== M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE Daily Cost : 833 Cumul Cost : 15761 =====

DRILLING MUD REPORT

OPERATOR



P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 22	
DATE 30 MAR 19 95	DEPTH 1758 m
SPUD DATE 9 MAR	PRESENT ACTIVITY DRILL OUT CEMENT.

OPERATOR GFE RESOURCES.	CONTRACTOR CENTURY	RIG NO. 11
REPORT FOR KEN SMITH	REPORT FOR ROGER BINDON	SECTION, TOWNSHIP, RANGE ONSHORE
WELL NAME AND NO. DUNBAR #1	FIELD OR BLOCK NO. PPL-1	COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN
		STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE 6"	TYPE HTC 654	JET SIZE	SURFACE 9 5/8 in. @ 312 m	HOLE 244	PITS 166	PUMP SIZE 6 x 8.5 in.	ANNULAR VEL (#/min) 5.5 x 7.75		DP 69	DC 111
DRILL PIPE SIZE 3 1/2	TYPE	LENGTH	INTERMEDIATE 7" in. @ 1209 m	TOTAL CIRCULATING VOLUME 410		PUMP MAKE, MODEL NAT 8P80	ASSUMED EFF. 95 %	CIRCULATION PRESSURE (psi) 800		
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE in. @ ft.	IN STORAGE 50	WEIGHT 9.3	bbf/stk 0.054/0.072	stk/min 110	BOTTOMS UP (min) (strk) 41 min.		
DRILL COLLAR SIZE 4 3/4		LENGTH 139 m	PRODUCTION OR LINER in. @ ft.	MUD TYPE PHDA/PAC R		5.94	250	TOTAL CIRC TIME (min) (strk) 52 min.		

MUD PROPERTIES			MUD PROPERTY SPECIFICATIONS		
Sample From	<input checked="" type="checkbox"/> FL <input type="checkbox"/> PIT	<input checked="" type="checkbox"/> FL <input type="checkbox"/> PIT	WEIGHT 9.3 ppg	VISCOSITY 35-42 sec/31	FILTRATE 5-7 cc
Time Sample Taken	23:00	06:00	RECOMMENDED TREATMENT		
Flowline Temperature (°F) (°C)	74(23)	75(23)	- DISPLACE WELL TO MUD & MAINTAIN MUD		
Depth (ft) (TVD)	1	1758	WT = 9.3 ppg.		
Weight (ppg)	<input type="checkbox"/> (lb/cu ft)	<input type="checkbox"/> (sp gr)	9.3	- PREPARE ADDITIONAL VOL. WT = 10 ppg.	
Funnel Viscosity (sec/qt) API @ 70 °F	38	40			
Plastic Viscosity cp @ 65 °F	14	18			
Yield Point (lb/100 ft²)	10	9			
Gel Strength (lb/100 ft²) 10 sec/10 min	219	219			
Filtrate API (cm³/30 min)	8.4	8.4	REMARKS		
API HTHP Filtrate (cm³/30 min) @ °F	-	+	- TEST BOPS.		
Cake Thickness (32nd in. API/HTHP)	11	11	- P/U 4 3/4" DC, M/U 6" BIT & RIH		
Solids Content (% by Vol) <input checked="" type="checkbox"/> calculated <input type="checkbox"/> retort	7.0	7.0	WITH 3 1/2" DP, TAG CMT @ 1102 m.		
Liquid Content (% by Vol) Oil/Water	93	93.0	- DRILL OUT CMT & SHOE TRACK		
Sand Content (% by Vol)	3	3	F/1102 m - 1196 m.		
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	12.0	12.0			
pH <input checked="" type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	12.5	13.0			
Alkalinity Mud (P _m)	2.2	2.0			
Alkalinity Filtrate (P _f /M _f)	1.9/2.1	1.8/2.1			
Chloride (mg/L)	750	750			
Total Hardness as Calcium (mg/L)	200	180			
PHDA		1.0			
SO₄	TR	TR			

PRODUCT INVENTORY	SOLIDS EQUIPMENT										
STARTING INVENTORY	343	71									SHAKER #1 3 x 50 mesh
RECEIVED											SHAKER #2 _____ mesh
USED LAST 24 hr	103	2									MUD CLEANER _____ mesh
CLOSING INVENTORY	240	69									CENTRIFUGE _____ hours
COST LAST 24 hr	569	263									DESANDER _____ hours
USED (from IADC)	5.53	131.74									DESILTER _____ hours

M-1 REPRESENTATIVE PAUL MARSHALL	PHONE 093254822	WAREHOUSE PHONE	DAILY COST \$ 833.07	CUMULATIVE COST \$ 15761.64
--	---------------------------	-----------------	--------------------------------	---------------------------------------

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)	MUD VOLUME ACCOUNTING	SOLIDS ANALYSIS	MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	5.5	Water Added (bbl) 15	Low Gravity % 6.7	Zero Gel 2	Avg ROP	ECD @ _____			
Drilling CMT	6.0	Mud Built (bbl) 40	Low Gravity, ppb 61.1	n Factor 0.54	% Cutting	Leak Off @ _____			
Reaming/Coring		Mud Received (bbl)	Bentonite % 0.8	k Factor 0.88	psi	%	hhp	HSI	Jet Vel
Circulating		Mud Disposed (bbl) 40	Bentonite, ppb 6.9	Bit Hydraulics					
Tripping	8.5	SURFACE 30	Drill Solids % 5.5	Annular Section	1	2	3	4	5
Survey		SCF/DUMP 10	Drill Solids, ppb 50.2	Hole Size	6.276	6.276	6.00		
Logging			Shale CEC, ppb	Pipe OD	4.75	3.5	4.75		
Running Casing		TOTAL MUD 460	D/B Ratio 3.57	Critical Velocity	102	82	110		
Testing BOPS SURF	4.0	Starting Depth	High Gravity % 0.3	Annular Velocity	111	69	139		
Fishing		Ending Depth	High Gravity, ppb 3.7	Viscosity	23	37	19		
		New Hole Vol. (bbl)		Annular Pressure	9.7	22.4	10.2		

===== WATER BASE MUD REPORT - Day : 23 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

Well No. : G0003

Date : 31/03/95
 Spud Date : 09/03/95

Depth : 1758.0 m
 Activity : LAY OUT DP

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 6.000 in	CASING	MUD VOLUME (bb1)
Nozzles: / / / / / 1/32"	Casing OD : 7.000 in	Liner OD : in
Drill Pipe 1 OD : 3.500 in	1758 m	Casing ID : 6.280 in
Drill Pipe 2 OD : in	m	Liner ID : in
Drill Collar OD : in	m	Casing TD : 1209.0m
		Liner TD : m
	Casing TVD : 1209.0m	Liner TVD : m
		Mud : FW POLYMER
		Hole Volume : 190
		Pits Volume : 129
		Circulating Volume : 319

MUD PROPERTIES :

Sample From : PIT 24:00

Flow Line Temp : ^F

Depth/TVD -m : 1758.0/1758.0

Mud Wt -lb/gal : 9.3

Funnel Vis -s/qt : 41 @ 70 ^F

Elastic Visc -cps : 19 @ 65 ^F

PP/R3 -lb/100ft2 /deg : 10 / 2

10s/10m Gel -lb/100ft2 : 2 / 9

API F Loss -cc/30 min : 7.6

HTHP F Loss -cc/30 min : @ ^F

Cake API/HT -1/32" : 1

Solids -%vol : 7.0

Oil/Water -%vol : /93

Sand -%vol : 1.5

MBT -lb/bbl : 12.5

pH : 13.5 @ 55 ^F

Alkal Mud (Pm) : 2.0

Pf/Mf : 1.8 / 2.0

Chlorides -mg/l : 750

Hardness Ca : 200

PHPA :

SULPHITE : 10

np Value : 0.727

Kp -lb-sec^n/100ft2 : 0.33333

ka Value : 0.581

Ka -lb-sec^n/100ft2 : 0.82763

CIRCULATION DATA

Flow Rate -gal/min :

DP Annular Vel -m/min :

DC Annular Vel -m/min :

DP Critical Vel -m/min : 89.8

DC Critical Vel -m/min :

Circ. Pressure -psi :

Bottoms Up -min :

Total Circ Time -min :

PRODUCTS USED LAST 24 HOURS

Polypac R 25 KG S 1

M-I Bar 25 KG S 80

SOLIDS ANALYSIS (% / lb/bbl)

NaCl : 0.0 / 0

KCl : 0.0 / 0

Low Gravity Solids : 7.2 / 66

Bentonite : 0.7 / 6

Drill Solids : 6.0 / 54

Weight Material : N/A / N/A

Chemical Conc : - / 5.0

Inert/React : 3.86 Average SG : 2.60

SOLIDS EQUIPMENT Size Hours

Shaker #1 : 3 X 50 12

Shaker #2 :

Shaker #3 :

Shaker #4 :

Mud Cleaner :

Centrifuge :

Desander : 2 X 12"

Desilter : 12 X 4"

Degasser :

MUD VOLUME ACCOUNTING bbl

Oil Added : SURFACE+SCE :30

Water Added : D/H +PLUG :66

Mud Built :60 TOTAL MUD :424

Mud Received:

Mud Disposed:96

Remarks :

Drill out shoe track. RIH to 1758m & circ POOH, lay out drl assy and RIH O/E to 1610m and set cmt plug #1.1610-1440m.
 Continue to drill out shoe track. RIH to 1265m, 1302m & 1758m. Circulate and flow check each stage. POOH and lay out DC. RIH O/E to 1610m and pump cement plug #1 from 1610 -1440m. POOH 12 stands and WOC. RIH and tag cement at 1437m.
 Circulate and lay out DP.

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE

Daily Cost : 574 Cumul Cost : 16335

DRILLING MUD REPORT

OPERATOR



P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 23
 DATE 31 MAR 19 95 DEPTH 1758 M
 SPUD DATE 9 MAR PRESENT ACTIVITY LAY OUT D.P.

OPERATOR GFE RESOURCES CONTRACTOR CENTURY RIG NO. 11
 REPORT FOR KEN SMITH REPORT FOR ROGER BINDON SECTION, TOWNSHIP, RANGE ONSHORE

WELL NAME AND NO. DUNBAR #1 FIELD OR BLOCK NO. PPL-1 COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN STATE/PROVINCE VICT

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	ANNULAR VEL (ft/min)		DP	DC
			<u>9 5/8 in. @ 312 ft</u>	<u>203</u>	<u>116</u>	<u>6 X 8-5 IN</u>	<u>5.5 - 7.75</u>			
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL	ASSUMED EFF		CIRCULATION PRESSURE (psi)	
			<u>7 in. @ 1209 ft</u>	<u>319</u>		<u>NAT 7P30</u>	<u>95 %</u>			
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bb/stk	stk/min		BOTTOMS UP (min) (strk)	
			<u>in. @</u>	<u>105</u>	<u>9.3</u>	<u>0054/0.072</u>	<u>132</u>			
DRILL COLLAR SIZE	LENGTH		PRODUCTION OR LINER	MUD TYPE				TOTAL CIRC TIME (min) (strk)		
			<u>in. @</u>	<u>PHPA/PAC</u>				<u>7.13</u> <u>300</u>		
								<u>gal/min</u> <u>(strk)</u>		

MUD PROPERTIES			MUD PROPERTY SPECIFICATIONS		
Sample From	<input type="checkbox"/> FL <input checked="" type="checkbox"/> PIT	<input type="checkbox"/> FL <input type="checkbox"/> PIT	WEIGHT	VISCOSITY	FILTRATE
Time Sample Taken	<u>24:00</u>		<u>9.3 ppg</u>	<u>35-42 sec/91</u>	<u>5-7 cc</u>

RECOMMENDED TOUR TREATMENT					
Flowline Temperature (°F)	<u>75</u>				
Depth (ft) (TVD)	<u>1</u>	ft)	<u>1758</u>		
Weight (ppg)	<input type="checkbox"/> (lb/cu ft)	<input type="checkbox"/> (sp gr)	<u>9.3</u>		
Funnel Viscosity (sec/qt) API @ 65 °F	<u>41</u>				
Plastic Viscosity cp @ 60 °F	<u>19</u>				
Yield Point (lb/100 ft²)	<u>10</u>				
Gel Strength (lb/100 ft²) 10 sec/10 min	<u>219</u> <u>1</u>				
Filtrate API (cm³/30 min)	<u>7.6</u>				

REMARKS					
API HTHP Filtrate (cm³/30 min) @ °F	<u>-</u>				
Cake Thickness (32nd in. API/HTHP)	<u>11</u>	<u>1</u>	<u>RIN TO 1265M & CIRC B/U - FLOW CHECK</u>		
Solids Content (% by Vol) <input type="checkbox"/> calculated <input type="checkbox"/> retort	<u>7.0</u>	<u>1</u>	<u>RIN TO 1302M & CIRC</u>		
Liquid Content (% by Vol) Oil/Water	<u>93</u>	<u>1</u>	<u>RIN TO 1758M, CIRC + FLOW CHECK</u>		
Sand Content (% by Vol)	<u>1.5</u>		<u>POOH + LAY OUT DIC</u>		
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud	<u>12.5</u>		<u>RIN O/E TO 1610M + PUMP</u>		
pH <input checked="" type="checkbox"/> Strip <input type="checkbox"/> Meter @ °F	<u>13.5</u>		<u>CEMENT PLUG #1 1610M - 1440M</u>		
Alkalinity Mud (P _m)	<u>2.0</u>		<u>POOH 12 SDS CIRC & WOC</u>		
Alkalinity Filtrate (P _f /M _f)	<u>1.8/2.0</u>	<u>1</u>	<u>RIN + TAG CAT @ 1437M. CIRC PIPE</u>		
Chloride (mg/L)	<u>750</u>		<u>& LAY OUT D.P.</u>		
Total Hardness as Calcium (mg/L)	<u>200</u>				
<u>PHMA</u>					
<u>SO₃</u>	<u>10</u>				

PRODUCT INVENTORY	SOLIDS EQUIPMENT										
STARTING INVENTORY	<u>240</u>	<u>69</u>									SHAKER #1 <u>3 x 50</u> mesh
RECEIVED											SHAKER #2 <u>1</u> mesh
USED LAST 24 hr	<u>80</u>	<u>1</u>									MUD CLEANER _____ mesh
CLOSING INVENTORY	<u>160</u>	<u>68</u>									CENTRIFUGE _____ hours
COST LAST 24 hr	<u>442</u>	<u>131</u>									DESANDER _____ hours
USED (from IADC)	<u>5.53</u>	<u>131.74</u>									DESILTER _____ hours

M-I REPRESENTATIVE PAUL MARSHALL PHONE 093254822 WAREHOUSE PHONE _____ DAILY COST \$ 574.14 CUMULATIVE COST \$ 16335.78

NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS						
Rig Up/Service	<u>1.5</u>	Water Added (bbl)		Low Gravity %	<u>6.7</u>	Zero Gel	Avg ROP		ECD @ _____			
Drilling		Mud Built (bbl)	<u>60</u>	Low Gravity, ppb	<u>611</u>	n Factor	% Cutting		Leak Off @ _____			
Reaming/Coring	<u>2.0</u>	Mud Received (bbl)		Bentonite %	<u>0.8</u>	k Factor	psi		%	hhp	HSI	Jet Vel
Circulating	<u>2.0</u>	Mud Disposed (bbl)	<u>96</u>	Bentonite, ppb	<u>6.9</u>	Bit Hydraulics						
Tripping	<u>13.5</u>	<u>PLUS</u>	<u>35</u>	Drill Solids %	<u>5.5</u>	Annular Section	1	2	3	4	5	
Survey		<u>SURF</u>	<u>30</u>	Drill Solids, ppb	<u>50.2</u>	Hole Size						
Logging		<u>D/H</u>	<u>31</u>	Shale CEC, ppb	<u>-</u>	Pipe OD						
Running Casing		<u>TOTAL MUD</u>	<u>424</u>	D/B Ratio	<u>3.57</u>	Critical Velocity						
Testing		Starting Depth		High Gravity %	<u>0.3</u>	Annular Velocity						
Fishing <u>CMT</u>	<u>1.0</u>	Ending Depth		High Gravity, ppb	<u>3.7</u>	Viscosity						
<u>NOC</u>	<u>4.0</u>	New Hole Vol. (bbl)				Annular Pressure						

===== WATER BASE MUD REPORT - Day : 24 =====

M-I Drilling Fluids Company
 DRILLING FLUIDS DATA MANAGEMENT SYSTEM

- -
 Well No. : G0003

Date : 01/04/95
 Spud Date : 09/03/95

Depth : 1758.0 m
 Activity : RIG DOWN

Operator : GFE RESOURCES
 Well Name : DUNBAR 1
 Report For: KEN SMITH

Contractor : CENTURY DRILLING 11
 Field/Area : PPL 1

Description : EXPLORATION
 Location : OTWAY BASIN

Bit : 6.000 in	CASING		MUD VOLUME (bbl)	
Nozzles: / / / / / 1/32"	Casing OD : 7.000 in	Liner OD :	in	Hole Volume : 190
Drill Pipe 1 OD : 3.500 in 1758 m	Casing ID : 6.280 in	Liner ID :	in	Pits Volume : -190
Drill Pipe 2 OD : in m	Casing TD : 1209.0m	Liner TD :	m	Circulating Volume :
Drill Collar OD : in m	Casing TVD : 1209.0m	Liner TVD :	m	Mud : FW POLYMER

MUD PROPERTIES :	CIRCULATION DATA	SOLIDS ANALYSIS (% / lb/bbl)
Sample From : FL 15:00	Flow Rate -gal/min :	NaCl : 0.0 / 0
Flow Line Temp : 70 ^F	DP Annular Vel -m/min :	KCl : 0.0 / 0
Depth/TVD -m : 1758.0/1758.0	DC Annular Vel -m/min :	Low Gravity Solids : 7.2 / 66
Mud Wt -lb/gal : 9.3	DP Critical Vel -m/min : 91.3	Bentonite : 0.7 / 6
Funnel Vis -s/qt : 42 @ 70 ^F	DC Critical Vel -m/min :	Drill Solids : 6.0 / 54
Plastic Visc -cps : 20 @ 65 ^F	Circ. Pressure -psi :	Weight Material : N/A / N/A
YP/R3 -lb/100ft2 /deg : 10 / 2	Bottoms Up -min :	Chemical Conc : - / 5.0
10s/10m Gel -lb/100ft2 : 2 / 9	Total Circ Time -min :	Inert/React : 3.86 Average SG : 2.60
API F Loss -cc/30 min : 7.6		
HTHP F Loss -cc/30 min : @ ^F	PRODUCTS USED LAST 24 HOURS	SOLIDS EQUIPMENT Size Hours
Cake API/HT -1/32" : 1	Bacban 6 LB JU 1	Shaker #1 : 3 X 50 7
Solids -%vol : 7.0	Conqor 303 25 LT D 10	Shaker #2 :
Oil/Water -%vol : /93		Shaker #3 :
Sand -%vol : 1.5		Shaker #4 :
MBT -lb/bbl : 12.5		Mud Cleaner :
pH : 12.5@ 55 ^F		Centrifuge :
Alkal Mud (Pm) : 2.0		Desander : 2 X 12"
Pf/Mf : 1.8 / 2.0		Desilter : 12 X 4"
Chlorides -mg/l : 750		Degasser :
Hardness Ca : 200		
PHPA : 0.9		MUD VOLUME ACCOUNTING bbl
SULPHITE : 300		Oil Added : PLUG :46
:		Water Added : DUMP :230
:		Mud Built : TOTAL MUD :148
np Value : 0.737		Mud Received:
Kp -lb-sec^n/100ft2 : 0.32402		Mud Disposed:276
na Value : 0.588		
Ka -lb-sec^n/100ft2 : 0.81775		

Remarks :

Rig up and set cement plug #2 f/1240-1180m. RIH and tag cmt @ 1178m circ and displace hole to inhibited mud.
 Rig up and set cement plug #2 from 1240-1189m. Pull 5 stands and WOC. RIH and tag cement at 1178m. Circulate and pressure test plug to 500 psi. Minimize pit volume and circulate inhibited mud. POOH and lay out drill pipe. P & A complete. Rig down.

M-I Sales Engineer: P.MARSHALL Warehouse: ADELAIDE

Daily Cost : 622 Cumul Cost : 16957

DRILLING MUD REPORT

OPERATOR



P.O. BOX 42842 ■ HOUSTON, TEXAS 77242 USA



DRILLING MUD REPORT NO. 24	
DATE 1st APRIL 19 95	DEPTH 1758
SPUD DATE 9 MAR	PRESENT ACTIVITY RIG DOWN

OPERATOR GFE RESOURCES	CONTRACTOR CENTURY	RIG NO. 11
REPORT FOR KEN SMITH	REPORT FOR ROGER BINDON	SECTION, TOWNSHIP, RANGE ONSHORE
WELL NAME AND NO. DUNBAR #1	FIELD OR BLOCK NO.	COUNTY, PARISH OR OFFSHORE AREA OTWAY BASIN
		STATE/PROVINCE VICT.

DRILLING ASSEMBLY			CASING		MUD VOLUME (BBL)		CIRCULATION DATA			
BIT SIZE	TYPE	JET SIZE	SURFACE	HOLE	PITS	PUMP SIZE	X	IN.	ANNULAR VEL (f/min)	
			9 5/8 in. @ 312 ft	148	-				DP	DC
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	TOTAL CIRCULATING VOLUME		PUMP MAKE, MODEL		ASSUMED EFF	CIRCULATION PRESSURE (psi)	
			7 in. @ 1209 ft					%		
DRILL PIPE SIZE	TYPE	LENGTH	INTERMEDIATE	IN STORAGE	WEIGHT	bbl/stk		stk/min	BOTTOMS UP (min) (strk)	
DRILL COLLAR SIZE	LENGTH		PRODUCTION OR LINER	MUD TYPE				gal/min	TOTAL CIRC TIME (min) (strk)	
				DHPA/PAC						

MUD PROPERTIES			MUD PROPERTY SPECIFICATIONS		
Sample From	<input type="checkbox"/> FL <input checked="" type="checkbox"/> PIT	<input type="checkbox"/> FL <input type="checkbox"/> PIT	WEIGHT	VISCOSITY	
Time Sample Taken					
Flowline Temperature (°F)					
Depth (ft) (TVD	1	ft)	1758		
Weight (ppg)	<input type="checkbox"/> (lb/cu ft)	<input type="checkbox"/> (sp gr)	9.3+		
Funnel Viscosity (sec/qt) API @	°F		42		
Plastic Viscosity cp @	°F		20		
Yield Point (lb/100 ft²)			10		
Gel Strength (lb/100 ft²) 10 sec/10 min			219	1	
Filtrate API (cm³/30 min)			7.4		
API HTHP Filtrate (cm³/30 min) @	°F		-		
Cake Thickness (32nd in. API/HTHP)			1 1	1	
Solids Content (% by Vol) <input type="checkbox"/> calculated <input type="checkbox"/> retort			7.0	1	
Liquid Content (% by Vol) Oil/Water			93.0	1	
Sand Content (% by Vol)			2.0		
Methylene Blue Capacity <input type="checkbox"/> lb/bbl equiv <input type="checkbox"/> cm³/cm³ mud			12.5		
pH <input checked="" type="checkbox"/> Strip <input type="checkbox"/> Meter @	°F		12.5		
Alkalinity Mud (P _m)			8.0		
Alkalinity Filtrate (P _f /M _f)			7.8/2.0	1	
Chloride (mg/L)			750		
Total Hardness as Calcium (mg/L)			200		

RECOMMENDED TREATMENT					
- MINIMISE SUCTION PIT TO 50 LITERS AND ADD CONCOR 303, BACBAN & OS-1 (NO CHARGE, STOCK ADJUSTMENT) WHILE CIRC. ON CMT PLUG # 2					
- DUMP SURFACE VOLUME.					

REMARKS					
- LAY OUT D/P.					
- RIG UP & PUMP CMT PLUG # 2					
F/ 1240m - 1180m - PRESS TEST - OK					
POOH 5 STDS & WOC					
RIN & TAG CEMENT @ 1178m					
CIRC & PRESS TEST PLUG TO 500M OK					
DISPLACE CASED HOLE TO INHIBITED MUD. POOH & L/OUT DR					
E. O. H.					
SO₃ 300					

PRODUCT INVENTORY	CONCOR 303	BACBAN	OS-1	SOLIDS EQUIPMENT									
STARTING INVENTORY	10	5		SHAKER #1 3 x 50 mesh									
RECEIVED				SHAKER #2 1 mesh									
USED LAST 24 hr	10	1	1	MUD CLEANER _____ mesh									
CLOSING INVENTORY	-	4		CENTRIFUGE _____ hours									
COST LAST 24 hr	70	34	NO CHARGE	DESANDER _____ hours									
USED (from IADC)	512	109		DESILTER _____ hours									

M-I REPRESENTATIVE PAUL MARSHALL	PHONE 093254822	WAREHOUSE PHONE	DAILY COST \$ 622.04	CUMULATIVE COST \$ 16957.82
---	------------------------	-----------------	-----------------------------	------------------------------------


NOTICE: THIS REPORT IS SUBJECT TO THE TERMS AND CONDITIONS SET FORTH ON REVERSE SIDE HEREOF.

TIME DISTRIBUTION (hrs)		MUD VOLUME ACCOUNTING		SOLIDS ANALYSIS		MUD RHEOLOGY and HYDRAULICS					
Rig Up/Service	12.0	Water Added (bbl)		Low Gravity %		Zero Gel	Avg ROP		ECD @ _____		
Drilling		Mud Built (bbl)		Low Gravity, ppb		n Factor	% Cutting		Leak Off @ _____		
Reaming/Coring		Mud Received (bbl)		Bentonite %		k Factor	psi	%	hhp	HSI	Jet Vel
Circulating	1.0	Mud Disposed (bbl)	276	Bentonite, ppb		Bit Hydraulics					
Tripping	5.5	PLUG	46	Drill Solids %		Annular Section	1	2	3	4	5
Survey		DUMP	230	Drill Solids, ppb		Hole Size					
Logging				Shale CEC, ppb		Pipe OD					
Running Casing	0.5	TOTAL MUD	148	D/B Ratio		Critical Velocity					
Testing		Starting Depth		High Gravity %		Annular Velocity					
Fishing		Ending Depth		High Gravity, ppb		Viscosity					
WOC	5.0	New Hole Vol. (bbl)				Annular Pressure					

• APPENDIX 3

APPENDIX 3

DAILY REPORT SUMMARY OF DRILLING OPERATIONS



GFE Resources Ltd

DRILLING OPERATIONS SUMMARY

DUNBAR-1

Permit: PPL1 **Spud Date:** 10 / 05 / 1995 **Rig:** Century Rig 11
GFE Rep: K. Smith **Geologist:** D. Horner

Time **Hours** **Operations** **Page: 1**

9 / 3 / 95

0600-1700	11	Finalize rig-up. Drill rat hole and mouse hole. Pre-spud meeting with crews and service companies.
1700-1900	2	Spud in and drill 12¼" hole from 10 to 41m.
1900-1930	½	Work on generator to restore power.
1930-2000	½	Drill to 43m. Circulate and survey at 30m.
2000-2300	3	Drill 12¼" hole from 43 to 97m.
2300-2330	½	Circulate and survey at 84m.
2330-2400	½	Drill 12¼" hole from 97 to 115m.

10 / 3 / 95

0000-0100	1	Drill 12¼" hole from 115 to 142m.
0100-0130	½	Circulate and survey at 129m.
0130-0300	1½	Drill 12¼" hole from 142 to 206m.
0300-0330	½	Circulate and survey at 193m.
0330-0500	1½	Drill 12¼" hole from 206 to 263m.
0500-0530	½	Work mud ring out of annulus and flow line.
0530-0600	½	Circulate and survey at 250m.
0600-0730	1½	Drill 12¼" hole from 263 to 291m.
0730-0800	½	Clear flow-line and conductor of mud ring.
0800-0900	1	Drill 12¼" hole from 291 to 310m.
0900-0930	½	Clear flow-line and conductor of mud ring.
0930-1000	½	Drill 12¼" hole from 310 to 317m - casing point.
1000-1030	½	Circulate hole clean.
1030-1400	3½	Wiper trip to surface - strap out to top of 8" DC's. Tag 1m of fill.
1400-1430	½	Circulate hole clean. Clean flow-line and unblock cellar jet from mud ring.
1430-1500	½	Circulate hole clean prior to running casing.
1500-1700	2	Pull out of hole to run casing. Lay out 8" DC's and 12¼" stabilizer.
1700-2200	5	Rig up to run and run 9 ⁵ / ₈ " casing. Hold safety meeting.
2200-2230	½	Break collar and head up Dowell.
2230-2300	½	Circulate 120bbbls of mud through casing prior to cementing.
2300-2400	1	Pressure test and mix cement. Only 35bbbls of slurry mixed after 1 hour. Unable to mix continuously and maintain weight.

11 / 3 / 95

0000-0130	1½	Circulate cement to surface and dump. Dowell working on cement unit.
0130-0230	1	Resume cementing - run 393 sacks and displace.
0230-0600	3½	Wait on cement.
0600-0930	3½	Wait on cement.
0930-1030	1	Slack off and remove landing joint and lay out same. Lay out cementing head and conductor barrel.
1030-2000	9½	Install casing bowl, nipple up BOP's, install choke manifold and lay flare line - function BOP.
2000-2200	2	Pressure test Hydril and flare line to 1500psi, blind rams to 1000psi, pipe rams to 2500psi and 300psi and all choke manifold valves, manual and HCR valve and 2 kill line valves to 2500psi.
2200-2400	2	Make up slick 8½" BHA and run in hole - pick up 2 x 6¼" DC's and drilling jars.

12 / 3 / 95

0000-0030	½	Run in hole with 8½" BHA.
0030-0100	½	Slip 20 ft of drill line.
0100-0130	½	Run in hole - tag top of cement at 293m.
0130-0200	½	Pressure test upper and lower kelly cocks to 1000psi.
0200-0330	1½	Drill out float, cement and shoe, and drill 5m of new hole (317-322m).
0330-0400	½	Circulate hole clean.
0400-0500	1	Run formation integrity test with Dowell/Schlumberger with 8½ppg mud at 321m to 790psi - EMW 22.89ppg.
0500-0600	1	Drill 8½" hole from 322 to 348m.
0600-0830	2½	Pull out of hole to pick up stabilizer, install at 60ft and run in hole.
0830-0930	1	Drill 8½" hole from 349 to 387m.
0930-1000	½	Clear shakers (and flow-line) of balling clay, reduce bit weight and ROP for shakers to cope.
1000-1100	1	Drill 8½" hole from 387 to 406m.
1100-1130	½	Clean shakers and sand trap - cuttings too gluey to flow through sand trap - dump gate.
1130-1230	1	Drill 8½" hole from 406 to 422m.
1230-1300	½	Circulate and survey at 422m.
1300-2030	7½	Drill 8½" hole from 435 to 626m.
2030-2100	½	Circulate and survey at 613m.
2100-2400	3	Drill 8½" hole from 626 to 693m.

13 / 3 / 95

0000-0600	6	Drill 8½" hole from 693 to 818m.
0600-0630	½	Drill 8½" hole from 818 to 827m.
0630-0700	½	Circulate and survey at 814m.
0700-0800	1	Drill 8½" hole from 827 to 856m.
0800-0830	½	Circulate bottoms up prior to wiper trip to casing shoe of 29 stands.
0830-0930	1	Wiper trip first 3 stands free - then starting to pull tight.
0930-1100	1½	Pick up kelly, work to free stuck pipe and work tight hole from 579 to 559m.
1100-1330	2½	Circulate and continue pulling to shoe, work tight hole from 550 to 531m., 512 to 474m., 394 to 378m. String spiralling and twisting block line - pull 1 pass with unlocked blocks and re-pull same with locked blocks to wipe hole clean.
1330-1700	3½	Run in hole. Ream from 531 to 569m, 597 to 610m, 665 to 678m, 798 to 856m, running stands where possible - 18m. of fill.
1700-2230	5½	Drill 8½" hole from 856 to 1028m.
2230-2300	½	Circulate and survey at 1015m.
2300-2400	1	Drill 8½" hole from 1028 to 1047m.

14 / 3 / 95

0000-0600	6	Drill 8½" hole from 1047 to 1204m.
0600-0730	1½	Drill 8½" hole from 1204 to 1230m.
0730-0800	½	Circulate and survey at 1217m.
0800-1130	3½	Drill 8½" hole from 1230 to 1287m.
1130-1200	½	Circulate bottoms up prior to wiper trip.
1200-1430	2½	Wiper trip from 1287 back to 575m. - work tight hole at 905 to 847m., 790 to 770m. and 713 to 675m.
1430-1500	½	Pick up kelly and break circulation to check for plugged bit jet and to wash stabilizer blades.
1500-1630	1½	Run in hole -ream and clean from 1255 to 1287m. - 7m. of fill.
1630-2400	7½	Drill 8½" hole from 1287 to 1382m.

15 / 3 / 95

0000-0400	4	Drill 8½" hole from 1382 to 1430m.
0400-0430	½	Circulate and survey at 1417m.
0430-0600	1½	Drill 8½" hole from 1430 to 1445m.
0600-1330	7½	Drill 8½" hole from 1445 to 1507m - Drill string torqueing up.
1330-1930	6	Pull out of hole, work tight hole 1331 to 1082m with up to 40000 lbs over-pull. Approximately 230m of the tight section was wiped last trip. Picked up kelly twice to fill pipe and wash stabilizer. Stabilizer ¾" and 7/8" undergauge, bit ½" undergauge.
1930-2100	1½	Make up new bit on junk sub and run in slick BHA to casing shoe.
2100-2130	½	Slip 32 feet of drilling line.
2130-2400	2½	Run in hole -precautionary ream tight hole from 616 to 683m, 756 to 780m, 823 to 836m, and 852 to 875m, running stands where possible.

16 / 3 / 95

0000-0600	6	Continue running in hole. Precautionary reaming tight hole from 920 to 971m, 1016 to 1067m, 1092 to 1125m, 1150 to 1248m and 1283 to 1411m Running stands where possible without forcing bit into under-gauge hole.
0600-0900	3	Ream and clean tight hole from 1411 to 1507m running stands where possible.
0900-0930	½	Work junk sub at 1507m.
0930-1330	4	Drill 8½" hole from 1507 to 1557m.
1330-1530	2	Circulate geological sample at 1507m - flow check and pull back 3 stands.
1530-1700	1½	Wiper trip back to 785m - work sticky hole from 1340 to 1168m.
1700-1850	1½	Run in hole - 5m of fill.
1830-1930	1	Break circulation, clean to bottom, pull 3 stands and circulate hole clean.
1930-2000	½	Run in hole 3 stands and spot high viscosity pill on bottom 50m of hole.
2000-2130	1½	Pull out of hole - strap pipe.
2130-2200	½	Slug pipe with baryte pill.
2200-2300	1	Continue to pull out of hole.
2300-2330	½	Slip 17 feet of drilling line.
2330-2400	½	Continue to pull out of hole.

17 / 3 / 95

0000-0100	1	Pull out of hole - lay out jars.
0100-0300	2	Make up test tool.
0300-0600	3	Run in hole with test tool.
0600-0700	1	Run in hole with test tool.
0700-0800	1	Head up surface equipment, pressure test chiksans with 100psi air pressure and hold safety meeting.
0800-1000	2	Run DST-1 from 1526m to 1557m.
1000-1400	4	Rig down surface equipment, pull free and pull out of hole for suspected plugged test tool.
1400-1700	3	Break and lay-out test tool and clean same - plugged.
1700-2100	4	Make up 8½" BHA and run in hole to bridge at 1533m.
2100-2130	½	Clean out bridge at 1533 to 1535m and wash to bottom - 3m of fill.
2130-2400	2½	Circulate 5 minutes, pull 3 stands to 1493m and circulate and condition mud, run back to bottom, pump 20bbbls of 80 viscosity sweep and circulate around while conditioning mud - pull back to 1493m when sweep clear of bit.

18 / 3 / 95

0000-0200	2	Wiper trip to 977m - 1.5m of fill.
0200-0600	4	Pull out of hole for DST-2. Lay out jars, shock sub and bit.
0600-0730	1½	Make up test tools.
0730-1100	3½	Run in hole with test tool.
1100-1130	½	Head up surface equipment. Pressure test surface chiksans and hold safety meeting.
1130-1600	4½	Set packers, open tool and run DST-2 from 1526m to 1557m with Baker Tools.
1600-2000	4	Unseat packers, rig down surface equipment and pull out of hole - recover fluid samples.
2000-2230	2½	Break and lay out test tools.
2230-2400	1½	Pressure test pipe rams, choke manifold valves, HCR, manifold choke line valve and kill line valve to 2500psi and Hydril to 1000psi.

19 / 3 / 95

0000-0200	2	Make up 8½" BHA and run in hole.
0200-0300	1	Slip 40ft and cut 110ft of drilling line.
0300-0500	2	Run in hole to 1533m.
0500-0530	½	Break circulation and wash to bottom - 1.5m of fill. Work junk sub and put fresh mud spacer behind rathole mud prior to drilling ahead.
0530-0600	½	Drill 8½" hole from 1557 to 1559m.
0600-1100	5	Drill 8½" hole from 1559 to 1632m.
1100-1130	½	Circulate and survey at 1619m.
1130-2100	9½	Drill 8½" hole from 1632 to 1758m.
2100-2200	1	Circulate bottoms up.
2200-2400	2	30 stand wiper trip back to 1169m - work tight hole from 1552 to 1495m.

20 / 3 / 95

0000-0200	2	Run in hole - wiper trip, clean and wash from 1533 to 1648m. Run stands where able - 7m of fill
0200-0330	1½	Circulate hole clean.
0330-0400	½	Drop survey and pump barite pill.
0400-0600	2	Pull out of hole to log - strap drill pipe.
0600-0730	1½	Pull out of hole to log. Lay out jars - recover survey barrel - strap pipe
0730-2400	16½	Rig up BPB and run logs - Run#1 AIS/MRS/BCA/SP/GR/CAL Run#2 AST. Run#3 PDS/CNS.

21 / 3 / 95

0000-0330	3½	Continue logging Run#3 with BPB and rig down.
0330-0430	1	Make up 8½" BHA and run in hole to casing shoe.
0430-0500	½	Slip 20ft of drilling line.
0500-0600	1	Run in hole to condition for RFT.
0600-0630	½	Run in hole to 1741m.
0630-0700	½	Break circulation and ream to bottom - 4 metres of fill.
0700-0800	1	Circulate hole clean at 300gpm.
0800-0830	½	Pull out of hole.
0830-0900	½	Pick up kelly and circulate barite pill - mud out of balance - wet pipe.
0900-1200	3	Pull out of hole - lay out jars.
1200-2400	12	Rig up BPB - BPB wireline damaged picking up tools, rig down, cut and splice new socket end, run RFS-GR - unable to maintain pressure on hydraulic arm and unable to repair - run velocity survey.

22 / 3 / 95

0000-0430	4½	Run velocity survey and sidewall cores with BPB - rig down BPB.
0430-0600	1½	Run in hole to condition mud and hole.
0600-0730	1½	Run in hole to 1751m. Break circulation and clean to bottom - 3m of fill.
0730-1200	4½	Circulate and condition mud while waiting for new RFS tool.
1200-1400	2	Wiper trip back to 1176m. Run in hole - 1.5m of fill.
1400-1500	1	Circulate bottoms up.
1500-1800	3	Pull out of hole to run RFS.
1800-2400	6	Rig up BPB and run RFS-GR.

23 / 3 / 95

0000-0530	5½	Continue to run RFS-GR with BPB.
0530-0600	½	Pull out of hole to clear plugging of RFS tool.
0600-1930	13½	Run RFS with BPB - pull out and rig down BPB.
1930-2300	3½	Make up 8½" BHA and run in hole.
2300-2400	1	Break circulation and clean to bottom, 2.5m of fill, circulate hole clean and prepare casing.

24 / 3 / 95

0000-0200	2	Circulate hole clean prior to running casing and prepare casing.
0200-0600	4	Pull out of hole laying down drill pipe.
0600-0730	1½	Layout drill pipe and BHA and break Kelly.
0730-0800	½	Slip 40ft of drill-line.
0800-1030	2½	Lay out BHA.
1030-1200	1½	Change 4½" to 7" rams and rig up to run 7" casing.
1200-2130	9½	Back out swage nipple, back off 2 x 7" collars. Make up shoe and float collar and run 7" casing installing centralisers and scratchers - casing stuck at 1245m while running in Joint #105.
2130-2400	1½	Work pipe free. Make up circulating swage. Circulate casing and work from 1237 to 1248m to clean up hole.

25 / 3 / 95

0000-0330	3½	Pick up Joint #106 and try to run - unable to get past 1253m (5m in). Work casing while circulating through swage.
0330-0600	2½	Circulate and lay out three joints of casing - work each joint free first.
0600-1200	6	Continue to try to get fourth Joint out before attempting to re-run casing. Hole packed off after getting joint #102 laid out. Picked up joint #103 to re-establish circulation; worked and circulated tight hole. Laid out joints # 103 and 102. Work joint #101 at 1201 to 1197m - 240,000 lbs pull.
1200-2230	10½	Picked up joint #102 and circulated and worked down from 1201 to 1210m. Pulled up with 250,000 lbs and lost 10 inches of down travel at 1210m end.
2230-2300	½	Slip 20 feet of drilling line.
2300-2400	1	Continue to work casing down at 1210m.

26 / 3 / 95

0000-0100	1	Head up casing with Dowell cement head and load plugs.
0100-0200	2	Circulate casing at 260 gpm - no losses. Hold cementing safety meeting with Dowell and rig crew.
0200-0400	2	Mix and run cement with Dowell Schlumberger and cement casing at 1209.32m.
0400-0430	½	Set 7" slip and assembly in casing bowl.
0430-0600	1½	Nipple down BOP's.
0600-0830	2½	Nipple down BOP and raise stack - slup and seal not level, re-seat - cut casing and lay out.
0830-0930	1	Lay out flow nipple and lift stack and dress casing stub at 6" (7" of clearance in spool).
0930-1130	2	Install tubing spool and lay out spacer spool.
1130-1500	3½	Nipple up BOP's.
1500-1730	2½	Change 7" casing rams to 3½" pipe rams.
1730-1900	1½	Energize 'X' bushing and pressure test to 3,000 psi with hydraulic hand pump.
1900-2000	1	Cut 84 feet of drilling line.
2000-2200	2	Lay out kelly bushing, kelly spinner and kelly.
2200-2400	2	General maintenance while waiting on cement and waiting on 3½" drill string.

27 / 3 / 95

0000-0600	6	General maintenance to rig while waiting on cement and waiting on 3½" drill string.
0600-2400	18	Standby with crew while waiting on 3½" drill string - test casing to 1,000 psi against blind rams and HCR valve for 15 minutes with Dowell/Schlumberger - OK.

28 / 3 / 95

0000-0600	6	Stand by with crew.
0600-2400	18	Standby with crew while waiting on 3½" drill string.

29 / 3 / 95

0000-0600	6	Standby with crew while waiting on 3½" drill string.
0600-2330	17½	Standby with crew while waiting on 3½" drill string.
2330-2400	½	Unload tubulars and handling equipment.

30 / 3 / 95

0000-0130	1½	Unload tubulars.
0130-0230	1	Pick up and make up kelly and kelly cock and install kelly bushing.
0230-0300	½	Pick up joint of 3½" drill pipe and make up 7" cup tester.
0300-0600	3	Pressure test pipe rams, all choke manifold valves, HCR valve, manual valve and kill-line valves to 300psi - chase and repair leaks.
0600-0700	1	Continue pressure testing pipe rams and pressure test Hydril to 1500psi. Load racks and sort pipe.
0700-0830	1½	Pick up 4¾" drill collars and make up 6" BHA.
0830-1530	7	Pick up 3½" drill pipe and run in hole. Tag cement at 1102m.
1530-1600	½	Hold meeting with crews on drill-out procedure. Pick up kelly and make up kelly cock and saver sub.
1600-1700	1	Pressure test upper and lower kelly cocks and stabbing valve to 1500psi.
1700-1730	½	Repair blockage in air line to koomey remote control.
1730-1800	½	Circulate through choke prior to drilling out.
1800-2400	6	Drill out cement from 1102 to 1196m.

31 / 3 / 95

0000-0100	1	Drill out shoe track to 1209m - flow check.
0100-0200	1	Precautionary ream from 1209m to 1265m.
0200-0230	½	Circulate bottoms up.
0230-0300	½	Run in hole, ream from 1264m to 1274m, run in hole to 1302m.
0300-0330	½	Circulate 1½ times hole volume.
0330-0600	2½	Run in hole, flow check every 10 stands, break circulation every 15 joints.
0600-0630	½	Run in hole to TD with flow check every ten stands - 2.5 metres of fill. Circulate.
0630-0730	1	Circulate two times hole volume at 300gpm.
0730-1030	3	Pull out of hole.
1030-1230	2	Lay out 4¾" drill collars and break out bit and bit sub.
1230-1530	3	Run in hole with open-ended drill pipe.
1530-1600	½	Head up to run cement plugs and circulate - wrong crossover sub.
1600-1700	1	Pick up kelly, prime pumps and circulate prior to running plug #1.
1700-1800	1	Pressure test line and run cement plug #1 from 1610 to 1440m with 200 sacks class 'G' cement through kelly.
1800-1830	½	Pull back 12 stands.
1830-2330	5	Wait on cement - circulate and lay out excess pipe. Run in hole nine stands and tag plug #1 at 1437m.
2330-2400	½	Circulate pipe clear after tagging plug.

1 / 4 / 95

0000-0030	½	Lay out 21 singles and run in hole one stand to 1240m.
0030-0130	1	Pick up kelly, circulate and run plug #2 from 1240 to 1180m.
0130-0600	4½	Pull out of hole five stands and circulate at 1144m while waiting on cement.
0600-0700	1	Circulate at 1144m while waiting on cement plug #2.
0700-0730	½	Run in hole and tag plug #2 at 1178m.
0730-0830	1	Circulate, pressure test plug to 500psi -OK, mix and circulate inhibited mud.
0830-0930	1	Pull out of hole laying out 3½" drill pipe.
0930-1100	1½	Break and lay out 3½" kelly and swivel.
1100-1200	1	Continue to lay out drill pipe.
1200-1500	3	Re-reeve fast line over crown with sand line. Slip 205ft of drilling line and cut 189ft after travelling block dropped on floor (refer to separate report).
1500-1730	2½	Finish laying out 3½" drill pipe.
1730-1800	½	Load last of 3½" (rental) drill pipe and handling equipment for return to Perth.
1800-2230	4½	Tear out BOP's and clean mud tank.
2230-2400	1½	Lay out studded adaptor flange. Grease tubing hanger seat. Install new adaptor flange, recover Cameron valve and install with top flange and bull plug. Release rig at 2400hrs. FINAL REPORT.

APPENDIX 4

APPENDIX 4

A: CUTTING DESCRIPTIONS

**B: DAILY REPORT
LITHOLOGICAL DESCRIPTIONS**



CUTTINGS DESCRIPTION

GFE Resources Ltd

WELL NAME:	DUNBAR - 1	DATE:	16 January, 1996
GEOLOGIST:	D.Horner	PAGE:	1

Interval (m)	%	Description
6-10	100	Calcarenite: orange, very fine to fine grained, sucrosic texture, common shell fragments and forams, common red brown iron oxide rich calcilutite, friable, good visual porosity.
10-15	100	Calcarenite: as for 6 to 10m.
15-20	100	Calcarenite: as for 6 to 10m.
20-25	30	Calcarenite: as for 6 to 10m.
	40	Calcarenite: light grey, very fine to fine grained, slightly to very argillaceous, common shell fragments, common forams, friable, poor visual porosity.
	30	Marl: medium grey, very calcareous grading to calcilutite, firm, non fissile.
25-30	10	Calcarenite: orange, very fine to fine grained, sucrosic texture, common shell fragments and forams, common red brown iron oxide rich calcilutite, friable, good visual porosity.
	60	Calcarenite: light grey, very fine to fine grained, slightly to very argillaceous, common shell fragments, common forams, friable, poor visual porosity.
	30	Marl: medium grey, very calcareous grading to calcilutite, firm, non fissile.
30-35	20	Marl: as for 25 to 30m.
	80	Calcarenite: light grey to yellow to orange to brown, very fine grained, often lutitic and very iron oxide rich, otherwise fine grained with common fossil fragments, trace glauconite, friable to moderately hard, poor visual porosity.
35-40	30	Marl: as for 25 to 30m.
	70	Calcarenite: as for 30 to 35m.
40-45	100	Calcarenite: light grey, occasionally yellow orange, fine grained, common fossil fragments including bivalves, gastropods, forams, sponge spicules, echinoid spines and bryozoa, trace grey chert, trace glauconite, trace black carbonaceous detritus, friable to moderately hard, poor visual porosity.
45-50	100	Calcarenite: as for 40 to 45m.
50-55	100	Calcarenite: very light grey, fine grained, trace fossil fragments as for 40 to 45m, slightly argillaceous, trace glauconite, trace medium grey marl, friable, poor visual porosity.
55-60	100	Calcarenite: as for 50 to 55m. but with common fossil fragments.
60-65	100	Calcarenite: very light grey, fine grained, slightly argillaceous, common fossil fragments including bivalves, gastropods, forams, sponge spicules, echinoid spines and bryozoa, trace grey chert, trace glauconite, trace black carbonaceous detritus, rare pyrite, friable to moderately hard, poor visual porosity.

65-70	100	<u>Calcarenite</u> : as for 60 to 65m.
70-75	100	<u>Calcarenite</u> : as for 60 to 65m. but with fossil fragments increasing to common to abundant.
75-80	90	<u>Calcarenite</u> : as for 70 to 75m.
	10	<u>Marl</u> : medium grey, very calcareous grading to calcilutite, firm, non fissile.
80-85	90	<u>Calcarenite</u> : as for 70 to 75m. becoming light grey with increasing argillaceous content.
	10	<u>Marl</u> : as for 75 to 80m.
85-90	90	<u>Calcarenite</u> : light grey, fine grained, slightly to occasionally very argillaceous, common fossil fragments including bivalves, gastropods, forams, sponge spicules, echinoid spines and bryozoa, trace grey chert, trace glauconite, trace black carbonaceous detritus, rare pyrite, friable to moderately hard, poor visual porosity.
	10	<u>Marl</u> : as for 75 to 80m.
90-95	100	<u>Calcarenite</u> : as for 85 to 90m.
	trace	<u>Marl</u> : medium grey, very calcareous grading to calcilutite, firm, non fissile.
95-100	100	<u>Calcarenite</u> : as for 85 to 90m.
	trace	<u>Marl</u> : as for 90 to 95m.
100-105	100	<u>Calcarenite</u> : light grey, very fine to fine grained, slightly to moderately argillaceous, trace fossil fragments, rare glauconite, trace black carbonaceous detritus, friable, poor visual porosity.
105-110	100	<u>Calcarenite</u> : as for 100 to 105m.
110-115	100	<u>Calcarenite</u> : as for 100 to 105m.
115-120	20	<u>Calcarenite</u> : as for 100 to 105m. but becoming finer grained and very calcilutitic.
	80	<u>Marl</u> : medium grey, very calcareous, common fossil fragments including bivalves, gastropods, forams, bryozoa, sponge spicules and echinoid spines, trace glauconite, rare dispersed quartz sand grains, very soft, sticky, non fissile.
120-125	10	<u>Calcarenite</u> : as for 115 to 120m.
	90	<u>Marl</u> : as for 115 to 120m.
125-130	100	<u>Marl</u> : as for 115 to 120m. with trace pyrite.
130-135	100	<u>Marl</u> : medium grey, very calcareous, common fossil fragments including bivalves, gastropods, forams, bryozoa, sponge spicules and echinoid spines, trace glauconite, rare dispersed quartz sand grains, rare pyrite, very soft, sticky, non fissile.
135-140	100	<u>Marl</u> : as for 130 to 135m but with trace black carbonaceous detritus.
140-150	80	<u>Marl</u> : as for 130 to 135m.
	20	<u>Calcarenite</u> : light grey, very fine to fine grained, slightly to moderately argillaceous, trace fossil fragments, rare glauconite, trace black carbonaceous detritus, friable, poor visual porosity.
150-155	100	<u>Marl</u> : medium grey, very calcareous, abundant fossil fragments including bivalves, gastropods, forams, bryozoa, sponge spicules and echinoid spines, rare glauconite, rare dispersed quartz sand grains, trace pyrite, very soft, sticky, non fissile.

Interval (m)	%	Description	PAGE: 3
155-160	100	Marl: as for 150 to 155m.	
160-165	100	Marl: as for 150 to 155m.	
165-170	100	Marl: as for 150 to 155m. with abundant forams.	
170-175	100	Marl: medium grey, very calcareous, abundant fossil fragments including bivalves, gastropods, forams, bryozoa, sponge spicules and echinoid spines, rare glauconite, rare dispersed quartz sand grains, trace pyrite, very soft, sticky, non fissile.	
175-180	100	Marl: as for 170 to 175m.	
180-185	100	Marl: as for 170 to 175m.	
185-190	100	Marl: as for 170 to 175m.	
190-195	100	Marl: as for 170 to 175m.	
195-200	100	Marl: as for 170 to 175m.	
200-205	100	Marl: as for 170 to 175m.	
205-210	100	Marl: medium grey, occasionally medium green grey, occasionally medium brown grey, moderately to very calcareous, abundant fossil fragments including bivalves, gastropods, forams, bryozoa, sponge spicules and echinoid spines, rare dispersed very fine quartz sand grains, trace pyrite, very soft, sticky, non fissile.	
210-215	100	Marl: as for 205 to 210m.	
215-220	100	Marl: as for 205 to 210m.	
220-225	100	Marl: as for 205 to 210m. but with common pyrite replaced fossil fragments.	
225-230	100	Marl: as for 205 to 210m.	
230-235	100	Marl: as for 205 to 210m.	
235-240	100	Marl: medium grey, occasionally medium green grey, occasionally medium brown grey, moderately to very calcareous, abundant fossil fragments including bivalves, gastropods, forams, bryozoa, sponge spicules and echinoid spines, rare dispersed very fine quartz sand grains, trace pyrite, trace pyrite replaced fossil fragments, very soft, sticky, non fissile.	
240-245	100	Marl: as for 235 to 240m.	
245-250	100	Marl: as for 235 to 240m.	
250-255	100	Marl: as for 235 to 240m.	
255-260	100	Marl: as above, medium grey, occasionally medium green grey, occasionally medium brown grey, moderately to very calcareous, abundant fossil fragments including bivalves, gastropods, forams, bryozoa, sponge spicules and echinoid spines, rare dispersed very fine quartz sand grains, trace pyrite, trace pyrite replaced fossil fragments, very soft, sticky, non fissile.	
260-265	100	Marl: medium grey to medium green grey, occasional medium brown grey, abundant fossil fragments including gastropods, forams, bivalves, bryozoa, sponge spicules and echinoid spines, trace pyrite occasionally as fossil replacement, trace micromica, trace clear very fine to coarse quartz sand grains, very soft, sticky, non fissile.	
265-270	100	Marl: as for 260 to 265m.	
270-280	100	Marl: as for 260 to 265m.	

Interval (m)	%	Description	PAGE: 4
280-290	100	<u>Marl</u> : as for 260 to 265m.	
290-295	100	<u>Marl</u> : as above, medium grey to medium green grey, occasionally medium brown grey, abundant fossil fragments including gastropods, forams, bivalves, bryozoa, sponge spicules and echinoid spines, trace pyrite occasionally as fossil replacement, trace micromica, trace clear very fine to coarse quartz sand grains, very soft, sticky, non fissile.	
295-300	100	<u>Marl</u> : as for 290 to 295m.	
300-305	100	<u>Marl</u> : as for 290 to 295m. but with trace black carbonaceous material.	
305-310	100	<u>Marl</u> : as for 290 to 295m.	
310-315	100	<u>Marl</u> : as for 290 to 295m.	
315-317	100	<u>Marl</u> : as above, medium green grey, often medium grey, occasionally medium brown grey, abundant fossil fragments including gastropods, forams, bivalves, bryozoa, sponge spicules and echinoid spines, trace pyrite occasionally as fossil replacement, trace micromica, trace clear very fine to coarse quartz sand grains, very soft, sticky, non fissile.	
317-325	100	<u>Marl</u> : medium green grey, often medium grey, occasionally medium brown grey, common fossil fragments including gastropods, forams, bivalves, bryozoa, sponge spicules and echinoid spines, trace pyrite occasionally as fossil replacement, trace micromica, trace clear very fine to coarse quartz sand grains, very soft, sticky, non fissile.	
325-330	100	<u>Marl</u> : as for 317 to 325m.	
330-335	100	<u>Marl</u> : as for 317 to 325m.	
335-340	100	<u>Marl</u> : as for 317 to 325m.	
340-345	100	<u>Marl</u> : as for 317 to 325m.	
345-348	100	<u>Marl</u> : as above, medium green grey to medium grey, occasionally medium brown grey, common fossil fragments including gastropods, forams, bivalves, bryozoa, sponge spicules and echinoid spines, trace pyrite occasionally as fossil replacement, trace micromica, trace clear very fine to coarse quartz sand grains, very soft, sticky, non fissile.	
348-355	100	<u>Marl</u> : medium grey, often medium green grey, occasionally medium brown grey, common fossil fragments including gastropods, forams, bivalves, bryozoa, sponge spicules and echinoid spines, trace pyrite occasionally as fossil replacement, trace micromica, trace clear very fine to coarse quartz sand grains, very soft, sticky, non fissile.	
355-360	100	<u>Marl</u> : as for 348 to 355m.	
360-365	100	<u>Marl</u> : as for 348 to 355m.	
365-370	100	<u>Marl</u> : as for 348 to 355m. Very poor samples due to clay encapsulation by PHPA. and from shaker screen blinding.	
370-385	100	<u>Marl</u> : as for 348 to 355m.	
385-390	100	<u>Marl</u> : as for 348 to 355m.	
390-395	100	<u>Marl</u> : medium green grey, often medium grey, occasionally medium brown grey, common fossil fragments including gastropods, forams, bivalves, bryozoa, sponge spicules and echinoid spines, trace pyrite occasionally as fossil replacement, trace micromica, trace clear very fine to coarse quartz sand grains, trace black carbonaceous matter, very soft, sticky, non fissile.	
395-405	100	<u>Marl</u> : as for 390 to 395m, rare brown calcarenitic material.	
405-410	100	<u>Marl</u> : as for 390 to 395m.	

Interval (m)	%	Description	PAGE: 5
410-415	100	Marl: as above, medium green grey, often medium grey, occasionally medium brown grey, common fossil fragments including gastropods, forams, bivalves, bryozoa, sponge spicules and echinoid spines, trace pyrite occasionally as fossil replacement, trace micromica, trace clear very fine to coarse quartz sand grains, trace black carbonaceous matter, very soft, sticky, non fissile.	
415-420	100	Calcarenite: orange brown, very fine to very coarse grained, abundant dark brown iron oxide pellets, abundant light to medium orange brown iron oxide stained bryozoa, trace to common shell fragments, echinoid spines and sponge spicules, common brown iron oxide stained very fine to very coarse frosted subrounded to well rounded quartz grains, weak cryptocrystalline calcareous cement, friable to moderately hard, poor inferred porosity, no oil fluorescence.	
420-425	30	Calcarenite: off white to light yellow to orange to brown, occasionally yellow green, often very lutitic, common bryozoa fragments, trace forams, echinoid spines, sponge spicules and shell fragments, trace dark brown very fine to occasionally very coarse iron oxide pellets, trace brown very fine to occasionally very coarse iron oxide stained frosted subrounded to well rounded quartz grains, friable, very poor visual porosity, no oil fluorescence.	
425-435	70	Marl: medium to dark brown, trace to common medium grey to medium green grey, common bryozoa, trace shell fragments, forams, echinoid spines and sponge spicules, common pyrite, trace dark green to black glauconite, common very fine clear quartz grains, very soft, sticky, non fissile.	
435-440	100	Marl: medium to dark brown, trace to common medium grey to medium green grey, common bryozoa, trace shell fragments, forams, echinoid spines and sponge spicules, common pyrite, trace dark green to black glauconite, common very fine clear quartz grains, very soft, sticky, non fissile.	
440-445	100	Marl: as for 435 to 440m. but with increasing dispersed very fine to occasionally fine clear quartz sand grains.	
445-450	100	Marl: as for 440 to 445m.	
450-455	100	Marl: as for 435 to 440m.	
455-460	100	Marl: medium to dark brown, common medium grey, trace medium green grey, common bryozoa, trace shell fragments, forams, echinoid spines and sponge spicules, common pyrite grading to marcasite, trace dark green to black glauconite, common very fine clear quartz grains, very soft, sticky, non fissile.	
460-470	100	Marl: as for 455 to 460m.	
470-480	100	Marl: medium brown, trace medium grey to medium green grey, common bryozoa, trace shell fragments, forams, echinoid spines and sponge spicules, common pyrite grading to marcasite, trace dark green to black glauconite, common very fine clear quartz grains, very soft, sticky, non fissile.	
480-485	100	Marl: as for 470 to 480m. but with quartz sand grains decreasing to trace.	
485-490	100	Marl: as for 470 to 480m but with common to abundant pyrite.	
490-495	100	Marl: medium brown, trace medium grey to medium green grey, common bryozoa, trace shell fragments, forams, echinoid spines and sponge spicules, common pyrite grading to marcasite, trace dark green to black glauconite, trace very fine clear quartz grains, very soft, sticky, non fissile.	
495-500	100	Marl: as for 490 to 495m.	
500-505	100	Marl: as for 490 to 495m. but with glauconite increasing to common.	

505-510	100	<u>Marl</u> : as for 490 to 495m.
510-515	50	<u>Sandstone</u> : medium brown, very fine to grit, dominantly medium, very poorly sorted, subangular to rounded, weak calcareous cement, weak silica cement, abundant white calcilutite matrix in part, abundant medium to dark brown argillaceous and silt matrix, strong brown stain on quartz grains, common glauconite, friable, very poor inferred porosity, no oil fluorescence.
	50	<u>Claystone</u> : medium to dark brown, non to occasionally very calcareous, very silty in part, abundant dispersed quartz grains in part grading to argillaceous sandstone, common glauconite, trace micromica, trace pyrite, soft, non fissile.
515-520	60	<u>Sandstone</u> : as for 510 to 515m. but becomin less calcareous.
	40	<u>Claystone</u> : as for 510 to 515m.
520-530	70	<u>Sandstone</u> : medium brown, very fine to grit, dominantly very coarse, subangular to rounded, very poorly sorted, occasionally moderate calcareous cement, weak silica cement, occasionally abundant white calcilutitic matrix, abundant medium to dark brown argillaceous and silt matrix, trace black carbonaceous detritus, trace glauconite, trace dark brown iron oxide pellets, strong brown stain on quartz grains, friable to occasionally moderately hard, very poor inferred porosity, no oil fluorescence.
	30	<u>Claystone</u> : as for 510 to 515m.
530-540	80	<u>Sandstone</u> : as for 520 to 530m. but with calcareous content decreasing to trace.
	20	<u>Claystone</u> : medium to dark brown, non to slightly calcareous, very silty in part, abundant dispersed quartz grains in part grading to argillaceous sandstone, trace glauconite, trace micromica, trace pyrite, soft, non fissile.
540-550	60	<u>Sandstone</u> : medium brown, very fine to very coarse, dominantly fine to medium, angular to rounded, dominantly subrounded, poorly sorted, weak silica and calcareous cements, abundant medium brown to dark brown argillaceous and silt matrix - matrix supported grading to arenaceous claystone, weak to strong brown stain on quartz grains, trace dark brown iron oxide pellets, trace black lithics, friable, very poor visual porosity.
	40	<u>Claystone</u> : as for 530 to 540m.
550-560	30	<u>Sandstone</u> : as for 540 to 550m. but becoming dominantly coarse grained.
	70	<u>Claystone</u> : medium to dark brown, very silty, abundant dispersed very fine to grit brown stained quartz grains, moderately calcareous in part, trace marcasite, occasionally black and very carbonaceous, trace micromica, soft, very dispersive, non fissile.
560-570	80	<u>Sandstone</u> : light to medium brown, very fine to grit, dominantly medium, subangular to rounded, poorly sorted, weak silica cement, abundant medium to dark brown argillaceous and silt matrix - matrix supported, trace brown to black iron oxide pellets, trace black carbonaceous detritus, friable, very poor visual porosity, no oil fluorescence.
	20	<u>Claystone</u> : medium to dark brown, very silty, abundant dispersed very fine to very coarse light brown stained quartz grains, trace marcasite, occasionally black and very carbonaceous, trace micromica, trace muscovite flakes, soft, very dispersive, non fissile.
570-580	80	<u>Sandstone</u> : light brown grey, very fine to very coarse, dominantly medium, subangular to subrounded, moderately sorted, weak silica cement, abundant medium to dark brown argillaceous and silt matrix, clear to light orange brown stained quartz grains, trace pyrite, trace muscovite flakes, trace green grey cherty lithics, friable, poor visual porosity, no oil fluorescence.
	20	<u>Claystone</u> : as for 560 to 570m.
580-585	80	<u>Sandstone</u> : as for 570 to 580m. but with common muscovite flakes.
	20	<u>Claystone</u> : as for 560 to 570m.

585-595	70	Sandstone: light brown grey, very fine to very coarse, dominantly coarse, subangular to subrounded, moderately sorted, weak silica cement, abundant medium to dark brown argillaceous and silt matrix, clear to light orange brown stained quartz grains, trace pyrite, common muscovite flakes, trace green grey cherty lithics, friable, poor visual porosity, no oil fluorescence.
	30	Claystone: medium to dark brown, very silty, abundant dispersed very fine to very coarse light brown stained quartz grains, trace marcasite, occasionally black and very carbonaceous, trace micromica, trace muscovite flakes, soft, very dispersive, non fissile.
595-605	70	Sandstone: as for 585 to 595m.
	30	Claystone: as for 585 to 595m.
605-615	50	Sandstone: light brown grey, very fine to grit, dominantly very coarse, subangular to subrounded, very poorly sorted, weak silica cement, abundant medium to dark brown argillaceous and silt matrix, clear to light orange brown stained quartz grains, trace pyrite, common muscovite flakes, trace green grey cherty lithics, friable, poor visual porosity, no oil fluorescence.
	50	Claystone: medium to dark brown, very silty, abundant dispersed very fine to very coarse light brown stained quartz grains, trace marcasite, common pyrite, occasionally black and very carbonaceous, trace micromica, trace muscovite flakes, soft, very dispersive, non fissile.
615-625	10	Sandstone: as for 605 to 615m.
	90	Claystone: medium to dark brown, occasionally dark grey and very carbonaceous, nil to abundant dispersed very fine to grit quartz sand grains, common pyrite occasionally grading to marcasite, trace micromica, soft, very dispersive, non fissile.
625-635	10	Sandstone: as for 605 to 615m.
	90	Claystone: as for 615 to 625m.
635-645	100	Claystone: as for 615 to 625m.
645-655	90	Claystone: as for 615 to 625m.
	10	Sandstone: as for 605 to 615m.
655-665	50	Sandstone: light brown grey, very fine to grit, dominantly very coarse, subangular to subrounded, very poorly sorted, weak silica cement, trace strong medium brown cryptocrystalline dolomite cement, abundant medium to dark brown argillaceous and silt matrix, clear to light orange brown stained quartz grains, trace pyrite, common muscovite flakes, trace green grey cherty lithics, friable, poor visual porosity, no oil fluorescence.
	50	Claystone: medium to dark brown, occasionally dark grey and very carbonaceous, nil to abundant dispersed very fine to grit quartz sand grains, slightly calcareous in part, common pyrite occasionally grading to marcasite, trace micromica, soft, very dispersive, non fissile.
665-675	100	Claystone: medium to dark brown, occasionally very dark grey and very carbonaceous, very silty, nil to often abundant dispersed very fine to grit subrounded to rounded brown stained quartz grains, trace fossil fragments, non to occasionally moderately calcareous, trace pyrite grading to marcasite, trace micromica, rare glauconite, soft, very dispersive, non fissile.
	Trace	Sandstone: as for 655 to 665m.
675-680	90	Claystone: as for 665 to 675m.
	10	Sandstone: as for 655 to 665m.
680-690	90	Claystone: as for 665 to 675m.

	10	Sandstone: as for 655 to 665.
690-700	80	Claystone: medium to dark brown, trace very dark grey and very carbonaceous, very silty, nil to often abundant dispersed very fine to grit subrounded to rounded brown stained quartz grains, trace fossil fragments, non to occasionally very calcareous, trace pyrite grading to marcasite, trace micromica, trace glauconite, soft, very dispersive, non fissile.
	20	Sandstone: as for 655 to 665m.
700-710	60	Claystone: as for 690 to 700m.
	40	Sandstone: light to medium brown, very fine to grit, dominantly coarse, subangular to occasionally rounded, very poorly sorted, weak silica and rare pyrite cement, abundant medium to dark brown argillaceous and silt matrix - matrix supported, trace with off white calcilutite matrix, rare green grey cherty lithics, rare muscovite flakes, weak brown stain on quartz grains, trace yellow quartz grains, friable, very poor visual porosity, no oil fluorescence.
710-715	90	Sandstone: light to medium brown, very fine to grit, dominantly medium to coarse, subangular to occasionally rounded, very poorly sorted, weak silica and rare pyrite cement, strong dolomite cement in part, abundant medium to dark brown argillaceous and silt matrix - matrix supported, trace with off white calcilutite matrix, rare green grey cherty lithics, rare muscovite flakes, weak brown stain on quartz grains, trace yellow quartz grains, friable, very poor visual porosity, no oil fluorescence.
	10	Claystone: as for 690 to 700m.
715-720	60	Sandstone: as for 710 to 715m. but becoming dominantly coarse grained.
	40	Claystone: medium to dark brown, trace very dark grey and very carbonaceous, very silty, nil to often abundant dispersed very fine to grit subrounded to rounded brown stained quartz grains, trace fossil fragments, non to occasionally very calcareous, trace medium brown cryptocrystalline dolomite, trace pyrite grading to marcasite, trace micromica, trace glauconite, soft, very dispersive, non fissile.
720-725	80	Sandstone: light to medium brown, very fine to grit, dominantly medium to coarse, subangular to occasionally rounded, very poorly sorted, weak silica and rare pyrite cement, strong dolomite cement in part, abundant medium to dark brown argillaceous and silt matrix - matrix supported, trace with off white calcilutite matrix, rare green grey cherty lithics, rare muscovite flakes, weak brown stain on quartz grains, trace yellow quartz grains, friable, very poor visual porosity, no oil fluorescence.
	20	Claystone: as for 715 to 720m.
725-730	80	Claystone: as for 715 to 720m.
	20	Sandstone: as for 720 to 725m.
730-740	70	Sandstone: as for 720 to 725m.
	30	Claystone: as for 715 to 720m. but with glauconite increasing to trace to common.
740-745	70	Sandstone: light to medium brown, very fine to grit, dominantly coarse to very coarse, subangular to occasionally rounded, very poorly sorted, weak silica and rare pyrite cement, trace strong dolomite cement, abundant medium to dark brown argillaceous and silt matrix - matrix supported, trace with off white calcilutite matrix, rare green grey cherty lithics, rare muscovite flakes, weak brown stain on quartz grains, trace yellow quartz grains, friable, very poor visual porosity, no oil fluorescence.
	30	Claystone: medium to dark brown, trace very dark grey and very carbonaceous, very silty, nil to often abundant dispersed very fine to grit subrounded to rounded brown stained quartz grains, trace fossil fragments, non to occasionally very calcareous, trace medium brown cryptocrystalline dolomite, trace pyrite grading to marcasite, trace micromica, trace glauconite, trace to occasionally common black carbonaceous matter, soft, very dispersive, non fissile.

Interval (m)	%	Description	PAGE: 9
745-760	60	<u>Claystone</u> : as for 740 to 745m.	
	40	<u>Sandstone</u> : as for 740 to 745m.	
760-765	90	<u>Claystone</u> : as for 765 to 770m. but with common pyrite.	
	10	<u>Sandstone</u> : light brown, very fine to fine, occasional medium to grit sized grains, subangular to rounded, dominantly subrounded, poorly sorted, weak silica cement, rare brown dolomite and calcareous cements, abundant medium to dark brown argillaceous and silt matrix - matrix supported, rare green grey cherty lithics, trace muscovite flakes, friable, very poor visual porosity, no oil fluorescence.	
765-770	95	<u>Claystone</u> : medium to dark brown, very silty, common to abundant dispersed very fine to fine quartz sand grains, trace dispersed medium to grit sized quartz sand grains, common pyrite, trace glauconite, trace fossil fragments, slightly calcareous in part, trace black carbonaceous material, trace micromica, soft, very dispersive, non fissile.	
	5	<u>Sandstone</u> : as for 760 to 765m.	
770-775	100	<u>Claystone</u> : as for 765 to 770m.	
775-780	100	<u>Claystone</u> : as for 765 to 770m.	
780-785	100	<u>Claystone</u> : medium to dark brown, very silty, common to abundant dispersed very fine to fine quartz sand grains, trace dispersed medium to grit sized quartz sand grains, common pyrite, trace glauconite, trace fossil fragments, slightly calcareous in part, trace medium brown cryptocrystalline dolomite, trace black carbonaceous material, trace micromica, soft, very dispersive, non fissile.	
	Trace	<u>Sandstone</u> : as for 760 to 765m.	
785-790	100	<u>Claystone</u> : as for 780 to 785.	
790-795	100	<u>Claystone</u> : as for 780 to 785m.	
795-805	100	<u>Claystone</u> : as for 780 to 785m.	
805-815	90	<u>Claystone</u> : medium to dark brown, very silty, common to abundant dispersed very fine to fine quartz sand grains, trace dispersed medium to grit sized quartz sand grains, common pyrite, trace glauconite, trace fossil fragments, slightly calcareous in part, trace medium brown cryptocrystalline dolomite, trace black carbonaceous material, trace micromica, soft, very dispersive, non fissile.	
	10	<u>Sandstone</u> : medium brown, very fine to grit, dominantly very coarse, subangular to rounded, dominantly subrounded, very poorly sorted, occasional strong calcareous cement, abundant medium brown argillaceous and silt matrix - matrix supported, trace brown stain on quartz grains, trace pyrite, friable, very poor visual porosity, no oil fluorescence.	
815-825	90	<u>Claystone</u> : as for 805 to 815m.	
	10	<u>Sandstone</u> : medium brown, very fine to grit, dominantly very coarse, subangular to rounded, dominantly subrounded, very poorly sorted, occasional strong calcareous and medium brown cryptocrystalline dolomite cements, abundant medium brown argillaceous and silt matrix - matrix supported, trace brown stain on quartz grains, trace pyrite, friable, very poor visual porosity, no oil fluorescence.	
825-835	90	<u>Sandstone</u> : light brown, very fine to grit, dominantly very coarse, subangular to subrounded, very poorly sorted, weak silica cement, trace to common medium brown argillaceous and silt matrix, trace white argillaceous matrix, trace to common yellow to brown quartz grains, trace green clay lithics, friable, fair visual porosity, no oil fluorescence.	
	10	<u>Claystone</u> : medium to dark brown, very silty, occasionally iron oxide rich, abundant dispersed very fine to grit quartz sand grains, common pyrite, trace glauconite, slightly calcareous in part, trace black carbonaceous material, soft, very dispersive, non fissile.	

835-845	90	Sandstone: as for 825 to 835m.
	10	Claystone: as for 825 to 835m.
845-855	90	Sandstone: light to medium brown, very fine to coarse, dominantly medium, subangular to subrounded, moderately sorted, moderate silica cement, abundant medium brown argillaceous and silt matrix, quartz grain stained yellow-brown, rare dark brown iron oxide pellets, friable, fair visual porosity, no oil fluorescence.
	10	Claystone: as for 825 to 835m.
855-865	90	Sandstone: light to medium brown, very fine to very coarse, dominantly coarse, subangular to subrounded, moderately sorted, moderate silica cement, abundant medium brown argillaceous and silt matrix, quartz grain stained yellow-brown, rare dark brown iron oxide pellets, friable, fair visual porosity, no oil fluorescence.
	10	Claystone: medium to dark brown, very silty, abundant dispersed very fine to very coarse brown stained quartz grains, trace pyrite, trace micromica, firm, very dispersive, non fissile.
865-875	20	Sandstone: as for 855 to 865m.
	80	Claystone: dark brown to dark grey, very silty, abundant dispersed very fine to very coarse brown stained quartz grains, trace pyrite, trace micromica, firm, very dispersive, non fissile.
875-885	80	Sandstone: light orange grey, very fine to pebbly, dominantly coarse, subangular to subrounded, very poorly sorted, weak silica cement, common medium brown argillaceous and silt matrix in part, common yellow quartz grains, trace to common grey green cherty lithics, trace pyrite, friable, fair to good visual porosity, no oil fluorescence.
	20	Claystone: medium to dark grey, often very fine to pebble dispersed quartz grains, very silty, trace micromica, common pyrite, firm, very dispersive, slightly subfissile.
885-895	100	Sandstone: very light orange grey, very fine to pebbly, dominantly grit, subangular to subrounded, moderately to well sorted, weak silica cement, trace medium brown argillaceous and silt matrix, common yellow quartz grains, common grey green and trace red cherty lithics, trace pyrite, friable, fair to good visual porosity, no oil fluorescence.
895-905	100	Sandstone: very light orange grey, very fine to pebbly, dominantly very coarse to grit, subangular to subrounded, moderately to well sorted, weak silica cement, trace medium brown argillaceous and silt matrix, common yellow quartz grains, common grey green and trace red cherty lithics, trace pyrite, friable, fair to good visual porosity, no oil fluorescence.
905-915	100	Sandstone: very light orange grey, very fine to pebbly, dominantly coarse to very coarse, subangular to subrounded, moderately to well sorted, weak silica cement, trace medium brown argillaceous and silt matrix, common yellow quartz grains, common grey green and trace red cherty lithics, trace pyrite, friable, fair to good visual porosity, no oil fluorescence.
915-925	100	Sandstone: very light orange grey, very fine to grit, dominantly coarse, subangular to subrounded, moderately sorted, weak silica cement, trace to common dark grey argillaceous and silt matrix, common yellow to orange quartz grains, trace grey to green cherty lithics, rare red to brown cherty lithics, trace pyrite, trace black carbonaceous detritus, trace muscovite flakes, friable, good inferred porosity.
925-930	100	Sandstone: very light orange grey, very fine to grit, dominantly medium to coarse, subangular to subrounded, moderately sorted, weak silica cement, trace to common dark grey argillaceous and silt matrix, common yellow to orange quartz grains, trace grey to green cherty lithics, rare red to brown cherty lithics, trace pyrite, trace black carbonaceous detritus, trace muscovite flakes, friable, good inferred porosity.
930-940	100	Sandstone: very light orange grey, very fine to grit, dominantly very coarse to grit, subangular to subrounded, moderately sorted, weak silica cement, trace to common dark grey argillaceous and silt matrix, common yellow to orange quartz grains, common grey to green cherty lithics, common red to brown cherty lithics, trace pyrite, trace black carbonaceous detritus, trace muscovite flakes, friable, good inferred porosity.
940-950	100	Sandstone: as for 930 to 940m. but dominantly coarse to very coarse.

950-960	100	Poor sample - abundant contaminants.	
960-970	100	Sandstone: as for 930 to 940m.	
970-980	70	Sandstone: very light orange grey, very fine to pebble, dominantly very coarse to pebble, subangular to subrounded, poorly sorted, weak silica cement, trace to common dark grey argillaceous and silt matrix, common yellow to orange quartz grains, trace grey to green cherty lithics, trace red to brown cherty lithics, trace pyrite, trace black carbonaceous detritus, trace muscovite flakes, friable, good inferred porosity.	
	30	Claystone: medium to dark grey to dark brown grey, very silty, often abundant dispersed very fine to pebble quartz grains, trace dispersed green grey and red cherty lithics, common black coaly detritus, common pyrite often associated with the coaly detritus, trace micromica, firm, very dispersive and washing from samples, slightly subfissile.	
980-990	70	Claystone: as for 970 to 980m.	
	30	Sandstone: as for 970 to 980m.	
990-995	90	Claystone: as for 970 to 980m.	
	10	Sandstone: as for 970 to 980m.	
995-1005	90	Claystone: as above, medium to dominantly dark grey, ark brown grey in part, very silty, often abundant dispersed very fine to pebble quartz grains, trace dispersed green grey and red cherty lithics, common black coaly detritus, common pyrite often associated with the coaly detritus, trace micromica, firm, very dispersive and washing from samples, slightly subfissile.	
	10	Sandstone: as for 970 to 980m.	
1005-1015	80	Sandstone: very light brown grey, very fine to pebble, dominantly very coarse to grit, subangular, poorly sorted, weak silica cement, trace to abundant medium to dark grey argillaceous and silt matrix, trace grey green and red cherty lithics, trace pyrite, trace black coal detritus often with associated pyrite, friable, fair to good visual porosity, no oil fluorescence.	
	20	Claystone: as for 995 to 1005m.	
1015-1025	60	Sandstone: as for 1005 to 1015m. but dominantly coarse grained.	
	40	Claystone: as for 995 to 1005m.	
1025-1035	100	Claystone: as above, medium to dominantly dark grey, dark brown grey in part, very silty, often abundant dispersed very fine to grit quartz grains, trace dispersed green grey and red cherty lithics, common black coaly detritus, common pyrite often associated with the coaly detritus, trace micromica, firm, very dispersive and washing from samples, slightly subfissile.	
	Trace	Sandstone: as for 1005 to 1015m.	
1035-1045	100	Claystone: medium grey occasionally dark grey and very carbonaceous, often light grey and very silty grading to siltstone, common dispersed very fine quartz and partially altered feldspar grains in part, common black coal detritus, common pyrite often being associated with the coal, trace micromica, firm, slightly subfissile.	
1045-1050	70	Claystone: as for 1035 to 1045m.	
	30	Sandstone: light grey, very fine to fine, dominantly fine, subangular, moderately sorted, weak to moderate silica cement, abundant light grey silt and medium grey argillaceous matrix, common very fine off white partially altered feldspars, trace grey green and red cherty lithics, trace black carbonaceous flecks, rare pyrite, friable, very poor visual porosity.	
1050-1055	60	Claystone: as for 1035 to 1045m.	

Interval (m)	%	Description	PAGE: 12
	40	Sandstone: light grey, very fine to coarse, dominantly fine, subangular, moderately sorted, weak to moderate silica cement, abundant light grey silt and medium grey argillaceous matrix, common very fine off white partially altered feldspars, trace grey green and red cherty lithics, trace black carbonaceous flecks, rare pyrite, friable, very poor visual porosity.	
1055-1060	80	Sandstone: light grey, very fine to grit, dominantly coarse, subangular, poorly sorted, weak silica and pyrite cement, abundant white argillaceous and silt matrix in part, abundant medium grey argillaceous and silt matrix in part, trace green grey cherty lithics, common very fine to medium off white partially altered feldspar, trace black coal detritus, friable to moderately hard, poor visual porosity, no oil fluorescence.	
	20	Claystone: medium grey occasionally dark grey and very carbonaceous, often light grey and very silty grading to siltstone, common dispersed very fine quartz and partially altered feldspar grains in part, common black coal detritus, common pyrite often being associated with the coal, trace micromica, firm, slightly subfissile.	
1060-1070	90	Sandstone: as for 1055 to 1060m.	
	10	Claystone: as for 1055 to 1060m.	
1070-1080	100	Sandstone: light grey, very fine to grit, dominantly coarse, subangular, poorly sorted, weak silica and pyrite cement, abundant white argillaceous and silt matrix in part, abundant medium grey argillaceous and silt matrix in part, trace green grey cherty lithics, common very fine to medium off white partially altered feldspar, trace black coal detritus, friable to moderately hard, poor visual porosity, no oil fluorescence.	
1080-1090	70	Claystone: light to dark grey, dominantly medium grey, often light grey and very silty, abundant dispersed very fine to fine quartz sand grains in part, common dispersed medium to grit quartz sand grains in part, trace pyrite, trace black coal detritus, trace very fine partially altered feldspar, trace micromica, firm, very dispersive and washing from samples, slightly subfissile.	
	30	Sandstone: as for 1070 to 1080.	
1090-1095	90	Claystone: as for 1080 to 1090m. but with minor medium brown cryptocrystalline dolomite.	
	10	Sandstone: as for 1070 to 1080m. but dominantly very coarse grained.	
1095-1100	100	Claystone: as for 1080 to 1090m. but with common medium brown cryptocrystalline dolomite.	
	Trace	Sandstone: as for 1070 to 1080m.	
1100-1110	100	Claystone: light to dark grey, dominantly medium grey, often light grey and very silty, abundant dispersed very fine to fine quartz sand grains in part, common dispersed medium to grit quartz sand grains in part, trace pyrite, trace black coal detritus, trace very fine partially altered feldspar, trace medium brown cryptocrystalline dolomite, trace micromica, firm, very dispersive and washing from samples, slightly subfissile.	
	Trace	Sandstone: as for 1070 to 1080m. but dominantly fine grained.	
1110-1120	80	Sandstone: light grey, very fine to grit, dominantly very coarse, subangular, poorly sorted, weak silica and pyrite cement, abundant white argillaceous and silt matrix in part, abundant medium grey argillaceous and silt matrix in part, trace green grey cherty lithics, common very fine to medium off white partially altered feldspar, trace black coal detritus, friable to moderately hard, poor visual porosity, no oil fluorescence.	
	20	Claystone: as for 1110 to 1120m.	
1120-1130	70	Sandstone: as for 1110 to 1120m.	
	30	Claystone: as for 1110 to 1120m.	
1130-1140	60	Sandstone: as for 1110 to 1120m.	

Interval (m)	%	Description	PAGE: 13
	40	Claystone: as for 1110 to 1120m.	
1140-1150	70	Sandstone: as above, light grey, very fine to grit, dominantly very coarse, subangular, poorly sorted, weak silica and pyrite cement, abundant white argillaceous and silt matrix in part, abundant medium grey argillaceous and silt matrix in part, trace green grey cherty lithics, common very fine to medium off white partially altered feldspar, trace black coal detritus, friable to moderately hard, poor visual porosity, no oil fluorescence.	
	30	Claystone: as above, light to dark grey, dominantly medium grey, often light grey and very silty, abundant dispersed very fine to fine quartz sand grains in part, common dispersed medium to grit quartz sand grains in part, trace pyrite, trace black coal detritus, trace very fine partially altered feldspar, trace medium brown cryptocrystalline dolomite, trace micromica, firm, very dispersive and washing from samples, slightly subfissile.	
1150-1160	80	Claystone: as for 1140 to 1150m.	
	20	Sandstone: as for 1140 to 1150m.	
1160-1170	70	Claystone: as for 1140 to 1150m.	
	30	Sandstone: light grey, very fine to grit, dominantly fine, subangular, poorly sorted, weak silica and pyrite cement, abundant white argillaceous and silt matrix, abundant medium grey argillaceous and silt matrix in part, trace green grey cherty lithics, common very fine to medium off white partially altered feldspar, trace black coal detritus, friable to moderately hard, poor visual porosity, no oil fluorescence.	
1170-1180	50	Claystone: as for 1140 to 1150m.	
	50	Sandstone: light grey, very fine to grit, dominantly fine, subangular, poorly sorted, moderate silica cement, weak light brown dolomite cement in part, common to abundant white to light brown argillaceous matrix, abundant medium grey argillaceous and silt matrix in part, trace grey green and red lithics, trace black coal detritus, trace pyrite often associated with coal detrital, friable to moderately hard, poor visual porosity, no oil fluorescence.	
1180-1190	30	Sandstone: as for 1170 to 1180m.	
	70	Claystone: as above, light to dark grey, dominantly medium grey, often light grey and very silty, abundant dispersed very fine to fine quartz sand grains in part, common dispersed medium to grit quartz sand grains in part, trace pyrite, trace black coal detritus, trace very fine partially altered feldspar, trace medium brown cryptocrystalline dolomite, trace micromica, firm, very dispersive and washing from samples, slightly subfissile.	
1190-1200	90	Claystone: as for 1180 to 1190m. in part off white and very kaolinitic.	
	10	Sandstone: off white to light grey to light brown, very fine, subangular, well sorted, strong dolomite cement in part, moderate silica cement, abundant white argillaceous matrix, common very fine partially altered feldspar, trace black carbonaceous flecks, rare pyrite, trace very fine muscovite flakes, moderately hard, very poor visual porosity	
1200-1210	90	Claystone: as for 1180 to 1190m. in part off white and very kaolinitic.	
	10	Sandstone: off white to light grey to light brown, very fine to dominantly fine, subangular, well sorted, strong dolomite cement in part, moderate silica cement, abundant white argillaceous matrix, common very fine partially altered feldspar, trace black carbonaceous flecks, rare pyrite, trace very fine muscovite flakes, moderately hard, very poor visual porosity	
1210-1220	70	Claystone: medium grey, occasionally light grey and very kaolinitic with abundant dispersed very fine quartz and partially altered feldspar grains, common black carbonaceous flecks in part, trace very fine light green glauconite grains, common micromica, trace medium brown cryptocrystalline dolomite, trace pyrite, firm, very dispersive washing from samples, very dispersive, slightly subfissile.	

Interval (m)	%	Description	PAGE: 14
	30	Sandstone: off white to very light grey, very fine to fine, occasional medium to very coarse grains, subangular, moderately sorted, moderate to strong silica cement, trace strong dolomite cement, common to abundant white argillaceous matrix, occasionally abundant medium grey argillaceous and silt matrix, trace very fine to fine grey and rare red lithics, common very fine to fine partially altered feldspar grains, trace black carbonaceous flecks, trace very fine light green glauconite, moderately hard, very poor visual porosity, no oil fluorescence.	
1220-1230	60	Claystone: as for 1210 to 1220m.	
1230-1240	40	Sandstone: as for 1210 to 1220m.	
	80	Claystone: as for 1210 to 1220m.	
	20	Sandstone: off white to very light grey, very fine, subangular, moderately sorted, moderate to strong silica cement, trace strong dolomite cement, common to abundant white argillaceous matrix, occasionally abundant medium grey argillaceous and silt matrix, trace very fine to fine grey and rare red lithics, common very fine to fine partially altered feldspar grains, trace black carbonaceous flecks, trace very fine light green glauconite, moderately hard, very poor visual porosity, no oil fluorescence.	
1240-1245	90	Claystone: medium grey, occasionally light grey and very kaolinitic with abundant dispersed very fine quartz and partially altered feldspar grains, common black carbonaceous flecks in part, trace very fine light green glauconite grains, common micromica, trace medium brown cryptocrystalline dolomite, trace pyrite, firm, very dispersive washing from samples, very dispersive, slightly subfissile.	
	10	Sandstone: off white to very light grey, very fine, subangular, moderately sorted, moderate to strong silica cement, trace strong dolomite cement, common to abundant white argillaceous matrix, occasionally abundant medium grey argillaceous and silt matrix, trace very fine to fine grey and rare red lithics, common very fine to fine partially altered feldspar grains, trace black carbonaceous flecks, trace very fine light green glauconite, moderately hard, very poor visual porosity, no oil fluorescence.	
1245-1250	90	Claystone: medium to dark grey, very silty, common dispersed very fine to fine quartz and partially altered feldspar grains, common pyrite, trace black carbonaceous flecks, trace micromica, firm, very dispersive, slightly subfissile.	
	10	Sandstone: light brown grey, very fine to fine, dominantly very fine, subangular, moderately sorted, moderate silica cement, abundant white to light brown argillaceous and silt matrix, trace black and green lithics, trace pyrite, trace micromica, moderately hard, no visual porosity, no oil fluorescence.	
1250-1255	100	Claystone: as for 1245 to 1250m.	
	Trace	Sandstone: as for 1245 to 1250m.	
1255-1260	100	Claystone: medium to dark grey, very silty, common dispersed very fine to fine quartz and partially altered feldspar grains, common pyrite, trace medium brown cryptocrystalline dolomite, trace black carbonaceous flecks, trace micromica, firm, very dispersive, slightly subfissile.	
	Trace	Sandstone: as for 1245 to 1250m.	
1260-1270	100	Claystone: as for 1255 to 1260m. with trace medium to dark brown grey	
	Trace	Sandstone: as for 1245 to 1250m.	
1270-1280	100	Claystone: medium to dark grey, occasionally medium to dark brown grey, very silty, common dispersed very fine to fine quartz and partially altered feldspar grains, common pyrite, trace medium brown cryptocrystalline dolomite, trace black carbonaceous flecks, trace micromica, firm, very dispersive, slightly subfissile.	

Interval (m)	%	Description	PAGE: 15
	Trace	Sandstone: as above, light brown grey, very fine to fine, dominantly very fine, subangular, moderately sorted, moderate silica cement, abundant white to light brown argillaceous and silt matrix, trace black and green lithics, trace pyrite, trace micromica, moderately hard, no visual porosity, no oil fluorescence.	
1280-1285	100	Claystone: as for 1270 to 1280m.	
	Trace	Sandstone: as for 1270 to 1280m.	
1285-1290	100	Claystone: as for 1270 to 1280m.	
	Trace	Sandstone: as for 1270 to 1280m. but with very strong calcareous and dolomitic cement in part.	
1290-1295	100	Claystone: as for 1270 to 1280m. but with common medium brown cryptocrystalline dolomite.	
	Trace	Sandstone: as for 1285 to 1290m.	
1295-1300	100	Claystone: as for 1285 to 1290m.	
	Trace	Sandstone: as for 1285 to 1290m.	
1300-1305	80	Claystone: medium to dark grey, occasionally medium to dark brown grey, very silty, common dispersed very fine to fine quartz and partially altered feldspar grains, common pyrite, trace medium brown cryptocrystalline dolomite, trace black carbonaceous flecks, trace micromica, firm, very dispersive, slightly subfissile.	
	20	Sandstone: off white to light grey to light brown, very fine to fine, dominantly very fine, subangular, well sorted, strong silica cement, strong calcareous cement in part, abundant white argillaceous matrix in part, abundant partially altered feldspar in part, common very fine grey to green to brown lithics, trace very fine black carbonaceous grains, trace pyrite, trace micromica, friable to hard, no visual porosity, no oil fluorescence.	
HARD BANDS	100	INTERVALS: 1308-1309.5m. 1316-1317.5m. Sandstone: off white to light grey, very fine to fine, subangular, well sorted, strong silica and calcareous cements, common white argillaceous matrix in part, common light green lithics, trace biotite and muscovite, trace very fine black carbonaceous grains, very hard, no visual porosity - MINERAL FLUORESCENCE: The sandstone has 20% solid moderately bright greenish yellow-white fluorescence, no cut, no show.	
1305-1310	60	Claystone: as for 1300 to 1305m.	
	40	Sandstone: as for "hard bands".	
1310-1315	90	Claystone: as for 1300 to 1305m.	
	10	Sandstone: as for 1300 to 1305m.	
1315-1320	70	Sandstone: off white to light grey, very fine to fine, subangular, well sorted, strong silica and calcareous cements, common white argillaceous matrix in part, common light green lithics, trace biotite and muscovite, trace very fine black carbonaceous grains, very hard, no visual porosity, 10% dull orange mineral fluorescence, no cut, no show.	
	30	Claystone: medium to dark grey, occasionally medium to dark brown grey, very silty, common dispersed very fine to fine quartz and partially altered feldspar grains, common pyrite, trace medium brown cryptocrystalline dolomite, trace black carbonaceous flecks, trace micromica, firm, very dispersive, slightly subfissile.	
1320-1325	90	Claystone: medium grey to medium brown grey, very silty, very dolomitic in part, very calcareous in part, occasionally dark grey and very carbonaceous, common very fine sandstone laminae, very finely arenaceous in part, trace black carbonaceous flecks, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
	10	Sandstone: as for 1320 to 1325m.	

Interval (m)	%	Description	PAGE: 16
1325-1330	90	Claystone: as for 1320 to 1325m.	
	10	Sandstone: off white to light grey to light brown, very fine to fine, dominantly very fine, subangular, well sorted, strong silica cement, strong calcareous cement in part, abundant white argillaceous matrix in part, abundant partially altered feldspar in part, common very fine grey to green to brown lithics, trace very fine black carbonaceous grains, trace pyrite, trace micromica, friable to hard, no visual porosity, no oil fluorescence.	
1330-1335	100	Claystone: medium grey to medium brown grey, very silty, trace dolomite, slightly calcareous in part, occasionally dark grey and very carbonaceous, common very fine sandstone laminae, very finely arenaceous in part, trace black carbonaceous flecks, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
	Trace	Sandstone: as for 1325 to 1330m.	
1335-1340	100	Claystone: as for 1330 to 1335m. but with abundant pyrite.	
	Trace	Sandstone: as for 1325 to 1330m.	
1340-1345	100	Claystone: medium to dark grey, occasionally medium brown grey, very silty, trace dolomite, slightly calcareous in part, occasionally dark grey and very carbonaceous, common very fine sandstone laminae, very finely arenaceous in part, trace black carbonaceous flecks, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
1345-1350	90	Claystone: medium grey to medium brown grey, very silty grading to siltstone, common dispersed very fine quartz sand grains in part, abundant dispersed very fine to fine off white partially altered feldspar grains in part, trace to common black carbonaceous flecks, common medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile	
	10	Sandstone, off white to light grey to light brown, very fine, subangular, moderately sorted, moderate to strong calcareous cement, common to abundant white argillaceous matrix, abundant medium grey silt matrix in part, common very fine black carbonaceous grains, trace pyrite, abundant off white partially altered feldspar grains, trace very fine biotite and muscovite flakes, friable to dominantly hard, no visual porosity, no oil fluorescence but 30% dull orange mineral fluorescence.	
1350-1355	100	Claystone: as for 1345 to 1350m.	
	Trace	Sandstone: as for 1345 to 1350m.	
1355-1360	100	Claystone: dark grey, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
1360-1370	100	Claystone: as for 1355 to 1360m. Note: very poor samples due to clay encapsulation by PHPA - difficult to describe formation fully.	
1370-1380	100	Claystone: Claystone: as for 1355 to 1360m.	
1380-1385	100	Claystone: dark grey, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
1385-1390	100	Claystone: as for 1380 to 1385m.	
1390-1395	100	Claystone: as for 1380 to 1385m. but with common very fine dispersed quartz sand grains.	
1395-1400	100	Claystone: dark grey, occasionally very dark grey and very carbonaceous, trace very fine dispersed quartz sand grains, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	

Interval (m)	%	Description	PAGE: 17
1400-1405	100	Claystone: dark grey, occasionally very dark grey and very carbonaceous, trace glauconite, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
1405-1410	100	Claystone: dark grey, occasionally very dark grey and very carbonaceous, common glauconite, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, common medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
1410-1415	100	Claystone: dark grey, occasionally very dark grey and very carbonaceous, common black coaly detritus, trace glauconite, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
1415-1420	100	Claystone: as for 1410 to 1415m.	
1420-1425	100	Claystone: as for 1410 to 1415m.	
1425-1430	100	Claystone: dark grey, occasionally very dark grey and very carbonaceous, trace to common black coaly detritus, common very dark green glauconite, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
1430-1435	100	Claystone: dark grey, occasionally very dark grey and very carbonaceous, trace to common black coaly detritus, common to abundant very dark green to black glauconite, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
1435-1440	100	Claystone: as for 1430 to 1435m.	
1440-1445	100	Claystone: as for 1430 to 1435m.	
1445-1450	100	Claystone: dark grey, occasionally very dark grey and very carbonaceous, trace to common black coaly detritus, common to abundant very dark green to black glauconite, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
1450-1455	100	Claystone: as for 1445 to 1450m.	
1455-1460	100	Claystone: medium to dark grey, moderately to very silty, common to bundant glauconite, comm medium brown cryptocrysalline dolomite, trace to common Inoceramus, trace very fine quartz and altered feldspar sand grains, trace black coal detritus, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.	
1460-1465	100	Claystone: as for 1455 to 1460m. but with minor very strongly calcareous and dolomitically cemented sandstone laminae.	
1460-1470	100	Claystone: as for 1455 to 1460m.	
1470-1477	100	Claystone: as for 1455 to 1460m.	
1477-1479	60	Claystone: as for 1455 to 1460m.	
	40	Limestone: very light brown, lutitic to cryptocrystalline, trace glauconite, hard, no visual porosity - the limestone has solid bright yellow mineral fluorescence, no cut, no show.	
1479-1485	20	Claystone: as for 1455 to 1460m.	
	80	Sandstone: light grey, very fine to grit, dominantly very coarse, angular to subangular, poorly sorted, weak silica cement, trace white argillaceous matrix, trace black coal detritus, trace pyrite, friable, good inferred porosity.	

1485-1490	90	<p>Sandstone: light grey, very fine to grit, dominantly very coarse, angular to subangular, poorly sorted, weak silica cement, trace white argillaceous matrix, trace black coal detritus, trace pyrite, friable, very good inferred porosity.</p> <p>Fluorescence: the sandstone from 1487.5 to 1489m. has trace dull blue-white fluorescence associated only with the rock flour giving a blue-white crush cut.</p>	
	10	<p>Claystone: as for 1455-1460m.</p>	
1490-1495	90	<p>Sandstone: as for 1485 to 1490m. but with increasing silica cement and argillaceous matrix, good inferred porosity, no oil fluorescence.</p>	
	10	<p>Claystone: as for 1455-1460m.</p>	
1495-1500	100	<p>Sandstone: light grey, very fine to grit, dominantly very coarse, angular to subangular, poorly sorted, weak silica cement, trace white argillaceous matrix, trace black coal detritus, trace pyrite, friable, very good inferred porosity.</p>	
1500-1505	100	<p>Sandstone: as for 1495 to 1500m.</p>	
1505-1507	70	<p>Claystone: medium to dark grey, very silty, moderately carbonaceous, trace micromica, firm, very dispersive, subfissile. Very poor sample due to low drill rate and clay encapsulation by PHPA.</p>	
	30	<p>Sandstone: as for 1505 to 1507m.</p>	
1507-1510	90	<p>Sandstone: light grey, very fine to very coarse, dominantly coarse, angular to subangular, poorly sorted, weak silica cement, trace weak calcareous cement, trace to occasionally abundant white argillaceous matrix, trace black carbonaceous detritus, trace pyrite, friable, good inferred porosity.</p>	
	10	<p>Claystone: medium to dark grey, moderately silty, moderately carbonaceous, trace black coal flecks, trace pyrite, trace very fine dispersed quartz and altered feldspar grains in part, trace to common micromica, firm, very dispersive and washing from sample, slightly subfissile.</p>	
1510-1515	100	<p>Sandstone: as for 1507 to 1510m.</p>	
1515-1520	90	<p>Claystone: medium to dark grey, moderately silty, moderately carbonaceous, trace black coal flecks, trace pyrite, trace very fine dispersed quartz and altered feldspar grains in part, trace to common micromica, firm, very dispersive and washing from sample, slightly subfissile.</p>	
	10	<p>Sandstone: as for 1507 to 1510m.</p>	
1520-1525	100	<p>Claystone: as for 1515 to 1520m.</p>	
	Trace	<p>Sandstone: as for 1507 to 1510m.</p>	
1525-1530	100	<p>Claystone: as for 1515 to 1520m.</p>	
1530-1535	70	<p>Sandstone: off white to very light grey, very fine to medium, occasional coarse to very coarse grains, dominantly fine, angular to subangular, poor to moderate sorting, weak silica cement, abundant white argillaceous matrix, in part matrix supported, trace to common grey, green, red and brown lithics, trace muscovite and brown mica flakes, trace black coal detritus, trace pyrite, friable, very poor to poor visual porosity, no oil fluorescence.</p>	
	30	<p>Claystone: - kaolinite - off white, abundant dispersed very fine to fine quartz and lithic sand grains in part, soft, sticky, non fissile.</p>	
1535-1540	90	<p>Sandstone: light green grey, very fine to coarse, trace very coarse to grit grains,, dominantly fine to medium, subangular, moderately sorted, weak silica cement, trace to abundant white argillaceous matrix, common green and brown lithics, trace black carbonaceous detritus, friable, poor visual porosity</p> <p>Fluorescence: the sandstone at 1544m. has trace dull blue white fluorescence giving trace blue crush cut.</p>	

Interval (m)	%	Description	PAGE: 19
	10	<u>Claystone</u> : as for 1530 to 1535m.	
1540-1545	90	<u>Sandstone</u> : light green grey, very fine to girt, common very coarse to grit grains,, dominantly medium, subangular, moderately sorted, weak silica cement, trace to abundant white argillaceous matrix, common green and brown lithics, trace black carbonaceous detritus, friable, poor visual porosity	
	10	<u>Claystone</u> : as for 1530 to 1535m.	
1545-1550	40	<u>Sandstone</u> : medium green grey, very fine to coarse, dominantly medium, subangular, moderately sorted, weak silica cement, trace weak calcareous cement, abundant white argillaceous matrix, abundant green grey lithics, common brown and red lithics, trace black carbonaceous detritus, friable, very poor visual porosity, no oil fluorescence.	
	60	<u>Claystone</u> : light blue grey, soft, sticky, very dispersive and washing from sample, non fissile.	
1550-1555	50	<u>Sandstone</u> : as for 1530 to 1535m.	
	50	<u>Claystone</u> : as for 1530 to 1535m.	
1555-1557	60	<u>Sandstone</u> : as for 1530 to 1535m.	
	40	<u>Claystone</u> : as for 1530 to 1535m.	
1557-1560	60	<u>Claystone</u> : sample too contaminated by cavings after DST for useful description.	
	40	<u>Sandstone</u> : sample too contaminated by cavings after DST for useful description.	
1560-1565	60	<u>Sandstone</u> : light grey to medium green grey, very fine to coarse, dominantly fine to medium, subangular, moderately sorted, weak silica and calcareous cement, abundant white argillaceous matrix, abunant gray green lithics, common brown and trace red lithics, abundant off white altered feldspars, trace black coal detritus, trace pyrite, friable, very poor visual porosity, no oil fluorescence.	
	40	<u>Claystone</u> : off white to light grey, slightly silty in part, trace dispersed very fine to medium lithic and quartz sand grains in part, trace black coaly detritus, trace pyrite, trace micromica, firm, very dispersive washing from sample, sticky, non fissile.	
1565-1570	70	<u>Sandstone</u> : as for 1560 to 1565m.	
	30	<u>Claystone</u> : as for 1560 to 1565m.	
1570-1575	90	<u>Sandstone</u> : as for 1560 to 1565m.	
	10	<u>Claystone</u> : as for 1560 to 1565m.	
1575-1580	50	<u>Sandstone</u> : light grey to medium green grey, very fine to coarse, dominantly fine to medium, subangular, moderately sorted, weak silica and calcareous cement, abundant white argillaceous matrix, abunant gray green lithics, common brown and trace red lithics, abundant off white altered feldspars, trace brown and green mica flakes, trace black coal detritus, trace pyrite, friable, very poor visual porosity, no oil fluorescence.	
	50	<u>Claystone</u> : off white to light grey, slightly silty in part, trace very fine latered feldspar grains in part, trace black coaly detritus, trace pyrite, trace micromica, firm, very dispersive washing from sample, sticky, non fissile.	
1580-1585	90	<u>Sandstone</u> : light grey to medium green grey, very fine to coarse, dominantly medium to coarse, subangular, moderately sorted, weak silica and calcareous cement, abundant white argillaceous matrix, abunant gray green lithics, common brown and trace red lithics, abundant off white altered feldspars, trace brown and green mica flakes, trace black coal detritus, trace pyrite, friable, very poor visual porosity, no oil fluorescence.	
	10	<u>Claystone</u> : as for 1575 to 1580m.	

1585-1595	70	Sandstone: as for 1580 to 1585m.
	30	Claystone: as for 1575 to 1580m.
1595-1600	50	Sandstone: light to medium green grey, very fine to coarse, dominantly medium to coarse, subangular, moderately sorted, weak silica and calcareous cements, common to dominantly abundant white argillaceous matrix, abundant green to grey to black lithics, common brown to red lithics, common to abundant altered feldspar grains, trace black coaly detritus, trace brown and green mica flakes, rare pyrite, friable, very poor visual porosity, no oil fluorescence.
	50	Claystone: light green grey to medium grey, slightly silty, trace black coal detritus, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.
1600-1605	50	Sandstone: as for 1595 to 1600m.
	50	Claystone: as for 1595 to 1600m.
1605-1610	70	Sandstone: as for 1595 to 1600m.
	30	Claystone: as for 1595 to 1600m.
1610-1620	60	Sandstone: as for 1595 to 1600m.
	40	Claystone: light green grey to medium grey, occasionally medium brown grey, slightly to occasionally very silty, trace black coal detritus, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.
1620-1630	50	Sandstone: as for 1595 to 1600m.
	50	Claystone: as for 1610 to 1620m.
1630-1635	60	Sandstone: light to medium green grey, very fine to coarse, dominantly medium, subangular, moderately sorted, weak silica cement, occasionally moderate calcareous cement, common to dominantly abundant white argillaceous matrix, abundant green to grey to black lithics, common brown to red lithics, common to abundant altered feldspar grains, trace black coaly detritus, trace brown and green mica flakes, rare pyrite, friable, very poor visual porosity, no oil fluorescence but trace dull orange mineral fluorescence, no cut, no show.
	40	Claystone: as for 1610 to 1620m.
1635-1640	70	Sandstone: as for 1630 to 1635m.
	30	Claystone: as for 1610 to 1620m.
1640-1645	50	Sandstone: as for 1630 to 1635m.
	50	Claystone: as for 1610 to 1620m.
1645-1650	20	Sandstone: as for 1630 to 1635m.
	80	Claystone: light green grey to medium grey, occasionally medium brown grey, slightly to occasionally very silty, trace black coal detritus, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.
1650-1655	70	Sandstone: light to medium green grey, very fine to occasionally coarse, dominantly fine to medium, subangular, moderately sorted, weak silica cement, occasionally moderate calcareous cement, abundant white argillaceous matrix, abundant green to grey to black lithics, common brown to red lithics, common to abundant altered feldspar grains, trace black coaly detritus, trace brown and green mica flakes, rare pyrite, friable, very poor visual porosity, no oil fluorescence but trace dull orange mineral fluorescence, no cut, no show.
	30	Claystone: as for 1645 to 1650m.

1655-1660	80	Claystone: as for 1645 to 1650m.
	20	Sandstone: as for 1650 to 1655m.
1660-1665	90	Claystone: light green grey to medium grey, occasionally medium brown grey, slightly to occasionally very silty, trace black coal detritus, slightly calcareous in part, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.
	10	Sandstone: as for 1650 to 1655m.
1665-1670	90	Claystone: as for 1660 to 1665m.
	10	Sandstone: as for 1650 to 1655m.
1670-1675	70	Sandstone: light to medium green grey, very fine to occasionally coarse, dominantly fine to medium, subangular, moderately sorted, weak silica cement, occasionally moderate calcareous cement, abundant white argillaceous matrix, abundant green to grey to black lithics, common brown to red lithics, common to abundant altered feldspar grains, trace black coaly detritus, trace brown and green mica flakes, rare pyrite, friable, very poor visual porosity, no oil fluorescence but trace dull orange mineral fluorescence, no cut, no show.
	30	Claystone: as for 1660 to 1665m.
1675-1680	50	Sandstone: as for 1670 to 1675m.
	50	Claystone: as for 1660 to 1665m.
1680-1685	70	Sandstone: as for 1670 to 1675m.
	30	Claystone: as for 1660 to 1665m.
1685-1690	80	Sandstone: as above, light to medium green grey, very fine to occasionally coarse, dominantly fine to medium, subangular, moderately sorted, weak silica cement, occasionally moderate calcareous cement, abundant white argillaceous matrix, abundant green to grey to black lithics, common brown to red lithics, common to abundant altered feldspar grains, trace black coaly detritus, trace brown and green mica flakes, rare pyrite, friable, very poor visual porosity, no oil fluorescence but trace dull orange mineral fluorescence, no cut, no show.
	20	Claystone: as above, light green grey to medium grey, occasionally medium brown grey, slightly to occasionally very silty, trace black coal detritus, slightly calcareous in part, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.
1690-1700	90	Sandstone: as for 1685 to 1690m.
	10	Claystone: as for 1685 to 1690m.
1700-1710	90	Sandstone: as for 1685 to 1690m.
	10	Claystone: as for 1685 to 1690m.
1710-1720	90	Sandstone: as for 1685 to 1690m.
	10	Claystone: as for 1685 to 1690m.
1720-1725	80	Sandstone: as for 1685 to 1690m.
	20	Claystone: as for 1685 to 1690m.
1725-1730	30	Sandstone: as for 1685 to 1690m.

Interval (m)	%	Description	PAGE: 22
	70	Claystone: light to medium grey, light to medium brown grey, light to medium green grey, slightly to occasionally very silty, common black carbonaceous flecks and black coal detritus, trace brown mica flakes, trace pyrite, nil to occasionally common very fine partially altered feldspar grains, trace micromica, firm, very dispersive, slightly subfissile.	
1730-1735	90	Claystone: as for 1725 to 1730m.	
	10	Sandstone: as for 1685 to 1690m.	
1735-1740	90	Claystone: as for 1725 to 1730m.	
	10	Sandstone: as for 1685 to 1690m.	
1740-1745	90	Claystone: as for 1725 to 1730m.	
	10	Sandstone: as for 1685 to 1690m.	
1745-1750	90	Sandstone: medium green grey, very fine to coarse, dominantly medium, subangular, moderately to well sorted, weak silica cement, trace weak calcareous cement, common to abundant white argillaceous matrix, abundant grey to green lithics, common black brown and red lithics, abundant white altered feldspar grains, trace black carbonaceous detritus, trace brown and green mica flakes, friable, very poor visual porosity, no oil fluorescence.	
	10	Claystone: as for 1725 to 1730m.	
1750-1755	80	Sandstone: as for 1745 to 1750m.	
	20	Claystone: as for 1725 to 1730m.	
1755-1758	60	Sandstone: medium green grey, very fine to coarse, dominantly medium, subangular, moderately to well sorted, weak silica cement, trace weak calcareous cement, common to abundant white argillaceous matrix, abundant grey to green lithics, common black brown and red lithics, abundant white altered feldspar grains, trace black carbonaceous detritus, trace brown and green mica flakes, friable, very poor visual porosity, no oil fluorescence.	
TD 1758m.	40	Claystone: light to medium grey, light to medium brown grey, light to medium green grey, slightly to occasionally very silty, common black carbonaceous flecks and black coal detritus, trace brown mica flakes, trace pyrite, nil to occasionally common very fine partially altered feldspar grains, trace micromica, firm, very dispersive, slightly subfissile.	

Interval (m)	ROP (Av.) (m/hr)	Lithological and Fluorescence Description	Page: 2
415-426	15-60 (40)	<p>Calcarenite: orange brown, very fine to very coarse grained, abundant dark brown iron oxide pellets, abundant light to medium orange brown iron oxide stained bryozoa, trace to common shell fragments, echinoid spines and sponge spicules, common brown iron oxide stained very fine to very coarse frosted subrounded to well rounded quartz grains, weak cryptocrystalline calcareous cement, friable to moderately hard, poor inferred porosity, no oil fluorescence. Grading with depth to off white to light yellow to orange to brown, occasionally yellow green, often very lutitic, common bryozoa fragments, trace foraminifera, echinoid spines, sponge spicules and shell fragments, trace dark brown very fine to occasionally very coarse iron oxide pellets, trace brown very fine to occasionally very coarse iron oxide stained frosted subrounded to well rounded quartz grains, friable, very poor visual porosity, no oil fluorescence. With minor interbedded</p> <p>Marl: medium to dark brown, trace to common medium grey to medium green grey, common bryozoa, trace shell fragments, foraminifera, echinoid spines and sponge spicules, common pyrite, trace dark green to black glauconite, common very fine clear quartz grains, very soft, sticky, non-fissile.</p>	
426-512	17-100 (50)	<p>Marl: medium to dark brown, common medium grey, trace medium green grey, massive, common bryozoa, trace shell fragments, foraminifera, echinoid spines and sponge spicules, common pyrite grading to marcasite, trace dark green to black glauconite, common very fine clear quartz grains, very soft, sticky, non-fissile.</p>	
512-562	8-125 (55)	<p>Sandstone: medium brown, very fine to grit, dominantly medium, very poorly sorted, subangular to rounded, weak calcareous cement, weak silica cement, abundant white calcilutite matrix in part, abundant medium to dark brown argillaceous and silt matrix, strong brown stain on quartz grains, common glauconite, friable, very poor inferred porosity, no oil fluorescence. With depth grading to</p> <p>Sandstone: medium brown, very fine to very coarse, dominantly fine to medium, angular to rounded, dominantly subrounded, poorly sorted, weak silica and calcareous cements, abundant medium brown to dark brown argillaceous and silty matrix (matrix supported grading to arenaceous claystone), weak to strong brown stain on quartz grains, trace dark brown iron oxide pellets, trace black lithics, friable, very poor visual porosity. Grading to</p> <p>Claystone: medium to dark brown, non to occasionally very calcareous, very silty in part, abundant dispersed quartz grains in part grading to argillaceous sandstone, common glauconite, trace micromica, trace pyrite, soft, non-fissile.</p>	
562-763	6-150 (60)	<p>Sandstone: light brown grey, very fine to very coarse, dominantly coarse, subangular to subrounded, moderately sorted, weak silica cement, occasional strong dolomite cement towards base, abundant medium to dark brown argillaceous and silty matrix, trace white calcilutite matrix in part, clear to light orange brown stained quartz grains, trace pyrite, trace muscovite flakes, trace green grey cherty lithics, trace glauconite, friable, poor visual porosity, no oil fluorescence. Grading to and occasionally interbedded with</p> <p>Claystone: medium to dark brown, very silty, trace to abundant dispersed very fine to very coarse light brown stained quartz grains, trace pyrite grading to marcasite, trace medium brown cryptocrystalline dolomite increasing towards base, occasionally black and very carbonaceous, trace micromica, trace muscovite flakes, soft, very dispersive, non-fissile.</p>	

Interval (m)	ROP (Av.) (m/hr)	Lithological and Fluorescence Description	Page: 3
763-810	13-45 (30)	<p>Claystone: medium to dark brown, very silty, common to abundant dispersed very fine to fine quartz sand grains, trace dispersed medium to grit-sized quartz sand grains, common pyrite, trace glauconite, trace fossil fragments, slightly calcareous in part, trace medium brown cryptocrystalline dolomite, trace black carbonaceous material, trace micromica, soft, very dispersive, non-fissile. Occasionally grading to</p> <p>Sandstone: light brown, very fine to fine, occasional medium to grit sized grains, subangular to rounded, dominantly subrounded, poorly sorted, weak silica cement, rare brown dolomite and calcareous cements, abundant medium to dark brown argillaceous and silt matrix (matrix supported), rare green grey cherty lithics, trace muscovite flakes, friable, very poor visual porosity, no oil fluorescence.</p>	
810-818	13-63 (45)	<p>Sandstone: medium brown, very fine to grit, dominantly very coarse, subangular to rounded, dominantly subrounded, very poorly sorted, occasional strong calcareous and medium brown cryptocrystalline dolomite cements, abundant medium brown argillaceous and silt matrix (matrix supported), trace brown stain on quartz grains, trace pyrite, friable, very poor visual porosity, no oil fluorescence. With minor interbedded and in part grading to</p> <p>Claystone: medium brown, very silty, common to abundant dispersed very fine to grit quartz sand grains, common pyrite, trace glauconite, trace fossil fragments, slightly calcareous in part, trace medium brown cryptocrystalline dolomite, trace black carbonaceous material, trace micromica, soft, very dispersive, non-fissile.</p>	
818-879	10-125 (55)	<p>Sandstone: light brown, very fine to grit, dominantly very coarse, subangular to subrounded, very poorly sorted, weak silica cement, trace to common medium brown argillaceous and silt matrix, trace white argillaceous matrix, trace to common yellow to brown quartz grains, trace green clay lithics, friable, fair visual porosity, no oil fluorescence. Grading in part to and occasionally interbedded with</p> <p>Claystone: medium to dark brown, very silty, occasionally iron oxide rich, abundant dispersed very fine to grit quartz sand grains, common pyrite, trace glauconite, slightly calcareous in part, trace black carbonaceous material, soft, very dispersive, non-fissile.</p>	

Interval (m)	ROP (Av.) (m/hr)	Lithological and Fluorescence Description	Page: 4
879-	6-120 (50)	<p>Sandstone: very light orange grey, very fine to pebbly, dominantly coarse to very coarse in general gradually becoming finer grained with depth, subangular to subrounded, moderately to well sorted, weak silica cement, trace medium brown argillaceous and silt matrix, common yellow quartz grains, common grey green and trace red cherty lithics, trace pyrite, friable, fair to good visual porosity, no oil fluorescence. With depth becoming</p> <p>Sandstone: light grey, very fine to grit, dominantly fine, subangular, poorly sorted, moderate silica cement, weak light brown dolomite cement in part, common to abundant white to light brown argillaceous matrix, abundant medium grey argillaceous and silt matrix in part, trace grey green and red lithics, trace black coal detritus, trace pyrite often associated with coal detritus, friable to moderately hard, poor visual porosity, no oil fluorescence. Grading to</p> <p>Sandstone: off white to light grey to light brown, very fine to dominantly fine, subangular, well sorted, strong dolomite cement in part, moderate silica cement, abundant white argillaceous matrix, common very fine partially altered feldspar, trace black carbonaceous flecks, rare pyrite, trace very fine muscovite flakes, moderately hard, very poor visual porosity grading to and interbedded with</p> <p>Claystone: light to dark grey, dominantly medium grey, often light grey and very silty, abundant dispersed very fine to fine quartz sand grains in part, common dispersed medium to grit quartz sand grains in part, trace pyrite, trace black coal detritus, trace very fine partially altered feldspar, trace medium brown cryptocrystalline dolomite, trace micromica, firm, very dispersive and washing from samples, slightly subfissile.</p>	
1204-1245	5-65 (40)	<p>Claystone: medium grey, occasionally light grey and very kaolinitic with abundant dispersed very fine quartz and partially altered feldspar grains, common black carbonaceous flecks in part, trace very fine light green glauconite grains, common micromica, trace medium brown cryptocrystalline dolomite, trace pyrite, firm, very dispersive, slightly subfissile. Interbedded with and grading to</p> <p>Sandstone: off white to very light grey, very fine to fine, occasional medium to very coarse grains, subangular, moderately sorted, moderate to strong silica cement, trace strong dolomite cement, common to abundant white argillaceous matrix, occasionally abundant medium grey argillaceous and silt matrix, trace very fine to fine grey and rare red lithics, common very fine to fine partially altered feldspar grains, trace black carbonaceous flecks, trace very fine light green glauconite, moderately hard, very poor visual porosity, no oil fluorescence.</p>	

Interval (m)	ROP (Av.) (m/hr)	Lithological and Fluorescence Description	Page: 5
1245-1352	1-60 (20)	<p>Claystone: medium to dark grey, occasionally medium to dark brown grey, very silty, common dispersed very fine to fine quartz and partially altered feldspar grains, common pyrite, trace medium brown cryptocrystalline dolomite, trace black carbonaceous flecks, trace micromica, firm, very dispersive, slightly subfissile. With minor interlaminated</p> <p>Sandstone: off white to very light grey, very fine to fine, occasional medium to very coarse grains, subangular, moderately sorted, moderate to strong silica cement, trace strong dolomite cement, common to abundant white argillaceous matrix, occasionally abundant medium grey argillaceous and silt matrix, trace very fine to fine grey and rare red lithics, common very fine to fine partially altered feldspar grains, trace black carbonaceous flecks, trace very fine light green glauconite, moderately hard, very poor visual porosity, no oil fluorescence. With from 1308-1309.5m. and 1316-1317.5m.</p> <p>Sandstone: off white to light grey, very fine to fine, subangular, well sorted, strong silica and calcareous cements, common white argillaceous matrix in part, common light green lithics, trace biotite and muscovite, trace very fine black Carbonaceous grains, very hard, no visual porosity -</p> <p>MINERAL FLUORESCENCE: The sandstone has 20% solid moderately bright greenish yellow-white mineral fluorescence, no cut, no show.</p>	
1352-1445	8.5-57 (13)	<p>Claystone: dark grey, occasionally very dark grey and very carbonaceous, trace to common glauconite increasing with depth, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace to occasionally common medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.</p>	
1445-1477	5-15 (11)	<p>Claystone: dark grey, occasionally very dark grey and very carbonaceous, trace to common glauconite increasing with depth, moderately silty, moderately carbonaceous, trace very fine partially altered feldspar grains in part, trace to occasionally common medium brown cryptocrystalline dolomite, trace pyrite, trace micromica, firm, very dispersive, slightly subfissile.</p>	
1477-1479	2.5-6 (5)	<p>Limestone: very light brown, lutitic to cryptocrystalline, trace glauconite, hard, no visual porosity - the limestone has solid bright yellow mineral fluorescence, no cut, no show.</p> <p>Intermixed with minor brownish Claystone, generally as for 1445 - 1477m.</p>	
1479-1507	12-35 (27)	<p>Sandstone: light grey, very fine to grit, dominantly very coarse, angular to subangular, poorly sorted, weak silica cement, trace white argillaceous matrix, trace black coal detritus, trace pyrite, friable, good inferred porosity.</p> <p>Interbedded below 1503m with Claystone: medium to dark grey, very silty, moderately carbonaceous, trace micromica, firm, very dispersive, subfissile.</p> <p>The Sandstone from 1487.5 to 1489m. has trace dull blue-white fluorescence associated only with the rock flour giving a blue-white crush cut.</p>	

Interval (m)	ROP (Av.) (m/hr)	Lithological and Fluorescence Description	Page: 6
1507-1519	15-40 (30)	Sandstone: light grey, very fine to very coarse, dominantly coarse, angular to subangular, poorly sorted, weak silica cement, trace weak calcareous cement, trace to occasionally abundant white argillaceous matrix, trace black carbonaceous detritus, trace pyrite, friable, good inferred porosity.	
1519-1532	10-15 (11)	Claystone: medium to dark grey, moderately silty, moderately carbonaceous, trace black coal flecks, trace pyrite, trace very fine dispersed quartz and altered feldspar grains in part, trace to common micromica, firm, very dispersive and washing from sample, slightly subfissile.	
1532-1544.5	12-56 (30)	Sandstone: off white to very light grey, very fine to medium, occasional coarse to very coarse grains, dominantly fine, angular to subangular, poor to moderate sorting, weak silica cement, abundant white argillaceous matrix, in part matrix supported, trace to common grey, green, red and brown lithics, trace muscovite and brown mica flakes, trace black coal detritus, trace pyrite, friable, very poor to poor visual porosity, no oil fluorescence. Grading with depth to Sandstone: light green grey, very fine to coarse, trace very coarse to grit grains, dominantly fine to medium, subangular, moderately sorted, weak silica cement, trace to abundant white argillaceous matrix, common green and brown lithics, trace black carbonaceous detritus, friable, poor visual porosity. Grading in part to Claystone (kaolinite): off white, abundant dispersed very fine to fine quartz and lithic sand grains in part, soft, sticky, non-fissile. The sandstone at 1544m has trace dull blue white fluorescence giving trace blue crush cut.	
1544.5-1548	10-58 (30)	Sandstone: off white to very light grey, very fine to medium, occasional coarse to very coarse grains, dominantly fine, angular to subangular, poor to moderate sorting, weak silica cement, abundant white argillaceous matrix, in part matrix supported, trace to common grey, green, red and brown lithics, trace muscovite and brown mica flakes, trace black coal detritus, trace pyrite, friable, very poor to poor visual porosity, no oil fluorescence. Interbedded with Claystone (kaolinite): off white, abundant dispersed very fine to fine quartz and lithic sand grains in part, soft, sticky, non-fissile.	
1548-1557	3-45 (35)	Sandstone: medium green grey, very fine to coarse, dominantly medium, subangular, moderately sorted, weak silica cement, trace weak calcareous cement, abundant white argillaceous matrix, abundant green grey lithics, common brown and red lithics, trace black carbonaceous detritus, friable, very poor visual porosity, no oil fluorescence. Interbedded with Claystone: light blue grey, soft, sticky, very dispersive and washing from sample, non-fissile.	
1557-1559	31-42 (36)	Sample too contaminated with cavings after DST for useful lithological description.	

Interval (m)	ROP (Av.) (m/hr)	Lithological and Fluorescence Description	Page: 7
-----------------	---------------------	---	---------

1559-1758	4-59 (25)	<p>Sandstone: light to medium green grey, very fine to coarse, dominantly medium, subangular, moderately sorted, weak silica cement, occasionally moderate calcareous cement, common to dominantly abundant white argillaceous matrix, abundant green to grey to black lithics, common brown to red lithics, common to abundant altered feldspar grains, trace black coaly detritus, trace brown and green mica flakes, rare pyrite, friable, very poor visual porosity, no oil fluorescence but trace dull orange mineral fluorescence, no cut, no shows. Interbedded with and in part grading to</p> <p>Claystone: light to medium grey, light to medium brown grey, light to medium green grey, slightly to occasionally very silty, common black carbonaceous flecks and black coal detritus, trace brown mica flakes, trace pyrite, nil to occasionally common very fine partially altered feldspar grains, trace micromica, firm, very dispersive, slightly subfissile.</p>	
-----------	--------------	---	--

APPENDIX 5

APPENDIX 5

SIDEWALL CORE DESCRIPTIONS



G F E Resources Ltd

SIDEWALL CORE DESCRIPTION

WELL NAME: Dunbar-1
GEOLOGIST: David Horner

DATE: 16 January, 1996

PAGE: 1

SWC No.	DEPTH (m)	REC'D (mm)	DESCRIPTION
---------	-----------	------------	-------------

Attempted 24, Recovered 20

1	1568.0	15	Claystone: medium brown grey, moderately carbonaceous, very slightly calcareous, slightly silty, trace micromica, slightly subfissile, no oil fluorescence.
2	1552.7	20	Sandstone: off white to light grey, very fine to medium, dominantly fine, subangular, moderately sorted, moderate calcareous cement in part, abundant white argillaceous matrix, common grey green lithics, trace red brown lithics, abundant altered feldspar grains, friable, no visual porosity, no oil fluorescence. Very finely interbedded with Siltstone: medium brown grey, very argillaceous, common dispersed very fine lithic and quartz sand grains, trace micromica, trace black carbonaceous flecks, firm, slightly subfissile, no oil fluorescence.
3	1548.2	30	Sandstone: light grey, very fine to dominantly fine, subangular, moderately to well sorted, weak calcareous cement, abundant white argillaceous matrix (matrix supported), abundant grey green lithics, soft and sticky, no visual porosity, no oil fluorescence.
4	1544.4	25	Claystone: medium brown grey, moderately carbonaceous, non-calcareous, non-silty, trace micromica, soft, non-fissile. Interbedded with 20% Sandstone: light grey, very fine to dominantly fine, subangular, well sorted, weak silica cement, non-calcareous, abundant white argillaceous matrix, common green grey lithics, trace red brown lithics, firm, no visual porosity, no oil fluorescence.
5	1543.5	26	Sandstone: light grey, very fine to dominantly fine, subangular, well sorted, non-calcareous, weak silica cement, abundant white argillaceous matrix, common green black lithics, abundant white altered feldspar grains, trace red lithics, trace black carbonaceous detritus, friable, very poor visual porosity, no oil fluorescence.
6	1541.9	29	Sandstone: light brown grey, very fine to dominantly fine, subangular, moderately sorted, trace weak calcareous cement, abundant white argillaceous matrix, common grey green lithics, trace red brown lithics, abundant altered feldspar grains, common black coaly detritus, soft, sticky, very poor visual porosity, no oil fluorescence. Interlaminated with 10% Siltstone: medium brown, very argillaceous, slightly calcareous, trace micromica, soft, slightly subfissile.
7	1540.5	36	Sandstone: light brown grey, very fine to dominantly fine, subangular, well sorted, weak calcareous cement in part, abundant white to light brown grey argillaceous matrix, common grey green lithics, friable, very poor visual porosity, no oil fluorescence.
8	1538.3	26	Sandstone: light brown grey, very fine, subangular, well sorted, trace weak calcareous cement, abundant light grey brown argillaceous matrix (matrix supported), common grey to green to brown lithics, soft, sticky, very poor visual porosity, no oil fluorescence.
9	1535.9	30	Sandstone: light brown grey, very fine to dominantly fine, subangular, well sorted, non-calcareous, very weak silica cement, abundant light brown grey argillaceous matrix (matrix supported), common grey green lithics, trace red brown lithics, soft, sticky, very poor visual porosity, no oil fluorescence.

SWC No.	DEPTH (m)	REC'D (mm)	DESCRIPTION
10	1534.8	37	Sandstone: light brown grey, fine to occasionally medium, subangular, well sorted, moderate calcareous cement in part, common light brown grey argillaceous matrix, trace grey to green to black lithics, friable, poor to fair visual porosity, no oil fluorescence.
11	1534.0	34	Sandstone: very light brown grey, very fine to dominantly fine, subangular, moderately sorted, non-calcareous, very weak silica cement, abundant light brown grey argillaceous matrix, trace grey lithics, abundant black to dark brown carbonaceous detritus, friable, very poor visual porosity, no oil fluorescence.
12	1531.5	25	Claystone: medium to dark brown grey, slightly silty, trace black coal detritus, non-calcareous, trace micromica, soft, sticky, non- to slightly subfissile, no oil fluorescence.
13	1523.5	30	Medium brown filter cake only.
14	1520.6	30	Claystone: medium to dark brown grey, very silty, moderately carbonaceous, trace micromica, non-calcareous, soft, sticky, slightly to non-fissile. Interlaminated with 10% Sandstone: off white, very fine, subangular, well sorted, very weak silica cement, abundant white argillaceous matrix (matrix supported), trace medium green lithics, soft, no visual porosity, no oil fluorescence.
15	1505.8	23	Claystone: medium to dark brown grey to dark green grey (mottled), very silty, common dispersed very fine quartz and fine glauconite and altered feldspar grains, trace micromica, firm, sticky, non-fissile, no oil fluorescence.
16	1501.3	34	Sandstone: light grey, very fine to grit, dominantly very coarse, angular, very poorly sorted, non-calcareous, very weak silica cement, trace white argillaceous matrix, friable, good visual porosity, no oil fluorescence. Interlaminated with 25% Coal: black to very dark brown, earthy to slightly subvitreous texture, blocky to granular fracture, abundant pyrite, firm to moderately hard.
17	1491.4		No Recovery.
18	1489.5		No Recovery.
19	1480.2	23	Claystone: medium to dark brown, moderately carbonaceous, slightly silty, trace very fine glauconite, trace to common very fine to micromica, firm, slightly subfissile, no oil fluorescence.
20	1477.0	34	Claystone: medium to dark brown, moderately carbonaceous, slightly silty, slightly to moderately calcareous, common fine glauconite, trace to common very fine to micromica, firm, slightly subfissile, no oil fluorescence.
21	1475.2		No Recovery.
22	1472.3	42	Claystone: medium to dark brown, moderately carbonaceous, slightly silty, slightly calcareous in part, common very fine to medium glauconite, trace very fine to micromica, firm, slightly subfissile, no oil fluorescence.
23	1467.2	41	Claystone: medium to dark brown, moderately carbonaceous, slightly silty, slightly calcareous in part, trace to common fine to medium glauconite, trace very fine to micromica, firm, slightly subfissile, no oil fluorescence.
24	1401.0	43	Claystone: medium to dark brown, moderately carbonaceous, slightly silty, non-calcareous, trace very fine to fine altered feldspar grains, trace very fine to micromica, firm, slightly subfissile, no oil fluorescence.

APPENDIX 6

APPENDIX 6

DRILL STEM TEST DATA (DST-1)

& GAS SAMPLE ANALYSIS

DST #: 1
DUNBAR # 1
5006.8 ft - 5108.5 ft

Location: INLINE 6515 XLINE 2665 Recorder Number: 1273A
Test Type: DUAL CONVENTIONAL BOTTOM HOLE Recorder Depth: 4984 ft
Formation: WARRE

Test Date: 17/03/95

PRESSURE
psia
1)Initial Hydrostatic: 2486.0
14)Final Hydrostatic : 2411.0

TEST TIMES (MIN)

BLOW DESCRIPTION:

PRE-FLOW: THE TOOL WAS OPENED AT 08:01 HRS WITH BOTH MANIFOLD AND BUBBLE HOSE CLOSED. NO VISIBLE PRESSURE INCREASE OCCURED. WHEN TOOL WAS CLOSED AT 08:07 THE BUBBLE HOSE WAS OPENED AND THERE WAS A TRACE AIR BLOW EVIDENT.
FINAL FLOW: TOOL WAS RE-OPENED AT 08:52 WITH BOTH MANIFOLD AND BUBBLE HOSE CLOSED. THE BUBBLE HOSE WAS OPENED AT 08:58 TO CHECK FOR ANY INDICATIONS OF PRESSURE BUILD UP BUT IT WAS DEAD. IT WAS DECIDED THAT THE HYDRAULIC SHUT-IN VALVE SHOULD BE CYCLED TO REMOVE ANY DOUBT FROM THE PREVIOUS OPENING. IT WAS CLOSED AT 09:09 AND RE-OPENED AT 09:12. SURFACE INDICATIONS OF TOOL FUNCTION WERE GOOD. BLOW REMAINED DEAD UNTIL TOOL CLOSED AT 09:42.

LIQUID RECOVERY:

THE TOTAL LIQUID RECOVERY WAS 10 FEET OF RAT HOLE MUD.
THE DOWNHOLE SAMPLER CONTAINED MUD ONLY.

REMARKS AND TEST SUMMARY:

PACKER DEPTHS WERE CALCULATED USING THE DRILLERS TALLY.
NO PRESSURE INCURRED AT SURFACE.
TEST FAILURE DUE TO PLUGGING AT PERFORATIONS EXTERNALLY AND IN THE HYDRAULIC TOOL INTERNALLY.


DST #: 1
DUNBAR # 1
5006.8 ft - 5108.5 ft

PRESSURE RECORDER NUMBER: 1273A

DEPTH : 4983.90 ft LOCATION : INSIDE
TYPE : 4983.9 CAPACITY : 10000.00 psig
***** TEMPERATURE AT RECORDER DEPTH = 138.0 F

PRESSURE
psia

1)Initial Hydrostatic: 2486.0
14)Final Hydrostatic : 2411.0

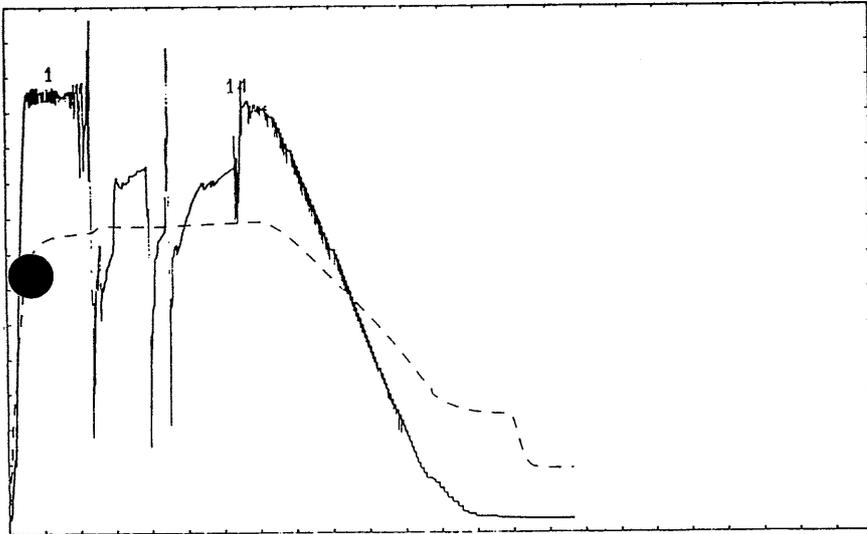


TEST TIMES (MIN)

PRESSURE RECORDER NUMBER: 14172

DEPTH : 4972.90 ft LOCATION : INSIDE
TYPE : K-3 CAPACITY : 3000.00 psig

PRESSURE
psia

1)Initial Hydrostatic: 2430.9
14)Final Hydrostatic : 2352.5

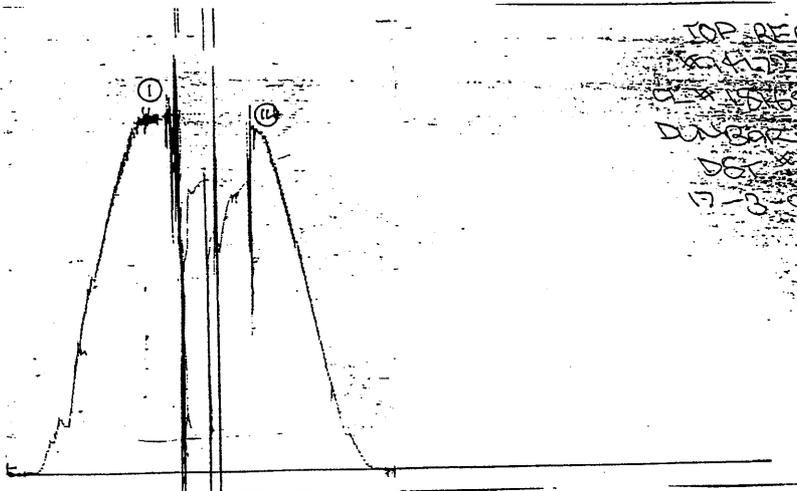


DST #: 1
DUNBAR # 1
5006.8 ft - 5108.5 ft

PRESSURE RECORDER NUMBER: 21149

DEPTH : 5082.00 ft LOCATION : OUTSIDE
TYPE : K-3 CAPACITY : 3025.00 psig

PRESSURE
psia

1)Initial Hydrostatic: 2450.4
14)Final Hydrostatic : 2467.4

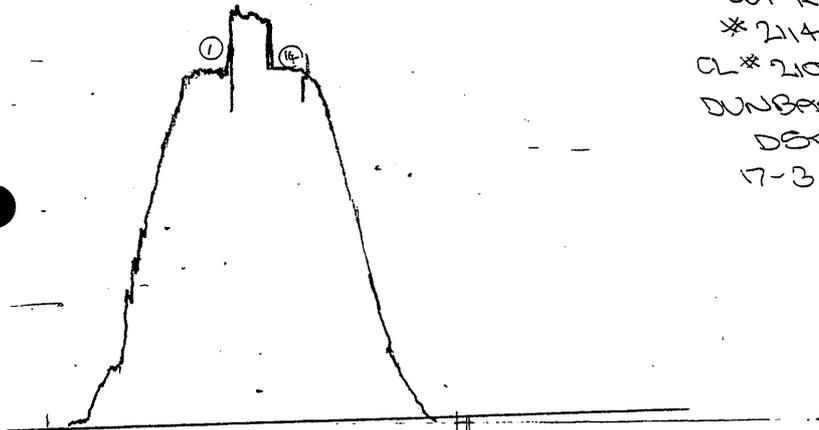

OUT REC
* 21149
CL # 21047
DUNBAR # 1
DST # 1
17-3-95

TEST TIMES (MIN)

PRESSURE RECORDER NUMBER: 9987

DEPTH : 4951.70 ft LOCATION : INSIDE
TYPE : K-3 CAPACITY : 3000.00 psig

PRESSURE
psia


1)Initial Hydrostatic: 14.7
2)Start of 1st Flow : 14.7
3)End of 1st Flow : 14.7
4)End of 1st Shut-in : 14.7
5)Start of 2nd Flow : 14.7
6)End of 2nd Flow : 14.7
7)End of 2nd Shut-in : 46.0
14)Final Hydrostatic : 0.0

REC REC
* 9987
CL # 13112
DUNBAR # 1
DST # 1
17-3-95



G.F.E. RESOURCES LTD
WELL NAME: DUNBAR # 1
LOCATION: INLINE 6515 XLINE 2665
DST #: 1

LEGEND: * 1 - 2486 psia
14 - 2411
RECORDER: 1273A

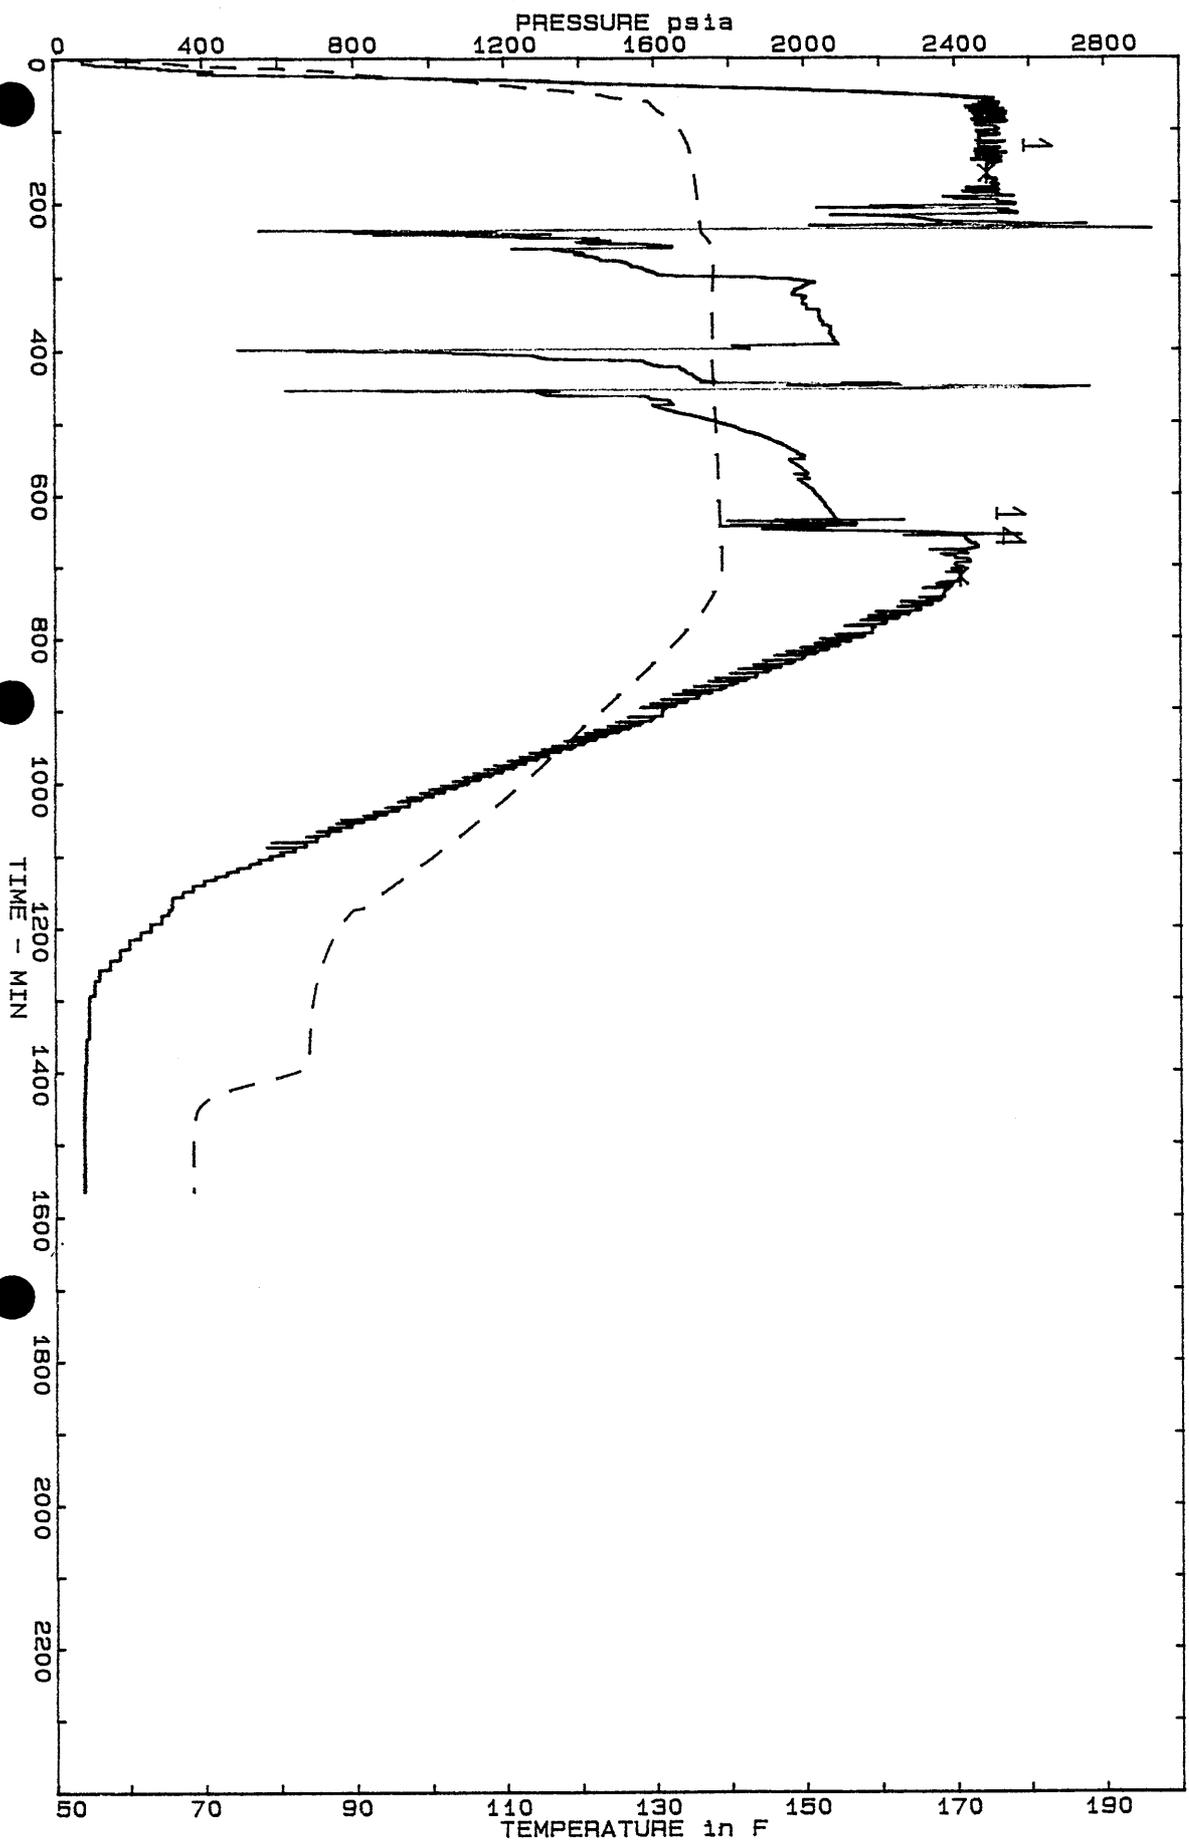


BOT CONVENTIONAL DST

DVG NO. 869-055-3

DESCRIPTION	LENGTH	O.D.	I.D.	DEPTH
PUMP OUT TYPE REVERSE CIRCULATING SUB	0.42	6.25	3.00	1480.99
DRILL COLLARS	8.61	6.25	2.8125	
IMPACT TYPE REVERSE CIRCULATING SUB	0.42	6.25	3.00	1490.02
DRILL COLLARS	17.53	6.25	2.8125	
CROSS OVER SUB	0.30	6.25	2.25	
INSIDE RECORDER CARRIER	1.37	4.875	1.00	1509.22
ROTATING SHUT IN VALVE	2.59	5.00	1.00	1511.81
POSITIVE CONTROL SAMPLER	1.04	5.00	1.00	
HYDRAULIC MULTIPLE SHUT IN VALVE	1.49	5.00	1.00	
INSIDE RECORDER CARRIER	1.37	4.875	1.00	1515.71
- PANEX	3.35	4.75	2.25	1519.06
HYDRAULIC JARS	2.01	5.00	1.25	
SAFETY JOINT	0.69	5.00	2.25	
PACKER SECTION	2.88	7.50	1.00	
PACKER SECTION STICK UP AND ELEMENT	1.36	7.50	1.00	1526.00
PACKER SECTION STICK DOWN	1.33	7.50	1.00	
PERFORATED ANCHOR PIPE	4.57	4.75	2.25	
OUTSIDE RECORDER CARRIER	2.06	5.00	1.25	1533.96
CROSS OVER SUB	0.70	6.25	2.25	
DRILL COLLARS	19.01	7.50	2.8125	
SPACING SECTIONS	2.44	4.75	2.25	
ANCHOR SHOE	0.91	5.00	-	1557.02

TEST TOOL AND PIPE RECORD (CONVENTIONAL).

<u>DESCRIPTION.</u>	<u>LENGTH</u>	<u>OD</u>	<u>ID</u>
TOTAL STRING BELOW PACKER SEAL	31.02	-	-
TOTAL TOOLS BETWEEN PACKER SEALS	-	-	-
TOTAL TOOLS ABOVE PACKER SEAL + PUP	22.23	-	-
TOTAL DRILL COLLARS ABOVE INTERVAL	142.96	6.25	2.8125
TOTAL HEVI-WATE ABOVE INTERVAL	55.18	4.50	2.8750
TOTAL DRILL PIPE ABOVE INTERVAL	1310.65	4.50	3.8260
TOTAL STRING	1562.04	-	-
TOTAL DEPTH	1557.00	-	-
TOP SINGLE ABOVE TABLE	5.04	-	-

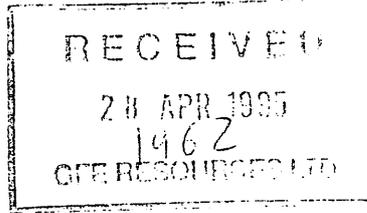

Amdel Limited
A.C.N. 008 127 802

Petroleum Services
PO Box 338
Torrensville Plaza SA 5031

Telephone: (08) 416 5240
Facsimile: (08) 234 2933

12 April 1995

GFE Resources Limited
GPO Box 1841Q
MELBOURNE VIC 3001

Attention: Kevin Lanigan

REPORT LQ3754

CLIENT REFERENCE: Verbal Request

WELL NAME/RE: Dunbar-1 DST-2

MATERIAL: DST Tool & Oil/Mud Sample

WORK REQUIRED: Sample Recovery & Compositional Analysis

Please direct technical enquiries regarding this work to the signatory below under whose supervision the work was carried out.

Brian L. Watson
Manager
Petroleum Services

Amdel Limited shall not be liable for loss, cost, damages or expenses incurred by the client, or any other person or company, resulting from the use of any information or interpretation given in this report. In no case shall Amdel Limited be liable for consequential damages including, but not limited to, lost profits, damages for failure to meet deadlines and lost production arising from this report. This document shall not be reproduced except in full and relates only to the items tested.

1. INTRODUCTION

A DST Tool was received from Dunbar-1 DST-2 for sample recovery and compositional analysis of recovered hydrocarbons. In addition an oil/mud was received.

This report is a formal presentation of data transmitted by facsimile on 21 and 22 March 1995.

2. PROCEDURE

Initially the opening pressure of the DST Tool was determined to be 2025 kPa @ 22°C. 29.63L of gas was recovered and the composition of this sample is presented in Table 1.

Oil separated from the oil/mud sample was analysed by gas chromatography (GC) for compositional analysis (Table 2). A density and kinematic viscosity determination were also performed on the oil, these results are presented in Table 3.

TABLE 1

PETROLEUM SERVICES GAS ANALYSIS

Method GL-01-01
ASTM D 1945-81 (modified)

Client: GFE RESOURCES Ltd

Report # LQ3754

Sample: DUNBAR-1, DST-2
Gas Ex DST Tool
Open.press. 2025 kPag @ 22°C

GAS	MOL %
Nitrogen	1.98
Carbon Dioxide	0.85
Methane	87.75
Ethane	5.11
Propane	2.37
I-Butane	0.52
N-Butane	0.65
I-Pentane	0.20
N-Pentane	0.16
Hexanes	0.18
Heptanes	0.15
Octanes and higher h'c	0.08
Total	100.00

(0.00 = less than 0.01%)

Calculated Gas Density
(Air = 1) : 0.653

Calorific Value (15.0 deg C, 101.325 kPa)

Gross:	1113 BTU/CU Ft	41.45 MJ/CU.M
Nett:	1006 BTU/CU Ft	37.48 MJ/CU.M
Gross calorific value of water-saturated gas		40.73 MJ/CU.M
Average Molecular Weight =	18.924	

All results are calculated on the basis that only the measured constituents are present.
This report relates specifically to the sample submitted for analysis.

Approved Signatory


Robyn L Tamke

Registration No: 2013

Date

20-Mar-95

TABLE 2

PETROLEUM SERVICES LIQUID ANALYSIS

Method GL-02-01

Client: GFE RESOURCES Ltd Report # 3754
 Sample: DUNBAR-1, DST-2
 Concentrated Sample
 1526-1557 m

Boiling Point Range (Deg.C)	Component	Weight%	Mol%
-88.6	ETHANE	0.00	0.01
-42.1	PROPANE	0.01	0.03
-11.7	I-BUTANE	0.01	0.03
-0.5	N-BUTANE	0.03	0.08
27.9	I-PENTANE	0.05	0.10
36.1	N-PENTANE	0.07	0.14
36.1-68.9	C-6	0.39	0.69
80.0	BENZENE	0.01	0.02
68.9-98.3	C-7	1.99	3.03
100.9	METHYLCYCHX	1.87	2.90
110.6	TOLUENE	0.29	0.48
98.3-125.6	C-8	6.28	8.39
136.1-144.4	ETHYLBZ+XYL	1.09	1.57
125.6-150.6	C-9	8.49	10.12
150.6-173.9	C-10	17.54	18.83
173.9-196.1	C-11	18.19	17.79
196.1-215.0	C-12	15.85	14.21
215.0-235.0	C-13	13.37	11.08
235.0-252.2	C-14	6.72	5.17
252.2-270.6	C-15	4.62	3.32
270.6-287.8	C-16	1.57	1.06
287.8-302.8	C-17	0.93	0.59
302.8-317.2	C-18	0.29	0.18
317.2-330.0	C-19	0.17	0.09
330.0-344.4	C-20	0.08	0.04
344.4-357.2	C-21	0.04	0.02
357.2-369.4	C-22	0.01	0.01
369.4-380.0	C-23	0.01	0.01
380.0-391.1	C-24	0.01	0.00
391.1-401.7	C-25	0.00	0.00
401.7-412.2	C-26	0.00	0.00
412.2-422.2	C-27	0.00	0.00
>422.2	C-28+	0.02	0.01
	Total	100.00	100.00

(0.00 = LESS THAN 0.01%)

The above boiling point ranges refer to the normal paraffin hydrocarbon boiling in that range. Aromatics, branched hydrocarbons, naphthenes and olefins may have higher or lower carbon numbers but are grouped and reported according to their boiling points.

Average molecular weight of C-8 plus 155 g/mol

This report relates specifically to the sample submitted for analysis.


Approved Signatory



Robyn L Tamke

DUNBAR-1 DST-2

1526-1557 m

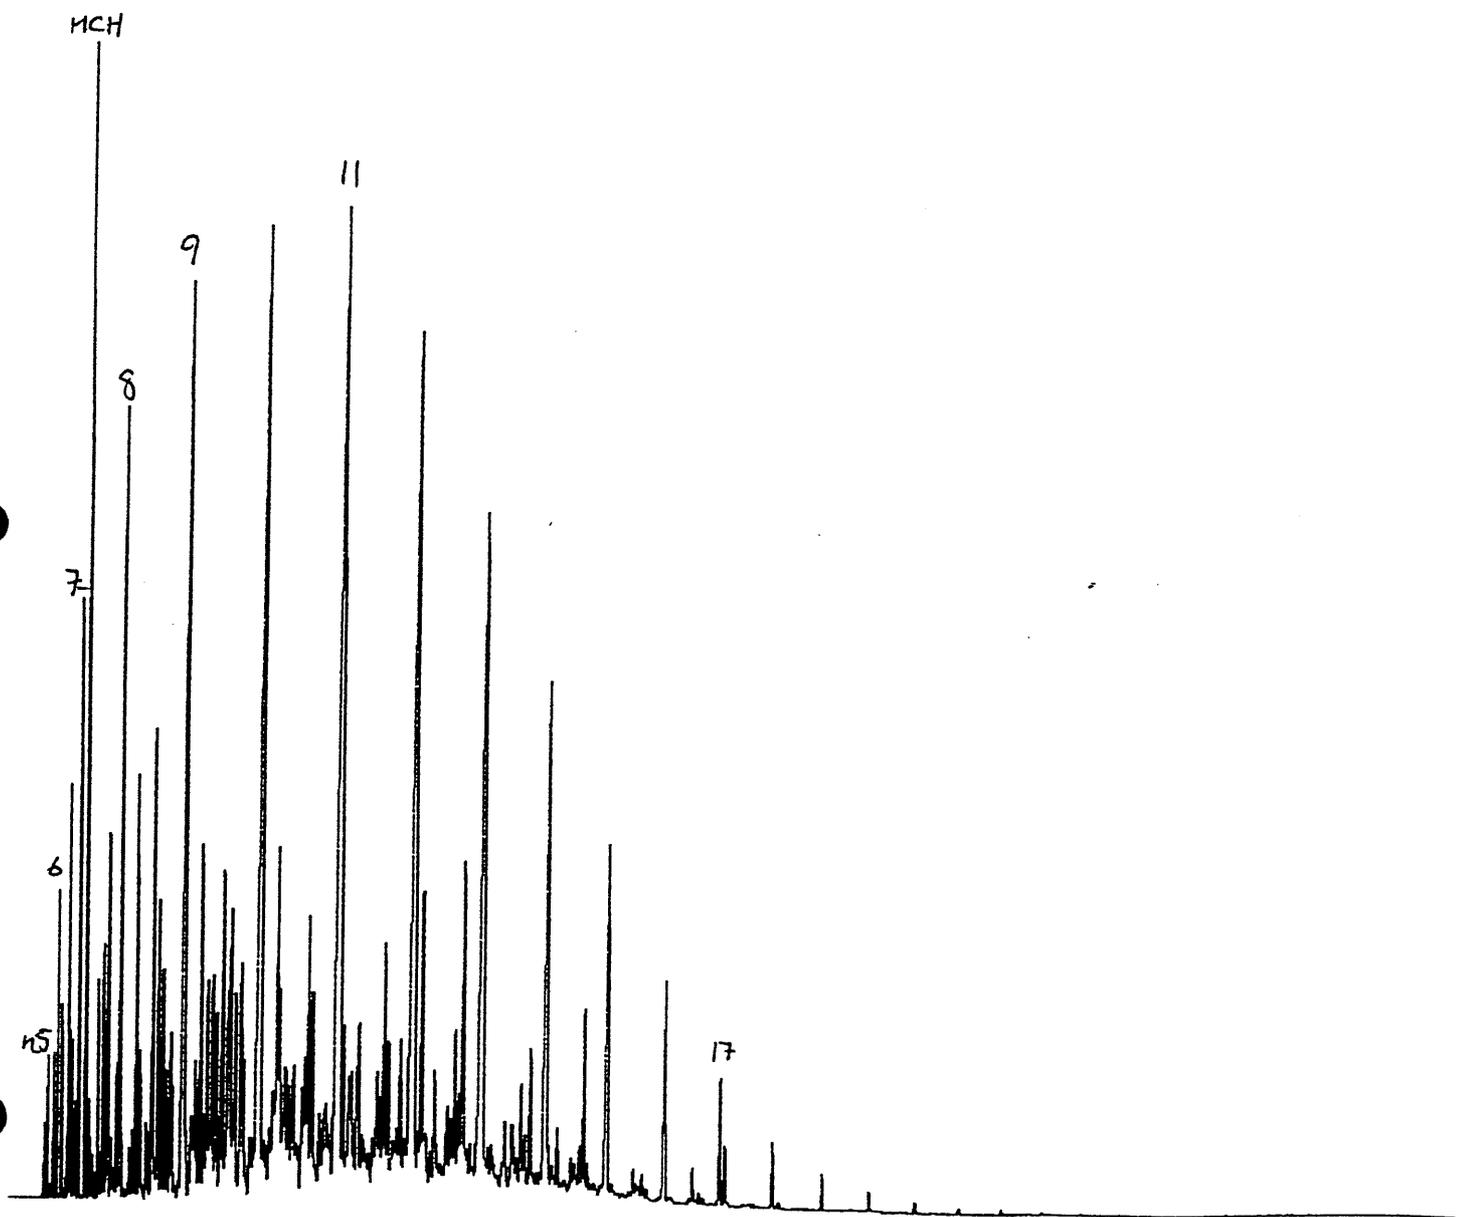

Client: G.F.E. RESOURCES Ltd.

Report # LQ3754

Sample: DUNBAR #1 (CONCENTRATED).
DST-2
1526-1557 m.

Method	Description	Units	DST-2
IP2	ASTM D611 Aniline Point	'C	
	ASTM D4176 Appearance, Free Water and Particulate Matter		
IP364	ASTM D976 Calculated Cetane Index		
IP219	ASTM D2500 Cloud Point	'C	
IP17	Colour by Lovibond Tintometer		
IP274	ASTM D2624 Conductivity of Fuels	pS	
IP13	ASTM D189 Conradson Carbon Residue	%wt	
IP154	ASTM D130 Copper Corrosion		
IP365	ASTM D4052 Density @ 15'C	gm/mL	0.7778
IP21	Diesel Index		
IP123	ASTM D86 Distillation		
	IBP	'C	
	10% Rec	'C	
	20% Rec	'C	
	30% Rec	'C	
	40% Rec	'C	
	50% Rec	'C	
	60% Rec	'C	
	70% Rec	'C	
	80% Rec	'C	
	90% Rec	'C	
	95% Rec	'C	
	Decomposition Point	'C	
	Residue	%vol	
	Loss	%vol	
	Evaporated @ 75'C, 105'C, 135'C	%vol	
IP131	ASTM D381 Existent Gum by Evaporation	mg/100mL	
IP170	Flash Point Abel Closed Cup	'C	
IP34	ASTM D93 Flash Point Pensky Martens Closed Cup	'C	
IP156	ASTM D1319 Fluorescent Indicator Absorption Aromatics	%	
IP16	ASTM D2386 Freezing Point	'C	
IP71	ASTM D445 Kinematic Viscosity @ 40'C	cSt	1.244
IP71	ASTM D445 Kinematic Viscosity @ 100'C	cSt	
IP15	ASTM D97 Pour Point	'C	
	ASTM D323 Reid Vapour Pressure	kPa	
IP277	Silver Corrosion		
IP57	Smoke Point	mm	
IP160	ASTM D1298 Specific Gravity @ 60/60'F		0.7781
IP354	ASTM D3242 Total Acidity in Aviation Fuel	mgKOH/gm	
IP270	Total Lead in Gasoline by Iodine Monochloride	gm/L	
	ASTM D2270 Viscosity Index		
IP289	ASTM D1094 Water Reaction	Interface Rating	
		Separation	
	ASTM D96 Water	%vol	
	ASTM D96 Sediment	%vol	
IP160	API Gravity		50.35

Approved Signatory



Mohammad Massoumi

Date 21-Mar-95

Registration No: 2013

This report relates specifically to the sample submitted for testing.

OPENING PRESSURE

WELL: DUNBAR-1 DST-2

SEPARATOR:

DATE: 21/03/95

CYLINDER NO: DST TOOL

OPENING PRESSURE: 2025 kpag @ 22°C

LIQUID CHECK: NIL

DST #: 2
 DUNBAR # 1
 5006.8 ft - 5108.5 ft

Location: INLINE 6515 XLINE 2665
 Test Type: DUAL CONVENTIONAL BOTTOM HOLE
 Formation: WARRE

Recorder Number: 1273A
 Recorder Depth: 4984 ft

Test Date: 18/03/95

PRESSURE
 psia

1)Initial Hydrostatic: 2528.0
 14)Final Hydrostatic : 2527.2

TEST TIMES (MIN)

 BLOW DESCRIPTION:

PRE-FLOW: TOOL WAS OPENED AT 11:28 WITH BOTH MANIFOLD AND BUBBLE HOSE CLOSED, A 60 PSI GAUGE WAS USED TO MONITOR PRESSURE INCREASE. PRESSURE INCREASED TO 9PSIG AT THE SHUT IN TIME OF 11:33. THE MANIFOLD WAS OPENED TO ALLOW THE DRILL STRING TO BLEED OFF IN PREPARATION FOR THE OPENING OF THE FINAL FLOW.
 FINAL FLOW: TOOL WAS RE-OPENED AT 12:33 WITH CLOSED MANIFOLD. A STRONG AIR BLOW WAS EVIDENT. 0.5 INCH CHOKE WAS OPENED AT 12:34. GAS TO SURFACE AT 12:38 (4PSIG) SURFACE PRESSURE INCREASED AT 12:39 THEN BEGAN TO DECREASE. 0.5 INCH CHOKE WAS CLOSED TO BUILD UP PRESSURE FOR GAS SAMPLE. CHOKE REOPENED AT 13:13 PRESSURE BEGAN TO DECREASE. AT 13:18 (6PSIG) 0.5 INCH CHOKE CLOSED. THERE WAS A RAPID INCREASE IN PRESSURE AND AT 13:20 (20 PSIG) THE 0.5 INCH CHOKE WAS RE-OPENED

TOOL CLOSED AT 14:33 HRS (10 PSIG).

 LIQUID RECOVERY:

THE TOTAL LIQUID RECOVERY WAS 40 m OF CONDENSATE AND LIGHT OIL CUT RAT HOLE MUD THROUGH DOWNHOLE SAMPLER WAS SENT TO PERTH FOR ANALYSIS.
 TOOL CLOSED AT 14:33 HRS (10 PSIG).

 REMARKS AND TEST SUMMARY:


PACKER SETTING DEPTHS WERE CALCULATED USING DRILLER'S TALLY.
 PROBLEMS WITH INTERNAL AND EXTERNAL PLUGGING WERE THE SAME AS ENCOUNTERED ON D.S.T. # 1. THE SAME OFFENDING MATERIAL WAS FOUND THROUGHOUT THE TOOL.

G.F.E. RESOURCES LTD
DST #: 2
DUNBAR # 1
5006.8 ft - 5108.5 ft

PRESSURE RECORDER NUMBER: 1273A

DEPTH : 4983.90 ft LOCATION : INSIDE
TYPE : PANEX CAPACITY : 10000.00 psig
***** TEMPERATURE AT RECORDER DEPTH = 138.0 F

PRESSURE
psia

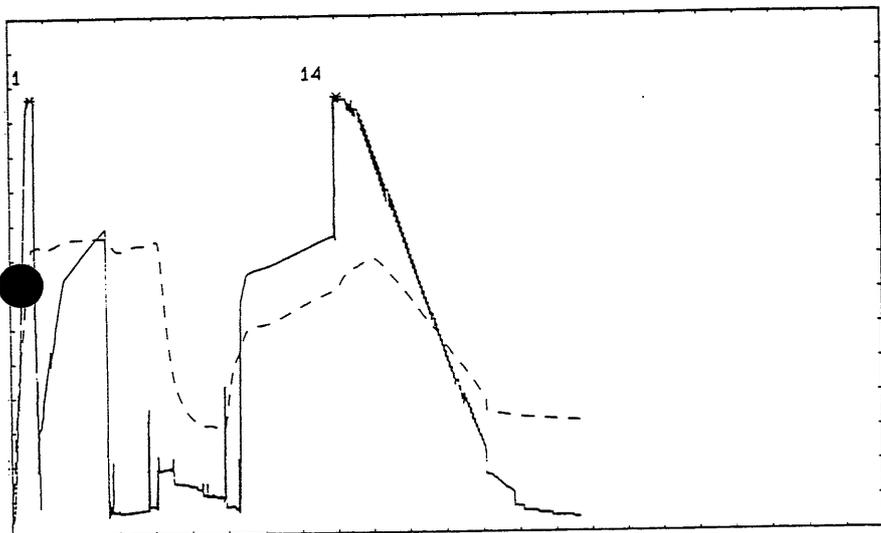


1) Initial Hydrostatic: 2528.0
14) Final Hydrostatic : 2527.2

TEST TIMES (MIN)

PRESSURE RECORDER NUMBER: 21149

DEPTH : 5032.80 ft LOCATION : OUTSIDE
TYPE : K-3 CAPACITY : 3025.00 psig

PRESSURE
psia

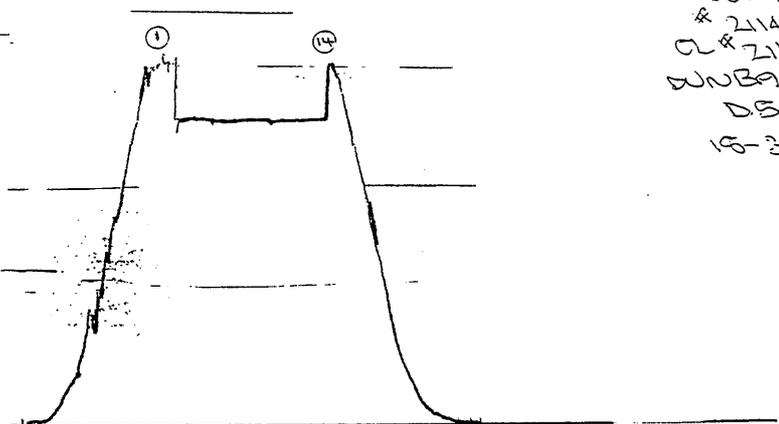

OUT REC
21149
CL # 21149
DUNBAR # 1
DST # 2
10-3-95

1) Initial Hydrostatic: 2517.8
14) Final Hydrostatic : 2503.5

G.F.E. RESOURCES LTD
DST #: 2
DUNBAR # 1
5006.8 ft - 5108.5 ft


PRESSURE RECORDER NUMBER: 14172

DEPTH : 4972.90 ft LOCATION : INSIDE
TYPE : K-3 CAPACITY : 3000.00 psig

PRESSURE
psia

1) Initial Hydrostatic: 2443.7
14) Final Hydrostatic : 2440.7

TOP REC
14172
CL # 180169
DUNBAR # 1
DST # 2
15-3-95

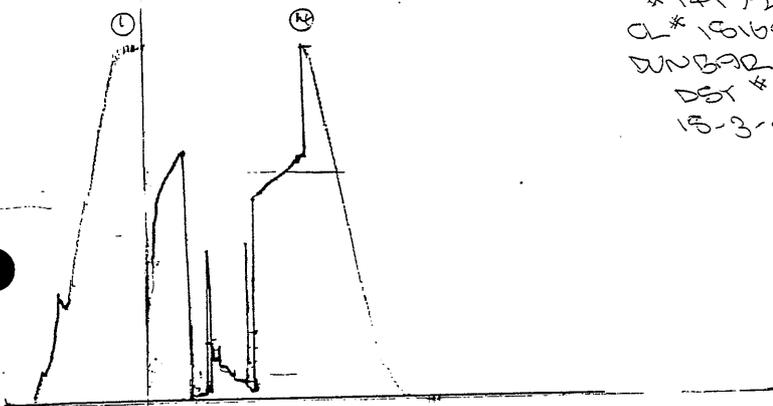

TEST TIMES (MIN)


PRESSURE RECORDER NUMBER: 9987

DEPTH : 4951.60 ft LOCATION : INSIDE
TYPE : K-3 CAPACITY : 3000.00 psig

PRESSURE
psia


1) Initial Hydrostatic: 14.7
2) Start of 1st Flow : 14.7
3) End of 1st Flow : 14.7
4) End of 1st Shut-in : 14.7
5) Start of 2nd Flow : 14.7
6) End of 2nd Flow : 14.7
7) End of 2nd Shut-in : 80.9
14) Final Hydrostatic : 14.7

REC REC
9987
CL # 180169
DUNBAR # 1
DST # 2
15-3-95



G.F.E. RESOURCES LTD
WELL NAME: DUNBAR # 1
LOCATION: INLINE 6515 XLINE 2665
DST #: 2

LEGEND: * 1 = 2528 psia
14 = 2527 psia
RECORDER: 1273A

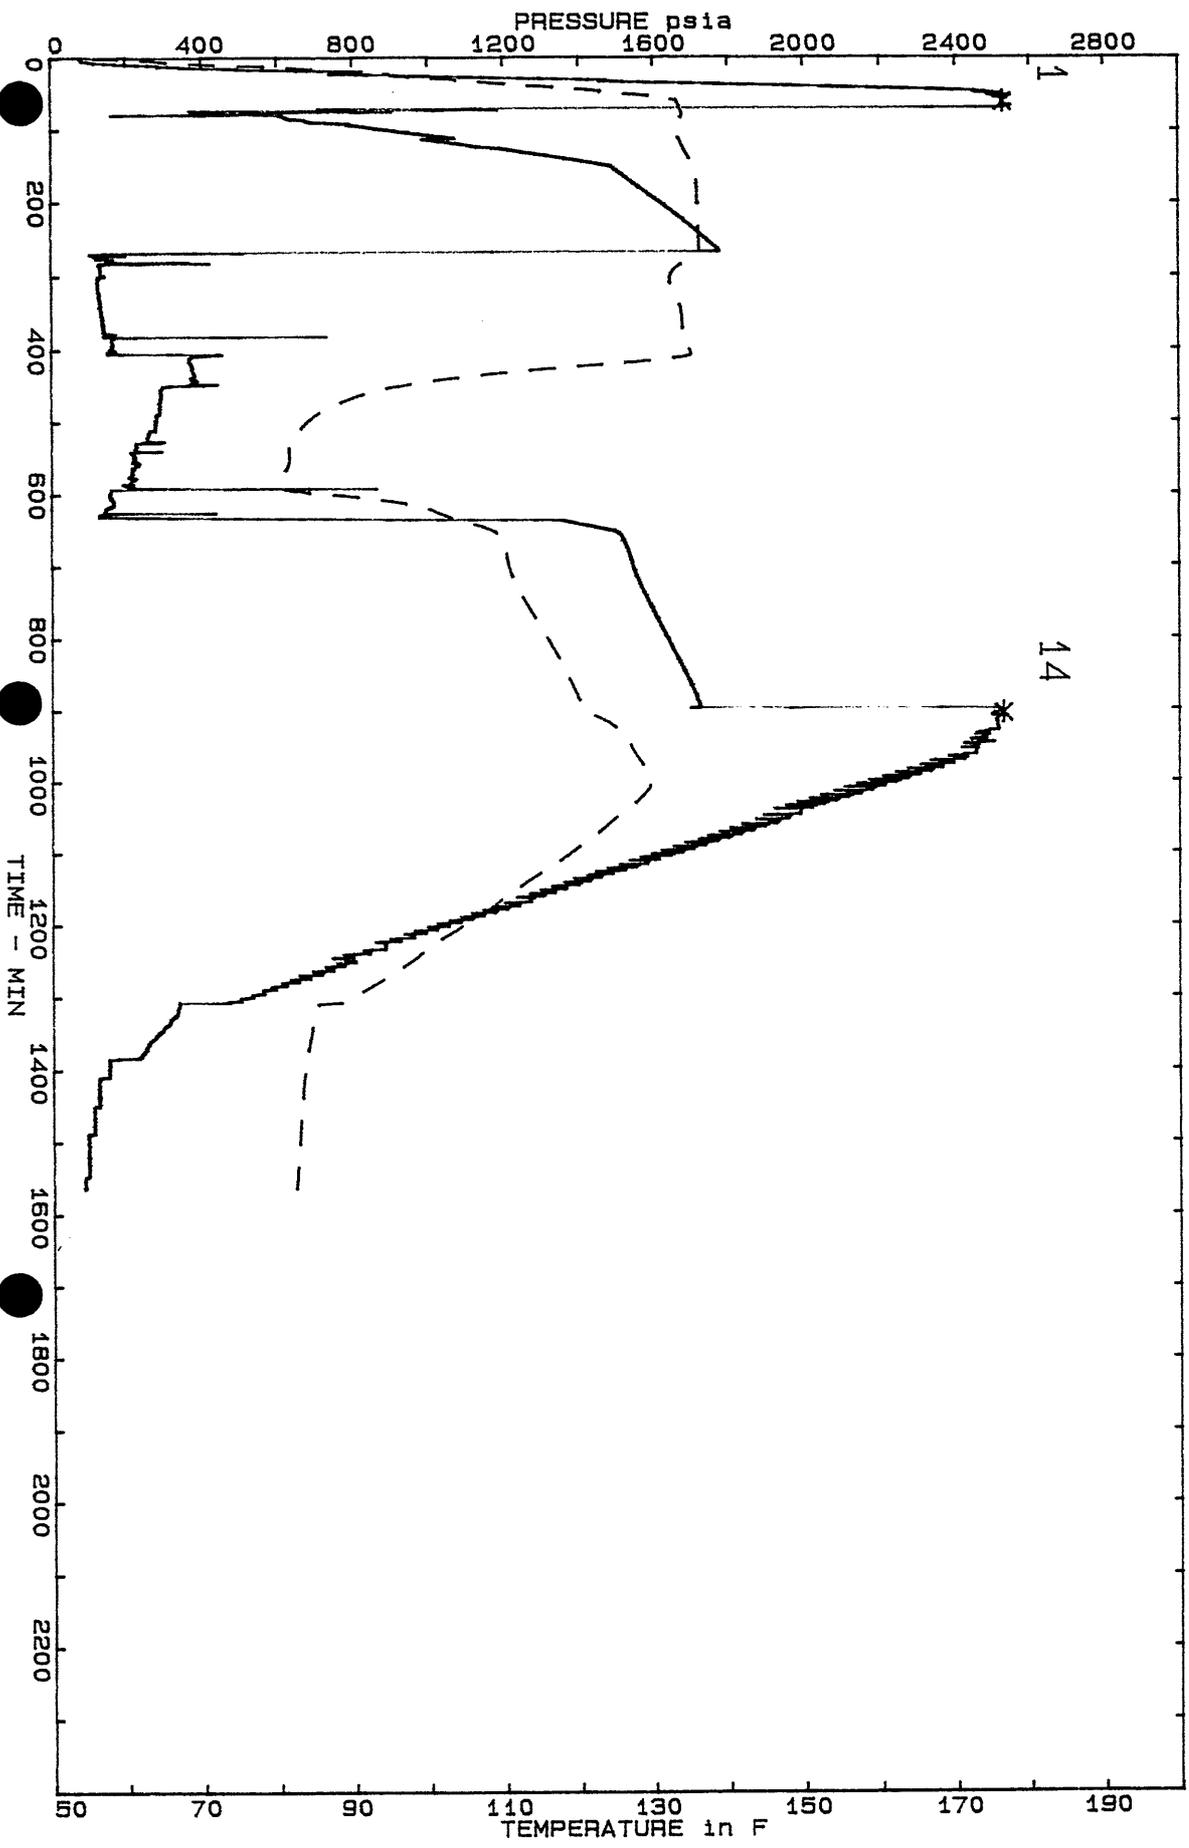

BOT CONVENTIONAL DST

DVG NO. 869-055-3

DESCRIPTION	LENGTH	O.D.	I.D.	DEPTH
PUMP OUT TYPE REVERSE CIRCULATING SUB	0.42	6.25	3.00	1489.60
DRILL COLLARS	8.61	6.25	2.8125	
IMPACT TYPE REVERSE CIRCULATING SUB	0.42	6.25	3.00	1498.63
DRILL COLLARS	8.92	6.25	2.8125	
CROSS OVER SUB	0.30	6.25	2.25	
INSIDE RECORDER CARRIER	1.37	4.875	1.00	1509.22
ROTATING SHUT IN VALVE	2.59	5.00	1.00	1511.81
POSITIVE CONTROL SAMPLER	1.04	5.00	1.00	
HYDRAULIC MULTIPLE SHUT IN VALVE	1.49	5.00	1.00	
INSIDE RECORDER CARRIER	1.37	4.875	1.00	1515.71
PANEX	3.35	4.75	2.25	1519.06
HYDRAULIC JARS	2.01	5.00	1.25	
SAFETY JOINT	0.69	5.00	2.25	
PACKER SECTION	2.88	7.50	1.00	
PACKER SECTION STICK UP AND ELEMENT	1.36	7.50	1.00	1526.00
PACKER SECTION STICK DOWN	1.33	7.50	1.00	
PERFORATED ANCHOR PIPE	4.57	4.75	2.25	
OUTSIDE RECORDER CARRIER	2.06	5.00	1.25	1533.96
CROSS OVER SUB	0.70	6.25	2.25	
DRILL COLLARS	19.01	6.25	2.8125	
SPACING SECTIONS	2.44	4.75	2.25	
ANCHOR SHOE	0.91	5.00	-	1557.02

DUNBAR # 1

DST # 2

TEST TOOL AND PIPE RECORD (CONVENTIONAL).

<u>DESCRIPTION.</u>	<u>LENGTH</u>	<u>OD</u>	<u>ID</u>
TOTAL STRING BELOW PACKER SEAL	31.02	-	-
TOTAL TOOLS BETWEEN PACKER SEALS	-	-	-
TOTAL TOOLS ABOVE PACKER SEAL	22.23	-	-
TOTAL DRILL COLLARS ABOVE INTERVAL	142.96	6.25	2.8125
TOTAL HEVI-WATE ABOVE INTERVAL	55.18	4.50	2.8750
TOTAL DRILL PIPE ABOVE INTERVAL	1310.65	4.50	3.8260
TOTAL STRING	1562.04	-	-
TOTAL DEPTH	1557.00	-	-
TOP SINGLE ABOVE TABLE	5.04	-	-



GAS AND FUEL

SCIENTIFIC SERVICES - LABORATORY REPORT

1136 Nepean Highway, Highett, Victoria 3190

Tel. 556 6222

Fax 555 7616

Subject: Analysis of Exploration Sample Dunbar No.1 - DST #2
@1340 Hr. - 18/03/1995

Requested by: Kevin Lanigan, GFE Resources Ltd

Report Reference: 95/0428

Date: March 21 1995

Received: March 19, 1995

Author: I. Strudwick

Approved by: P. Roga

Distribution: Kevin Lanigan
Explorationist
GFE Resources Limited
Level 6, 6 Riverside Quay
South Melbourne 3205

Gas Quality and Environment (2)

Master File

Keywords: Exploration, Natural, Gas, Analysis

Disc Reference: A2:\95\GFE0428.DOC

Job Order Number: 10031140

Master Report Number: 95/0428/C



GAS AND FUEL
SCIENTIFIC SERVICES - LABORATORY REPORT

1136 Nepean Highway, Highett, Victoria 3190
 Tel. 556 6222 Fax 555 7616

Subject: Analysis of Exploration Sample Dunbar No.1 - DST #2
 @ 1340 Hr. - 18/03/1995

Requested by: Kevin Lanigan, GFE Resources Ltd

Report Reference: 95/0428

<u>Component</u>	<u>Mole Percent Concentration</u>
Methane	88.3
Ethane	4.53
Propane	2.19
Iso-Butane	0.513
Normal-Butane	0.599
Neo-Pentane	0.008
Iso-Pentane	0.215
Normal-Pentane	0.180
Hexanes	0.327
Heptanes+	0.295
Carbon Dioxide	0.14
Oxygen+Argon	0.14
Nitrogen	2.56
Helium	0.022


Calculated Characteristics for the dry gas at MSC

Gross Heating Value	41.6 MJ/m ³
Wobbe Index	51.5 MJ/m ³
Relative Density	0.652

Method References: SSS-11-006, ISO 6974

Analyst: I. Strudwick

Date: 21/03/1995

Approved Signatory: 



GAS AND FUEL

SCIENTIFIC SERVICES - LABORATORY REPORT

1136 Nepean Highway, Highett, Victoria 3190

Tel. 556 6222

Fax 555 7616

Subject: Analysis of Exploration Sample Dunbar No.1 - DST #2
@1426 Hr. - 18/03/1995

Requested by: Kevin Lanigan, GFE Resources Ltd

Report Reference: 95/0427

Date: March 21 1995

Received: March 19, 1995

Author: I. Strudwick

Approved by: P. Roga

Distribution: Kevin Lanigan
Explorationist
GFE Resources Limited
Level 6, 6 Riverside Quay
South Melbourne 3205

Gas Quality and Environment (2)

Master File

Keywords: Exploration, Natural, Gas, Analysis

Disc Reference: A2:\95\GFE0427.DOC

Job Order Number: 10031140

Master Report Number: 95/0427/C

APPENDIX 7

APPENDIX 7

RFT PRESSURE TEST REPORT SHEET

RFT - PRESSURE TEST REPORT SHEET

WELL NAME: DUNBAR-1	PERMIT: PPL1	OBSERVER: Dean Grant	DATE: 22 / 3 / 95
---------------------	--------------	----------------------	-------------------

TEST NO	FILE NO	DEPTH (mKB)	SEAT		HYDROSTATIC PRESSURE		FORMATION PRESSURE (PSIA)		TIME TO STABILISATION (secs)	SAMPLE		FORMATION/REMARKS
			Y	N	INITIAL	FINAL	QUARTZ GAUGE	STRAIN GAUGE		Y	N	
1	1	1534.0	✓		2504.3	2505.1	2135.7		843		✓	
2	2	1536.0	✓		2508.8	2510.2	2145.2		1535		✓	Still unstabilised
3	3	1540.5	✓		2518.0	2518.1	2147.3		1431		✓	Close to stabilised
4	4	1542.5	✓		2512.2	2521.5					✓	Supercharged and tight
5	5	1535.5	✓		2511.2	2511.4	2130.9		65		✓	
6	6	1540.0		✓	2518.5	2518.7						Seal failure
7	7	1536.5	✓		2513.5	2513.7	2132.9		1437		✓	Close to stabilised
8	8	1597.5	✓		2523.2	2523.6	2217.0		732		✓	Supercharged?
9	9	1607.0	✓		2612.4	2612.2						Tool plugged
10	10	1607.0		✓	2627.4	2627.5						Seal failure
11	11	1607.0		✓	2627.7	2627.7						Seal failure
12	12	1644.5	✓		2689.1	2689.2						Tight
13	13	1482.5		✓	2427.2	2426.5						Seal failure
14	14	1482.2	✓		2426.0	2426.2						Suspect tool plugged
15	15	1482.4	✓		2426.9	2427.4						Suspect tool plugged
16	16	1483.2	✓		2428.6	2427.7						Suspect tool plugged
17	17	1484.0	✓		2429.1	2429.6						Suspect tool plugged

GFE RESOURCES LTD

RFT - PRESSURE TEST REPORT SHEET

WELL NAME: DUNBAR-1	PERMIT: PPL1	OBSERVER: Dean Grant	DATE: 22 / 3 / 95
---------------------	--------------	----------------------	-------------------


TEST NO	FILE NO	DEPTH (mKB)	SEAT		HYDROSTATIC PRESSURE		FORMATION PRESSURE (PSIA)		TIME TO STABILISATION (secs)	SAMPLE		FORMATION/REMARKS
			Y	N	INITIAL	FINAL	QUARTZ GAUGE	STRAIN GAUGE		Y	N	
18	14	1515.0	✓		2479.2	2479.9	-	-			✓	Plugging test, tool plugged
					P.O.H. and Inspect Tool							
19	-	1482.5		✓	2424.6	2425.1	-	-			✓	Seal failure
20	-	1482.6		✓	2426.1	2426.4	-	-			✓	Seal failure
21	15	1483.5		✓	2429.2	2429.5	-	-			✓	Seal failure
22	16	1483.8	✓		2430.6	2431.0	2044.5	458			✓	Built to 2635.5 quickly, nearly stabilised and started building again.
23	17	1486.5	✓		2435.9	2436.5	2044.5	126			✓	
24	18	1488.5	✓		2440.2	2440.7	2049.6	64			✓	
25	19	1491.5	✓		2445.5	2446.1	2053.4	355			✓	
26	20	1495.5	✓		2452.4	2451.4	-	-			✓	Supercharged?
27	-	1500.2		✓	2460.0	2459.9	-	-			✓	Seal failure
28	-	1500.3		✓	2459.6	2459.2	-	-			✓	Seal failure
29	21	1515.0	✓		2484.2	2484.1	2085.1	122			✓	
30	-	1518.0		✓			-	-			✓	Seal failure
31		1517.5		✓			-	-			✓	Seal failure
32	-	1518.5		✓			-	-			✓	Seal failure
33	-	1518.7		✓			-	-			✓	Seal failure

APPENDIX 8

APPENDIX 8

VELOCITY SURVEY

Velocity Data

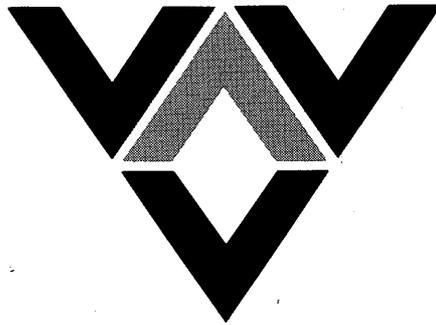

VELOCITY SURVEY

DUNBAR No. 1

VICTORIA

AUSTRALIA


for

GFE RESOURCES

recorded by

VELOCITY DATA PTY. LTD.

processed by

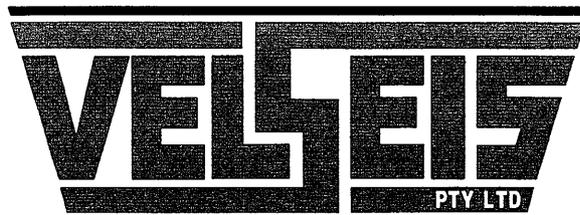

Integrated Seismic Technologies

Brisbane, Australia
19 July, 1995

CONTENTS

SUMMARY 1

GENERAL INFORMATION 1

EQUIPMENT 2

RECORDING 3

PROCESSING

Elevation Data 3

Recorded Data 4

Correction to Obtain 4
Vertically Corrected Time

Mud Pit Calibration 4

Correction to Datum 4

Calibration of Sonic Log

Method 4

Trace Playouts 5

FIGURES

Figure 1 Shot location sketch


Figure 2 Time-depth and velocity curves

Figure 3 Trace playouts

Enclosures

1. Calculation Sheets

2. Trace Display and
First Arrival Plots

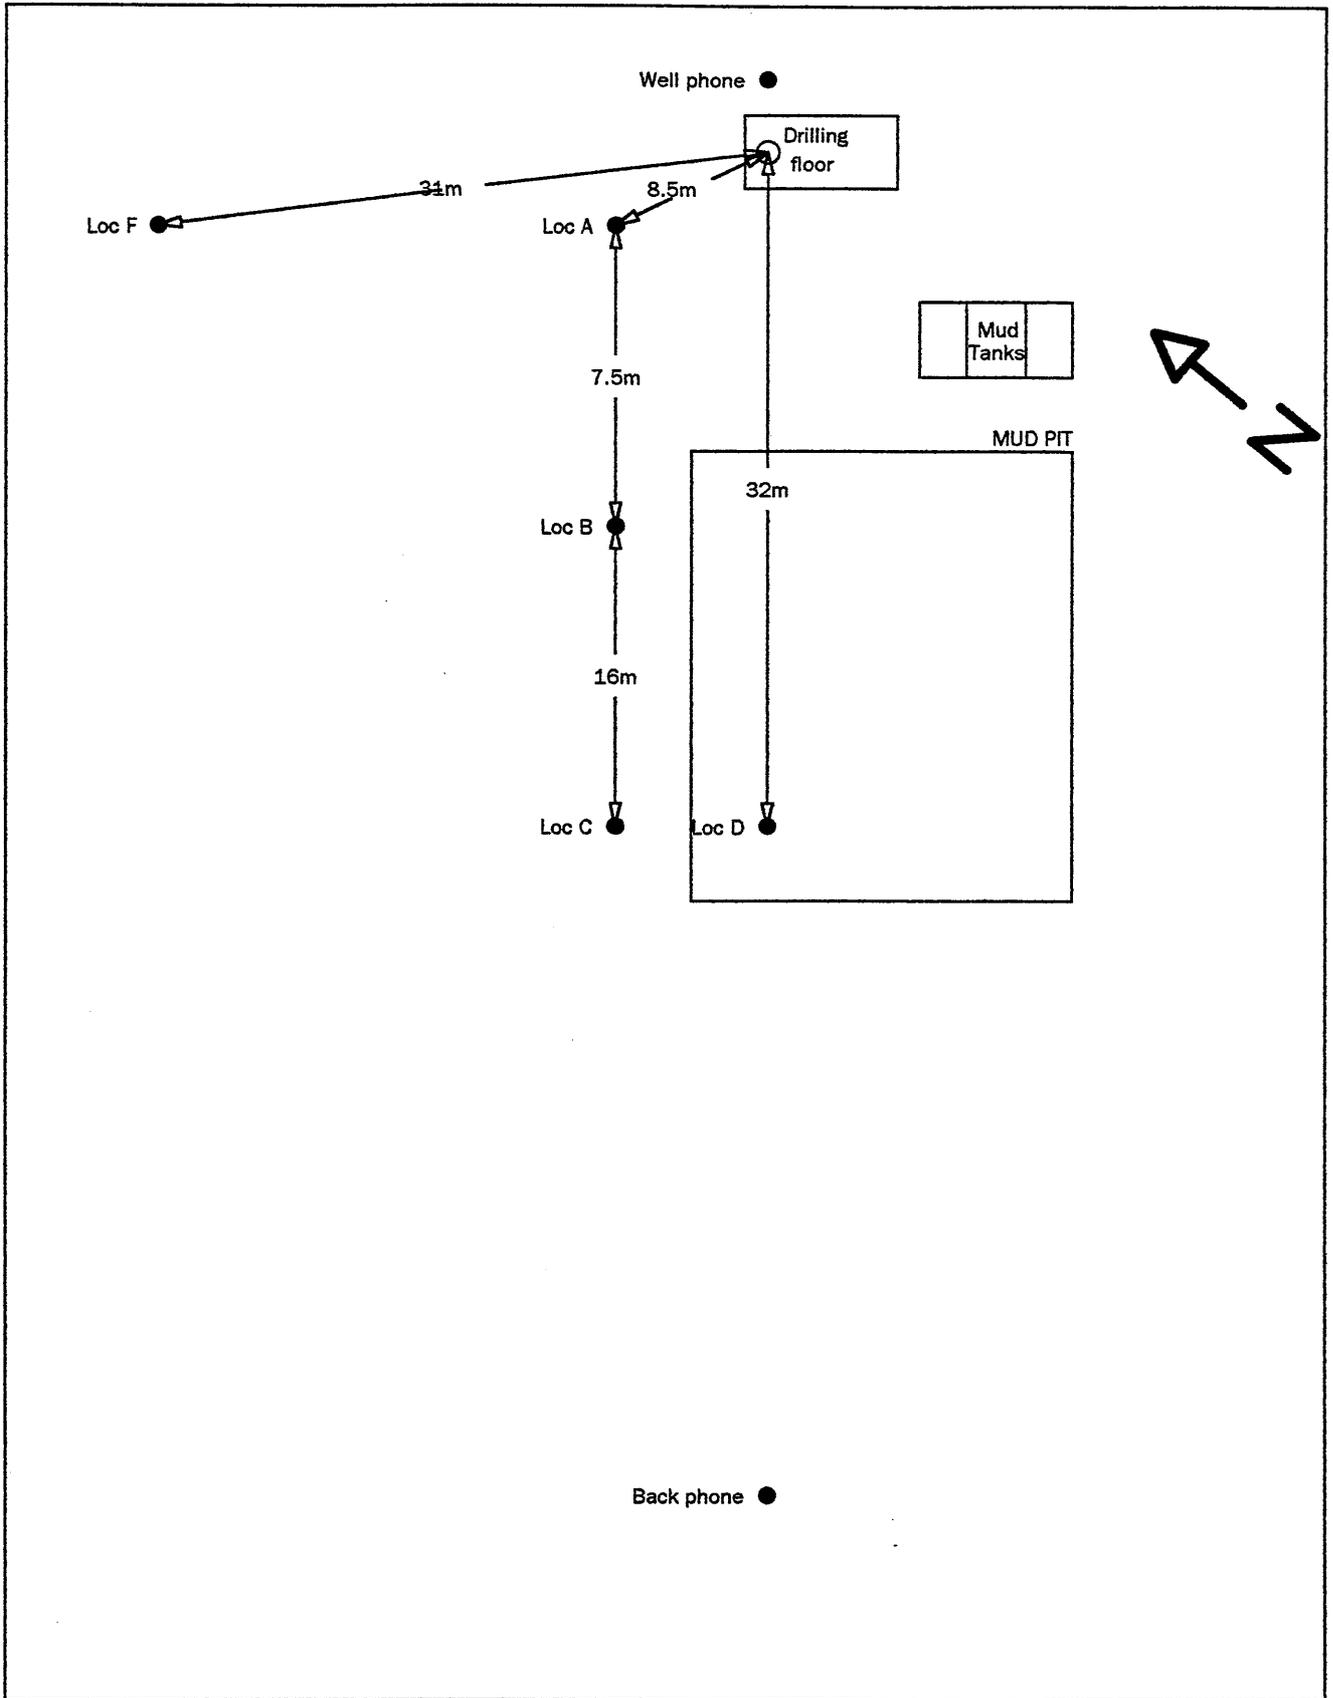

DUNBAR-1

SHOT POINT LOCATION SKETCH
GFE RESOURCES LTD

Figure 1

SUMMARY

Velocity Data Pty Ltd conducted a velocity survey for GFE Resources in the Dunbar No. 1 well, Victoria, Australia. The date of the survey was the 21st March 1995.

Explosives were used as an energy source with shots being fired in the mud pit in the majority of instances.

GENERAL INFORMATION

Name of Well : Dunbar No. 1
Location : Victoria - PPL 1
Coordinates : Latitude 38 32 54.09 S
: Longitude 142 54 23.8E
Date of Survey : 21st March 1995
Weather : Showers
Operational Base : Brisbane
Operator : J. Larsen
Shooter : D. Blick
Client Representative : Mr. D. Horner

EQUIPMENT

Downhole Tool

Veldata Camlock 100 (90 mm)

Sensors:

6 HSI 4.5 Hz 215 ohm, high temperature
(300 degrees F) detectors connected in
series parallel. Frequency response
8-300 Hz within 3 dB.

Preamplifier:

48 dB fixed gain.
Frequency response 5-200 Hz within 3 dB.

Reference Geophone

Mark Products L1 4.5 Hz

Recording Instruments

System VDL 16

Windows based high resolution seismic acquisition instruments

Computer :	386 Portable computer
Resolution :	A/D conversion 16 bits
Dynamic Range :	96dB
Total Gain :	136dB
Data channels :	8
Display :	A4 Bubble Jet Printer 300 D.P.I.

RECORDING

Energy Source : Explosive, Powergel
Shot Location : Mud pit
Charge Size : .2/3.0 sticks
Average Shot Depth : .7 metres
Mud Pit Shot Offset : 32.0 metres
Recording Geometry : Figure 1

Acquisition of the survey was carried out using the VDLS 16 recording system.

Shots were recorded on 3¹/₂" floppy disc. The sample rate was 0.5 msec for the entire survey.

The scale of the graphic display varies with signal strength and is noted on each playout.
The times were picked from a sample by sample screen plot, a full set of these trace displays can be seen at the rear of the report.

PROCESSING

Elevation Data

Elevation of KB : 82.7m above sea level
Elevation of Ground : 77.0m above sea level
Elevation of Seismic Datum : 0.0m above sea level
Depth Surveyed : 1752.0m below KB
Depth of Casing : 312.0m below KB

PROCESSING

Recorded Data

Number of Shots Used : 30

Number of Levels
Recorded : 20

Data Quality : Excellent

Noise Level : Low

Corrections to Obtain Vertically Corrected Time

The 'corrected' times shown on the calculation sheet have been obtained by:

- (1) Subtraction of the instrument delay (2msec) from the recorded arrival times.
- (2) Geometric correction for non-verticality of ray paths resulting from shot offset.
- (3) Addition of an Uphole correction time which corrects for the depth of shot below ground level for shots external to the pit using an uphole time (2.0msec) determined from surface channel information.
- (4) Replacement velocity to correct for variation in elevation between the ground level of the shot and ground level of the well head.
- (5) re-addition of the instrument delay (2msec).

Mud Pit Calibration

Due to a variation in shooting conditions between shots discharged within the pit to those external to the pit, It is necessary to tie the mud pit shots to the external shots. Thus a bulk shift of 2.0msec has been applied which has been calculated from the difference in corrected vertical time for pit and external shots at the 82.7m below KB level.

Correction to Datum

The datum chosen was 0.0 metres ASL that is 82.7 metres below KB. This level was shot eight times during the survey, all of which have been used to calculate an effective datum correction time of 47.4msec. Please note this time includes a 2msec instrument delay which must be subtracted to obtain the raw pick time.

Calibration of Sonic Log - Method

A sonic log was not provided by GFE Resources. As a result all values appearing on the calculation sheet are un-calibrated.

PROCESSING

Trace Playouts (Figure 3)


Figure 3A is a plot of all raw data traces used.

Figure 3B is a plot to scale in depth and time of selected traces.

Figure 3C is a plot of selected surface traces. .

Troy Peters
Geophysicist.

Figure 2

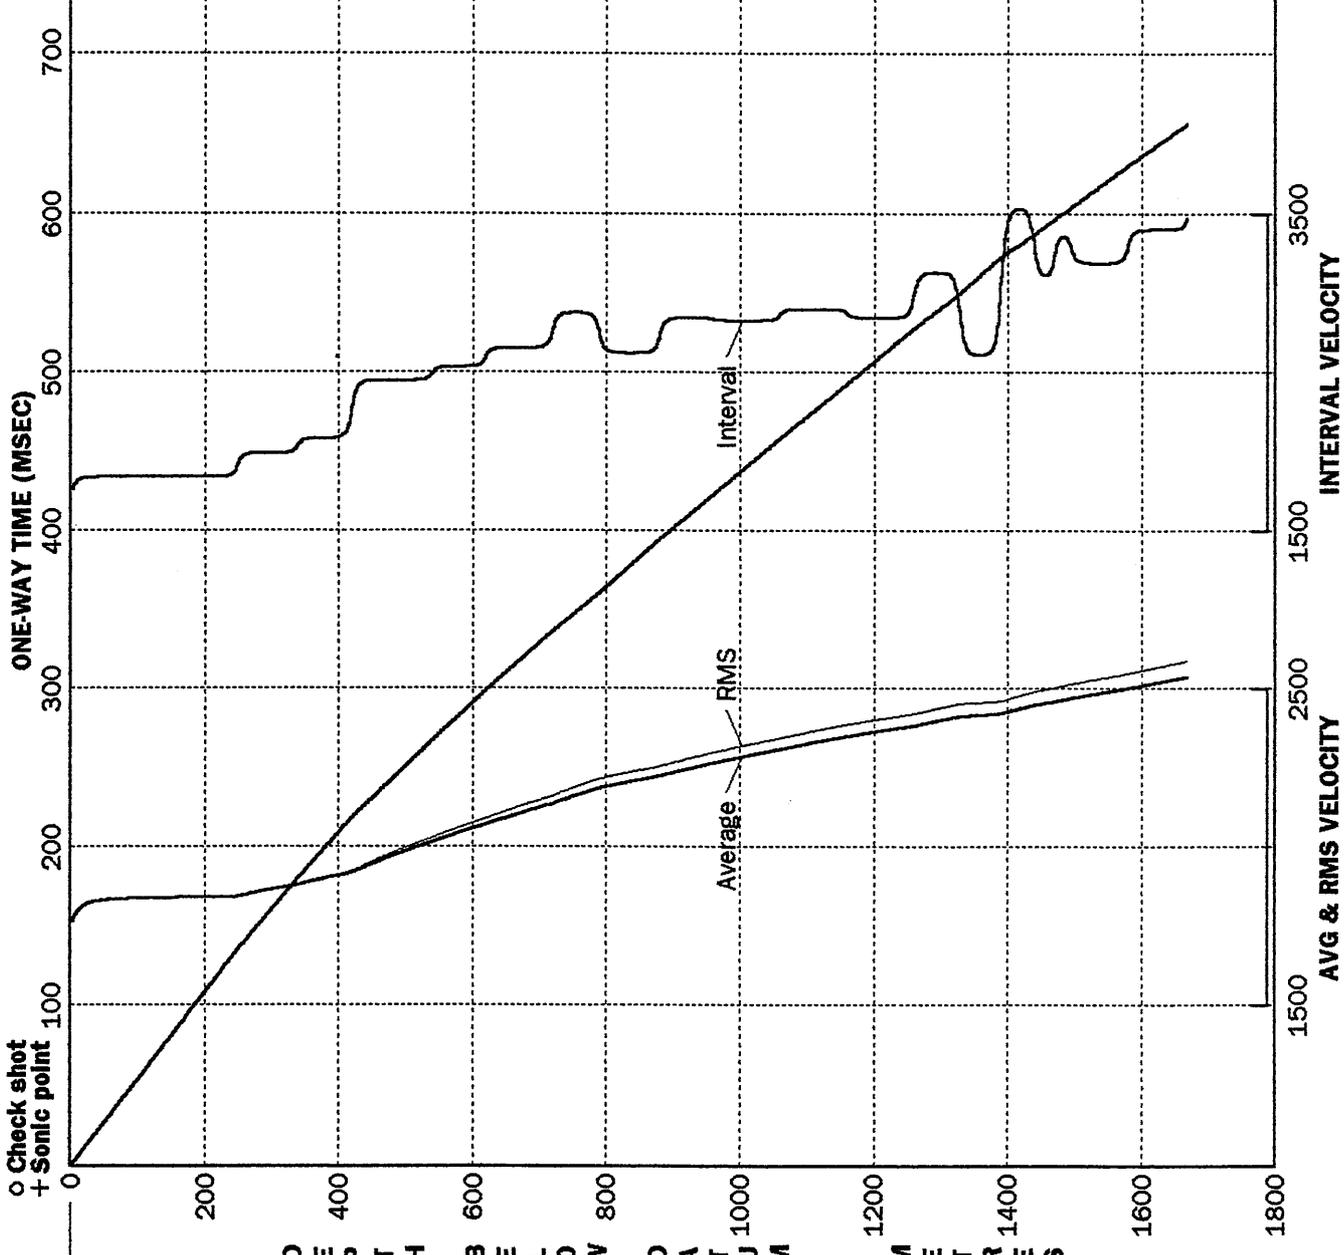


82.7 — DATUM

o Check shot
+ Sonic point

D E P T H B E L O W D A T U M I N M E T R E S


Time Depth & Velocity Curves
DUNBAR-1

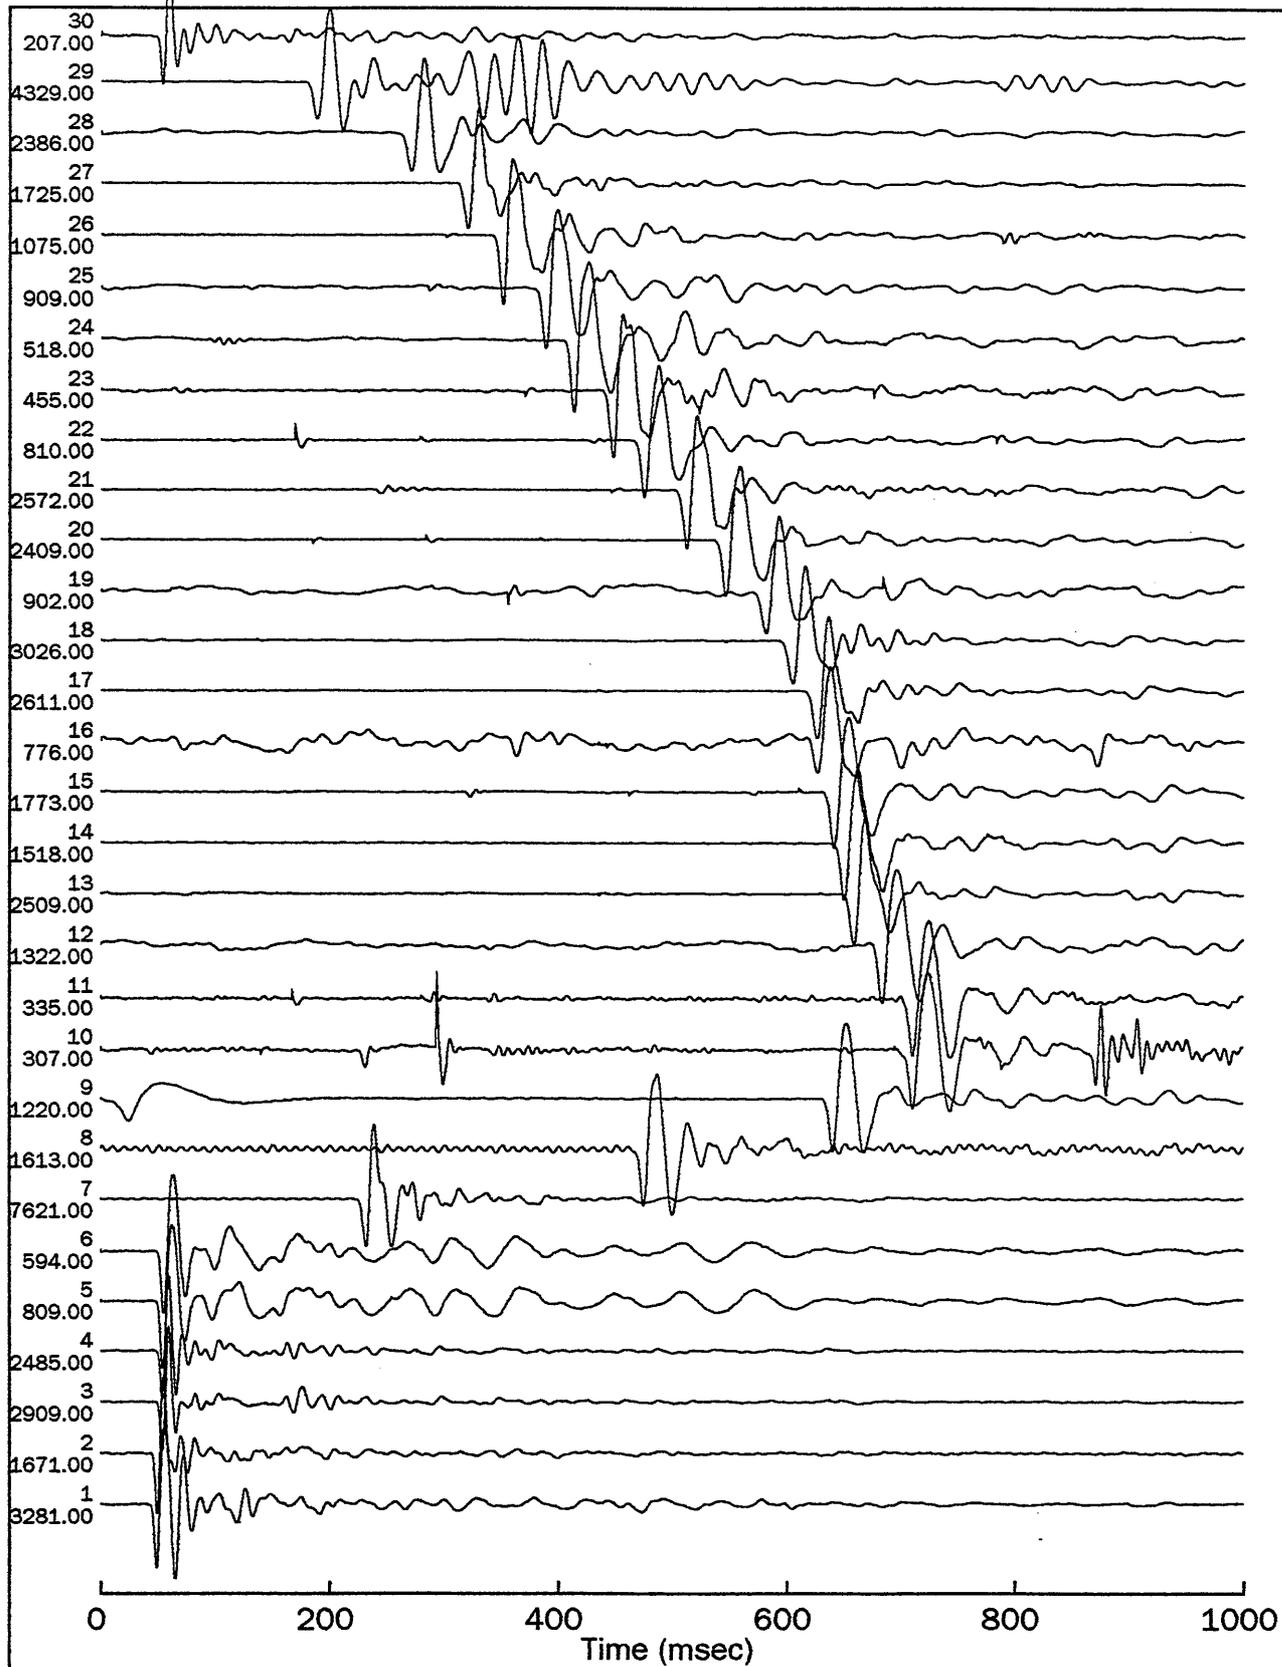

DUNBAR-1

VELOCITY SURVEY TRACE DISPLAY



Figure 3A

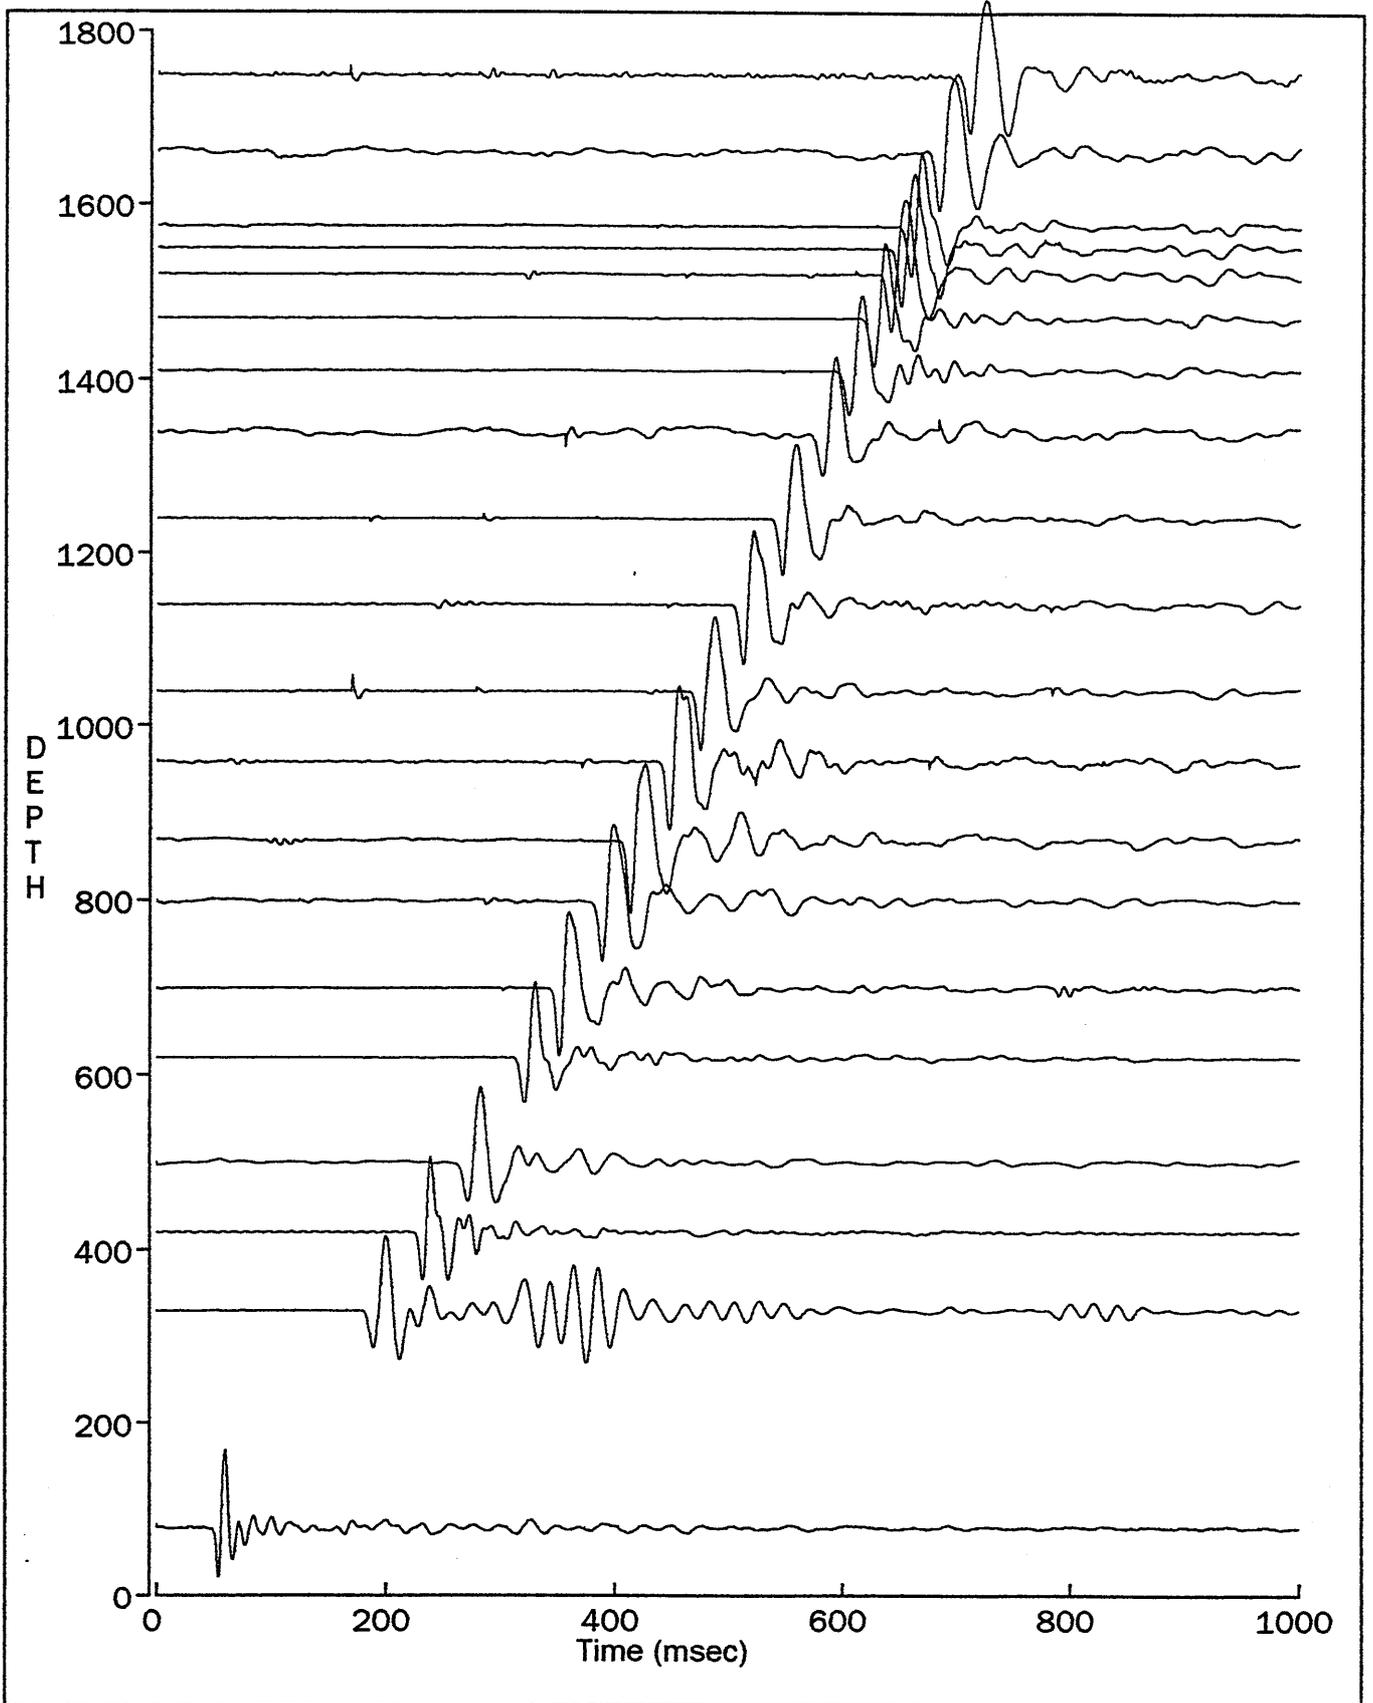

DUNBAR-1

VELOCITY SURVEY TRACE DISPLAY

Figure 3B

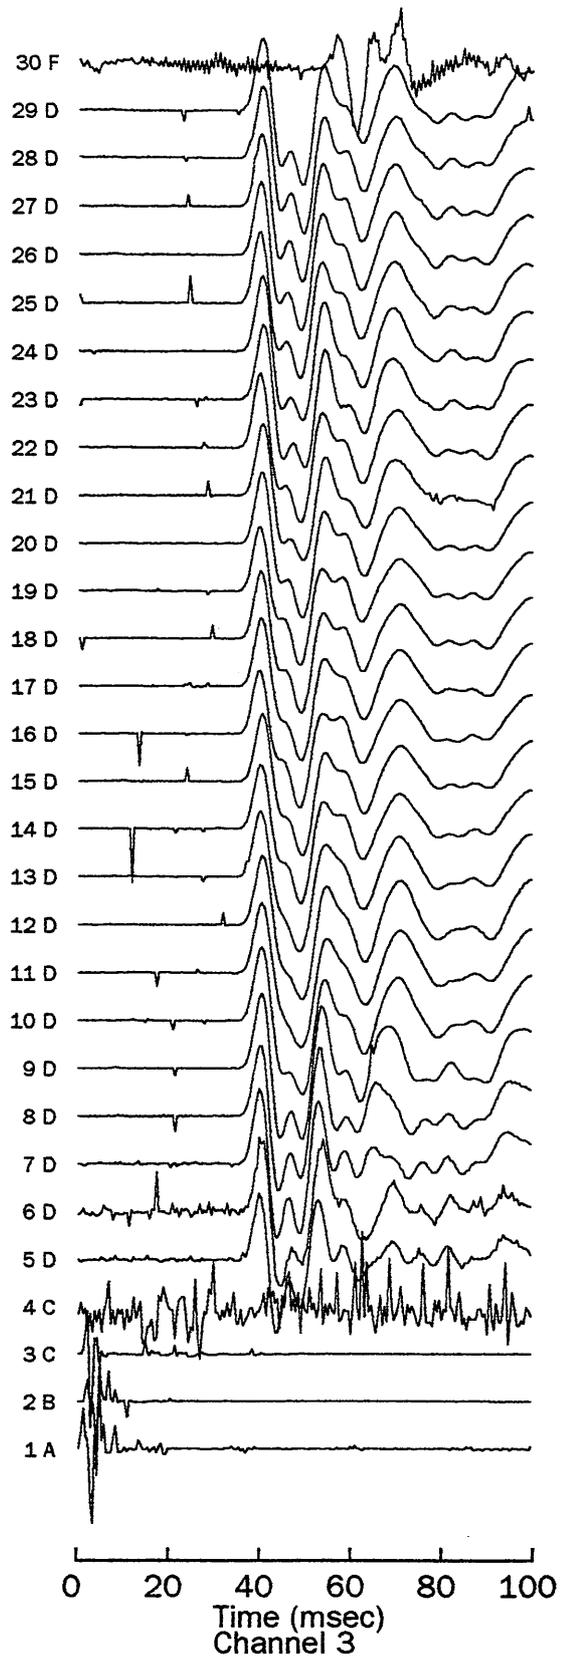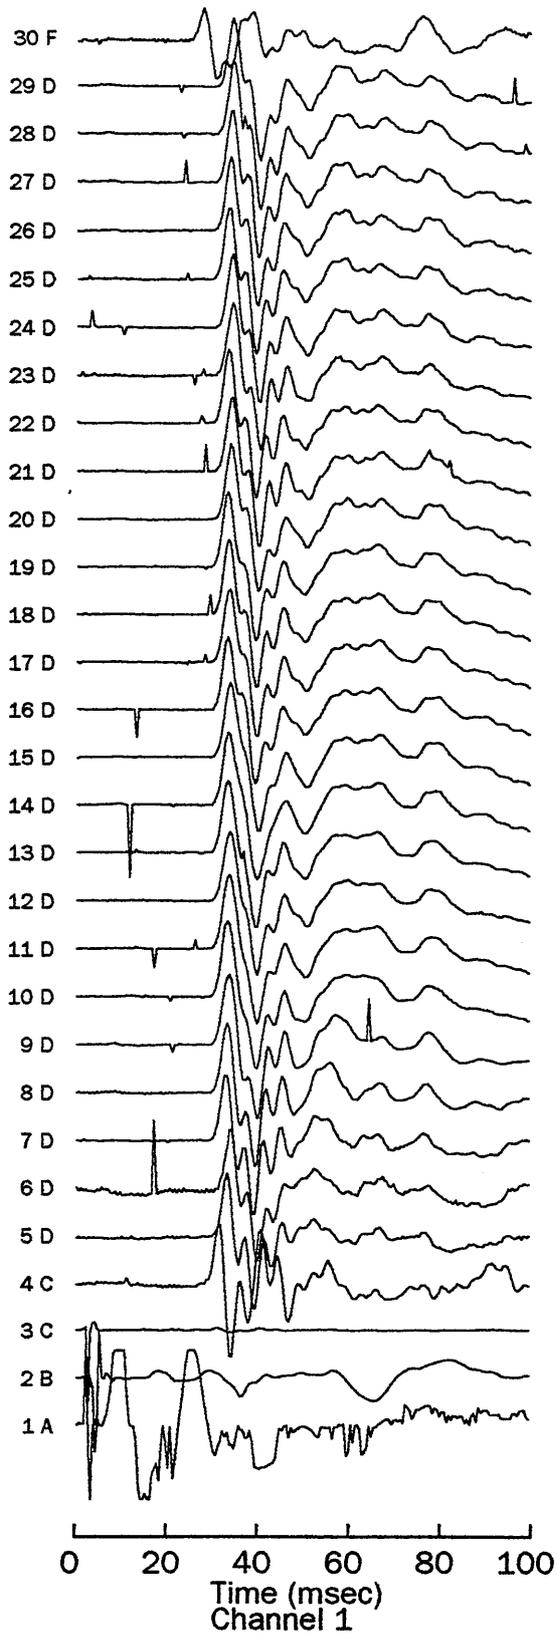

DUNBAR-1

VELOCITY SURVEY TRACE DISPLAY
AUXILIARY CHANNELS

Figure 3C

COMPANY : GFE RESOURCES LTD
WELL : DUNBAR-1

Latitude : 38 32 54.097S Longitude : 142 54 23.82E Survey date : 21-Mar-95 Survey units : METRES
 Elevations : Datum : 0 Ground : 77 Kelly : 82.7 Times : MILLISECONDS

Shot data : Location Elevation Offset
 A 77.0 8.5
 B 77.0 16.0
 C 76.3 32.0
 D 76.1 32.0
 F 77.8 31.0

Rig identification : CENTURY 11
 Energy source : POWERGEL
 Logger : BPB
 Elevation velocity
 for shot statics : 1700
 Instrument delay : 2.0 msec

SHOT CALCULATIONS :

Shot no.	Geophone depth Kelly - Datum	Shot Locn	Shot Depth	TIMES			Datum	Check shot interval		Velocities		
				Record	Corr.	Avg.		distance	time	Average	RMS	Interval
1	82.7	0.0	A	0.5	44.5	46.2						
2	82.7	0.0	B	0.5	45.0	46.1						
3	82.7	0.0	C	0.5	49.0	47.7						
4	82.7	0.0	C	0.5	49.0	47.7						
5	82.7	0.0	D	0.5	49.0	47.8						
6	82.7	0.0	D	0.5	49.5	48.3						
30	82.7	0.0	F	0.5	50.0	48.1	47.4	0.0	247.3	134.2	1842.8	1842.8
29	330.0	247.3	D	0.7	180.0	181.6	181.6	134.2	90.0	45.2	1880.2	1842.8
7	420.0	337.3	D	0.5	225.0	226.8	226.8	179.4	80.0	38.2	1917.7	1881.3
28	500.0	417.3	D	0.7	263.0	265.0	265.0	217.6	120.0	49.1	2014.6	1920.4
27	620.0	537.3	D	0.7	312.0	314.1	314.1	266.7	80.0	31.5	2070.1	2026.9
26	700.0	617.3	D	0.7	343.5	345.6	345.6	298.2	100.0	37.6	2136.1	2087.1
25	800.0	717.3	D	0.7	381.0	383.2	383.2	335.8			2136.1	2158.7

DATUM


SHOT CALCULATIONS : (cont)

Shot no.	Geophone depth Kelly - Datum	Shot Loon	Shot Depth	Record	TIMES		Datum	Check shot distance	Check shot interval time	Velocities		
					Corr.	Avg.				Average	RMS	
24	870.0	D	0.7	405.5	407.7	407.7	360.3	70.0	24.5	2185.1	2213.2	2857.1
23	960.0	D	0.7	439.5	441.8	441.8	394.4	90.0	34.1	2224.4	2253.2	2639.3
8	1040.0	D	0.5	468.5	470.8			80.0	28.2	2265.3	2296.8	2836.9
22	1040.0	D	0.7	467.0	469.3	470.0	422.6	100.0	35.3	2309.0	2342.5	2832.9
21	1140.0	D	0.7	503.0	505.3	505.3	457.9	100.0	34.5	2350.3	2385.7	2898.6
20	1240.0	D	0.7	537.5	539.8	539.8	492.4	100.0	35.0	2384.0	2419.8	2857.1
19	1340.0	D	0.7	572.5	574.8	574.8	527.4	70.0	22.6	2413.3	2451.4	3097.3
18	1410.0	D	0.7	595.0	597.4	597.4	550.0					
16	1470.0	D	0.7	618.0	620.4	620.4		60.0	22.5	2423.2	2460.2	2666.7
17	1470.0	D	0.7	617.0	619.4	619.4	572.5					
9	1520.0	D	0.5	632.0	634.4	634.4		50.0	14.5	2448.6	2489.3	3448.3
15	1520.0	D	0.7	632.0	634.4	634.4	587.0	30.0	9.5	2459.8	2501.4	3157.9
14	1550.0	D	0.7	641.5	643.9	643.9	596.5					
13	1575.0	D	0.7	649.0	651.4	651.4	604.0	25.0	7.5	2470.7	2513.4	3333.3
12	1660.0	D	0.5	675.5	677.9	677.9	630.5	85.0	26.5	2501.7	2546.4	3207.5
10	1752.0	D	0.5	702.5	704.9	704.9						

SHOT CALCULATIONS : (cont)

Shot no.	Geophone depth Kelly - Datum	Shot Loch	Shot Depth	Record	TIMES Corr.	Avg.	Datum	Check shot distance	interval time	Average	Velocities RMS	Interval
11	1752.0	D	0.5	702.5	704.9	704.9	657.5	92.0	27.0	2538.9	2587.4	3407.4

First arrivals plot : DUNBAR-1

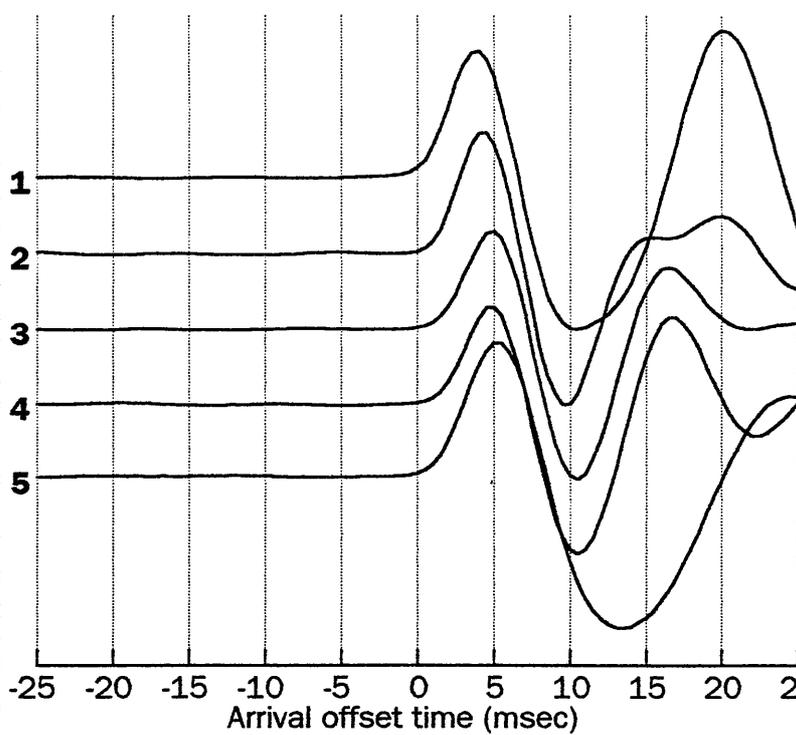

Shot 1 Location : A
 Charge depth .5 Size .2
 Phone depth : 82.7
 Arrival time : 44.5 msec

Shot 2 Location : B
 Charge depth .5 Size .2
 Phone depth : 82.7
 Arrival time : 45.0 msec


Shot 3 Location : C
 Charge depth .5 Size .3
 Phone depth : 82.7
 Arrival time : 49.0 msec

Shot 4 Location : C
 Charge depth .5 Size .3
 Phone depth : 82.7
 Arrival time : 49.0 msec

Shot 5 Location : D
 Charge depth .5 Size .3
 Phone depth : 82.7
 Arrival time : 49.0 msec

SHOT 1		SHOT 2		SHOT 3		SHOT 4		SHOT 5	
Time	Ampl	Time	Ampl	Time	Ampl	Time	Ampl	Time	Ampl
34.0	-22.00	34.0	5.00	38.0	-11.00	38.0	-8.00	38.0	-18.00
34.5	-19.00	34.5	4.00	38.5	-14.00	38.5	-14.00	38.5	-18.00
35.0	-18.00	35.0	3.00	39.0	-18.00	39.0	-15.00	39.0	-17.00
35.5	-15.00	35.5	1.00	39.5	-24.00	39.5	-16.00	39.5	-16.00
36.0	-10.00	36.0	-4.00	40.0	-24.00	40.0	-16.00	40.0	-15.00
36.5	-9.00	36.5	-6.00	40.5	-31.00	40.5	-15.00	40.5	-14.00
37.0	-8.00	37.0	-11.00	41.0	-34.00	41.0	-14.00	41.0	-12.00
37.5	-6.00	37.5	-17.00	41.5	-34.00	41.5	-10.00	41.5	-13.00
38.0	-7.00	38.0	-22.00	42.0	-34.00	42.0	-6.00	42.0	-12.00
38.5	-8.00	38.5	-24.00	42.5	-31.00	42.5	-3.00	42.5	-10.00
39.0	-13.00	39.0	-25.00	43.0	-30.00	43.0	0.00	43.0	-11.00
39.5	-13.00	39.5	-26.00	43.5	-25.00	43.5	4.00	43.5	-12.00
40.0	-18.00	40.0	-27.00	44.0	-24.00	44.0	4.00	44.0	-13.00
40.5	-23.00	40.5	-26.00	44.5	-20.00	44.5	4.00	44.5	-12.00
41.0	-29.00	41.0	-24.00	45.0	-18.00	45.0	5.00	45.0	-13.00
41.5	-36.00	41.5	-17.00	45.5	-16.00	45.5	5.00	45.5	-13.00
42.0	-43.00	42.0	-16.00	46.0	-14.00	46.0	3.00	46.0	-13.00
42.5	-48.00	42.5	-11.00	46.5	-13.00	46.5	-2.00	46.5	-14.00
43.0	-55.00	43.0	-11.00	47.0	-14.00	47.0	-6.00	47.0	-13.00
43.5	-67.00	43.5	-9.00	47.5	-16.00	47.5	-10.00	47.5	-17.00
44.0	-88.00	44.0	-13.00	48.0	-23.00	48.0	-17.00	48.0	-18.00
44.5	-135.00	44.5	-19.00	48.5	-29.00	48.5	-22.00	48.5	-22.00
45.0	-238.00	45.0	-35.00	49.0	-52.00	49.0	-36.00	49.0	-31.00
45.5	-407.00	45.5	-77.00	49.5	-85.00	49.5	-66.00	49.5	-52.00
46.0	-732.00	46.0	-150.00	50.0	-147.00	50.0	-117.00	50.0	-81.00
46.5	-1113.00	46.5	-273.00	50.5	-277.00	50.5	-209.00	50.5	-131.00
47.0	-1563.00	47.0	-492.00	51.0	-454.00	51.0	-389.00	51.0	-212.00
47.5	-2118.00	47.5	-721.00	51.5	-692.00	51.5	-601.00	51.5	-301.00
48.0	-2510.00	48.0	-966.00	52.0	-1048.00	52.0	-861.00	52.0	-403.00
48.5	-2762.00	48.5	-1215.00	52.5	-1361.00	52.5	-1196.00	52.5	-528.00
49.0	-2815.00	49.0	-1335.00	53.0	-1641.00	53.0	-1437.00	53.0	-621.00
49.5	-2628.00	49.5	-1348.00	53.5	-1864.00	53.5	-1615.00	53.5	-696.00
50.0	-2248.00	50.0	-1212.00	54.0	-1899.00	54.0	-1623.00	54.0	-743.00
50.5	-1586.00	50.5	-978.00	54.5	-1773.00	54.5	-1484.00	54.5	-739.00
51.0	-921.00	51.0	-663.00	55.0	-1407.00	55.0	-1135.00	55.0	-690.00
51.5	-202.00	51.5	-212.00	55.5	-945.00	55.5	-720.00	55.5	-604.00
52.0	663.00	52.0	193.00	56.0	-380.00	56.0	-231.00	56.0	-489.00
52.5	1338.00	52.5	592.00	56.5	374.00	56.5	407.00	56.5	-322.00
53.0	1939.00	53.0	1033.00	57.0	1015.00	57.0	931.00	57.0	-167.00
53.5	2523.00	53.5	1332.00	57.5	1613.00	57.5	1419.00	57.5	-4.00
54.0	2878.00	54.0	1548.00	58.0	2224.00	58.0	1912.00	58.0	182.00
54.5	3109.00	54.5	1671.00	58.5	2602.00	58.5	2219.00	58.5	325.00
55.0	3240.00	55.0	1656.00	59.0	2836.00	59.0	2415.00	59.0	450.00
55.5	3255.00	55.5	1543.00	59.5	2909.00	59.5	2485.00	59.5	564.00
56.0	3218.00	56.0	1305.00	60.0	2803.00	60.0	2409.00	60.0	647.00

First arrivals plot : DUNBAR-1

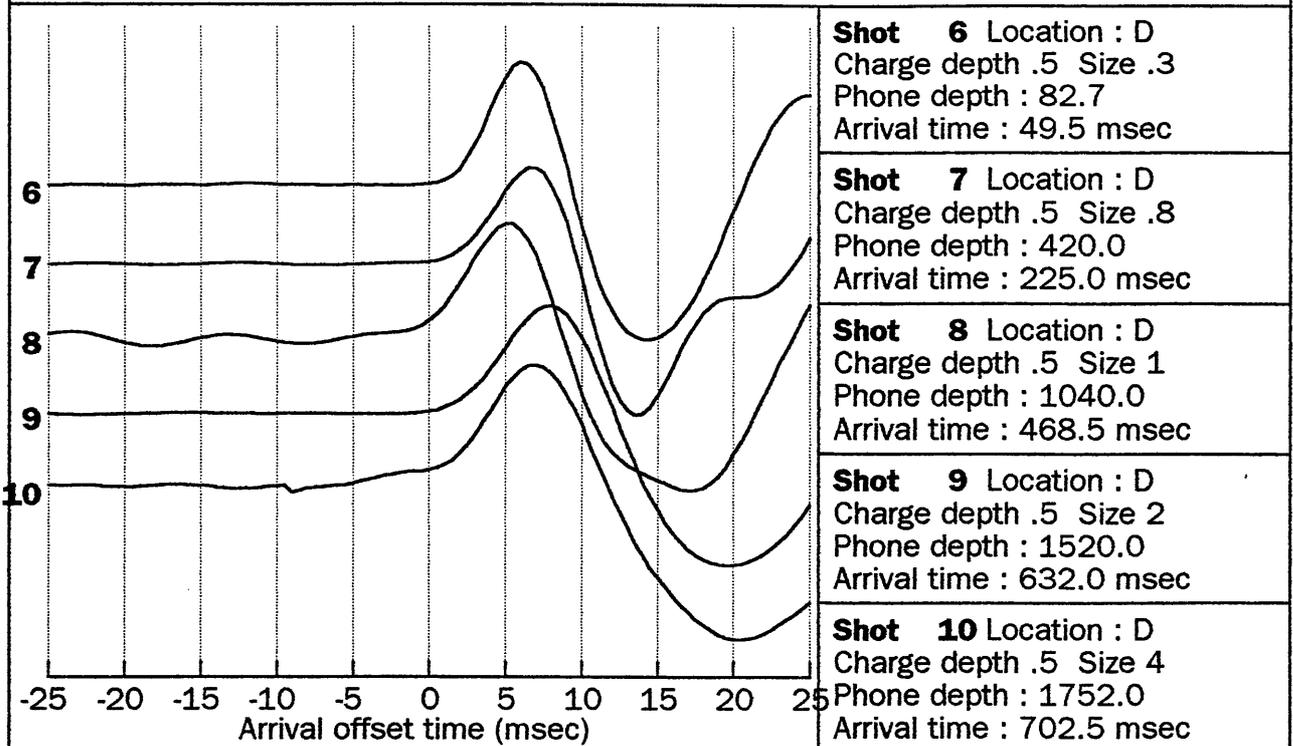

Shot 6 Location : D
 Charge depth .5 Size .3
 Phone depth : 82.7
 Arrival time : 49.5 msec

Shot 7 Location : D
 Charge depth .5 Size .8
 Phone depth : 420.0
 Arrival time : 225.0 msec


Shot 8 Location : D
 Charge depth .5 Size 1
 Phone depth : 1040.0
 Arrival time : 468.5 msec

Shot 9 Location : D
 Charge depth .5 Size 2
 Phone depth : 1520.0
 Arrival time : 632.0 msec

Shot 10 Location : D
 Charge depth .5 Size 4
 Phone depth : 1752.0
 Arrival time : 702.5 msec

SHOT 6		SHOT 7		SHOT 8		SHOT 9		SHOT 10	
Time	Ampl	Time	Ampl	Time	Ampl	Time	Ampl	Time	Ampl
38.0	-21.00	214.0	-55.00	458.0	-9.00	621.0	-11.00	692.0	-6.00
38.5	-20.00	214.5	-36.00	458.5	5.00	621.5	-11.00	692.5	-8.00
39.0	-19.00	215.0	-20.00	459.0	22.00	622.0	-12.00	693.0	-8.00
39.5	-17.00	215.5	-6.00	459.5	33.00	622.5	-13.00	693.5	-10.00
40.0	-19.00	216.0	12.00	460.0	39.00	623.0	-14.00	694.0	4.00
40.5	-17.00	216.5	25.00	460.5	43.00	623.5	-14.00	694.5	0.00
41.0	-17.00	217.0	36.00	461.0	42.00	624.0	-14.00	695.0	-5.00
41.5	-16.00	217.5	43.00	461.5	36.00	624.5	-14.00	695.5	-6.00
42.0	-14.00	218.0	43.00	462.0	25.00	625.0	-13.00	696.0	-7.00
42.5	-14.00	218.5	39.00	462.5	13.00	625.5	-13.00	696.5	-9.00
43.0	-15.00	219.0	31.00	463.0	-4.00	626.0	-11.00	697.0	-11.00
43.5	-16.00	219.5	21.00	463.5	-20.00	626.5	-9.00	697.5	-11.00
44.0	-16.00	220.0	4.00	464.0	-33.00	627.0	-9.00	698.0	-15.00
44.5	-16.00	220.5	-11.00	464.5	-50.00	627.5	-9.00	698.5	-19.00
45.0	-15.00	221.0	-29.00	465.0	-60.00	628.0	-8.00	699.0	-22.00
45.5	-16.00	221.5	-46.00	465.5	-66.00	628.5	-7.00	699.5	-26.00
46.0	-14.00	222.0	-56.00	466.0	-70.00	629.0	-8.00	700.0	-30.00
46.5	-16.00	222.5	-62.00	466.5	-74.00	629.5	-9.00	700.5	-32.00
47.0	-15.00	223.0	-66.00	467.0	-80.00	630.0	-9.00	701.0	-35.00
47.5	-15.00	223.5	-69.00	467.5	-93.00	630.5	-12.00	701.5	-37.00
48.0	-16.00	224.0	-74.00	468.0	-115.00	631.0	-15.00	702.0	-39.00
48.5	-19.00	224.5	-91.00	468.5	-148.00	631.5	-20.00	702.5	-38.00
49.0	-20.00	225.0	-124.00	469.0	-207.00	632.0	-30.00	703.0	-42.00
49.5	-24.00	225.5	-182.00	469.5	-273.00	632.5	-41.00	703.5	-46.00
50.0	-35.00	226.0	-304.00	470.0	-359.00	633.0	-63.00	704.0	-52.00
50.5	-53.00	226.5	-462.00	470.5	-482.00	633.5	-89.00	704.5	-61.00
51.0	-78.00	227.0	-739.00	471.0	-598.00	634.0	-121.00	705.0	-76.00
51.5	-127.00	227.5	-1048.00	471.5	-726.00	634.5	-173.00	705.5	-92.00
52.0	-178.00	228.0	-1438.00	472.0	-882.00	635.0	-226.00	706.0	-111.00
52.5	-240.00	228.5	-2001.00	472.5	-1005.00	635.5	-289.00	706.5	-138.00
53.0	-321.00	229.0	-2531.00	473.0	-1111.00	636.0	-376.00	707.0	-159.00
53.5	-387.00	229.5	-3091.00	473.5	-1205.00	636.5	-456.00	707.5	-183.00
54.0	-443.00	230.0	-3752.00	474.0	-1244.00	637.0	-539.00	708.0	-209.00
54.5	-492.00	230.5	-4241.00	474.5	-1241.00	637.5	-640.00	708.5	-226.00
55.0	-508.00	231.0	-4625.00	475.0	-1174.00	638.0	-719.00	709.0	-241.00
55.5	-498.00	231.5	-4879.00	475.5	-1063.00	638.5	-787.00	709.5	-251.00
56.0	-458.00	232.0	-4868.00	476.0	-912.00	639.0	-848.00	710.0	-252.00
56.5	-397.00	232.5	-4623.00	476.5	-678.00	639.5	-878.00	710.5	-247.00
57.0	-298.00	233.0	-3994.00	477.0	-452.00	640.0	-885.00	711.0	-235.00
57.5	-199.00	233.5	-3199.00	477.5	-160.00	640.5	-861.00	711.5	-218.00
58.0	-92.00	234.0	-2178.00	478.0	88.00	641.0	-815.00	712.0	-190.00
58.5	41.00	234.5	-718.00	478.5	327.00	641.5	-725.00	712.5	-164.00
59.0	147.00	235.0	628.00	479.0	590.00	642.0	-626.00	713.0	-133.00
59.5	245.00	235.5	2294.00	479.5	783.00	642.5	-511.00	713.5	-92.00
60.0	349.00	236.0	3641.00	480.0	947.00	643.0	-353.00	714.0	-58.00

First arrivals plot : DUNBAR-1

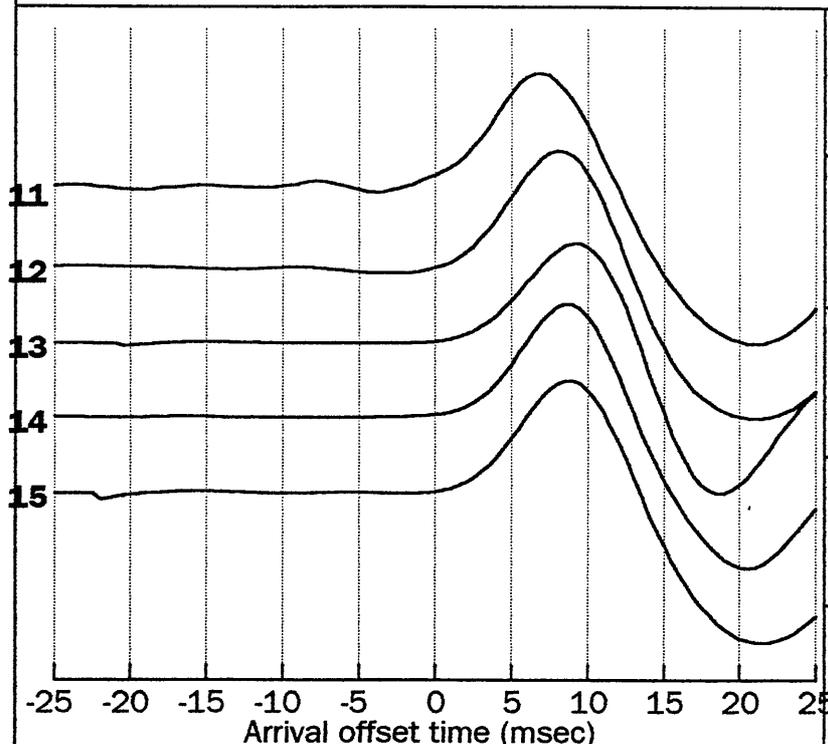

Shot 11 Location : D
 Charge depth .5 Size 4
 Phone depth : 1752.0
 Arrival time : 702.5 msec

Shot 12 Location : D
 Charge depth .5 Size 3
 Phone depth : 1660.0
 Arrival time : 675.5 msec


Shot 13 Location : D
 Charge depth .7 Size 3
 Phone depth : 1575.0
 Arrival time : 649.0 msec

Shot 14 Location : D
 Charge depth .7 Size 3
 Phone depth : 1550.0
 Arrival time : 641.5 msec

Shot 15 Location : D
 Charge depth .7 Size 3
 Phone depth : 1520.0
 Arrival time : 632.0 msec

SHOT 11		SHOT 12		SHOT 13		SHOT 14		SHOT 15	
Time	Ampl								
692.0	-9.00	664.0	-1.00	638.0	-15.00	630.0	-9.00	621.0	-2.00
692.5	-11.00	664.5	-5.00	638.5	-14.00	630.5	-9.00	621.5	1.00
693.0	-13.00	665.0	-7.00	639.0	-13.00	631.0	-11.00	622.0	1.00
693.5	-15.00	665.5	-9.00	639.5	-13.00	631.5	-13.00	622.5	-1.00
694.0	-17.00	666.0	-9.00	640.0	-13.00	632.0	-13.00	623.0	-1.00
694.5	-21.00	666.5	-9.00	640.5	-14.00	632.5	-13.00	623.5	-2.00
695.0	-24.00	667.0	-6.00	641.0	-14.00	633.0	-14.00	624.0	-3.00
695.5	-24.00	667.5	-2.00	641.5	-14.00	633.5	-14.00	624.5	-5.00
696.0	-21.00	668.0	5.00	642.0	-16.00	634.0	-13.00	625.0	-8.00
696.5	-18.00	668.5	11.00	642.5	-16.00	634.5	-14.00	625.5	-10.00
697.0	-14.00	669.0	17.00	643.0	-15.00	635.0	-13.00	626.0	-9.00
697.5	-9.00	669.5	24.00	643.5	-16.00	635.5	-13.00	626.5	-10.00
698.0	-5.00	670.0	30.00	644.0	-15.00	636.0	-14.00	627.0	-11.00
698.5	-1.00	670.5	35.00	644.5	-15.00	636.5	-14.00	627.5	-9.00
699.0	0.00	671.0	38.00	645.0	-14.00	637.0	-16.00	628.0	-7.00
699.5	1.00	671.5	40.00	645.5	-15.00	637.5	-17.00	628.5	-5.00
700.0	-3.00	672.0	40.00	646.0	-14.00	638.0	-19.00	629.0	-2.00
700.5	-7.00	672.5	40.00	646.5	-14.00	638.5	-19.00	629.5	0.00
701.0	-12.00	673.0	37.00	647.0	-16.00	639.0	-23.00	630.0	1.00
701.5	-17.00	673.5	32.00	647.5	-18.00	639.5	-27.00	630.5	1.00
702.0	-25.00	674.0	23.00	648.0	-22.00	640.0	-29.00	631.0	-3.00
702.5	-32.00	674.5	13.00	648.5	-28.00	640.5	-33.00	631.5	-8.00
703.0	-38.00	675.0	-6.00	649.0	-38.00	641.0	-41.00	632.0	-20.00
703.5	-46.00	675.5	-25.00	649.5	-56.00	641.5	-50.00	632.5	-35.00
704.0	-55.00	676.0	-52.00	650.0	-81.00	642.0	-67.00	633.0	-57.00
704.5	-66.00	676.5	-93.00	650.5	-118.00	642.5	-88.00	633.5	-92.00
705.0	-81.00	677.0	-137.00	651.0	-159.00	643.0	-117.00	634.0	-132.00
705.5	-101.00	677.5	-190.00	651.5	-213.00	643.5	-163.00	634.5	-181.00
706.0	-121.00	678.0	-267.00	652.0	-293.00	644.0	-213.00	635.0	-257.00
706.5	-144.00	678.5	-340.00	652.5	-373.00	644.5	-273.00	635.5	-332.00
707.0	-173.00	679.0	-423.00	653.0	-470.00	645.0	-362.00	636.0	-422.00
707.5	-198.00	679.5	-528.00	653.5	-602.00	645.5	-450.00	636.5	-543.00
708.0	-221.00	680.0	-620.00	654.0	-726.00	646.0	-547.00	637.0	-654.00
708.5	-243.00	680.5	-718.00	654.5	-858.00	646.5	-673.00	637.5	-771.00
709.0	-257.00	681.0	-816.00	655.0	-1026.00	647.0	-779.00	638.0	-915.00
709.5	-266.00	681.5	-891.00	655.5	-1165.00	647.5	-902.00	638.5	-1029.00
710.0	-266.00	682.0	-964.00	656.0	-1321.00	648.0	-995.00	639.0	-1152.00
710.5	-262.00	682.5	-1005.00	656.5	-1446.00	648.5	-1073.00	639.5	-1238.00
711.0	-247.00	683.0	-1025.00	657.0	-1546.00	649.0	-1138.00	640.0	-1302.00
711.5	-229.00	683.5	-1016.00	657.5	-1632.00	649.5	-1163.00	640.5	-1340.00
712.0	-207.00	684.0	-982.00	658.0	-1669.00	650.0	-1160.00	641.0	-1339.00
712.5	-180.00	684.5	-923.00	658.5	-1665.00	650.5	-1111.00	641.5	-1305.00
713.0	-150.00	685.0	-819.00	659.0	-1605.00	651.0	-1036.00	642.0	-1219.00
713.5	-116.00	685.5	-710.00	659.5	-1506.00	651.5	-932.00	642.5	-1114.00
714.0	-76.00	686.0	-583.00	660.0	-1359.00	652.0	-775.00	643.0	-982.00

First arrivals plot : DUNBAR-1

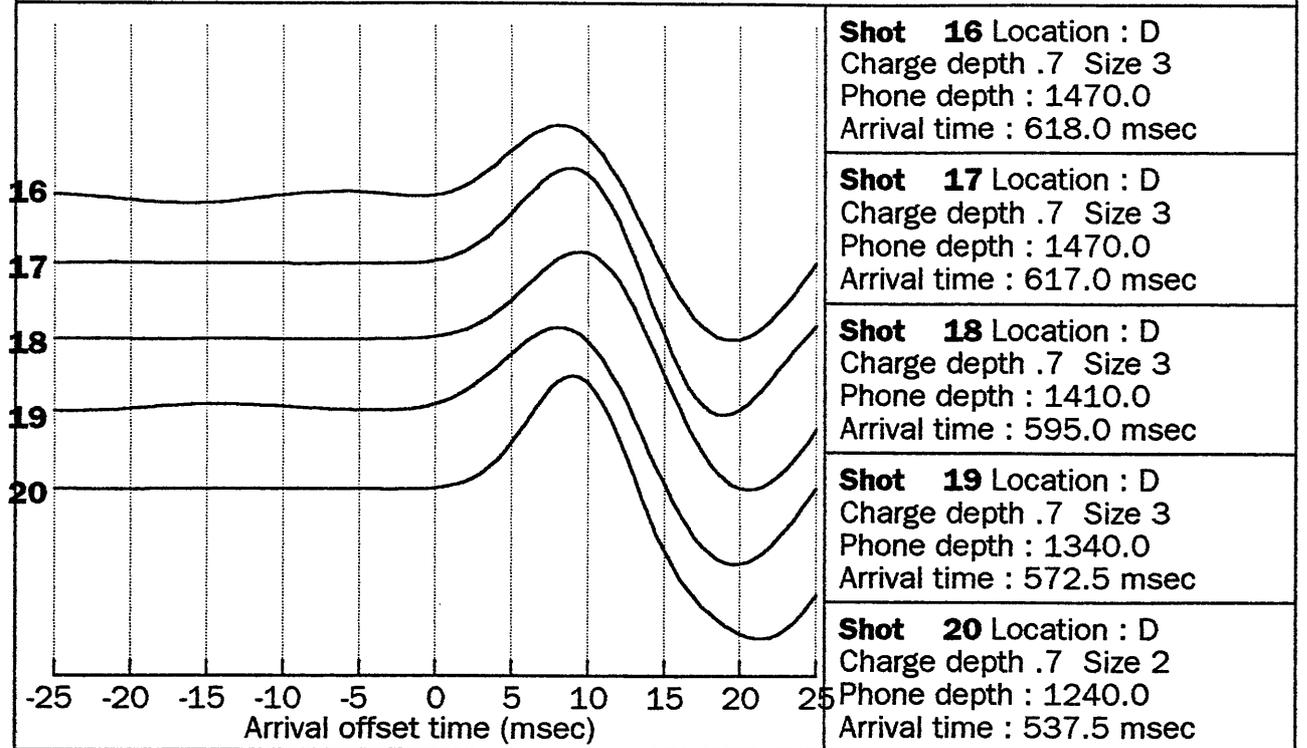

Shot 16 Location : D
 Charge depth .7 Size 3
 Phone depth : 1470.0
 Arrival time : 618.0 msec

Shot 17 Location : D
 Charge depth .7 Size 3
 Phone depth : 1470.0
 Arrival time : 617.0 msec


Shot 18 Location : D
 Charge depth .7 Size 3
 Phone depth : 1410.0
 Arrival time : 595.0 msec

Shot 19 Location : D
 Charge depth .7 Size 3
 Phone depth : 1340.0
 Arrival time : 572.5 msec

Shot 20 Location : D
 Charge depth .7 Size 2
 Phone depth : 1240.0
 Arrival time : 537.5 msec

SHOT 16		SHOT 17		SHOT 18		SHOT 19		SHOT 20	
Time	Ampl	Time	Ampl	Time	Ampl	Time	Ampl	Time	Ampl
607.0	43.00	606.0	-12.00	584.0	-12.00	562.0	-51.00	526.0	-7.00
607.5	37.00	606.5	-12.00	584.5	-9.00	562.5	-50.00	526.5	-10.00
608.0	33.00	607.0	-12.00	585.0	-6.00	563.0	-47.00	527.0	-11.00
608.5	29.00	607.5	-11.00	585.5	-4.00	563.5	-44.00	527.5	-11.00
609.0	26.00	608.0	-10.00	586.0	-1.00	564.0	-42.00	528.0	-12.00
609.5	23.00	608.5	-11.00	586.5	0.00	564.5	-40.00	528.5	-11.00
610.0	21.00	609.0	-10.00	587.0	1.00	565.0	-36.00	529.0	-12.00
610.5	19.00	609.5	-11.00	587.5	1.00	565.5	-35.00	529.5	-11.00
611.0	16.00	610.0	-11.00	588.0	-1.00	566.0	-32.00	530.0	-10.00
611.5	16.00	610.5	-13.00	588.5	-1.00	566.5	-29.00	530.5	-9.00
612.0	15.00	611.0	-14.00	589.0	-3.00	567.0	-29.00	531.0	-7.00
612.5	15.00	611.5	-15.00	589.5	-5.00	567.5	-28.00	531.5	-5.00
613.0	17.00	612.0	-16.00	590.0	-7.00	568.0	-27.00	532.0	-5.00
613.5	19.00	612.5	-16.00	590.5	-9.00	568.5	-26.00	532.5	-4.00
614.0	23.00	613.0	-17.00	591.0	-10.00	569.0	-26.00	533.0	-3.00
614.5	25.00	613.5	-17.00	591.5	-12.00	569.5	-26.00	533.5	-3.00
615.0	29.00	614.0	-17.00	592.0	-16.00	570.0	-26.00	534.0	-2.00
615.5	33.00	614.5	-19.00	592.5	-17.00	570.5	-29.00	534.5	-4.00
616.0	36.00	615.0	-21.00	593.0	-23.00	571.0	-32.00	535.0	-5.00
616.5	39.00	615.5	-26.00	593.5	-28.00	571.5	-36.00	535.5	-7.00
617.0	39.00	616.0	-34.00	594.0	-35.00	572.0	-43.00	536.0	-11.00
617.5	39.00	616.5	-45.00	594.5	-46.00	572.5	-50.00	536.5	-17.00
618.0	34.00	617.0	-66.00	595.0	-64.00	573.0	-64.00	537.0	-27.00
618.5	27.00	617.5	-91.00	595.5	-85.00	573.5	-79.00	537.5	-43.00
619.0	17.00	618.0	-123.00	596.0	-120.00	574.0	-96.00	538.0	-63.00
619.5	0.00	618.5	-177.00	596.5	-159.00	574.5	-121.00	538.5	-89.00
620.0	-17.00	619.0	-234.00	597.0	-208.00	575.0	-146.00	539.0	-136.00
620.5	-39.00	619.5	-318.00	597.5	-279.00	575.5	-175.00	539.5	-189.00
621.0	-69.00	620.0	-402.00	598.0	-353.00	576.0	-213.00	540.0	-256.00
621.5	-98.00	620.5	-498.00	598.5	-440.00	576.5	-247.00	540.5	-361.00
622.0	-127.00	621.0	-629.00	599.0	-560.00	577.0	-283.00	541.0	-468.00
622.5	-166.00	621.5	-749.00	599.5	-672.00	577.5	-329.00	541.5	-592.00
623.0	-197.00	622.0	-878.00	600.0	-795.00	578.0	-367.00	542.0	-763.00
623.5	-227.00	622.5	-1037.00	600.5	-952.00	578.5	-403.00	542.5	-924.00
624.0	-260.00	623.0	-1169.00	601.0	-1090.00	579.0	-445.00	543.0	-1090.00
624.5	-286.00	623.5	-1297.00	601.5	-1236.00	579.5	-475.00	543.5	-1291.00
625.0	-305.00	624.0	-1435.00	602.0	-1383.00	580.0	-504.00	544.0	-1451.00
625.5	-322.00	624.5	-1532.00	602.5	-1501.00	580.5	-518.00	544.5	-1620.00
626.0	-329.00	625.0	-1606.00	603.0	-1623.00	581.0	-527.00	545.0	-1730.00
626.5	-325.00	625.5	-1659.00	603.5	-1701.00	581.5	-523.00	545.5	-1803.00
627.0	-314.00	626.0	-1665.00	604.0	-1751.00	582.0	-507.00	546.0	-1834.00
627.5	-295.00	626.5	-1625.00	604.5	-1769.00	582.5	-484.00	546.5	-1804.00
628.0	-259.00	627.0	-1548.00	605.0	-1745.00	583.0	-439.00	547.0	-1724.00
628.5	-220.00	627.5	-1428.00	605.5	-1681.00	583.5	-390.00	547.5	-1560.00
629.0	-173.00	628.0	-1232.00	606.0	-1551.00	584.0	-332.00	548.0	-1369.00

First arrivals plot : DUNBAR-1

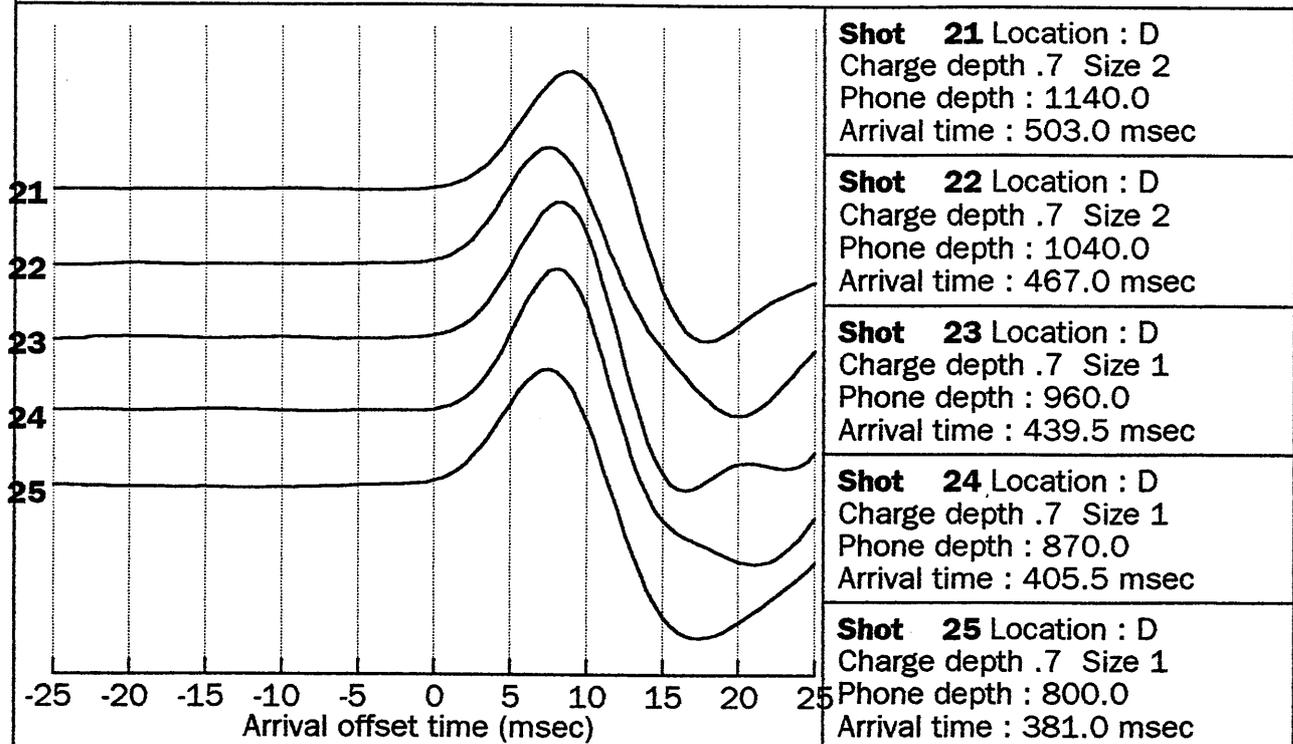

Shot 21 Location : D
 Charge depth .7 Size 2
 Phone depth : 1140.0
 Arrival time : 503.0 msec

Shot 22 Location : D
 Charge depth .7 Size 2
 Phone depth : 1040.0
 Arrival time : 467.0 msec


Shot 23 Location : D
 Charge depth .7 Size 1
 Phone depth : 960.0
 Arrival time : 439.5 msec

Shot 24 Location : D
 Charge depth .7 Size 1
 Phone depth : 870.0
 Arrival time : 405.5 msec

Shot 25 Location : D
 Charge depth .7 Size 1
 Phone depth : 800.0
 Arrival time : 381.0 msec

SHOT 21		SHOT 22		SHOT 23		SHOT 24		SHOT 25	
Time	Ampl								
492.0	-14.00	456.0	-8.00	428.0	-9.00	394.0	-17.00	370.0	-11.00
492.5	-15.00	456.5	-8.00	428.5	-10.00	394.5	-17.00	370.5	-12.00
493.0	-15.00	457.0	-7.00	429.0	-10.00	395.0	-15.00	371.0	-12.00
493.5	-17.00	457.5	-8.00	429.5	-10.00	395.5	-14.00	371.5	-12.00
494.0	-17.00	458.0	-8.00	430.0	-9.00	396.0	-14.00	372.0	-15.00
494.5	-17.00	458.5	-9.00	430.5	-9.00	396.5	-13.00	372.5	-16.00
495.0	-17.00	459.0	-8.00	431.0	-8.00	397.0	-13.00	373.0	-17.00
495.5	-14.00	459.5	-8.00	431.5	-6.00	397.5	-13.00	373.5	-19.00
496.0	-11.00	460.0	-8.00	432.0	-7.00	398.0	-13.00	374.0	-19.00
496.5	-10.00	460.5	-9.00	432.5	-4.00	398.5	-14.00	374.5	-20.00
497.0	-7.00	461.0	-10.00	433.0	-7.00	399.0	-15.00	375.0	-23.00
497.5	-5.00	461.5	-10.00	433.5	-5.00	399.5	-16.00	375.5	-24.00
498.0	-3.00	462.0	-10.00	434.0	-5.00	400.0	-17.00	376.0	-27.00
498.5	-2.00	462.5	-12.00	434.5	-6.00	400.5	-17.00	376.5	-27.00
499.0	0.00	463.0	-12.00	435.0	-6.00	401.0	-17.00	377.0	-29.00
499.5	0.00	463.5	-12.00	435.5	-6.00	401.5	-17.00	377.5	-30.00
500.0	-1.00	464.0	-13.00	436.0	-6.00	402.0	-17.00	378.0	-31.00
500.5	-2.00	464.5	-13.00	436.5	-8.00	402.5	-17.00	378.5	-32.00
501.0	-5.00	465.0	-15.00	437.0	-8.00	403.0	-16.00	379.0	-34.00
501.5	-10.00	465.5	-15.00	437.5	-10.00	403.5	-17.00	379.5	-37.00
502.0	-17.00	466.0	-18.00	438.0	-10.00	404.0	-17.00	380.0	-40.00
502.5	-28.00	466.5	-24.00	438.5	-13.00	404.5	-19.00	380.5	-46.00
503.0	-43.00	467.0	-33.00	439.0	-17.00	405.0	-21.00	381.0	-56.00
503.5	-62.00	467.5	-42.00	439.5	-22.00	405.5	-27.00	381.5	-70.00
504.0	-94.00	468.0	-57.00	440.0	-28.00	406.0	-34.00	382.0	-93.00
504.5	-134.00	468.5	-81.00	440.5	-39.00	406.5	-45.00	382.5	-119.00
505.0	-184.00	469.0	-109.00	441.0	-51.00	407.0	-61.00	383.0	-152.00
505.5	-266.00	469.5	-142.00	441.5	-67.00	407.5	-83.00	383.5	-204.00
506.0	-352.00	470.0	-194.00	442.0	-91.00	408.0	-108.00	384.0	-256.00
506.5	-456.00	470.5	-245.00	442.5	-118.00	408.5	-146.00	384.5	-313.00
507.0	-607.00	471.0	-301.00	443.0	-154.00	409.0	-184.00	385.0	-389.00
507.5	-754.00	471.5	-373.00	443.5	-188.00	409.5	-229.00	385.5	-458.00
508.0	-952.00	472.0	-434.00	444.0	-225.00	410.0	-287.00	386.0	-522.00
508.5	-1129.00	472.5	-505.00	444.5	-274.00	410.5	-336.00	386.5	-598.00
509.0	-1312.00	473.0	-557.00	445.0	-311.00	411.0	-394.00	387.0	-653.00
509.5	-1529.00	473.5	-598.00	445.5	-348.00	411.5	-437.00	387.5	-698.00
510.0	-1697.00	474.0	-630.00	446.0	-386.00	412.0	-473.00	388.0	-730.00
510.5	-1843.00	474.5	-638.00	446.5	-407.00	412.5	-502.00	388.5	-738.00
511.0	-1976.00	475.0	-627.00	447.0	-421.00	413.0	-510.00	389.0	-720.00
511.5	-2041.00	475.5	-592.00	447.5	-420.00	413.5	-504.00	389.5	-680.00
512.0	-2055.00	476.0	-541.00	448.0	-404.00	414.0	-474.00	390.0	-619.00
512.5	-1998.00	476.5	-475.00	448.5	-376.00	414.5	-432.00	390.5	-519.00
513.0	-1881.00	477.0	-380.00	449.0	-325.00	415.0	-374.00	391.0	-419.00
513.5	-1702.00	477.5	-289.00	449.5	-265.00	415.5	-288.00	391.5	-303.00
514.0	-1412.00	478.0	-194.00	450.0	-181.00	416.0	-208.00	392.0	-150.00

First arrivals plot : DUNBAR-1

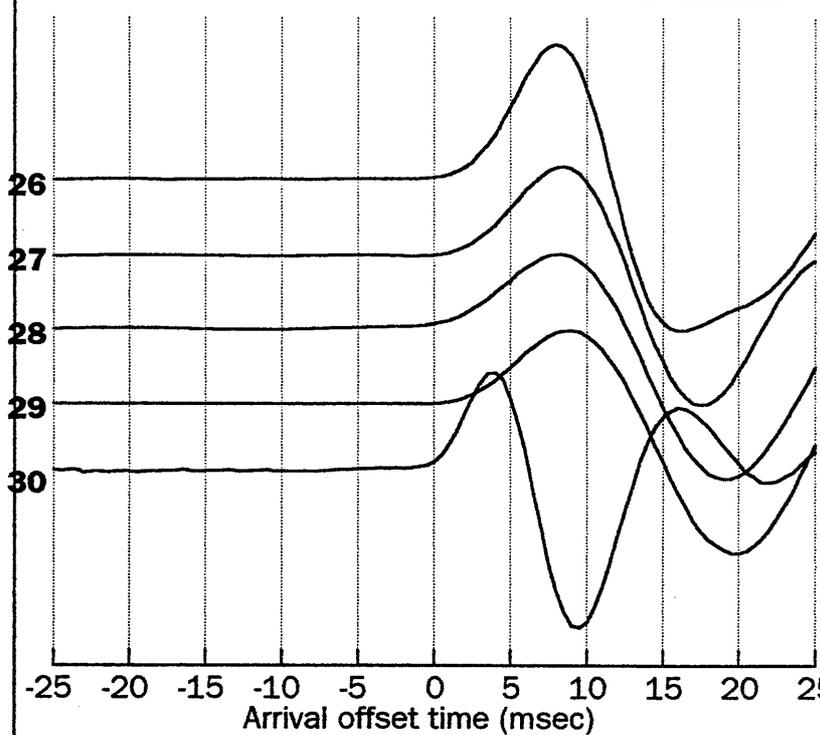

Shot 26 Location : D
 Charge depth .7 Size 1
 Phone depth : 700.0
 Arrival time : 343.5 msec

Shot 27 Location : D
 Charge depth .7 Size 1
 Phone depth : 620.0
 Arrival time : 312.0 msec

Shot 28 Location : D
 Charge depth .7 Size 1
 Phone depth : 500.0
 Arrival time : 263.0 msec

Shot 29 Location : D
 Charge depth .7 Size .7
 Phone depth : 330.0
 Arrival time : 180.0 msec

Shot 30 Location : F
 Charge depth .5 Size .3
 Phone depth : 82.7
 Arrival time : 50.0 msec

SHOT 26		SHOT 27		SHOT 28		SHOT 29		SHOT 30	
Time	Ampl	Time	Ampl	Time	Ampl	Time	Ampl	Time	Ampl
332.0	-13.00	301.0	-4.00	252.0	-12.00	169.0	-19.00	39.0	-12.00
332.5	-14.00	301.5	-4.00	252.5	-12.00	169.5	-18.00	39.5	-10.00
333.0	-13.00	302.0	-5.00	253.0	-14.00	170.0	-18.00	40.0	-11.00
333.5	-12.00	302.5	-6.00	253.5	-17.00	170.5	-17.00	40.5	-10.00
334.0	-13.00	303.0	-8.00	254.0	-20.00	171.0	-17.00	41.0	-10.00
334.5	-12.00	303.5	-8.00	254.5	-22.00	171.5	-17.00	41.5	-11.00
335.0	-12.00	304.0	-10.00	255.0	-26.00	172.0	-17.00	42.0	-10.00
335.5	-12.00	304.5	-13.00	255.5	-30.00	172.5	-16.00	42.5	-11.00
336.0	-13.00	305.0	-14.00	256.0	-34.00	173.0	-16.00	43.0	-11.00
336.5	-14.00	305.5	-17.00	256.5	-37.00	173.5	-14.00	43.5	-12.00
337.0	-15.00	306.0	-17.00	257.0	-41.00	174.0	-15.00	44.0	-13.00
337.5	-14.00	306.5	-18.00	257.5	-45.00	174.5	-13.00	44.5	-12.00
338.0	-15.00	307.0	-18.00	258.0	-49.00	175.0	-12.00	45.0	-14.00
338.5	-15.00	307.5	-18.00	258.5	-51.00	175.5	-13.00	45.5	-14.00
339.0	-16.00	308.0	-16.00	259.0	-55.00	176.0	-12.00	46.0	-14.00
339.5	-16.00	308.5	-15.00	259.5	-57.00	176.5	-11.00	46.5	-15.00
340.0	-15.00	309.0	-14.00	260.0	-60.00	177.0	-10.00	47.0	-14.00
340.5	-15.00	309.5	-11.00	260.5	-61.00	177.5	-13.00	47.5	-15.00
341.0	-16.00	310.0	-9.00	261.0	-65.00	178.0	-11.00	48.0	-14.00
341.5	-16.00	310.5	-7.00	261.5	-70.00	178.5	-14.00	48.5	-15.00
342.0	-18.00	311.0	-9.00	262.0	-78.00	179.0	-18.00	49.0	-17.00
342.5	-21.00	311.5	-11.00	262.5	-90.00	179.5	-23.00	49.5	-18.00
343.0	-27.00	312.0	-17.00	263.0	-111.00	180.0	-34.00	50.0	-23.00
343.5	-35.00	312.5	-30.00	263.5	-134.00	180.5	-55.00	50.5	-33.00
344.0	-49.00	313.0	-47.00	264.0	-167.00	181.0	-85.00	51.0	-49.00
344.5	-71.00	313.5	-79.00	264.5	-217.00	181.5	-130.00	51.5	-67.00
345.0	-100.00	314.0	-115.00	265.0	-270.00	182.0	-204.00	52.0	-91.00
345.5	-138.00	314.5	-159.00	265.5	-345.00	182.5	-288.00	52.5	-113.00
346.0	-199.00	315.0	-224.00	266.0	-424.00	183.0	-414.00	53.0	-133.00
346.5	-262.00	315.5	-289.00	266.5	-507.00	183.5	-548.00	53.5	-147.00
347.0	-335.00	316.0	-364.00	267.0	-617.00	184.0	-699.00	54.0	-148.00
347.5	-439.00	316.5	-465.00	267.5	-715.00	184.5	-904.00	54.5	-139.00
348.0	-532.00	317.0	-556.00	268.0	-811.00	185.0	-1088.00	55.0	-112.00
348.5	-630.00	317.5	-648.00	268.5	-925.00	185.5	-1279.00	55.5	-78.00
349.0	-745.00	318.0	-757.00	269.0	-1014.00	186.0	-1507.00	56.0	-37.00
349.5	-834.00	318.5	-843.00	269.5	-1093.00	186.5	-1687.00	56.5	20.00
350.0	-920.00	319.0	-917.00	270.0	-1169.00	187.0	-1848.00	57.0	67.00
350.5	-967.00	319.5	-986.00	270.5	-1213.00	187.5	-2008.00	57.5	119.00
351.0	-985.00	320.0	-1022.00	271.0	-1234.00	188.0	-2104.00	58.0	156.00
351.5	-965.00	320.5	-1032.00	271.5	-1232.00	188.5	-2160.00	58.5	184.00
352.0	-908.00	321.0	-1008.00	272.0	-1200.00	189.0	-2167.00	59.0	204.00
352.5	-816.00	321.5	-955.00	272.5	-1125.00	189.5	-2121.00	59.5	207.00
353.0	-661.00	322.0	-849.00	273.0	-1032.00	190.0	-1998.00	60.0	199.00
353.5	-501.00	322.5	-728.00	273.5	-910.00	190.5	-1837.00	60.5	178.00
354.0	-317.00	323.0	-576.00	274.0	-728.00	191.0	-1626.00	61.0	152.00

APPENDIX 9

APPENDIX 9

GEOCHEMISTRY REPORT


GEOTECH GEOTECHNICAL SERVICES PTY LTD

41-45 Furnace Road, Welshpool, Western Australia. 6106
Locked Bag 27, Cannington, Western Australia. 6107

Telephone: (09) 458 8877
Facsimile: (09) 458 8857

4 April, 1995

Mr. K. Lanigan
GFE Resources Ltd
Level 6
6 Riverside Quay
South Melbourne VIC 3205

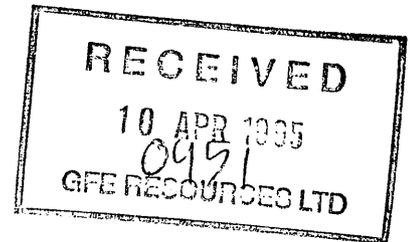

FILE COPY

Dear Kevin,

Please find enclosed saturate GC and branched/cyclic GC-MS data for Dunbar-1 DST 2, as well as an invoice for this work.

If you have further queries or if we can be of any assistance to you, please do not hesitate to contact us.

Yours sincerely,

A handwritten signature in cursive script, appearing to read "B. A. Hartung-Kagi".

Dr. Birgitta Hartung-Kagi
Managing Director

DUNBAR 1, 1526-1557m, DST 2
Saturate Fraction
C12 + GLC

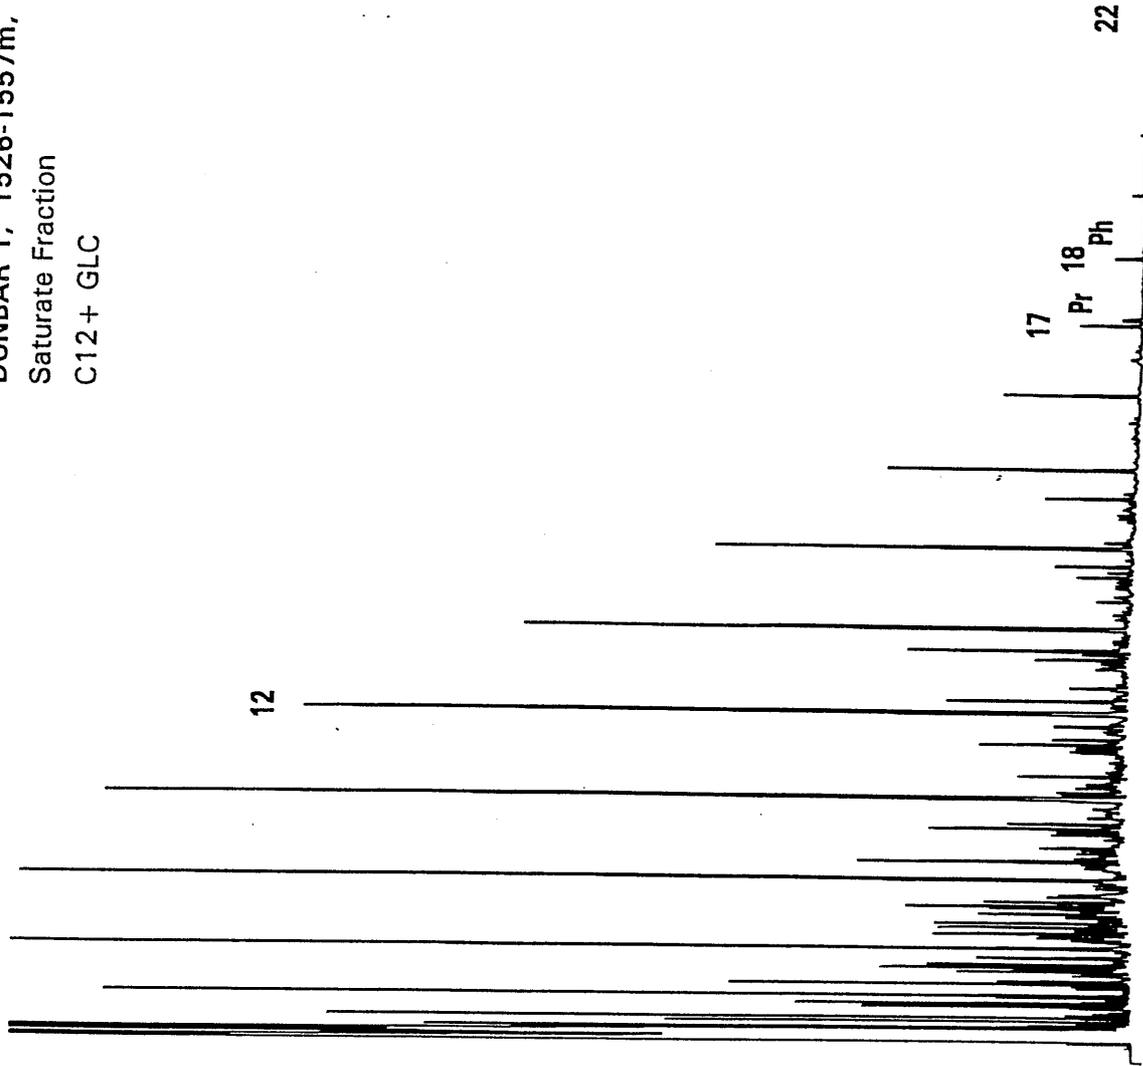


TABLE 1

Summary of Physical Property and Sulphur Data

DUNBAR 1

Mar-95

SAMPLES	API GRAVITY	%SULPHUR (W/W)	VISCOSITY at 25°C (cSt)	VISCOSITY at 60°C (cSt)
DST 2	nd	nd	nd	nd

TABLE 1

Summary of Liquid Chromatography (Compositional data),

DUNBAR 1

Mar-95

SAMPLES	---Hydrocarbons---			---Nonhydrocarbons---			SAT	ASPH	HC
	%SAT	%AROM	%HC's	%NSO's	%ASPH	%Non HC's	AROM	NSO	Non HC
DST 2	96.5	1.6	98.2	1.8	nd	1.8	59.3	nd	53.6

nd = no data

TABLE 2

Summary of Gas Chromatography Data

DUNBAR 1

A. Alkane Compositional Data

SAMPLES	Prist./Phyt.	Prist./n-C17	Phyt./n-C18	CPI(1)	CPI(2)	(C21 + C22)/(C28 + C29)
DST 2	10.1	0.44	0.09	nd	nd	nd

TABLE 2

Summary of Gas Chromatography Data

DUNBAR 1

B. n-Alkane Distributions

SAMPLES	nC12	nC13	nC14	nC15	nC16	nC17	iC19	nC18	iC20	nC19	nC20	nC21	nC22	nC23	nC24	nC25	nC26	nC27	nC28	nC29	nC30	nC31
DST 2	39.5	26.0	15.7	8.9	4.5	2.3	1.0	1.1	0.1	0.5	0.2	0.1	0.0	-	-	-	-	-	-	-	-	-

nd = no data

TABLE 3

SELECTED AROMATIC PARAMETERS

DUNBAR 1

Apr-95

DEPTH	TYPE	DNR-1	DNR-5	DNR-6	TNR-1	TNR-5	TNR-6	MPR-1	MPI-1	MPI-2	Rc(a)	Rc(b)
1526-1557m	DST 2	7.60	nd	3.64	0.52	0.67	nd	2.63	0.79	0.88	0.88	1.82

response factors have been applied to DNR 6, TNR 1, TNR 5, MPI 1 and MPI 2

TABLE 3

SELECTED AROMATIC PARAMETERS CONT.


DUNBAR 1

Apr-95



DEPTH	TYPE	1,7-DMP/X (m/z 206)	RETENE/9-MP (m/z 219,192)	1MP/9MP
1526-1557m	DST 2	0.50	0.28	0.81

nd = no data



File : A3575.D
Sample : DUNBAR-1 DST#2 AF
NASC. Info : COL#155. 12-4-95. DJ

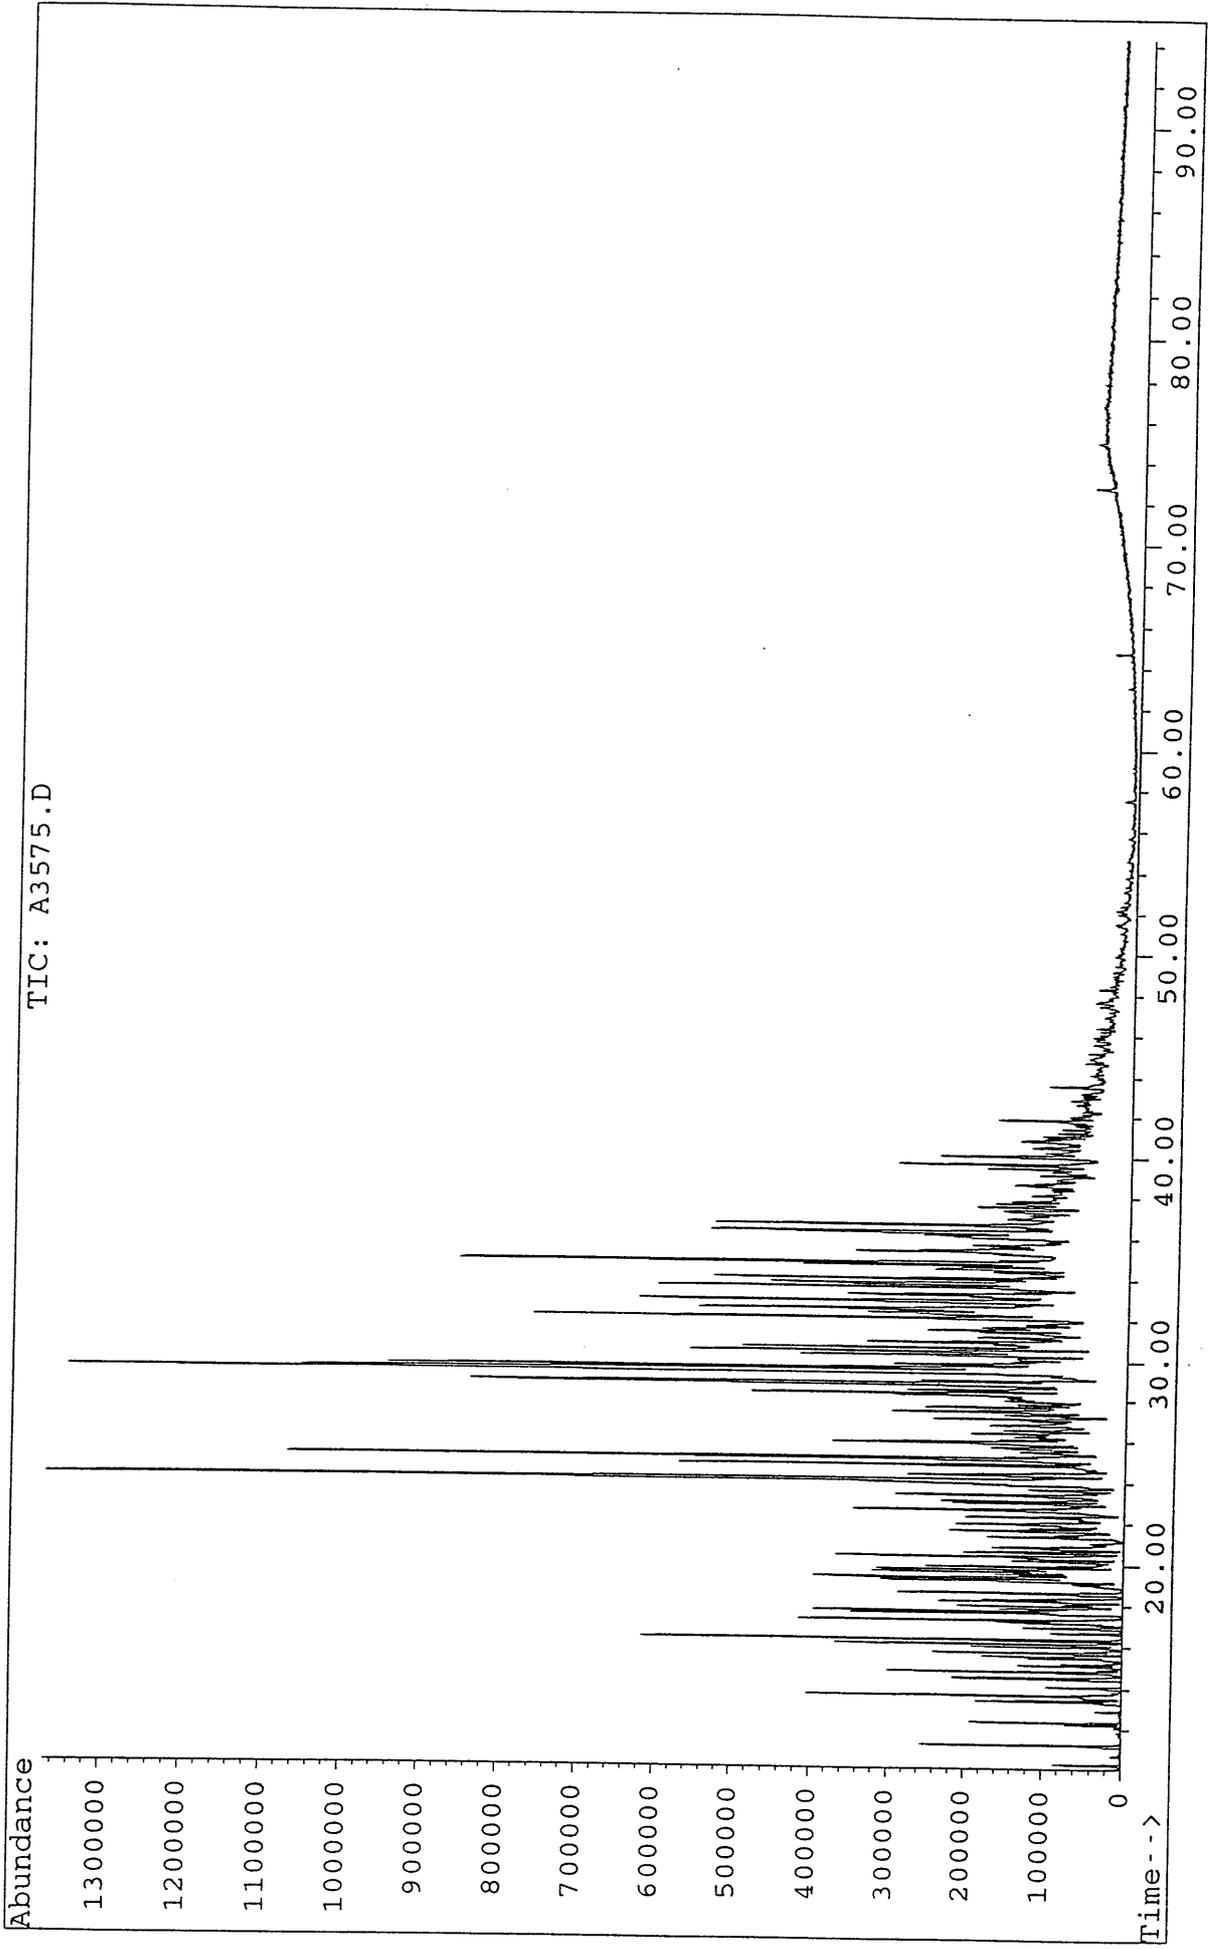

File : A3575.D
Sample : DUNBAR-1 DST#2 AROS
Misc. Info : COL#155. 12-4-95. DJ



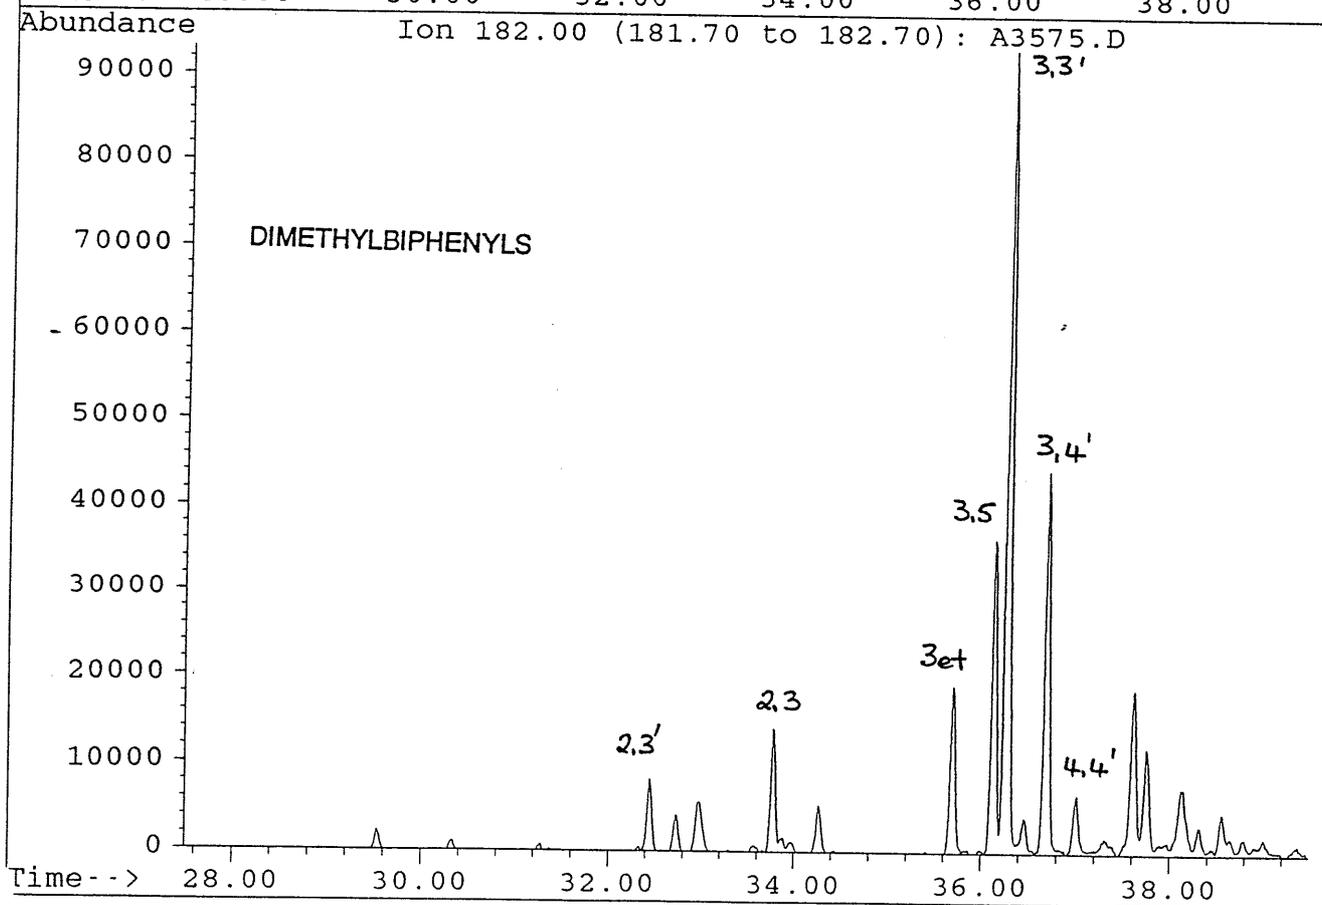
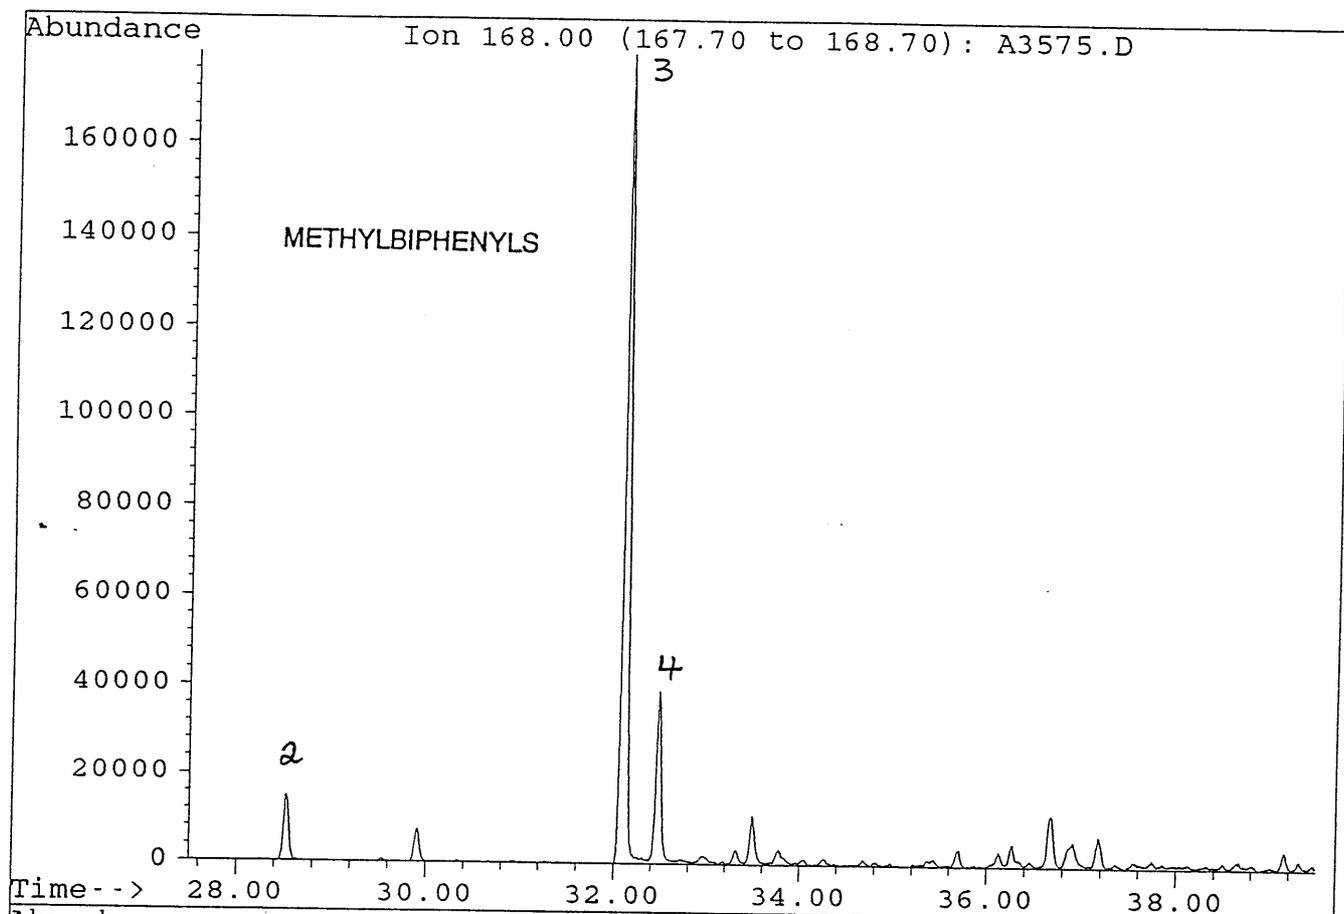


File : A3575.D
Sample : DUNBAR-1 DST#2 AROS
Misc. Info : COL#155. 12-4-95. DJ

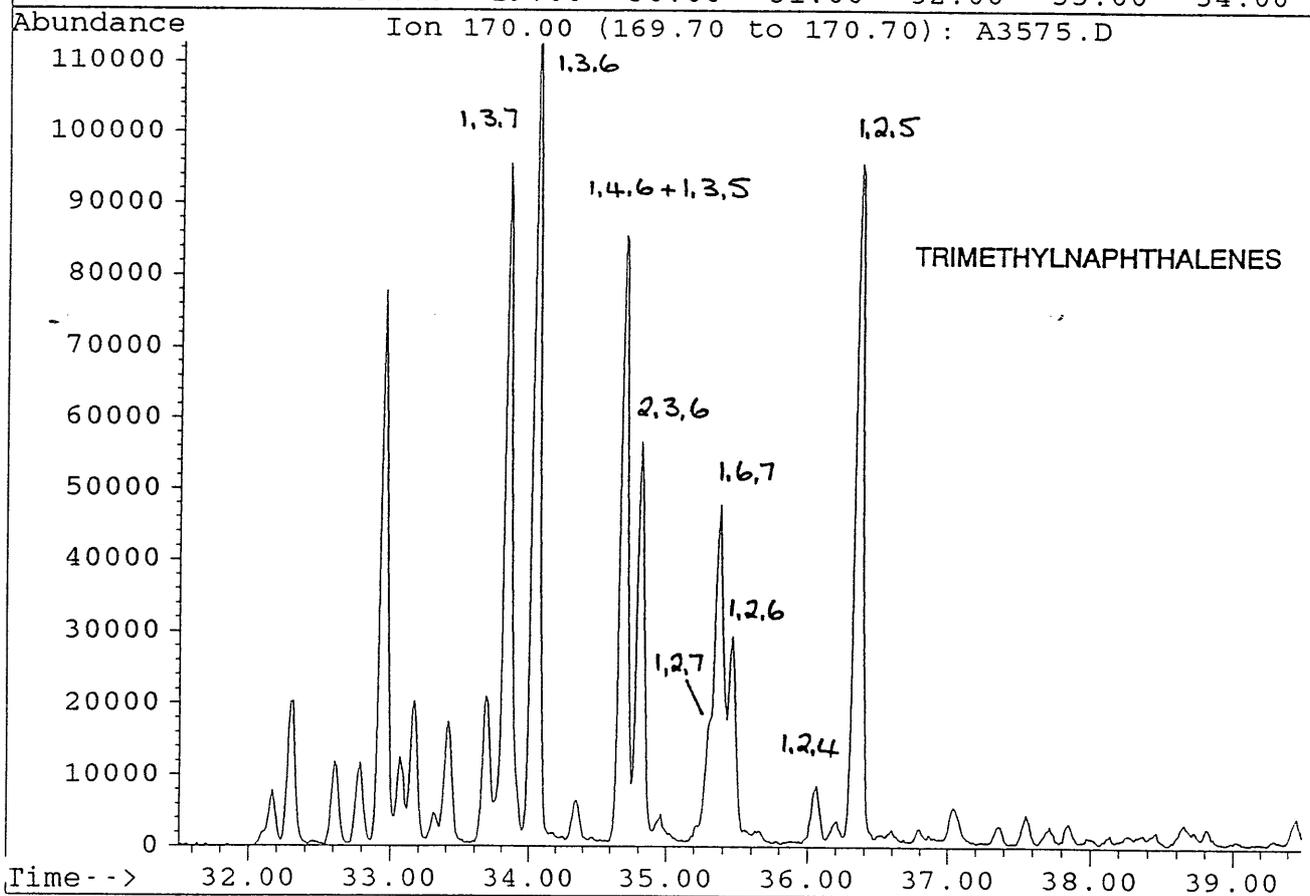
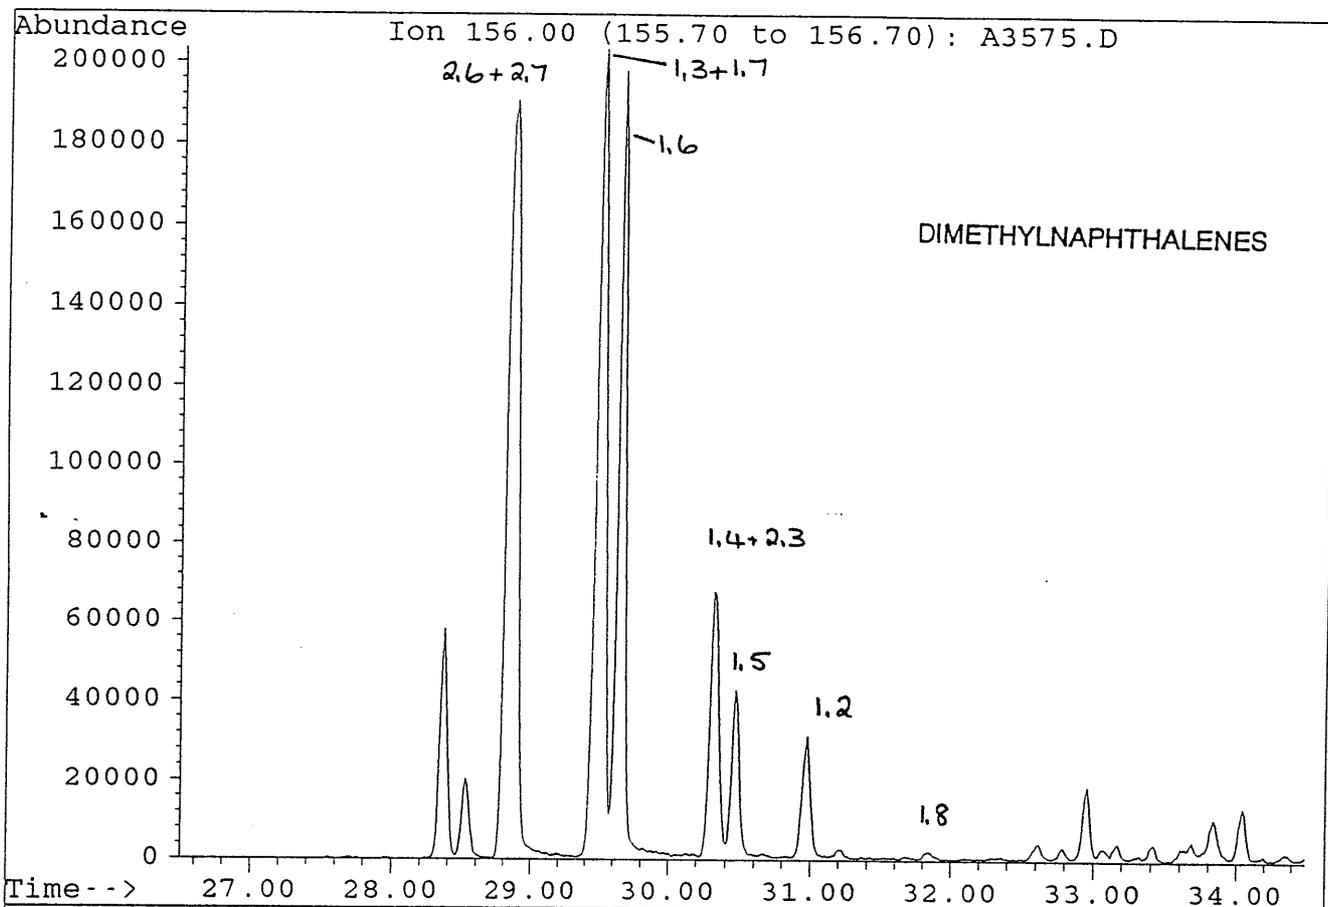


File : A3575.D
Sample : DUNBAR-1 DST#2 AROS
Misc. Info : COL#155. 12-4-95. DJ



FLUORENES

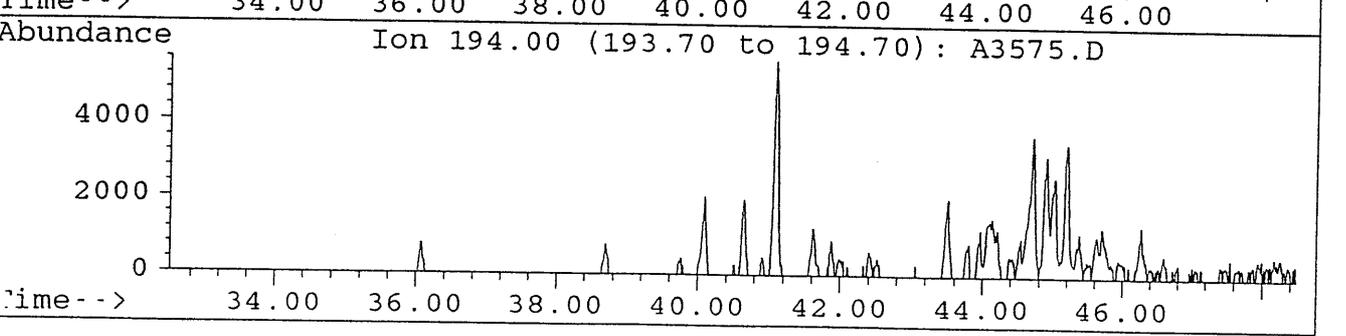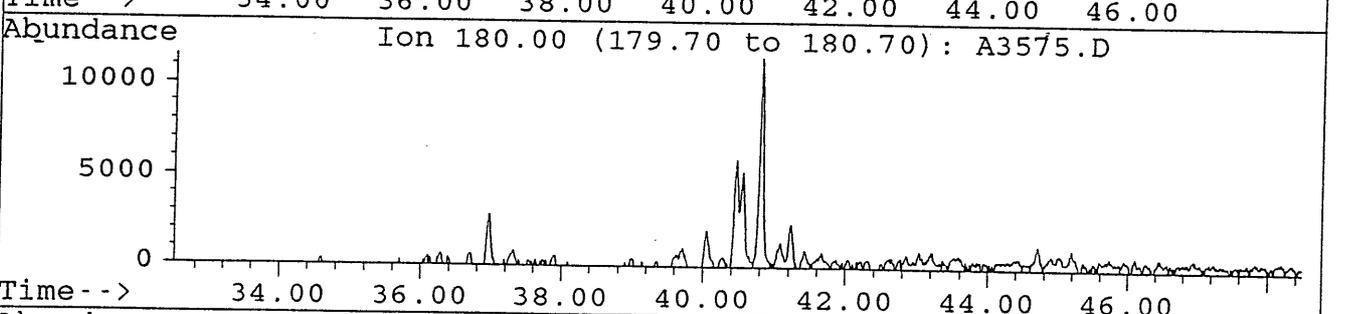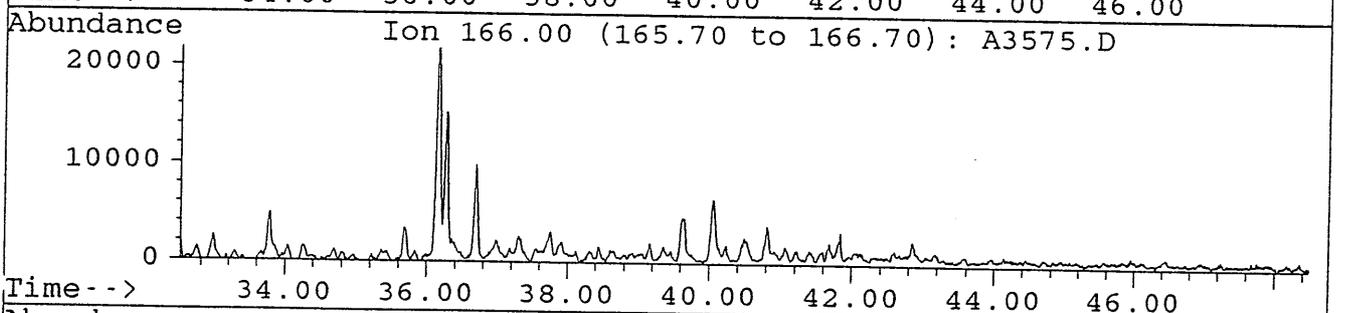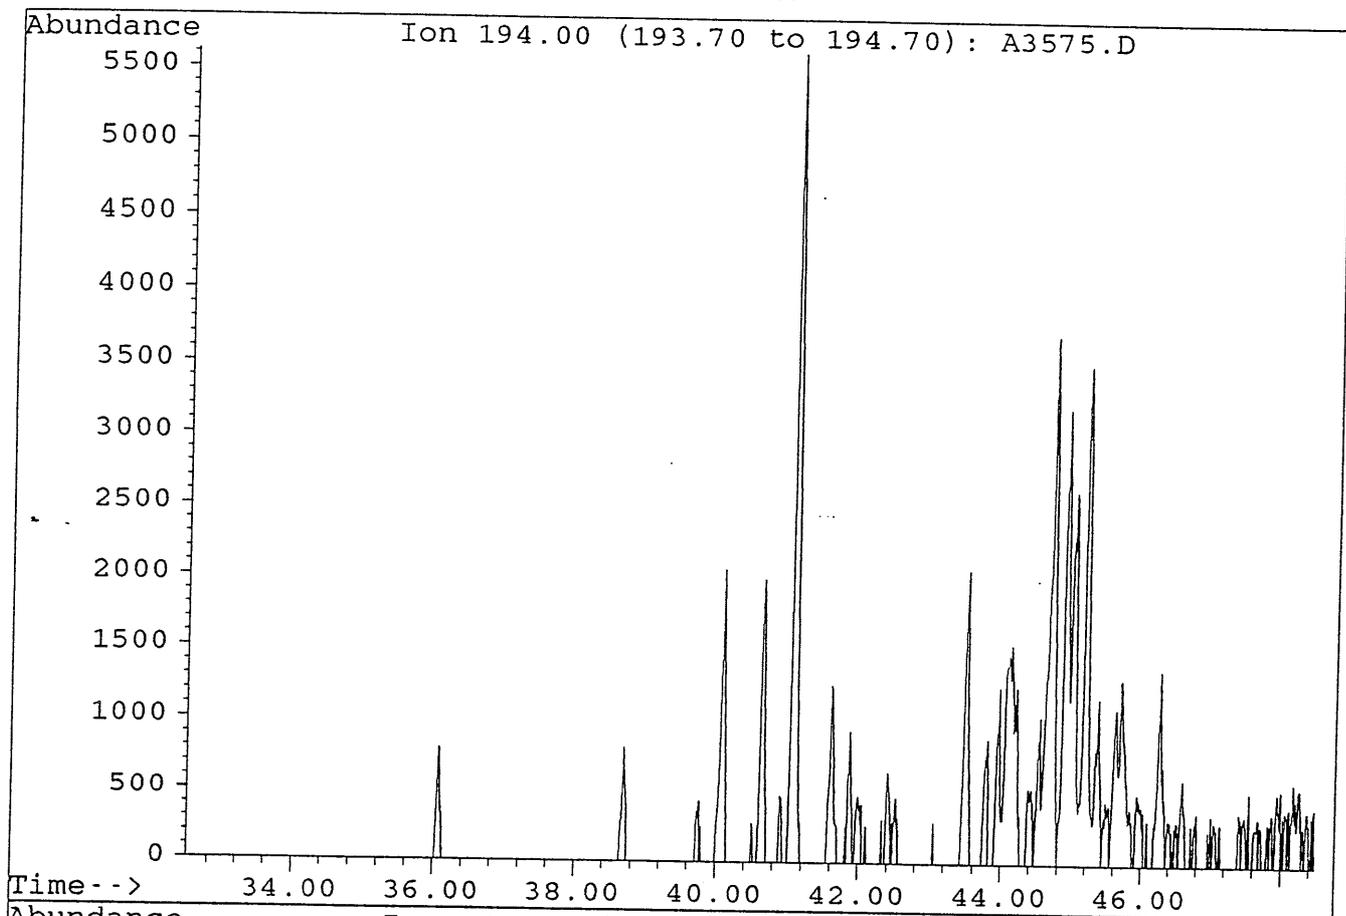



File : A3575.D
Sample : DUNBAR-1 DST#2 AROS
Misc. Info : COL#155. 12-4-95. DJ

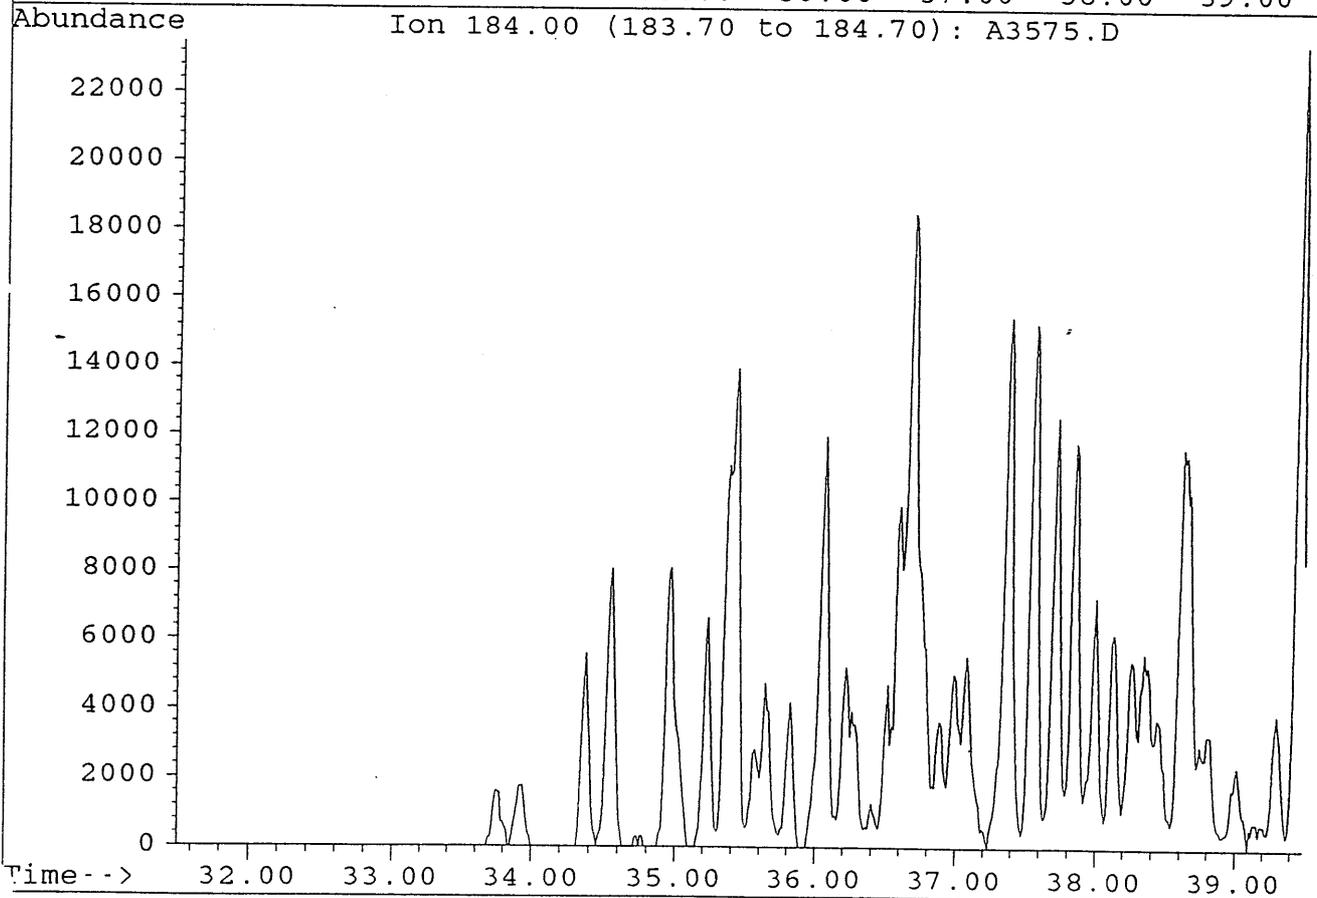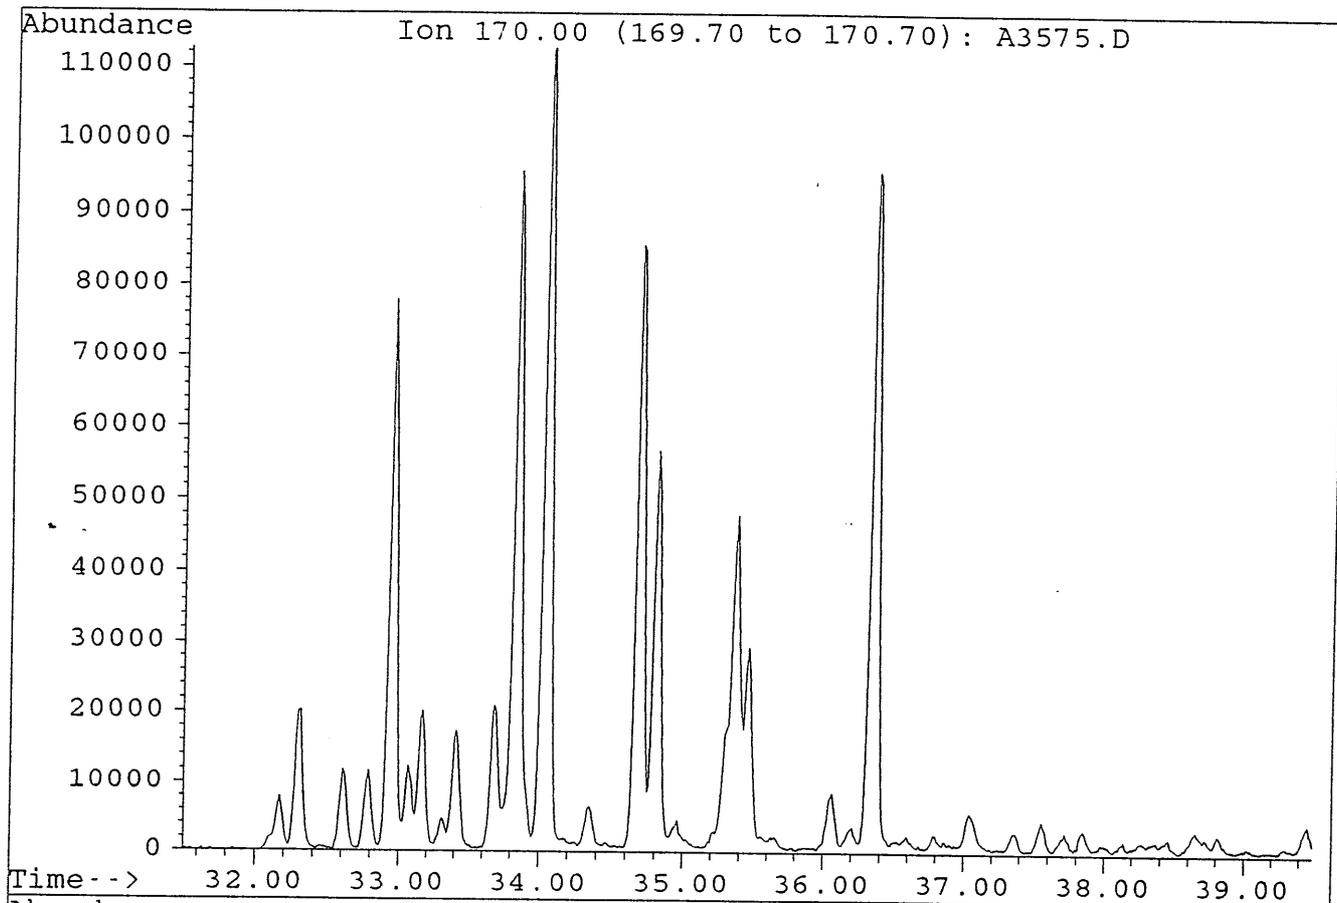



File : A3575.D
Sample : DUNBAR-1 DST#2 AROS
Misc. Info : COL#155. 12-4-95. DJ

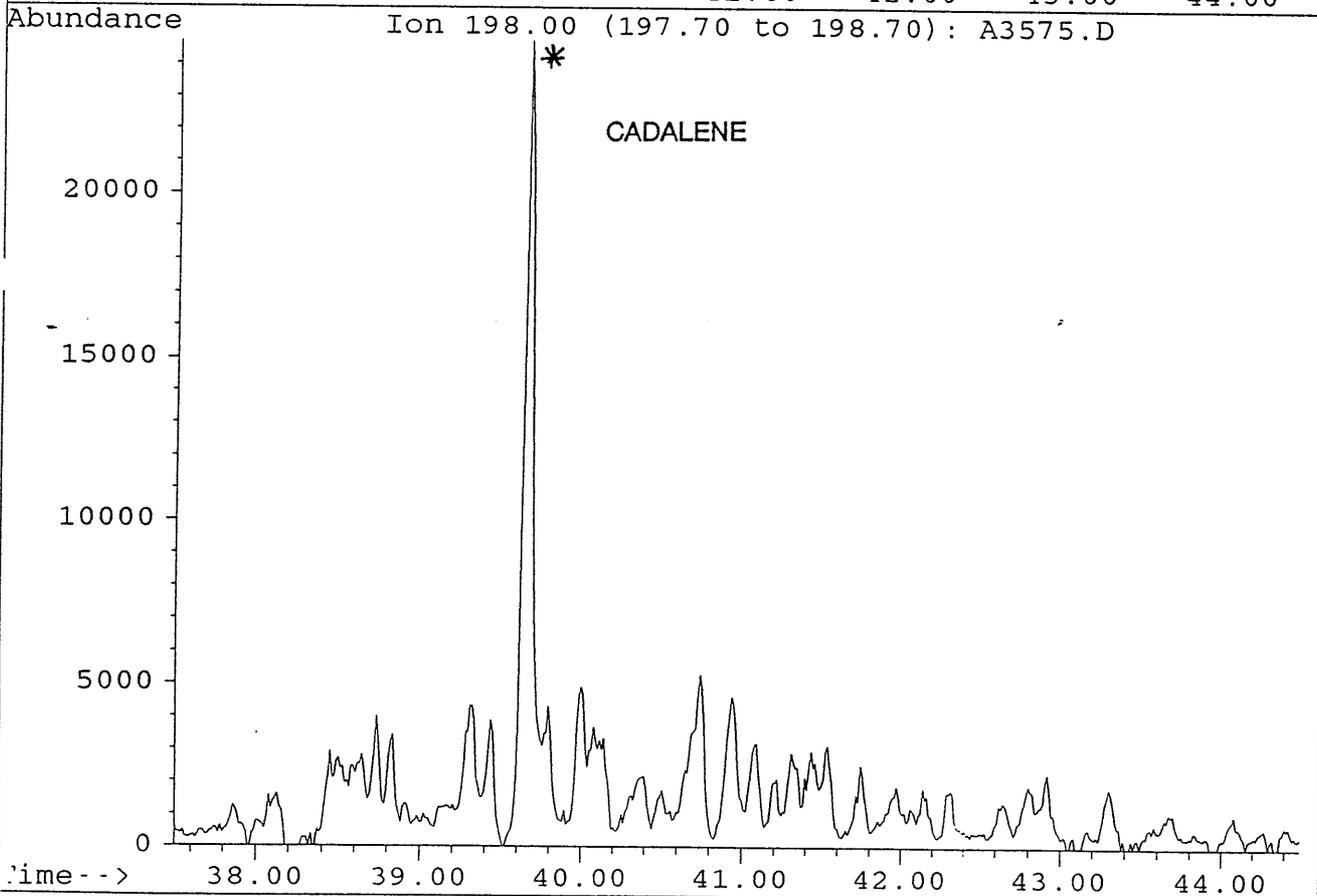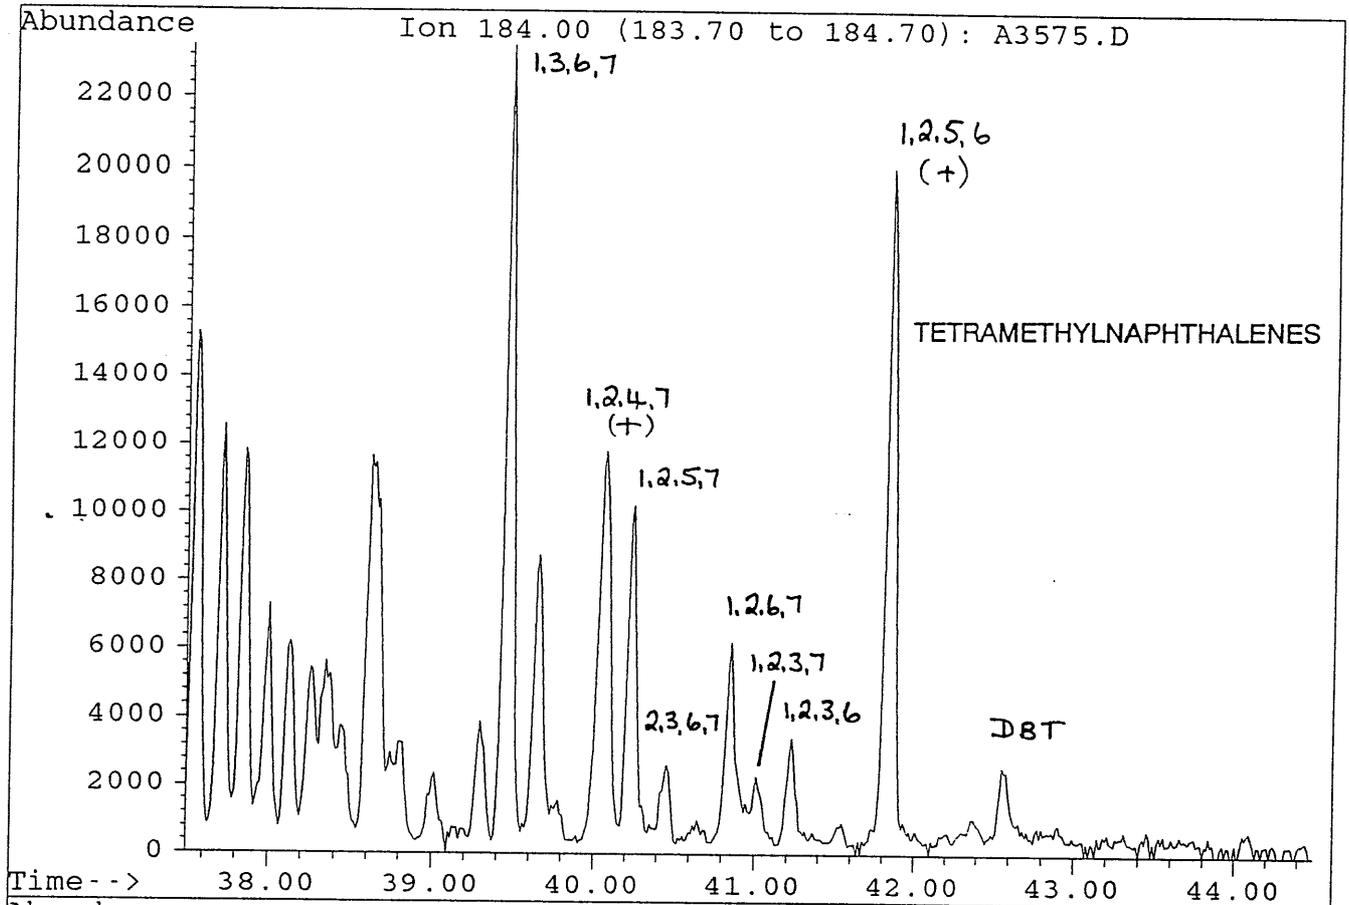


File : A3575.D
Sample : DUNBAR-1 DST#2 AROS
Misc. Info : COL#155. 12-4-95. DJ

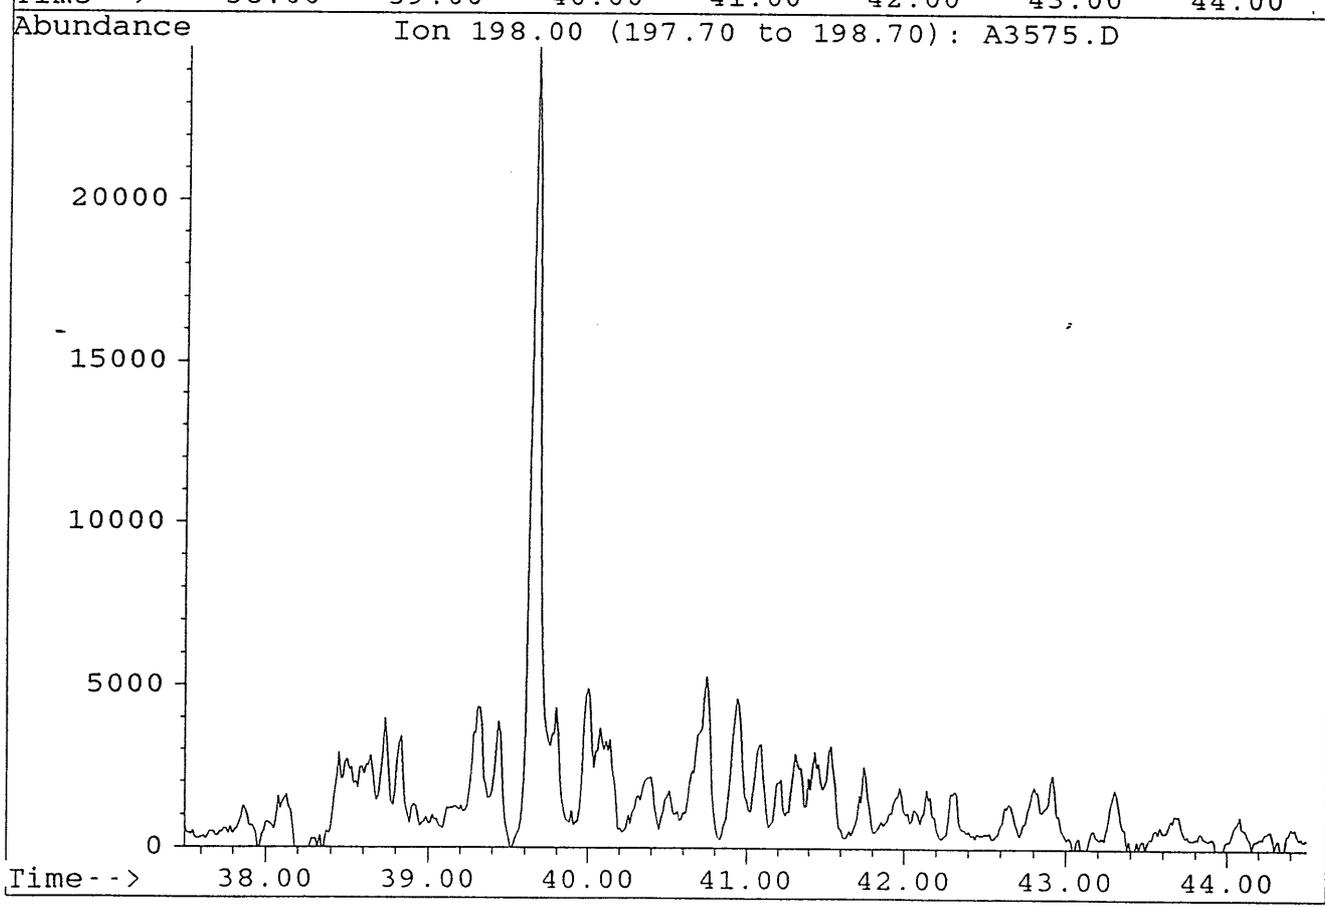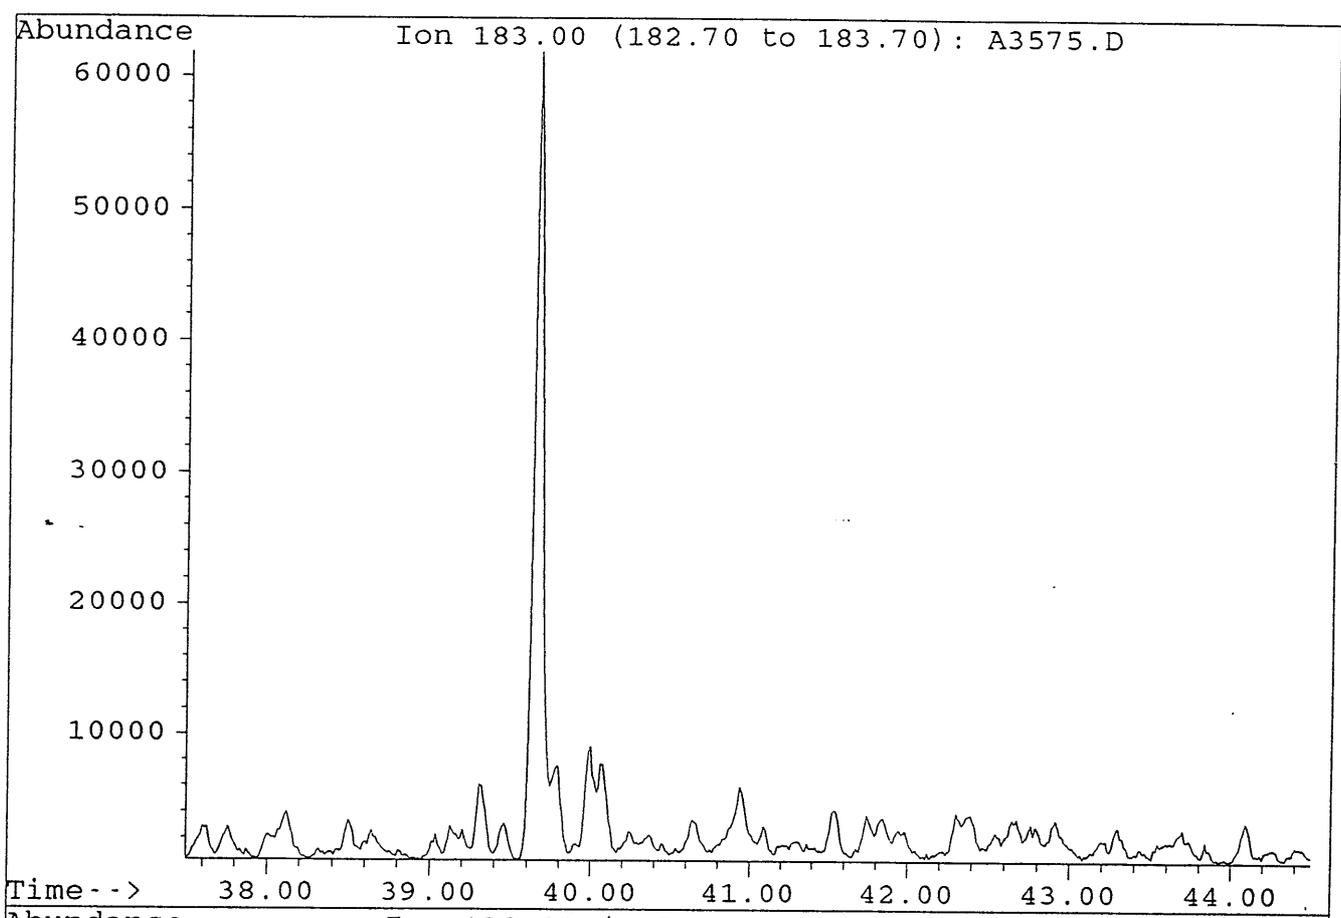

File : A3575.D
Sample : DUNBAR-1 DST#2 AROS
Misc. Info : COL#155. 12-4-95. DJ

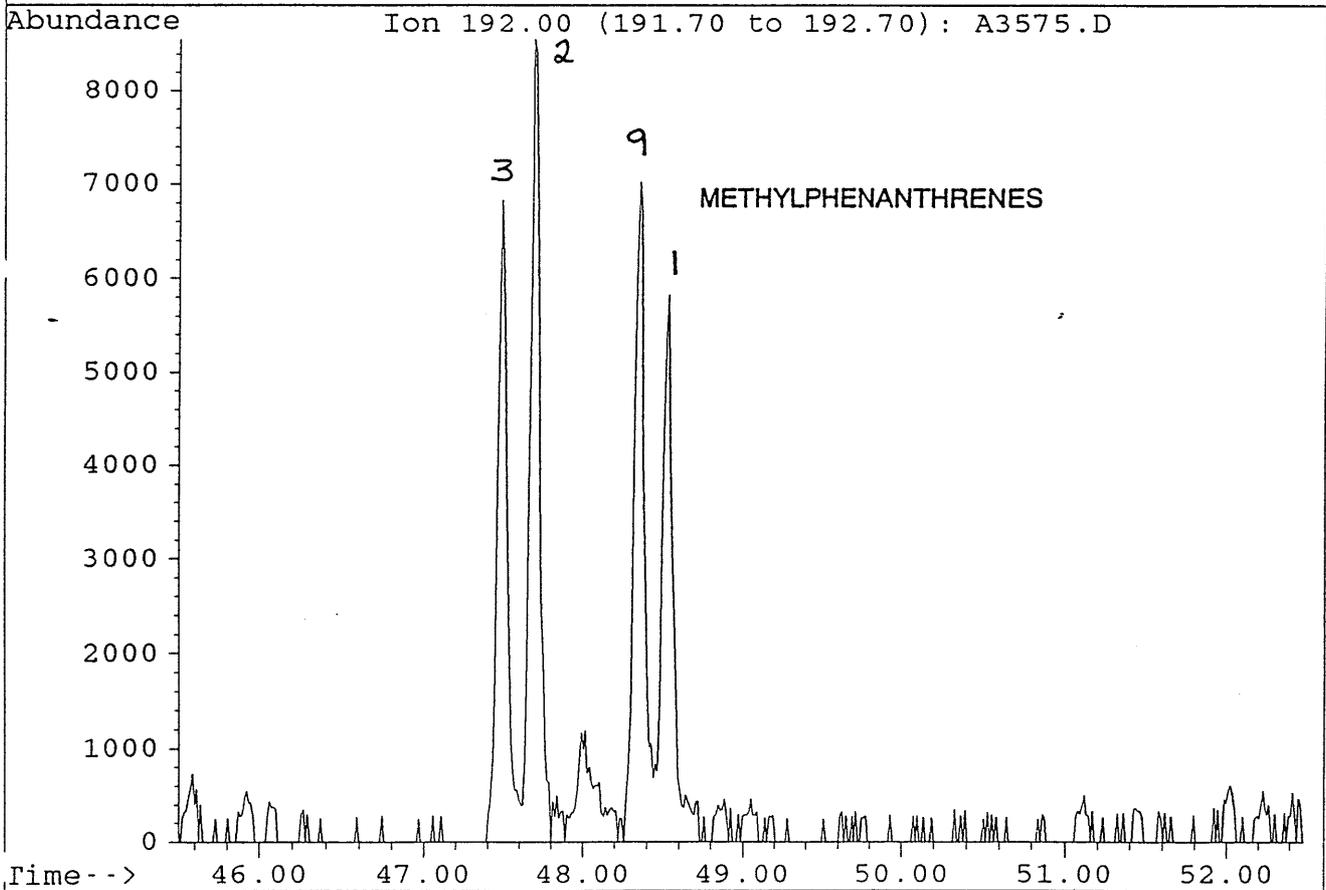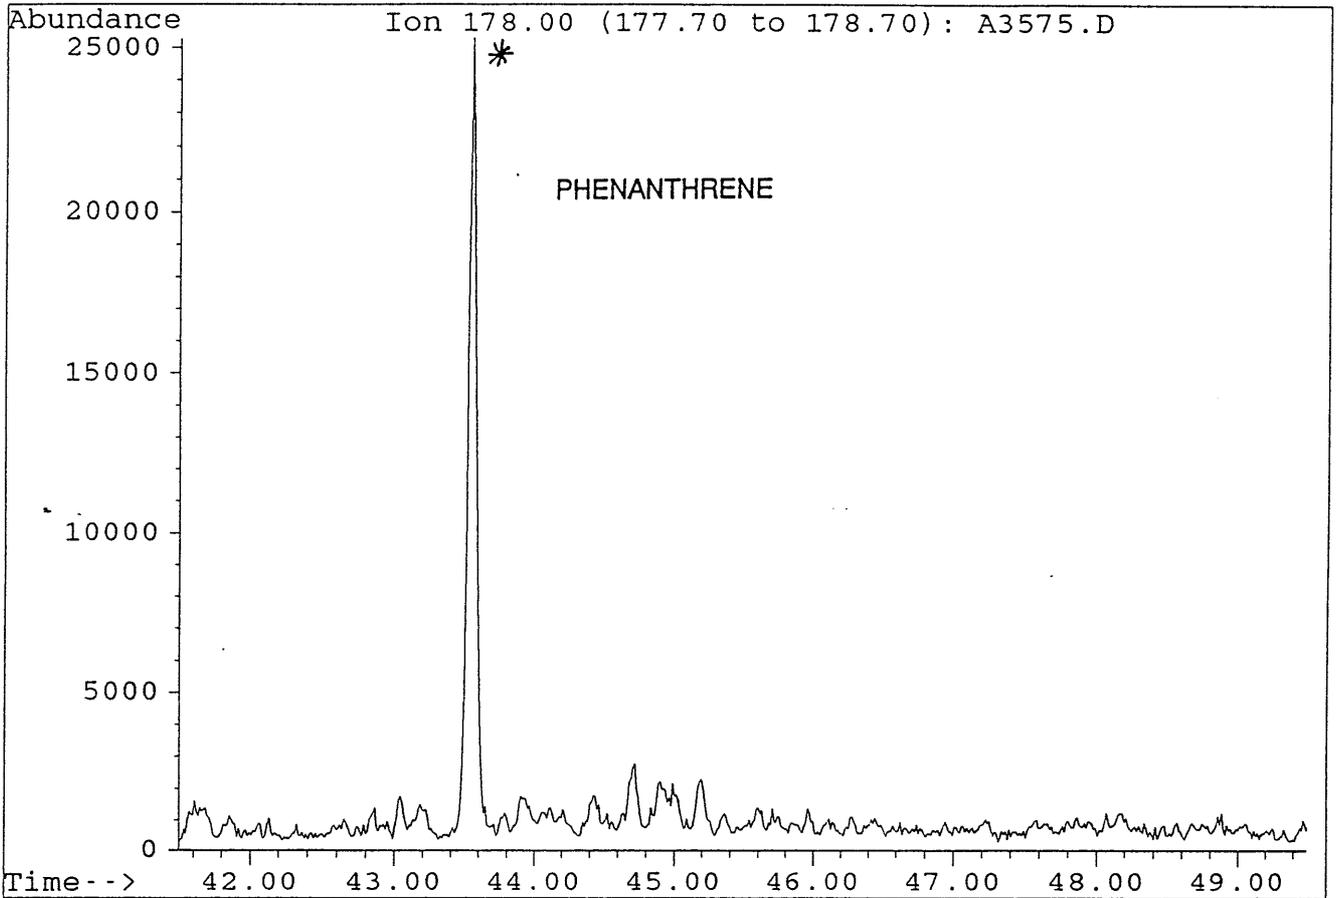

File : A3575.D
Sample : DUNBAR-1 DST#2 AROS
Misc. Info : COL#155. 12-4-95. DJ

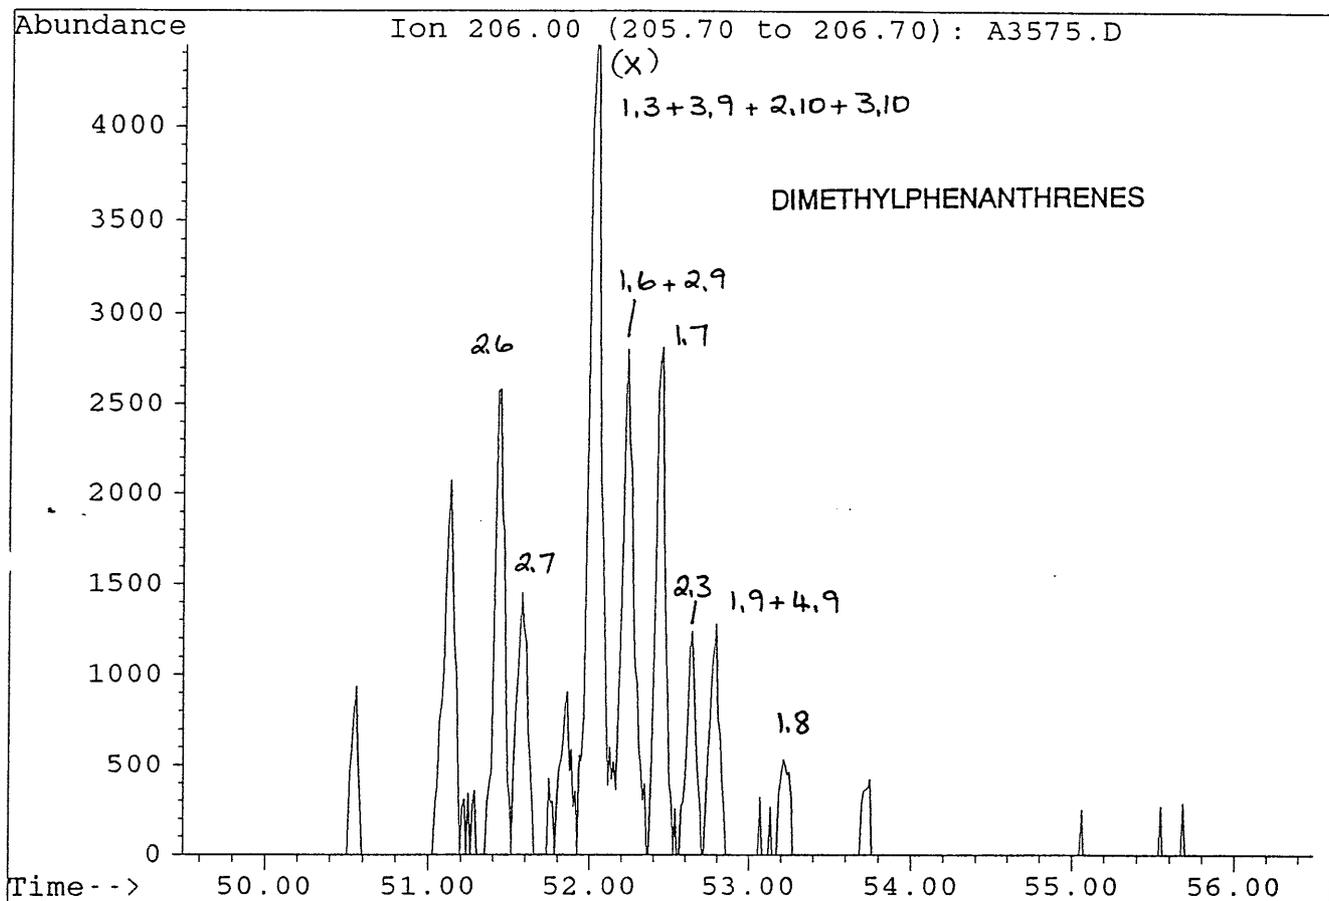

File : A3575.D
Sample : DUNBAR-1 DST#2 AROS
Misc. Info : COL#155. 12-4-95. DJ

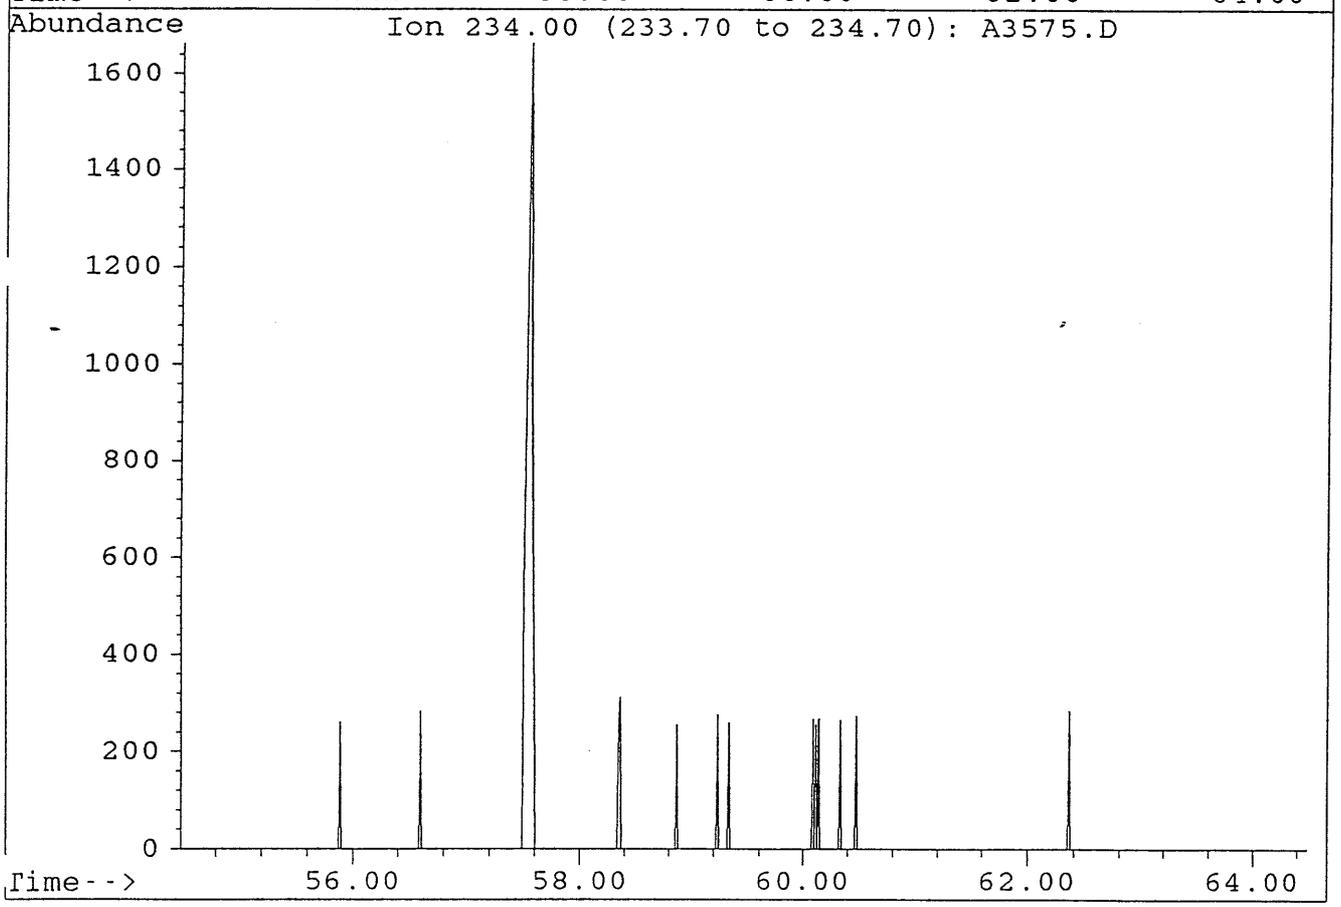
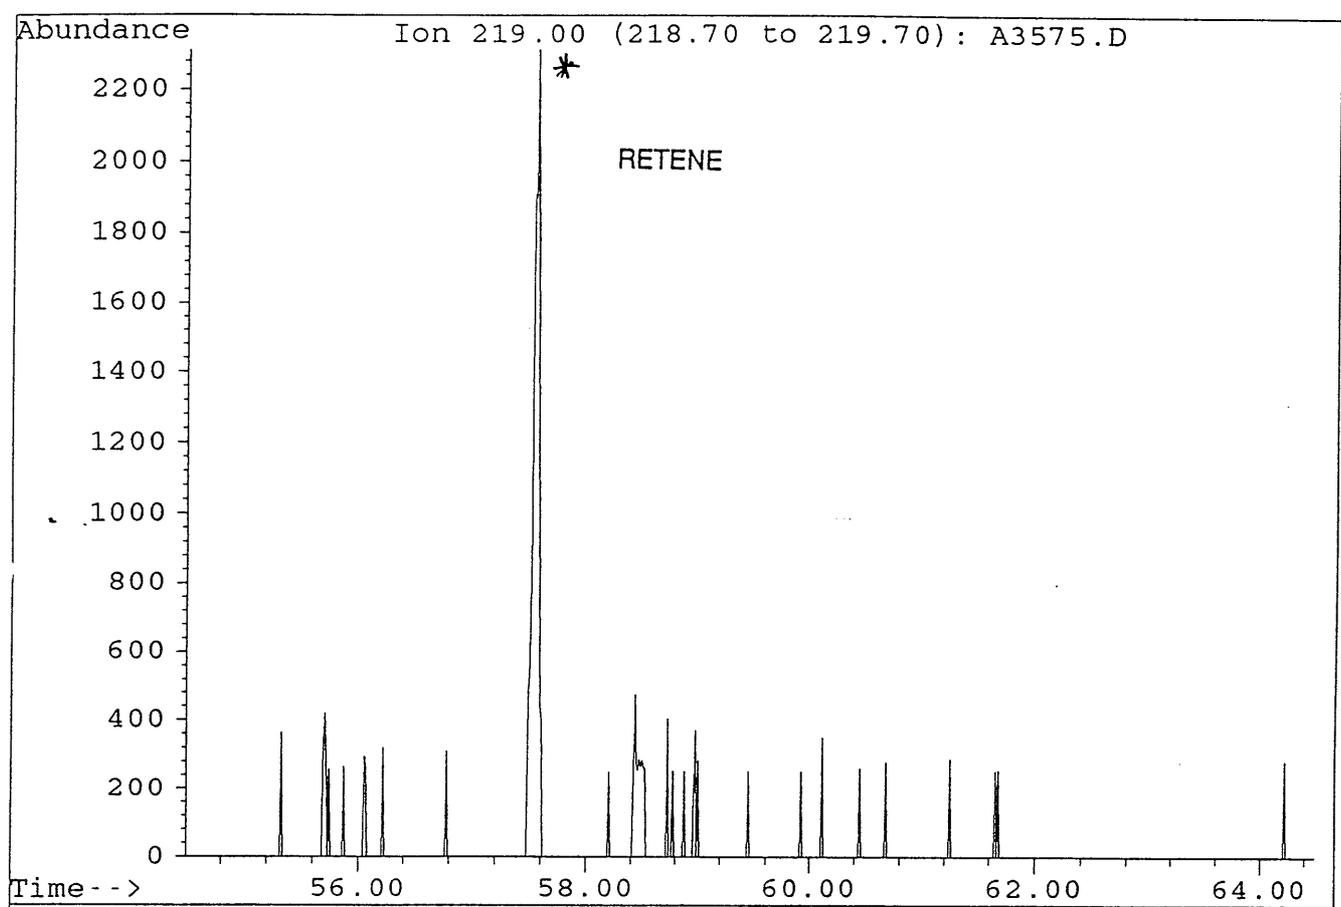


TABLE 3




SELECTED PARAMETERS FROM GC/MS ANALYSIS

DUNBAR 1, DST 2, Condensate


	<u>Parameter</u>	<u>Ion(s)</u>	<u>Value</u>
1.	18 α (H)- hopane/17 α (H)-hopane (Ts/Tm)	191	nd
2.	C30 hopane/C30 moretane	191	nd
3.	C31 22S hopane/C31 22R hopane	191	nd
4.	C32 22S hopane/C32 22R hopane	191	nd
5.	C29 20S $\alpha\alpha\alpha$ sterane/C29 20R $\alpha\alpha\alpha$ sterane	217	nd
6.	C29 $\alpha\alpha\alpha$ steranes (20S / 20S+20R)	217	nd
7.	C29 $\alpha\beta\beta$ steranes ----- C29 $\alpha\alpha\alpha$ steranes + C29 $\alpha\beta\beta$ steranes	217	nd
8.	C27/C29 diasteranes	259	nd
9.	C27/C29 steranes	217	nd
10.	18 α (H)-oleanane/C30 hopane	191	nd
11.	C29 diasteranes ----- C29 $\alpha\alpha\alpha$ steranes + C29 $\alpha\beta\beta$ steranes	217	nd
12.	C30 (hopane + moretane) ----- C29 (steranes + diasteranes)	191/217	nd
13.	C15 drimane/C16 homodrimane	123	1.26
14.	Rearranged drimanes/normal drimanes	123	1.33

nd = not detectable




File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

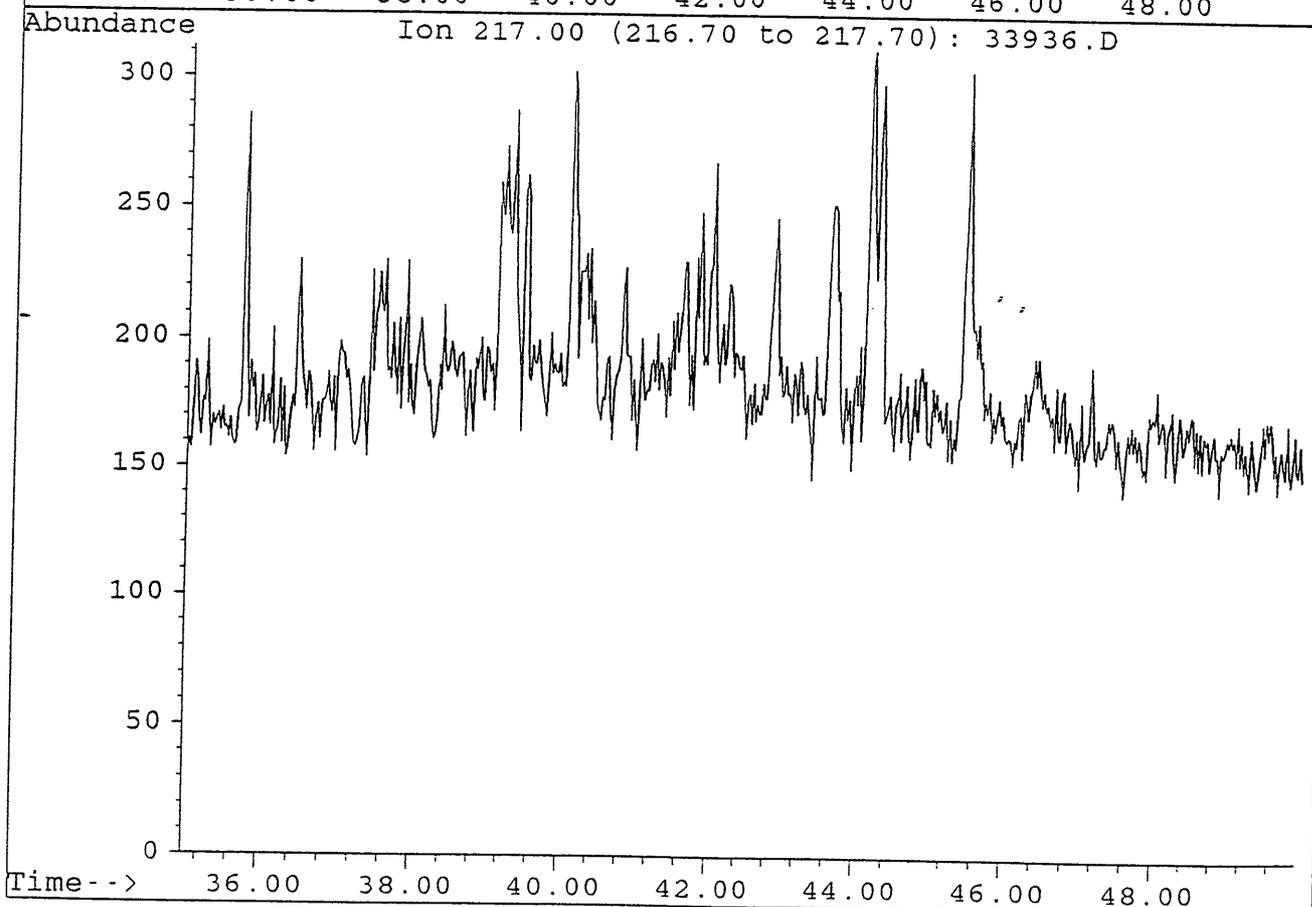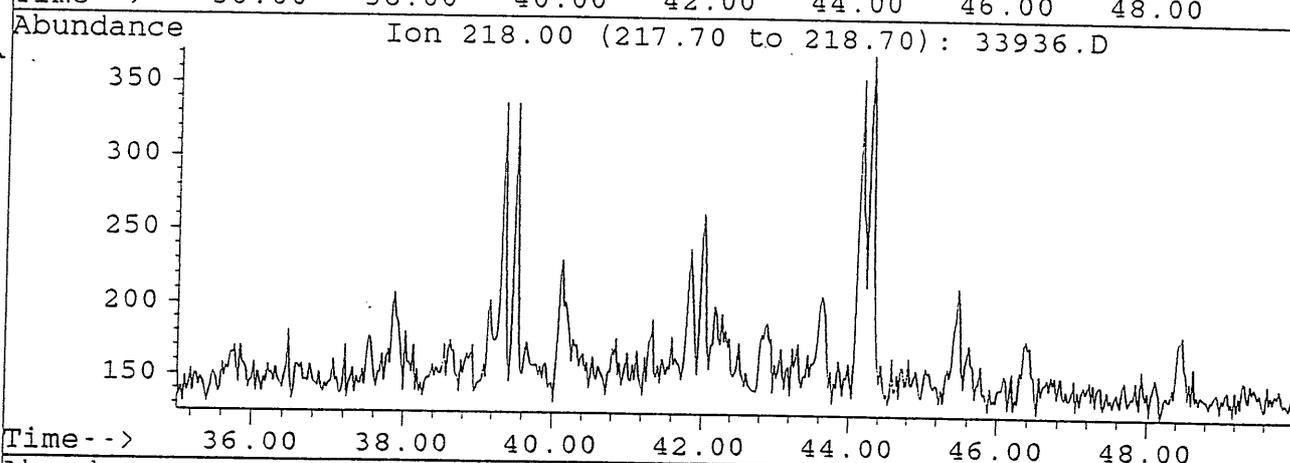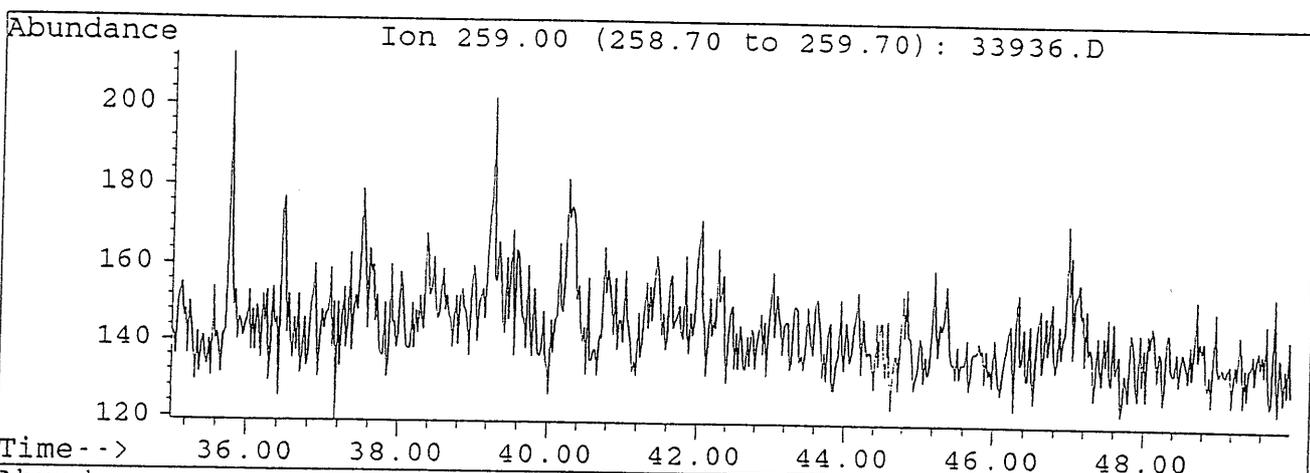


File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

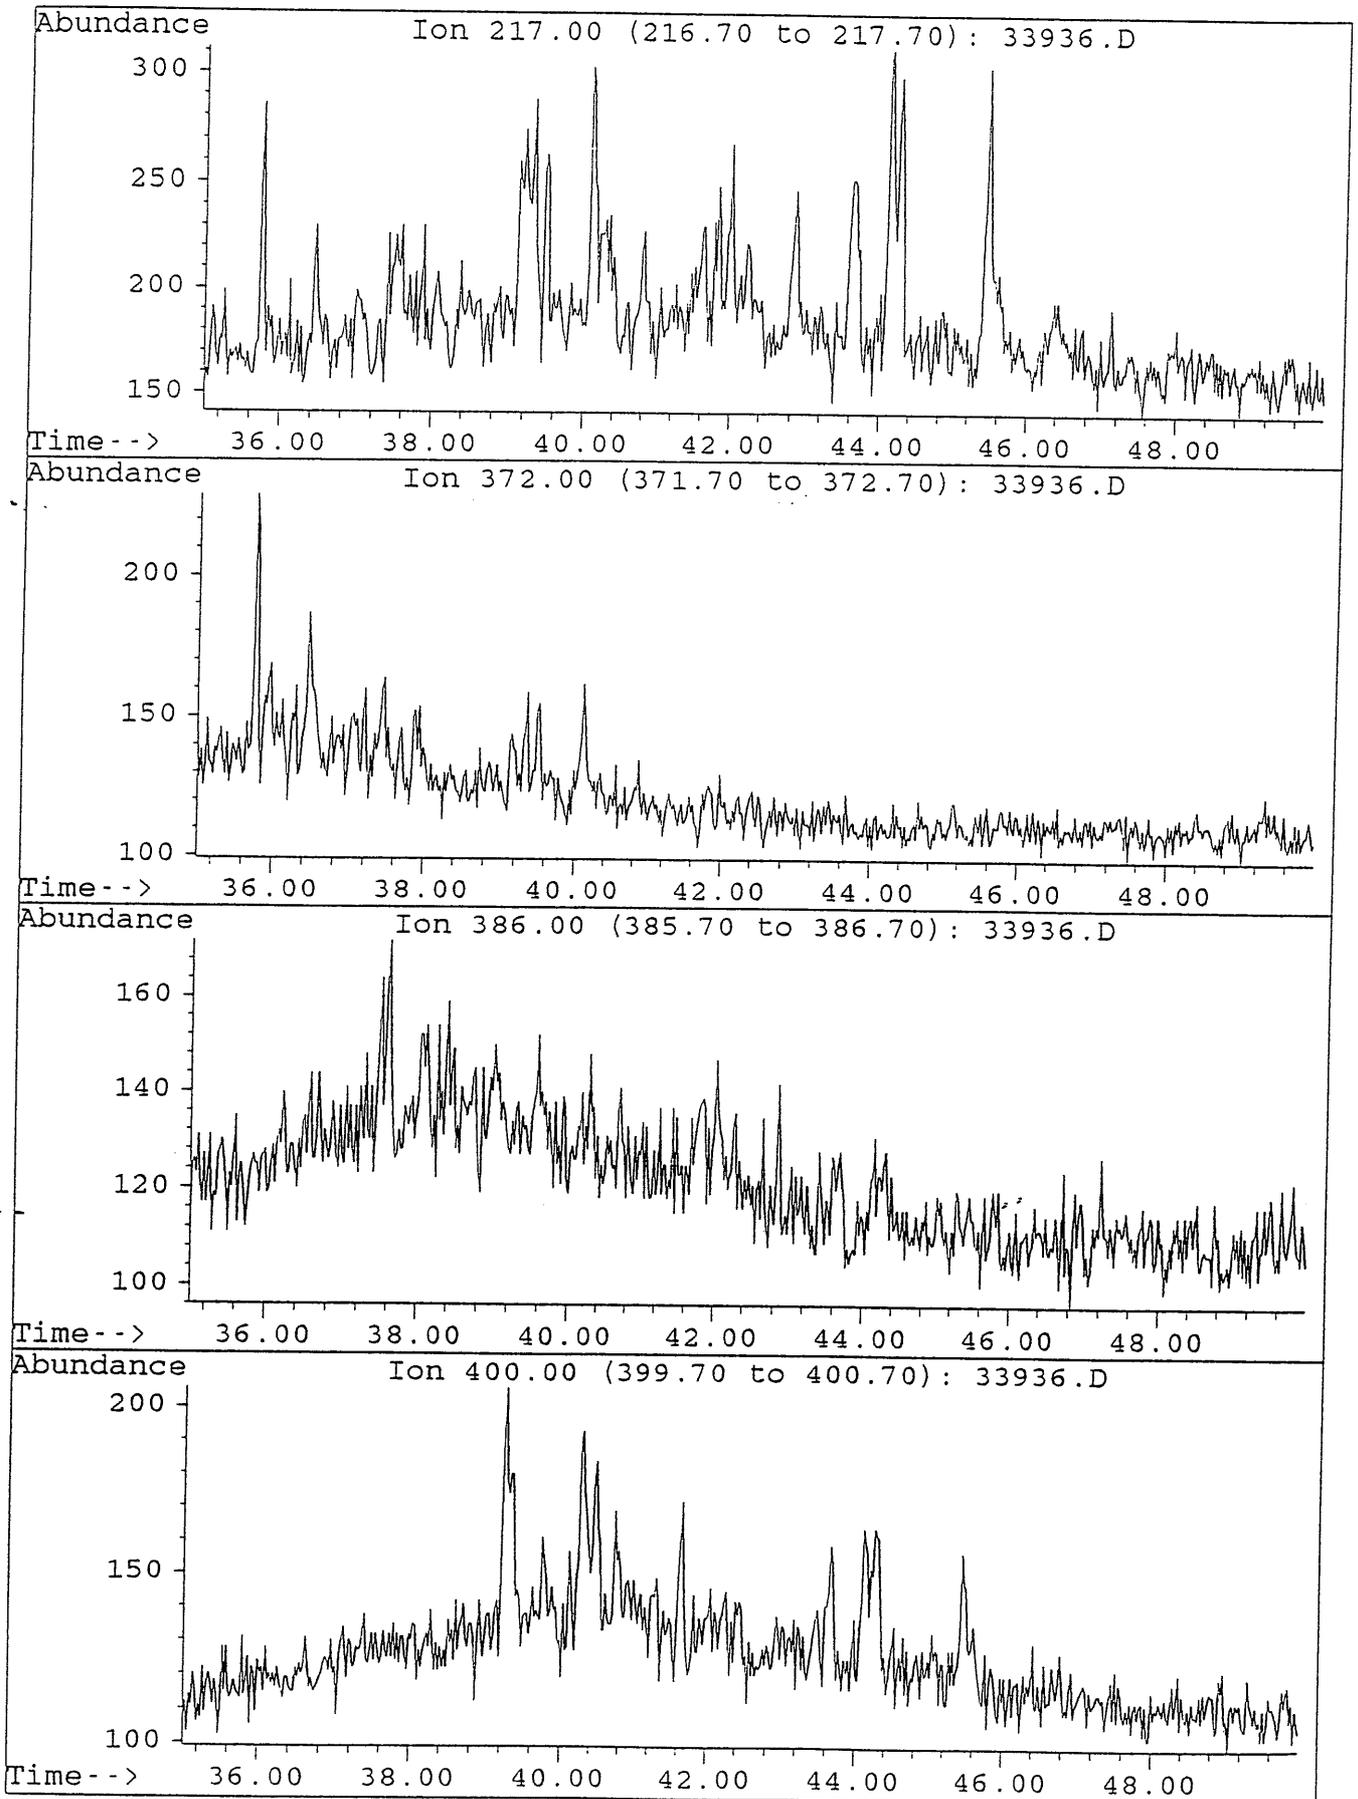


File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

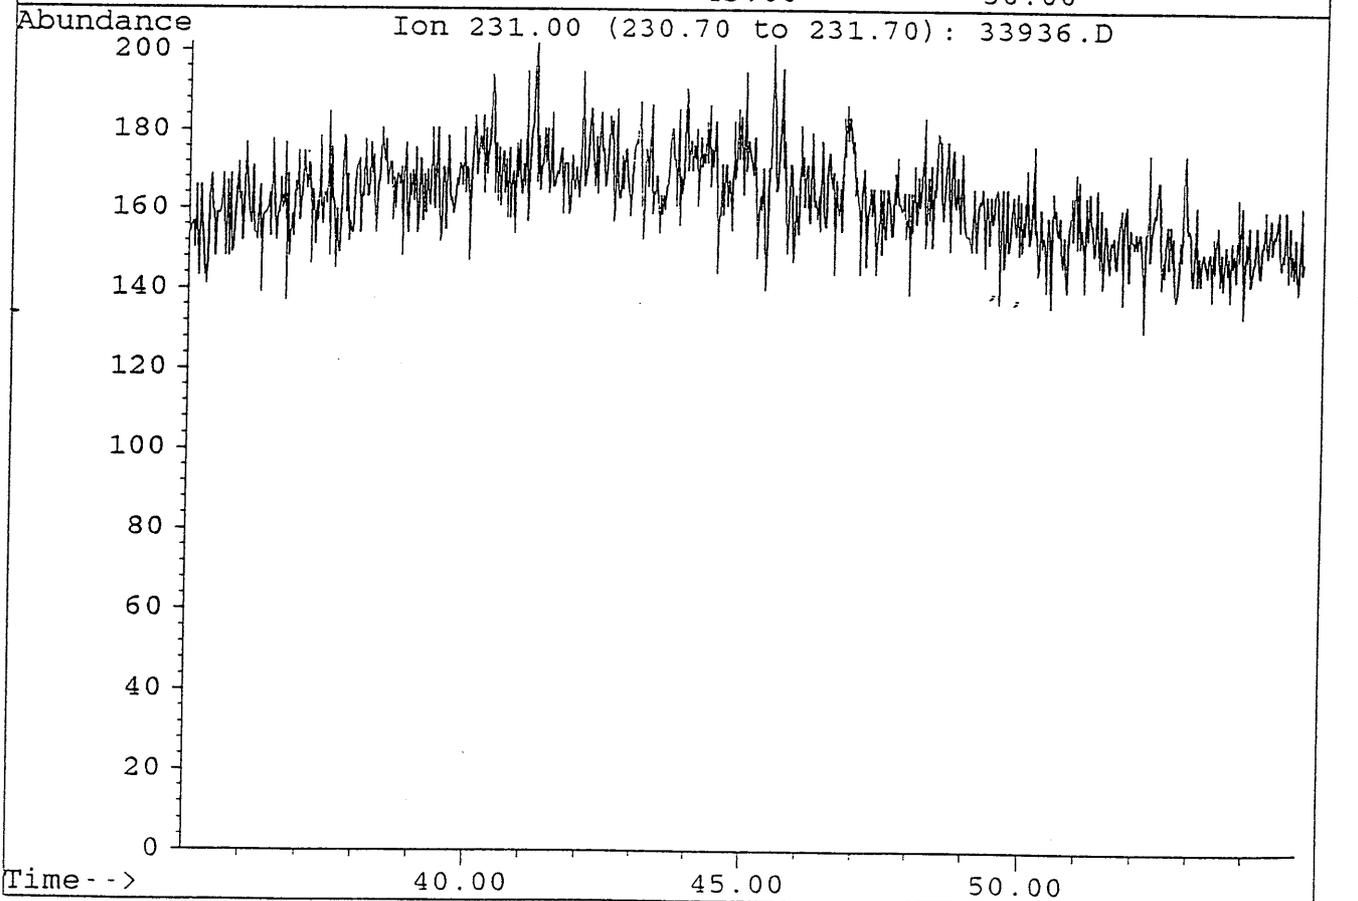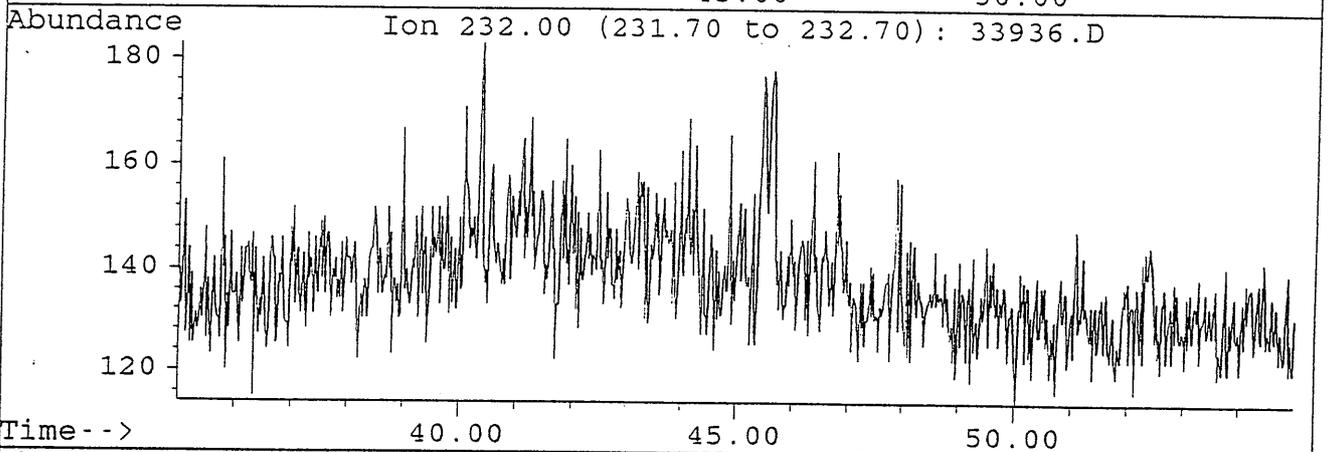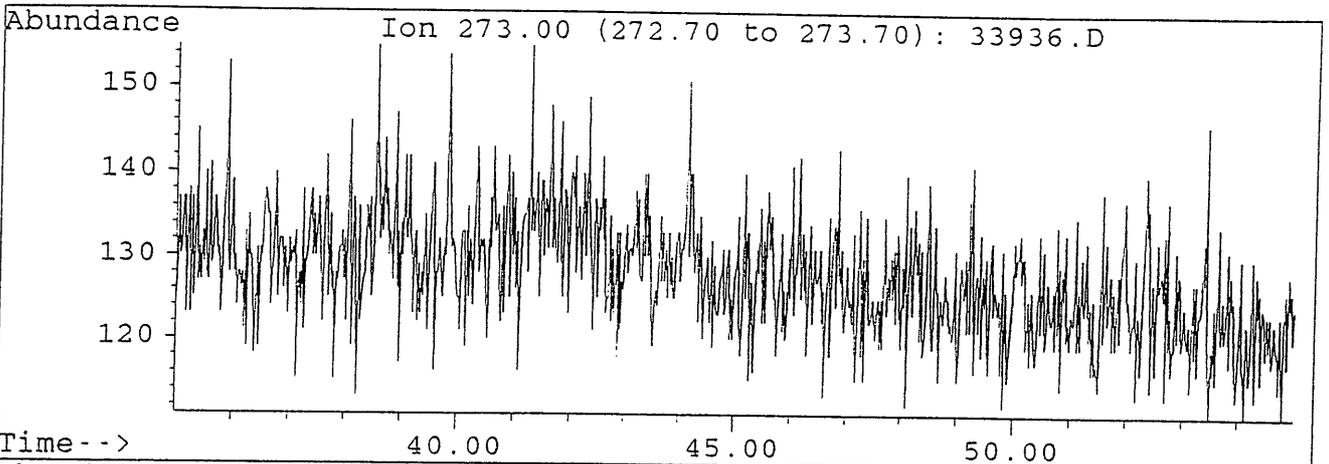



File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

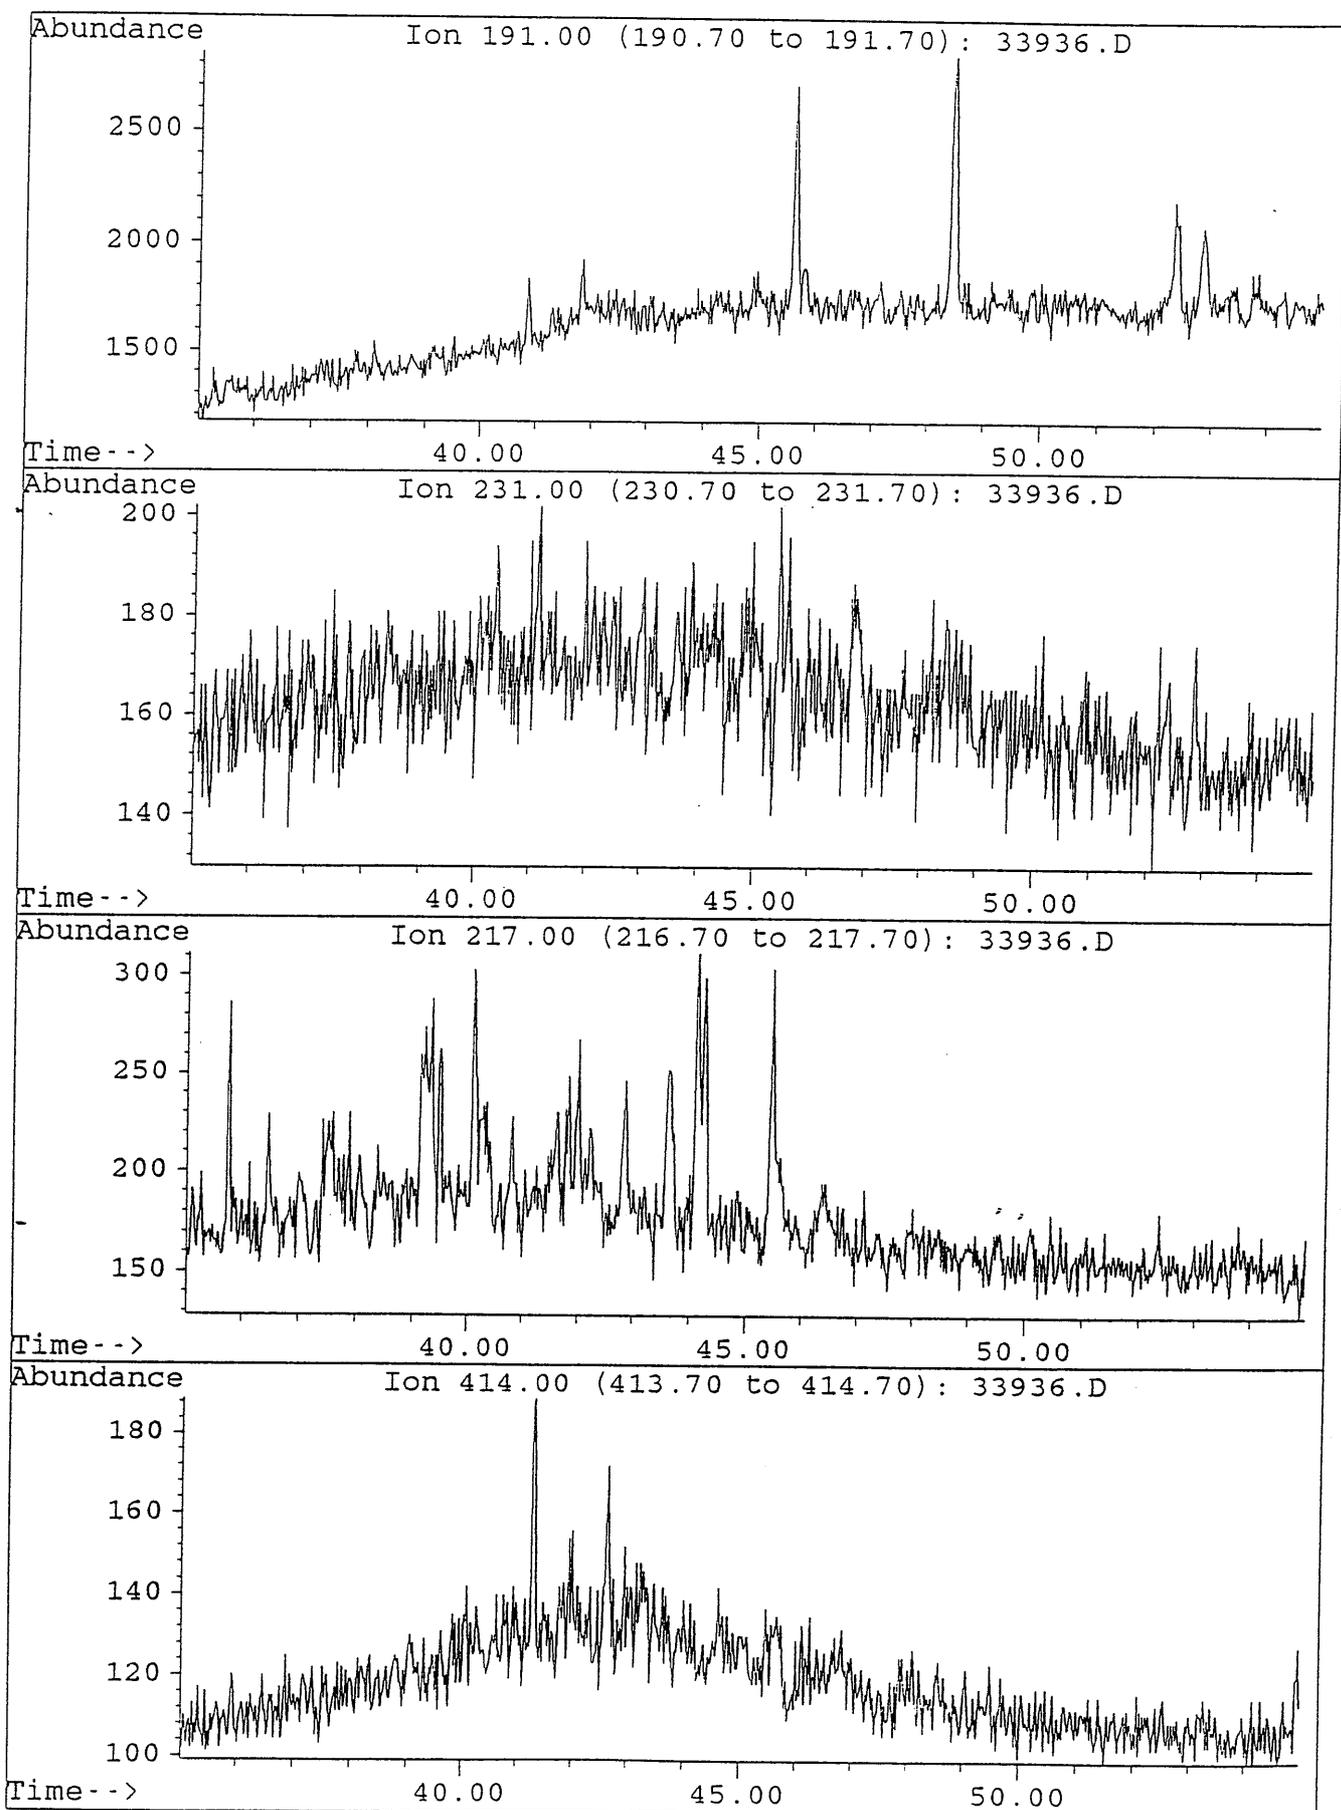





File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

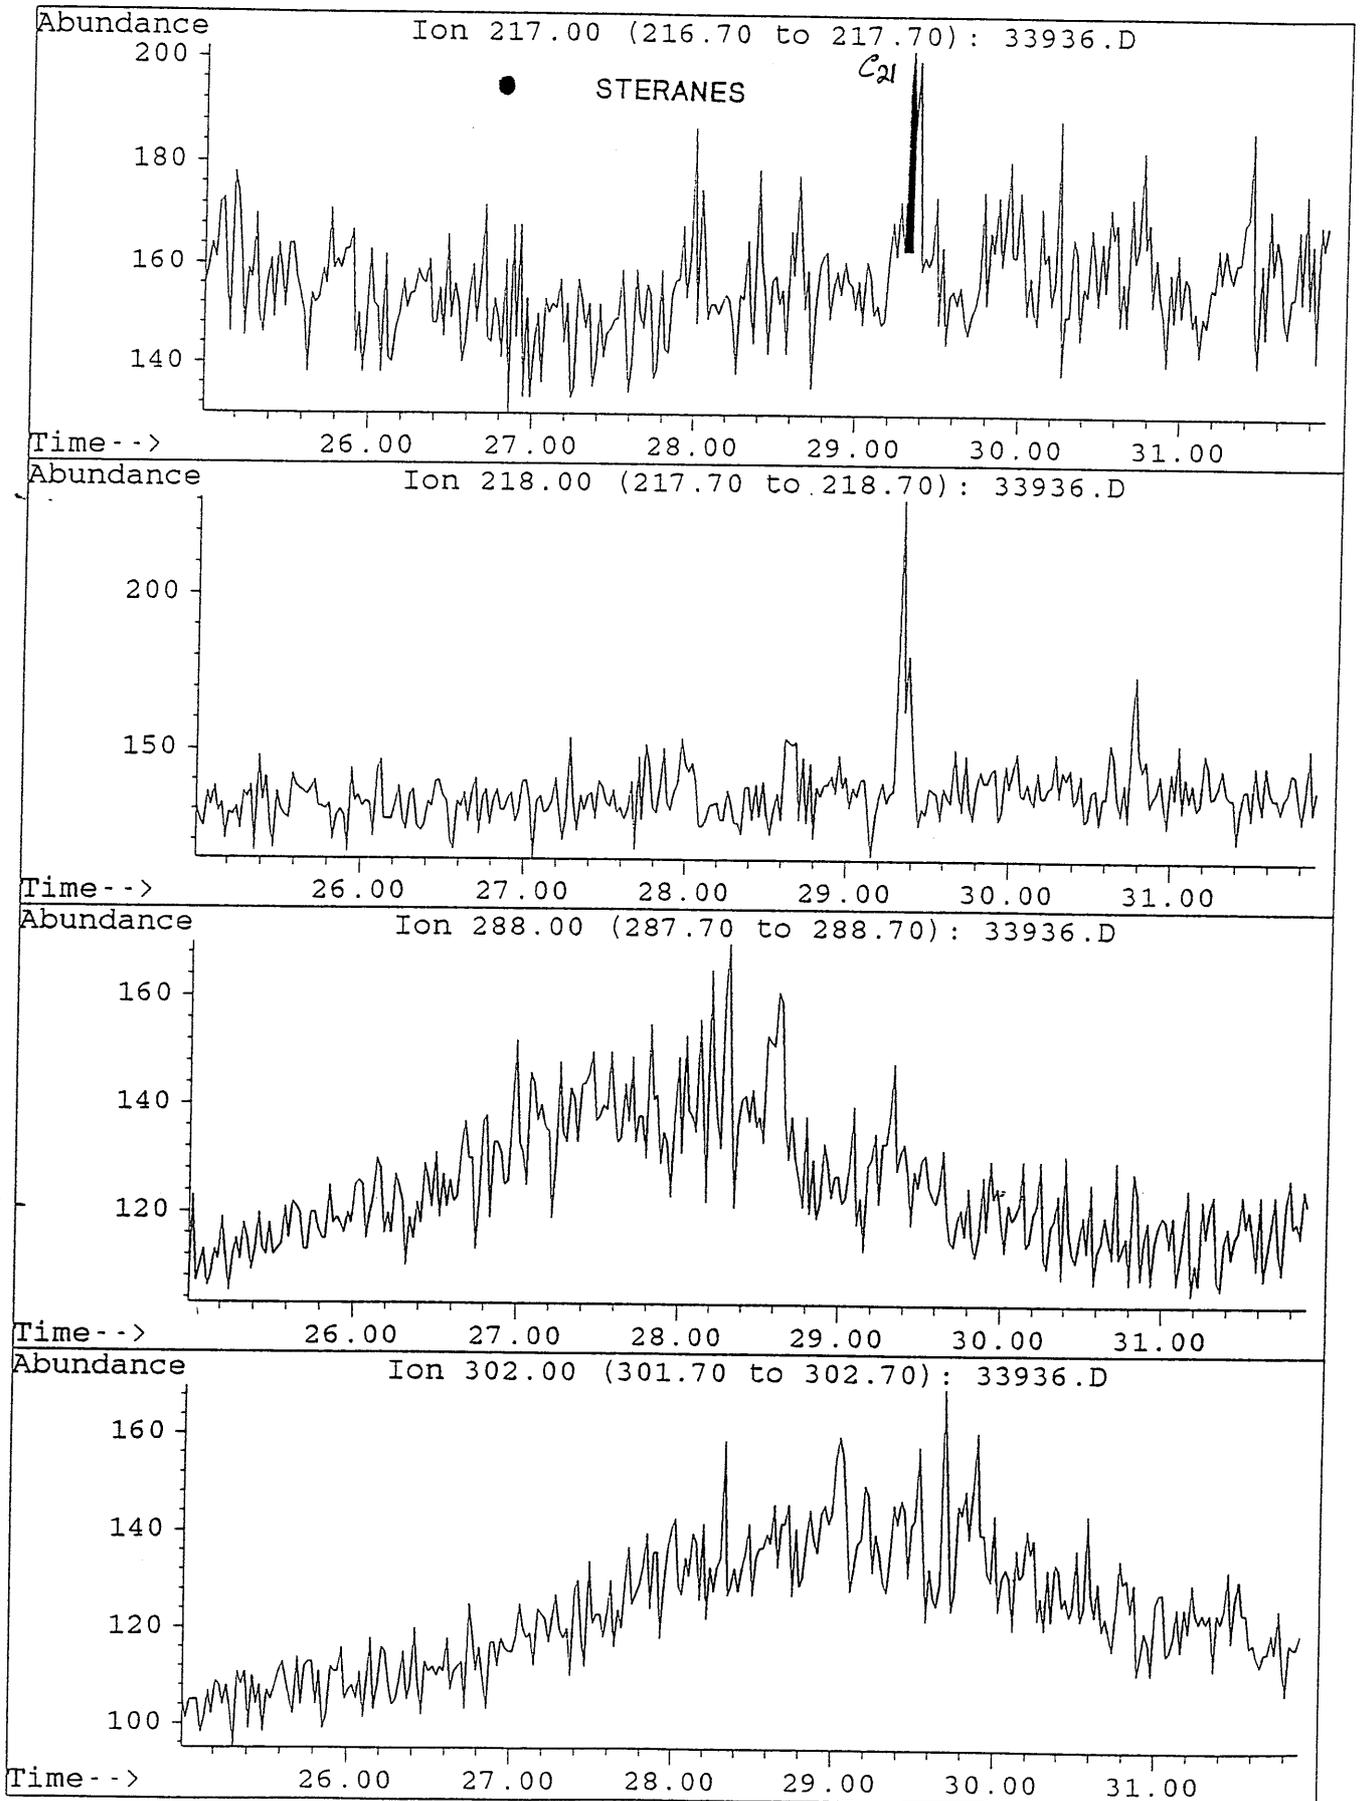


File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

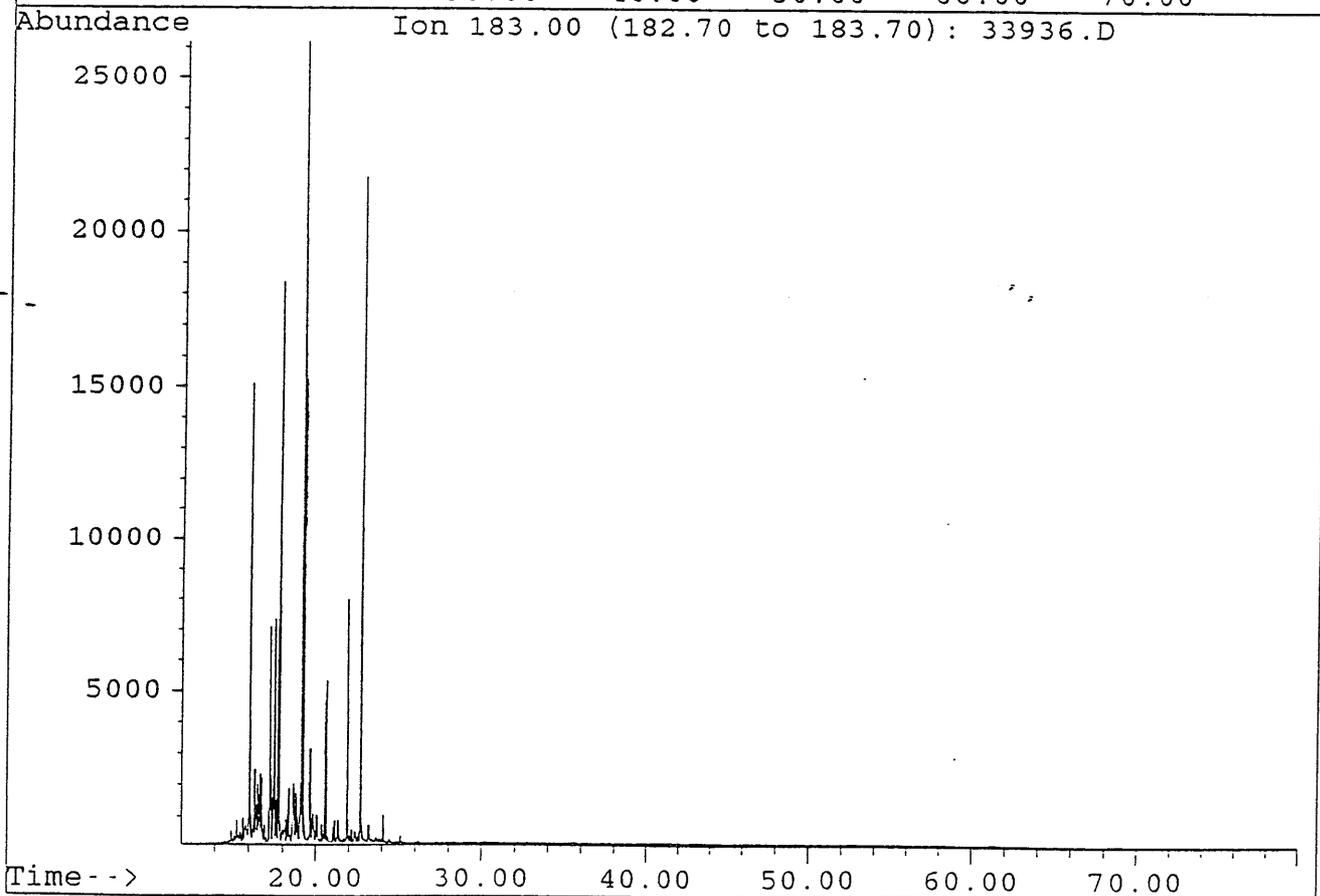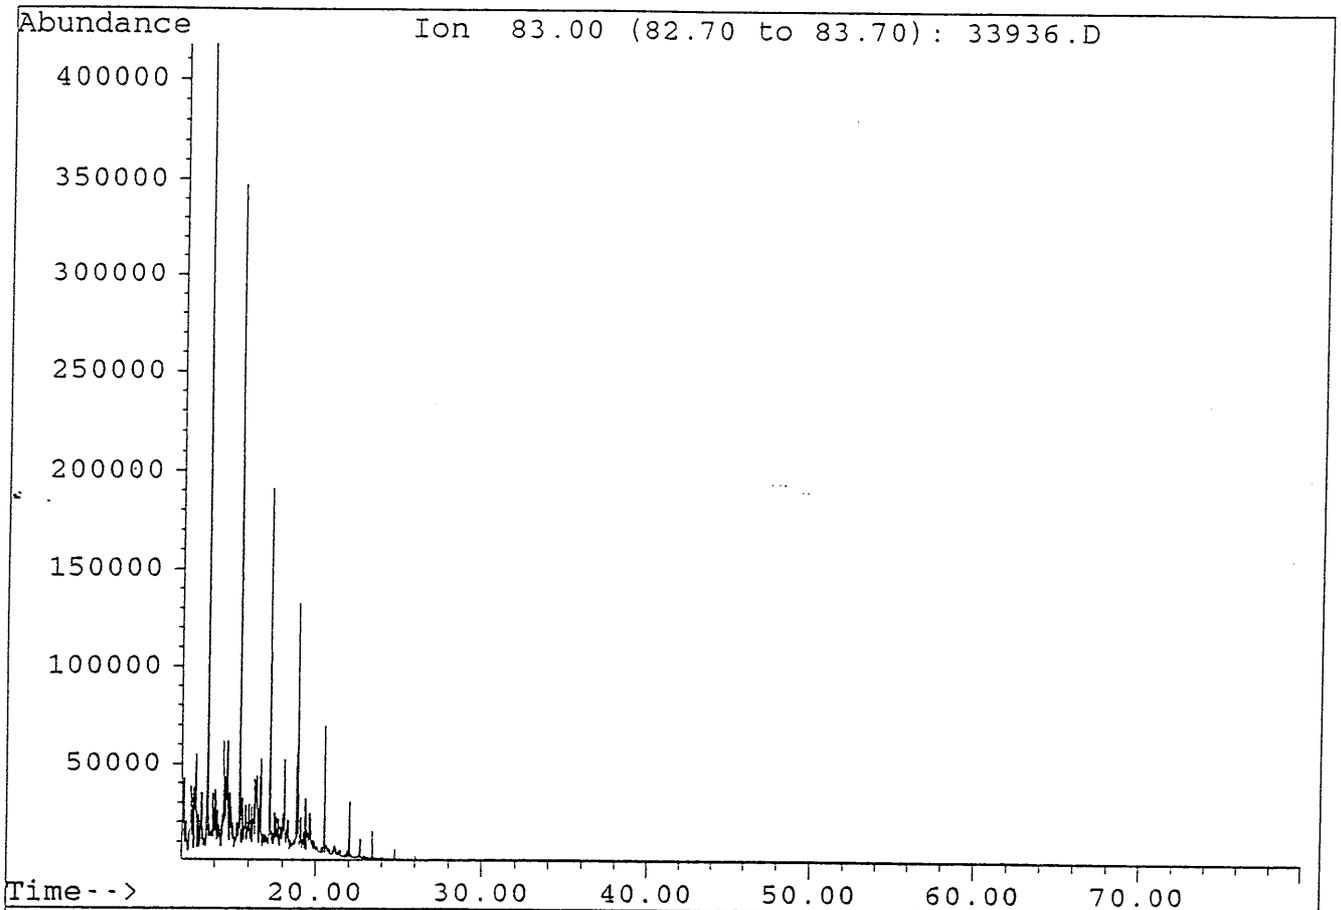



File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

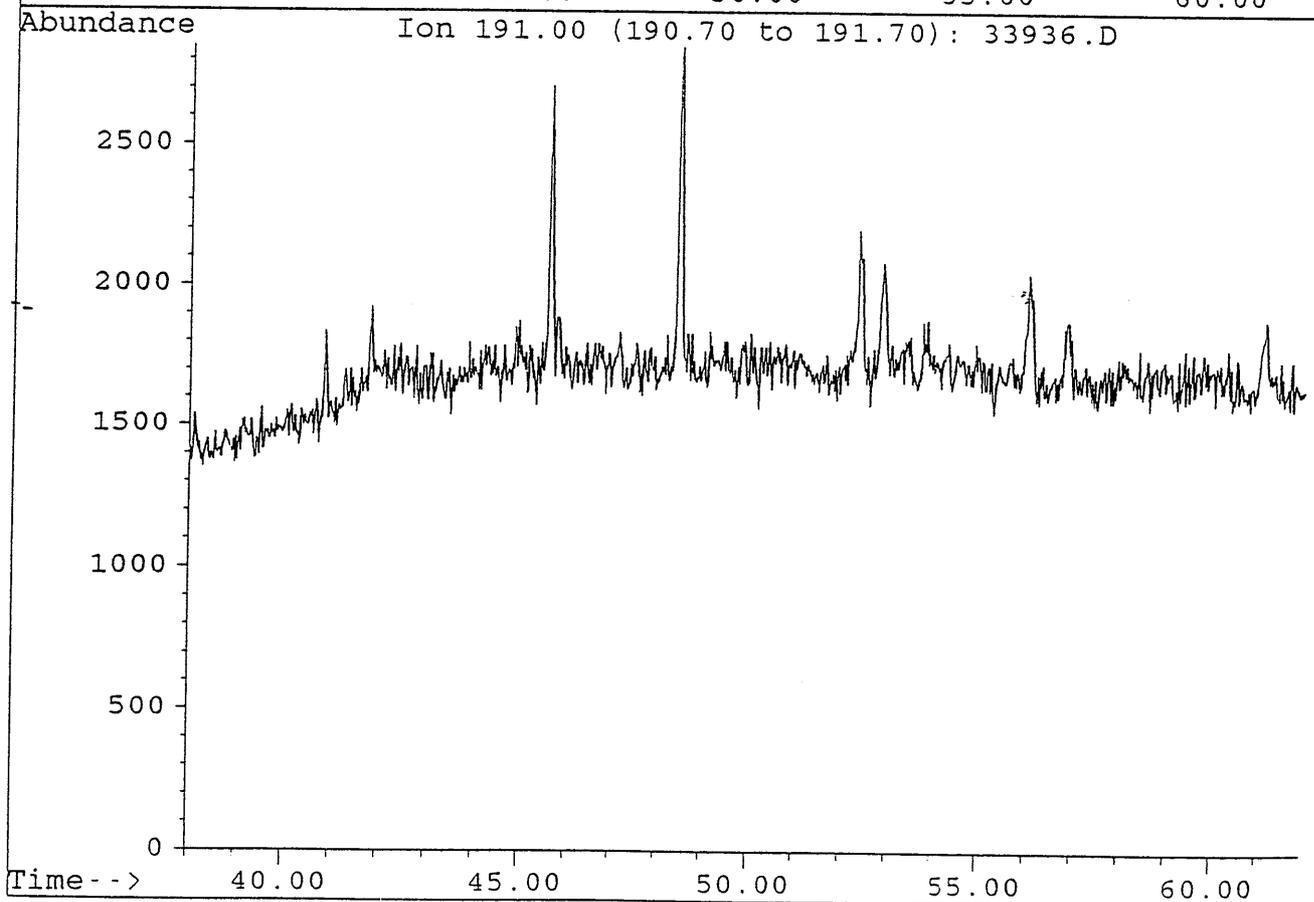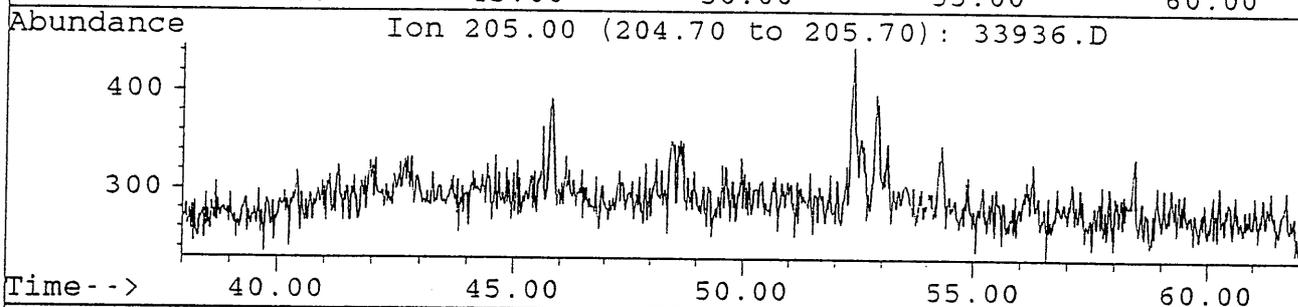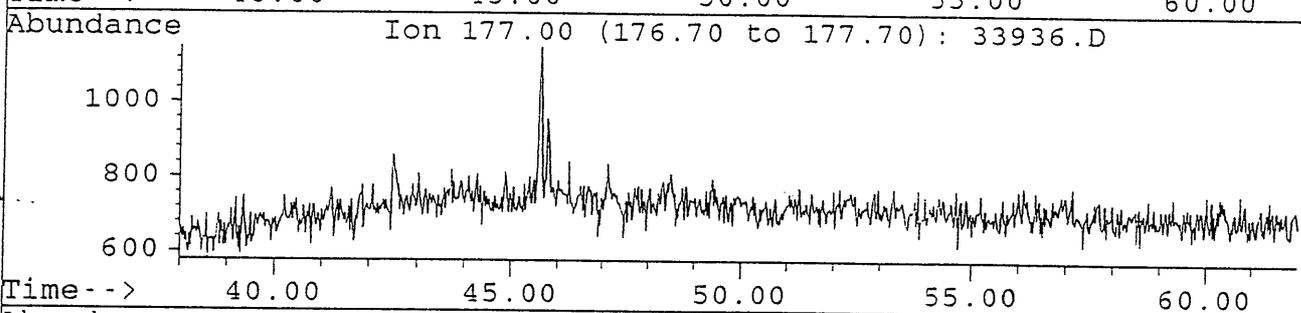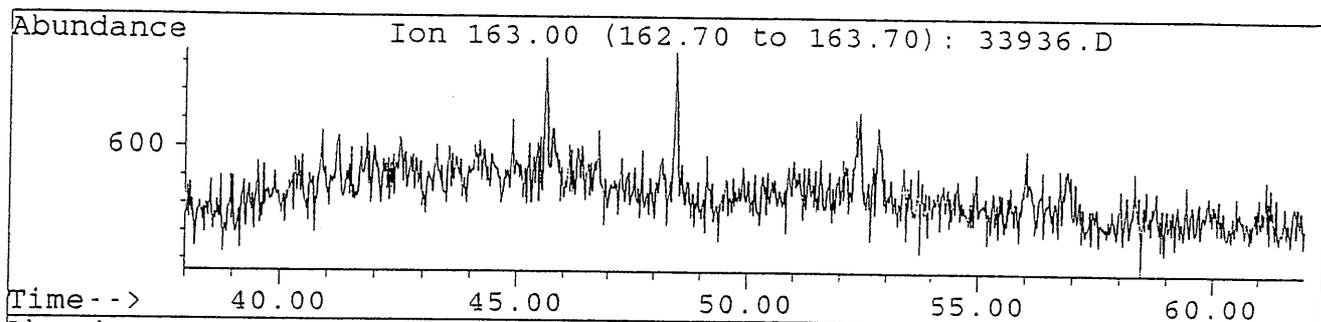

File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

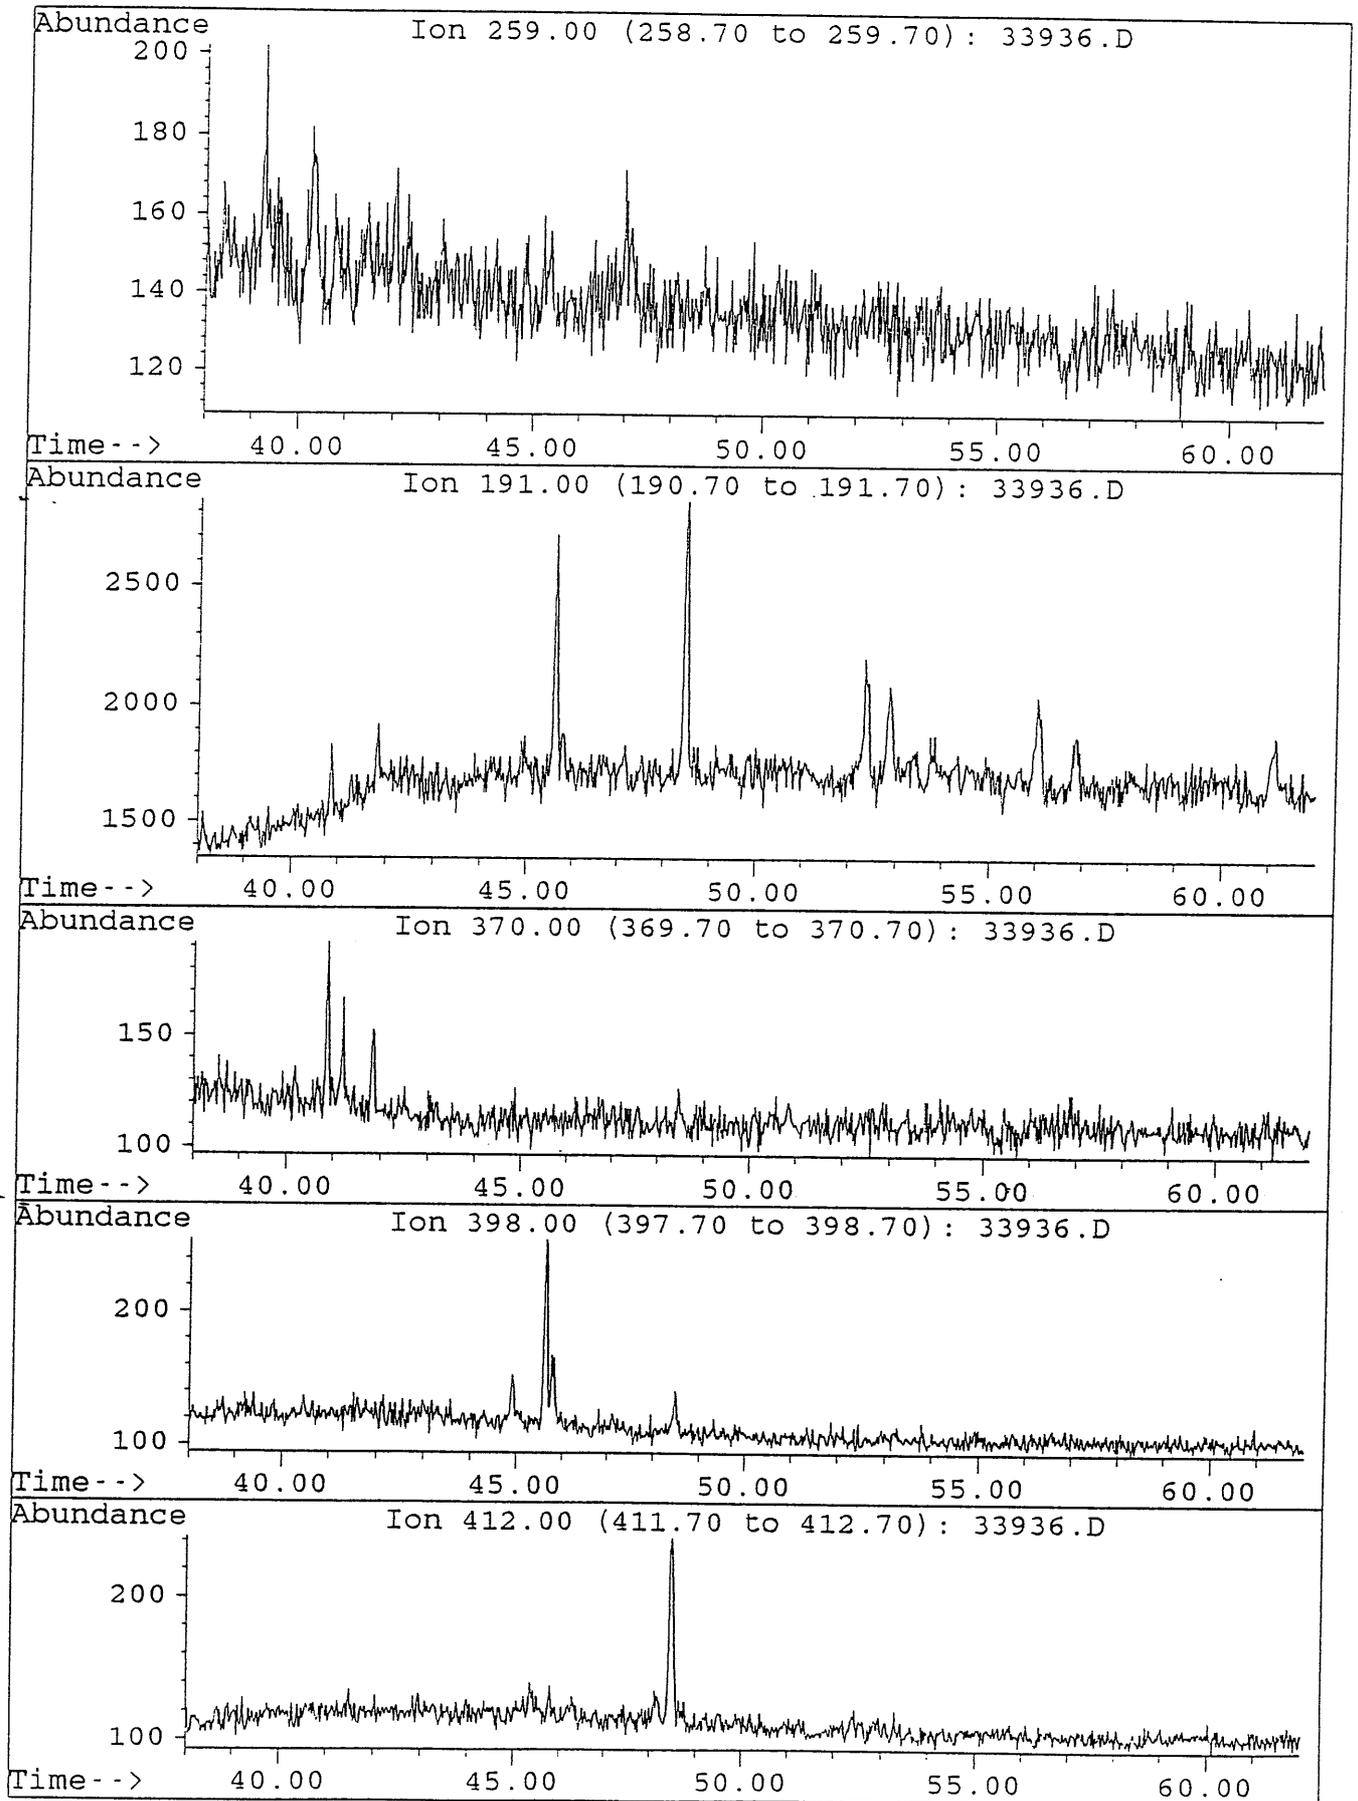



File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

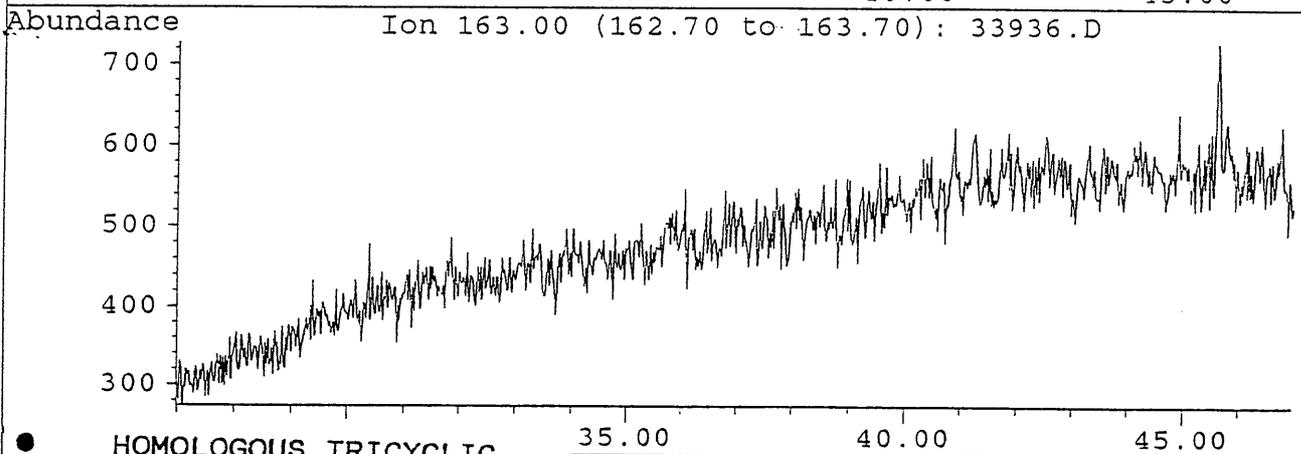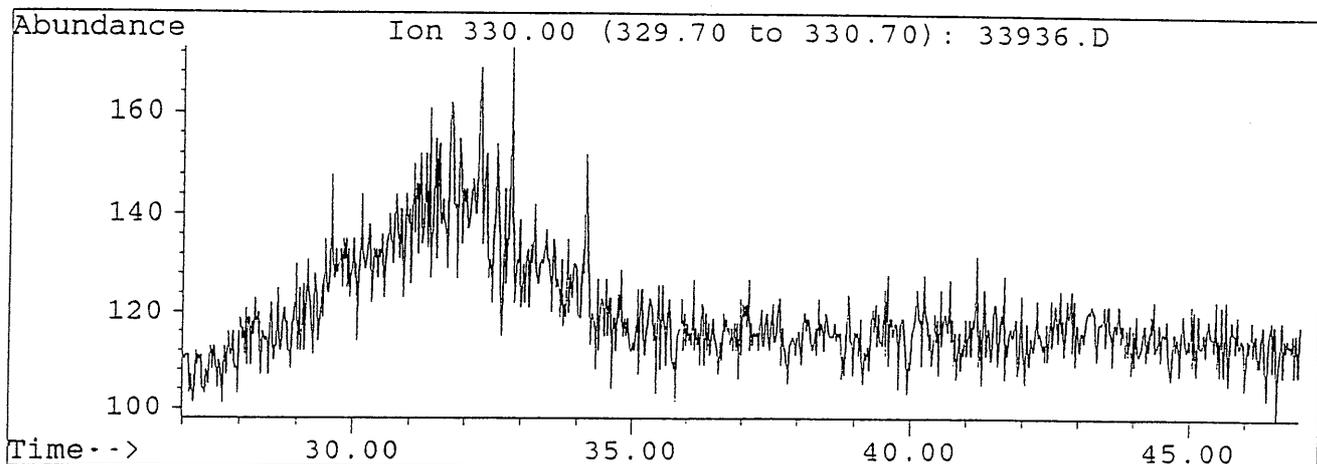


HOMOLOGOUS TRICYCLIC
TERPANES

35.00 40.00 45.00
(190.70 to 191.70): 33936.D


HOMOLOGOUS TETRACYCLIC
TERPANES

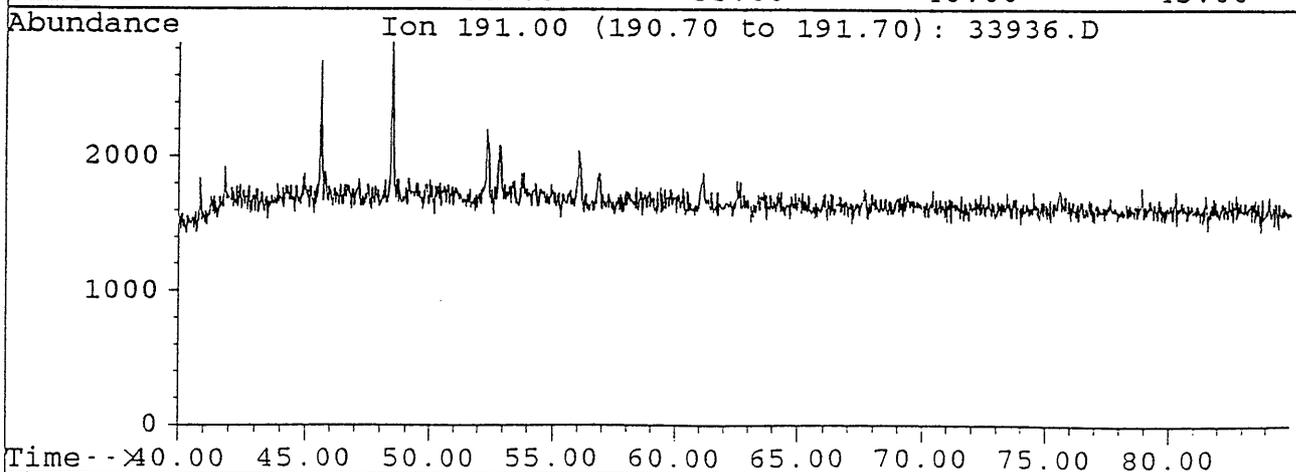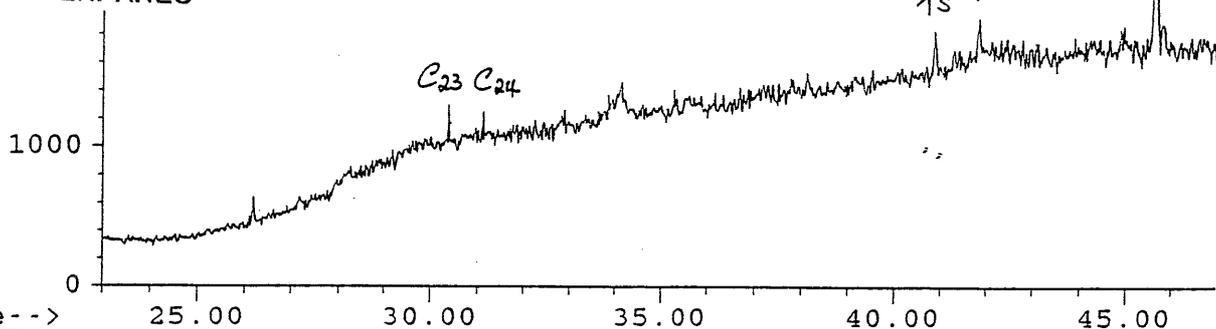



File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

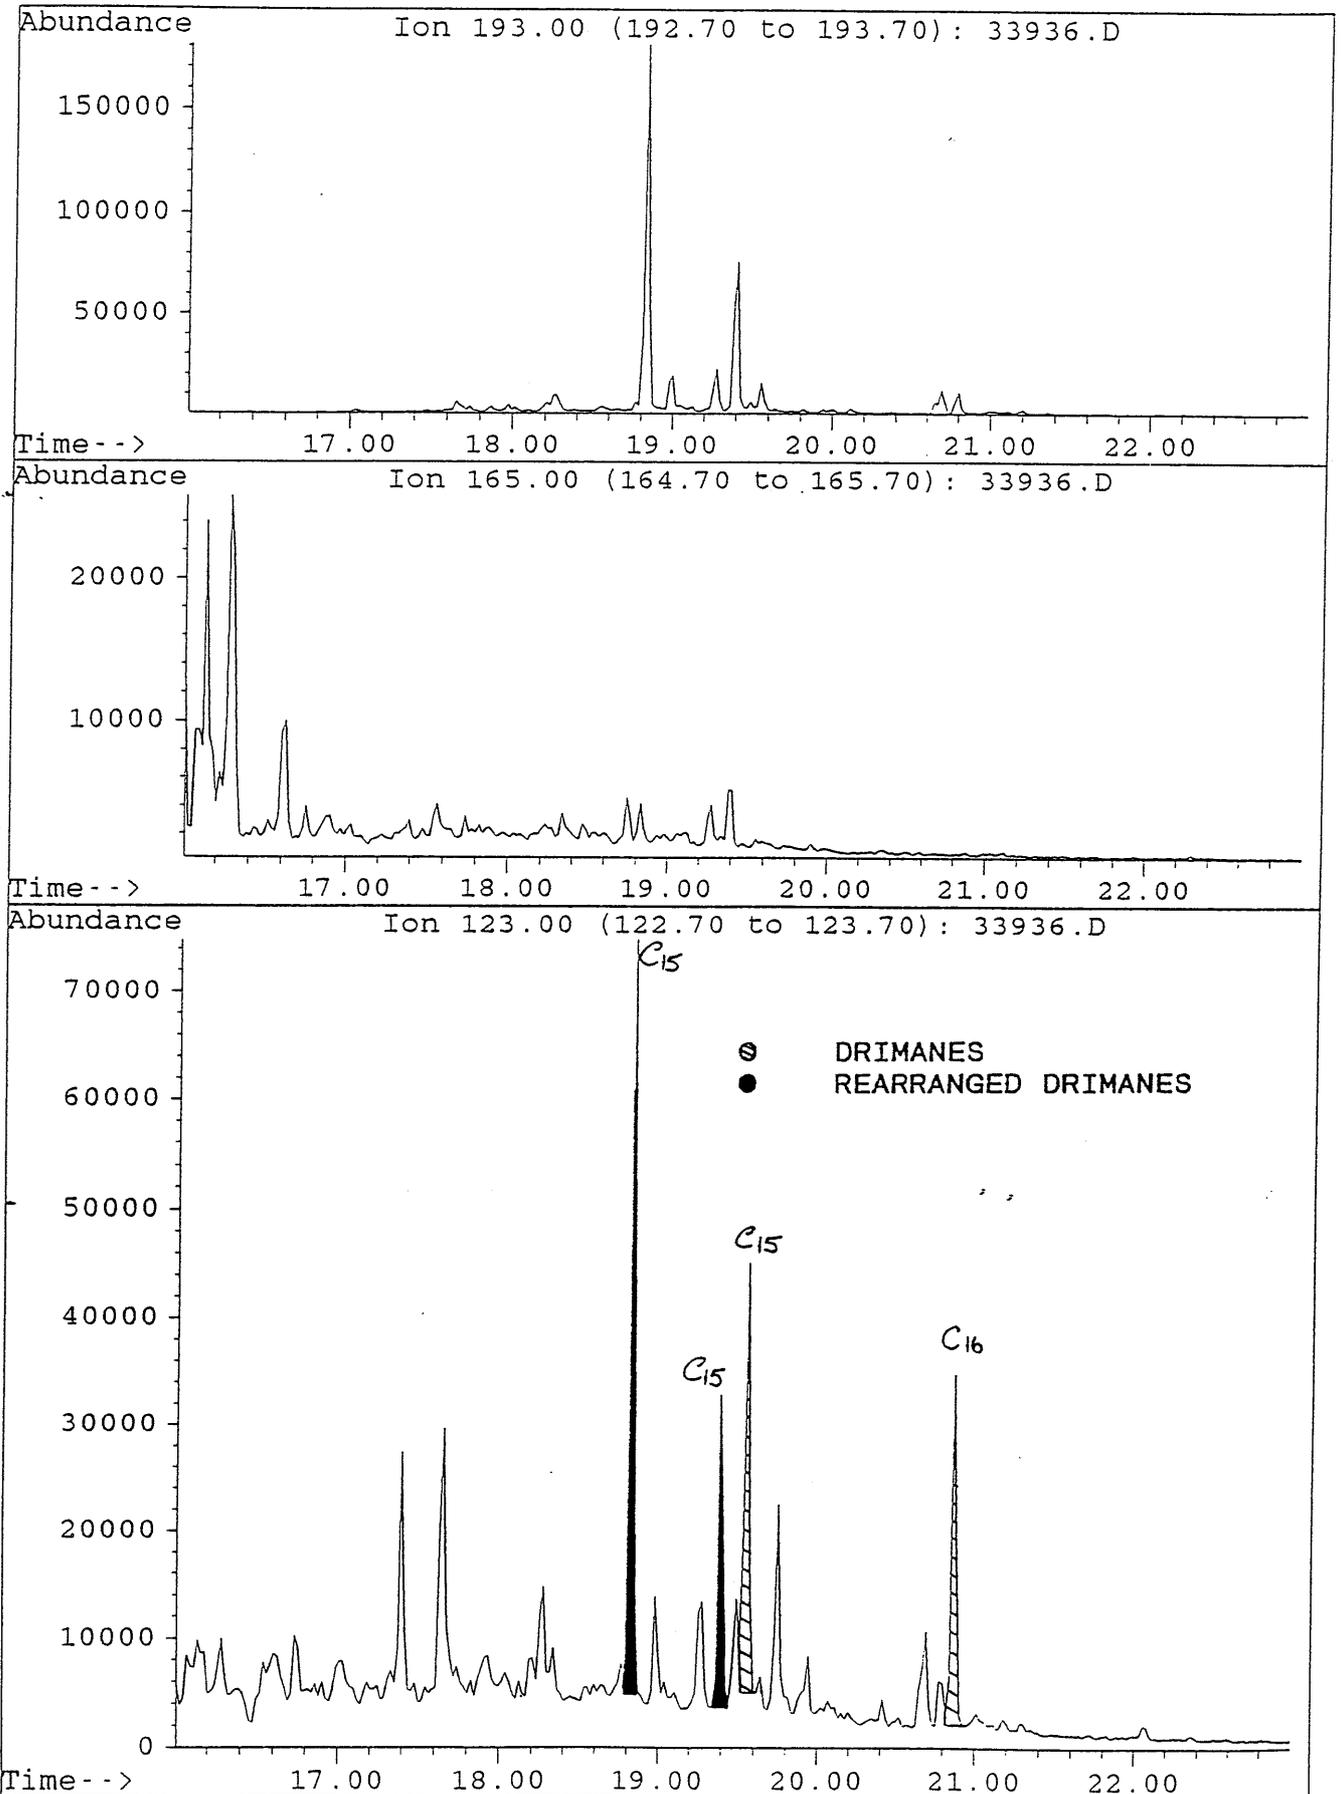


File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

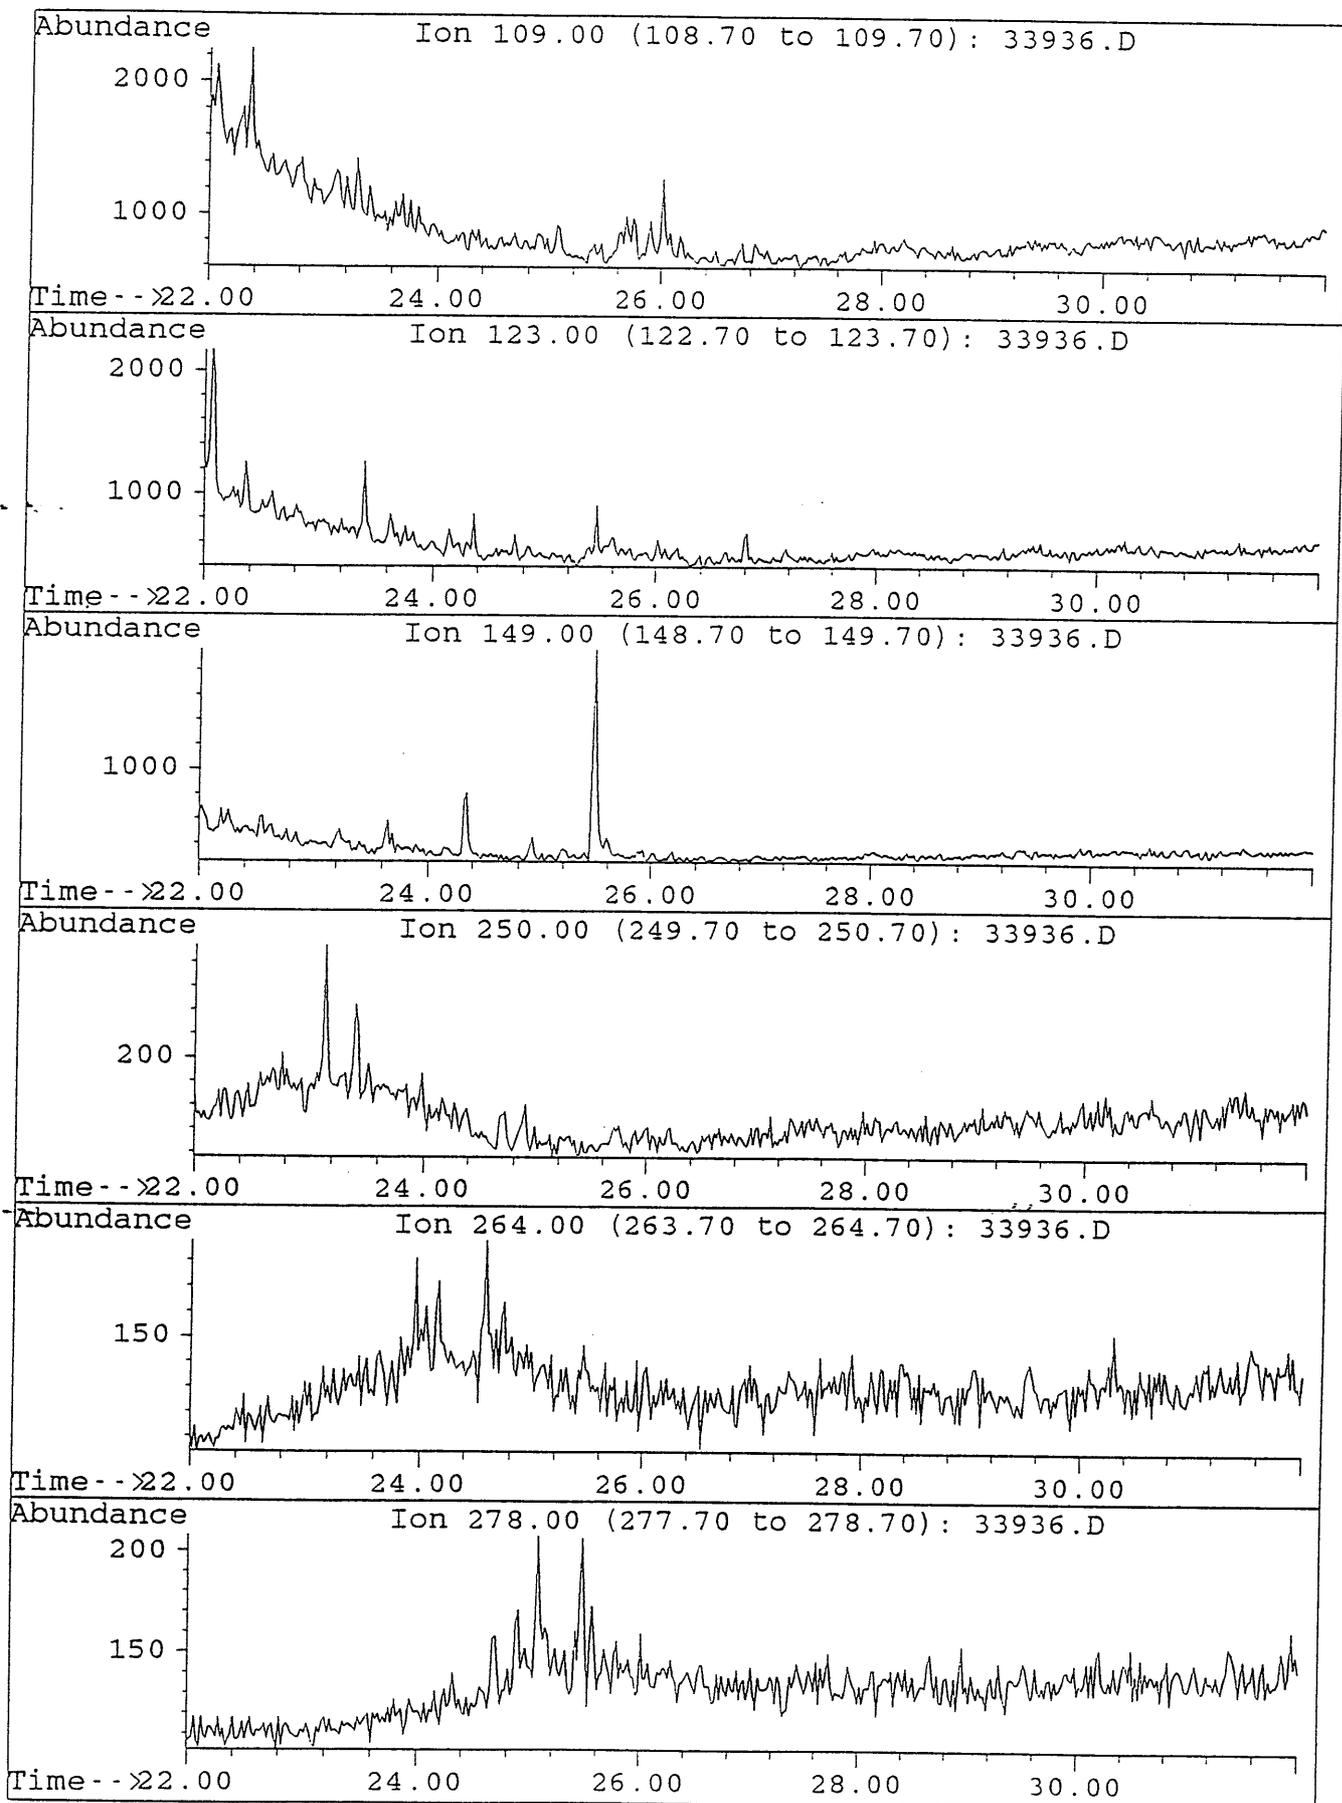

File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

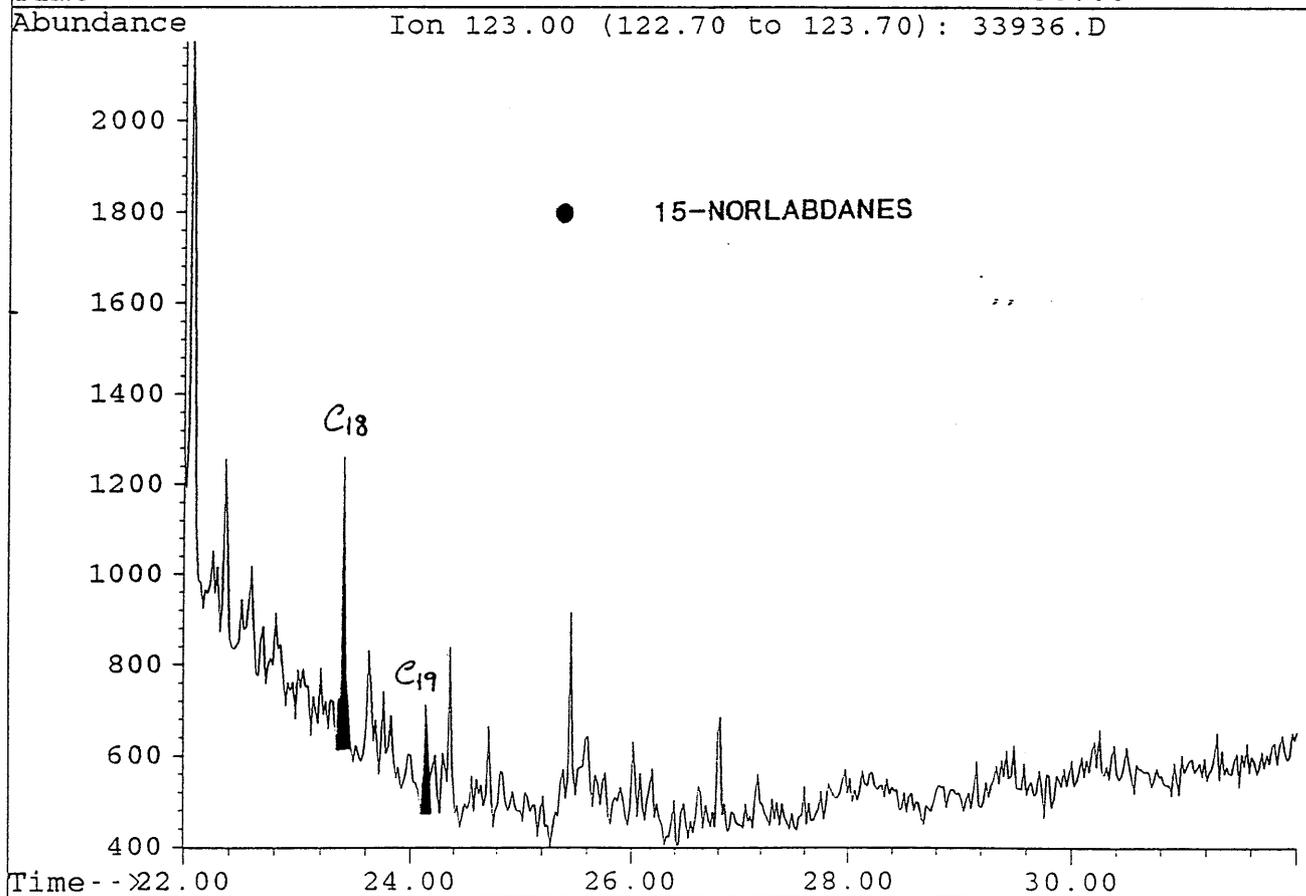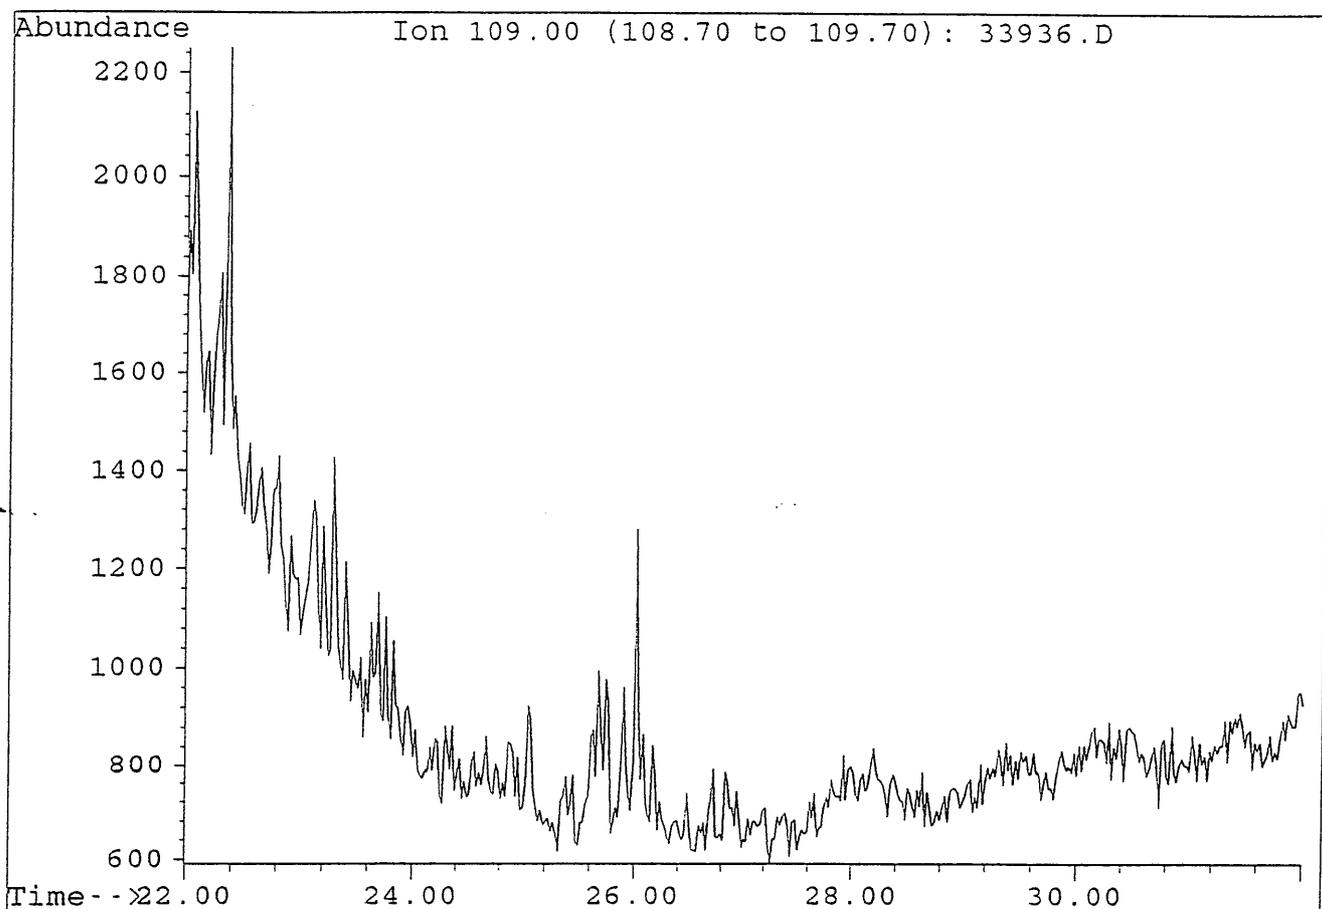

File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

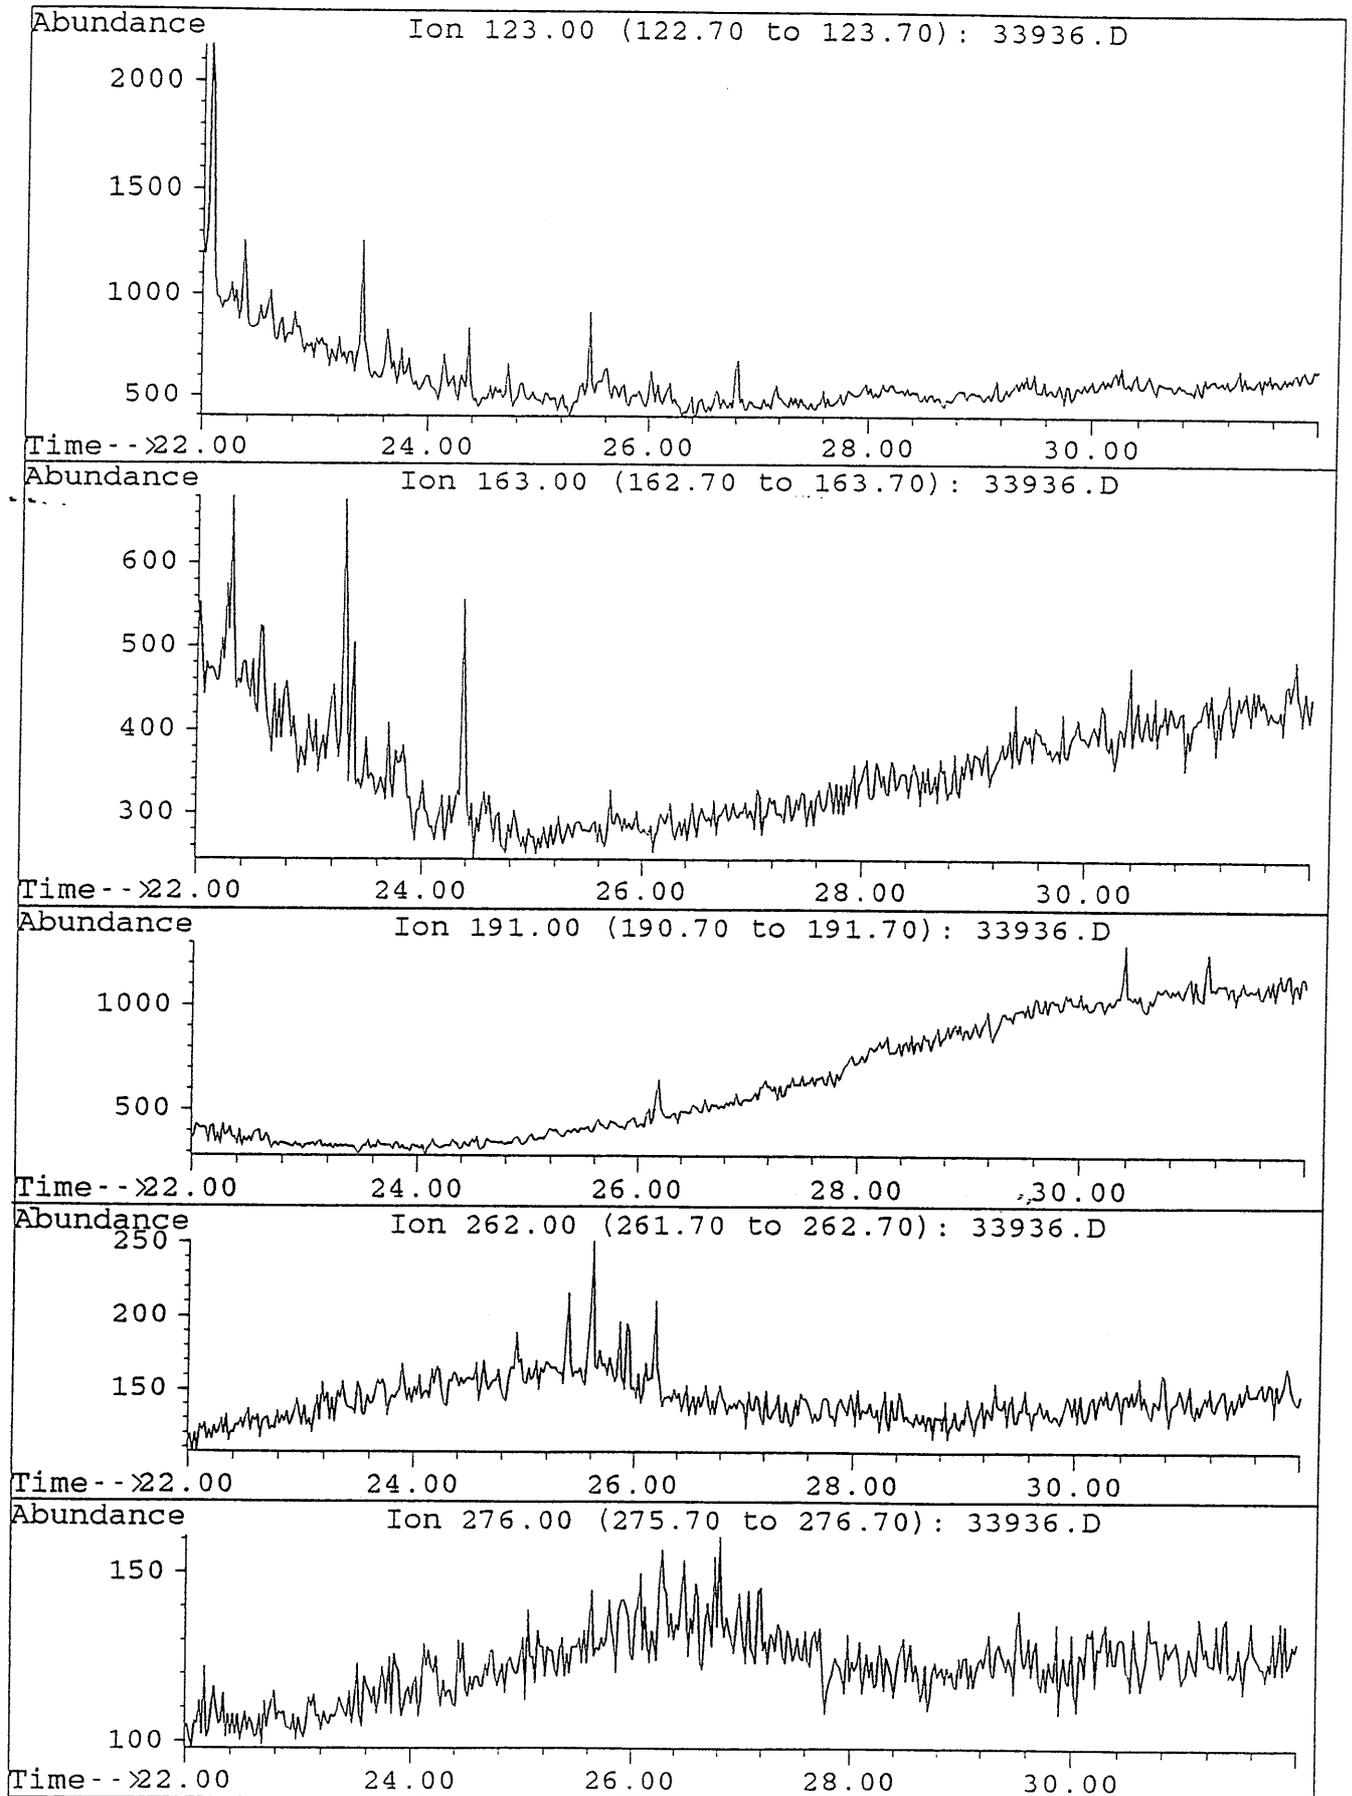

File : 33936.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

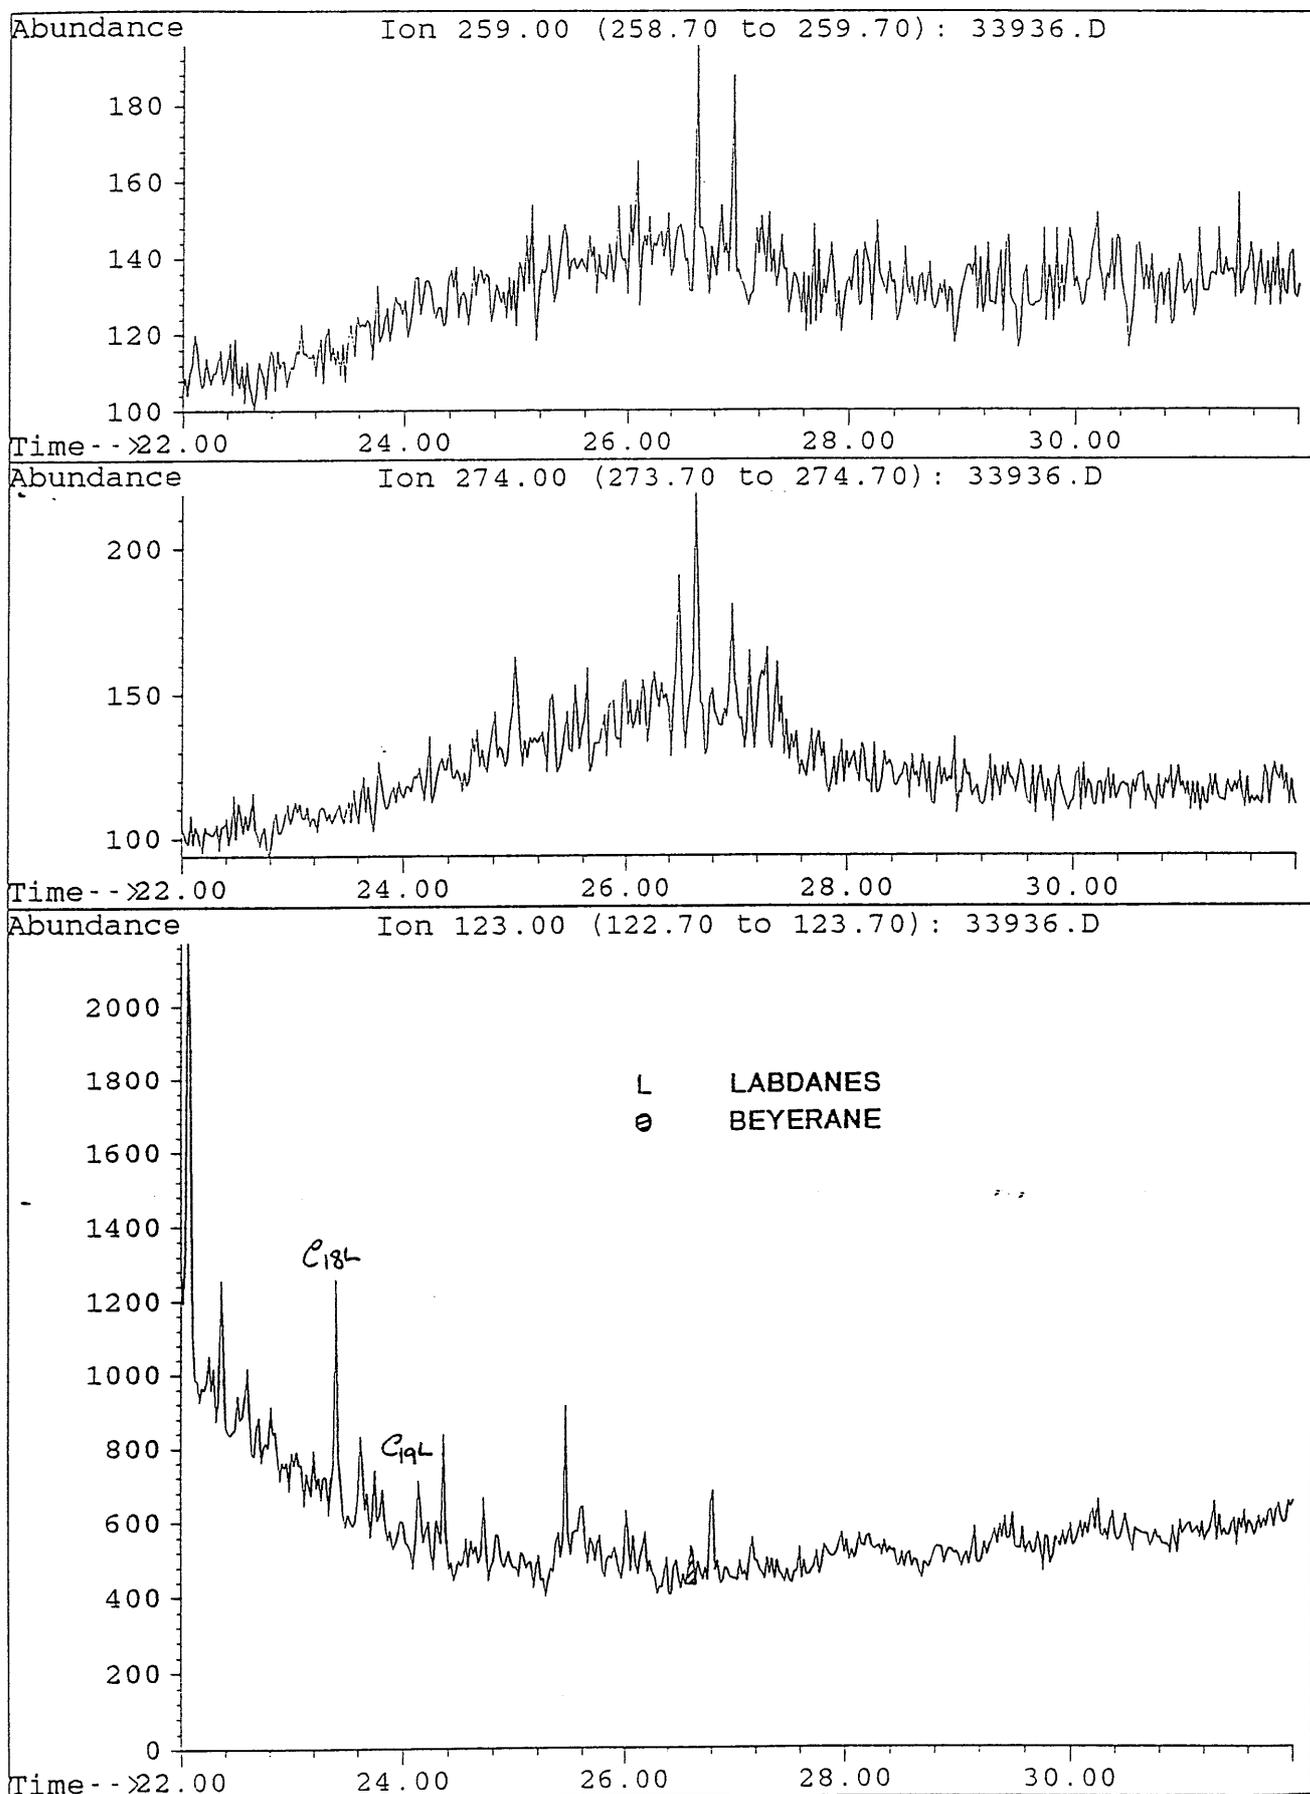


TABLE 3S




SELECTED PARAMETERS FROM GC/MS ANALYSIS

DUNBAR 1, DST 2, Condensate
Special SIM



	<u>Parameter</u>	<u>Ion(s)</u>	<u>Value</u>
1.	18 α (H)- hopane/17 α (H)-hopane (Ts/Tm)	191	0.99
2.	C30 hopane/C30 moretane	191	13.01
3.	C31 22S hopane/C31 22R hopane	191	1.38
4.	C32 22S hopane/C32 22R hopane	191	1.37
5.	C29 20S $\alpha\alpha\alpha$ sterane/C29 20R $\alpha\alpha\alpha$ sterane	217	0.73
6.	C29 $\alpha\alpha\alpha$ steranes (20S / 20S+20R)	217	0.42
7.	<u>C29 $\alpha\beta\beta$ steranes</u> C29 $\alpha\alpha\alpha$ steranes + C29 $\alpha\beta\beta$ steranes	217	0.55
8.	C27/C29 diasteranes	259	1.38
9.	C27/C29 steranes	217	1.04
10.	18 α (H)-oleanane/C30 hopane	191	nd
11.	<u>C29 diasteranes</u> C29 $\alpha\alpha\alpha$ steranes + C29 $\alpha\beta\beta$ steranes	217	0.37
12.	<u>C30 (hopane + moretane)</u> C29 (steranes + diasteranes)	191/217	1.79
13.	C15 drimane/C16 homodrimane	123	nd
14.	Rearranged drimanes/normal drimanes	123	nd

nd = not detectable


File : 33939.D
 Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
 Misc. Info : COL#164. 30-3-95. GEC.

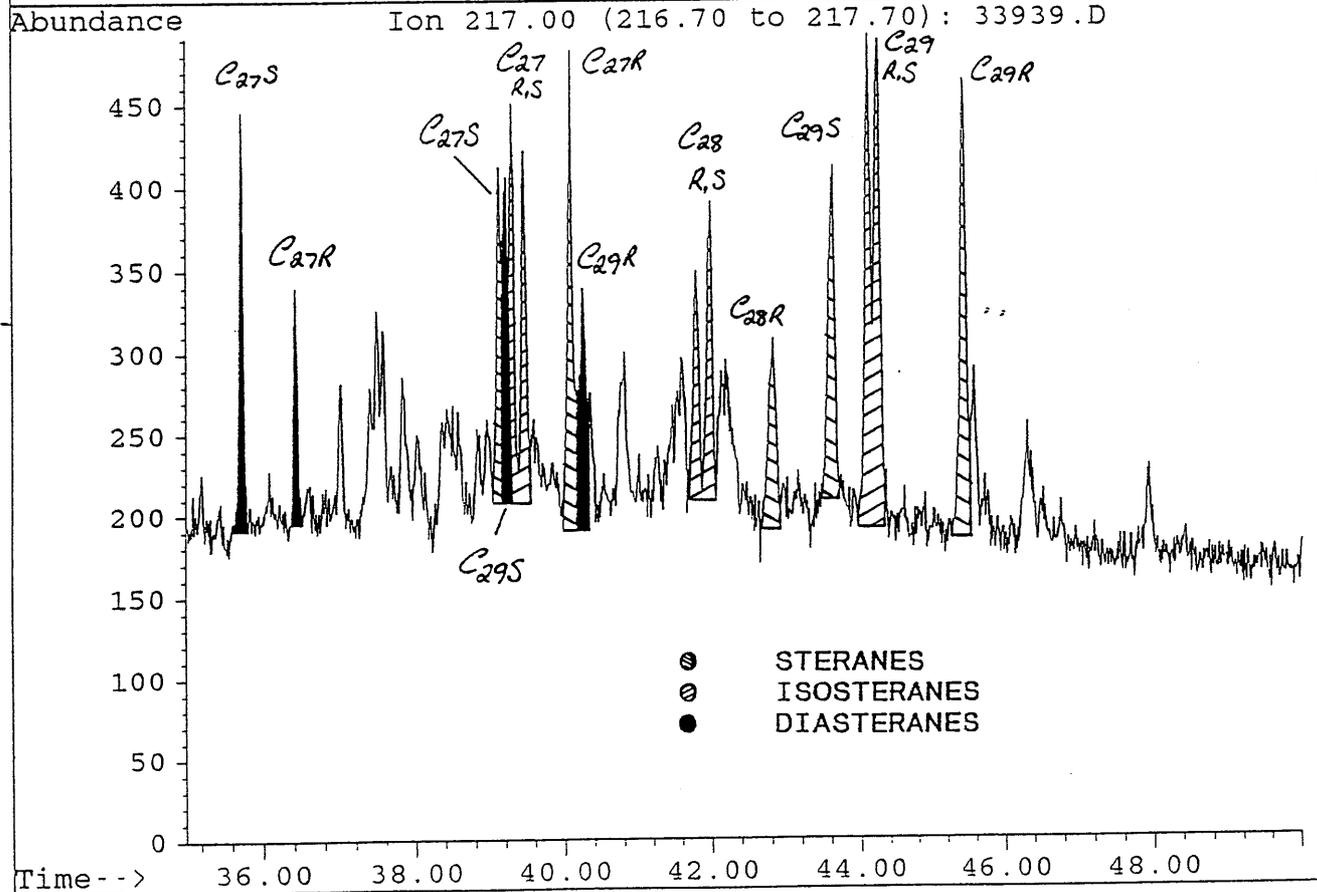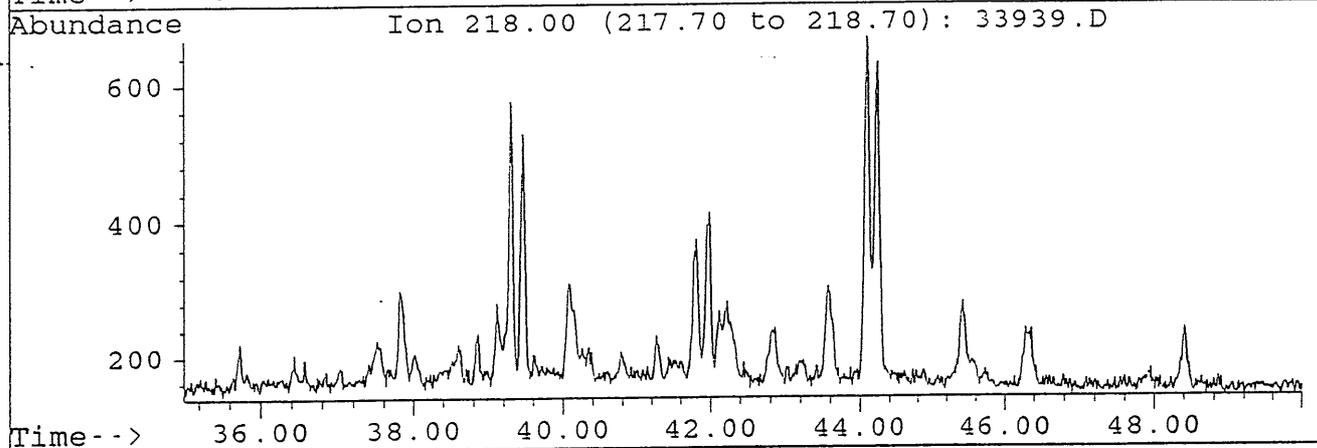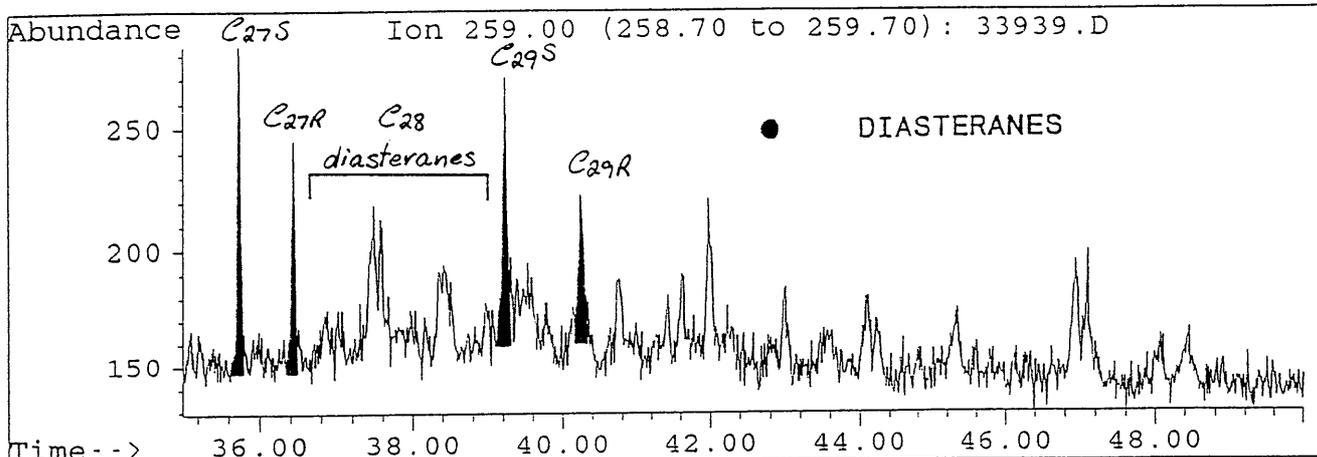


File : 33939.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

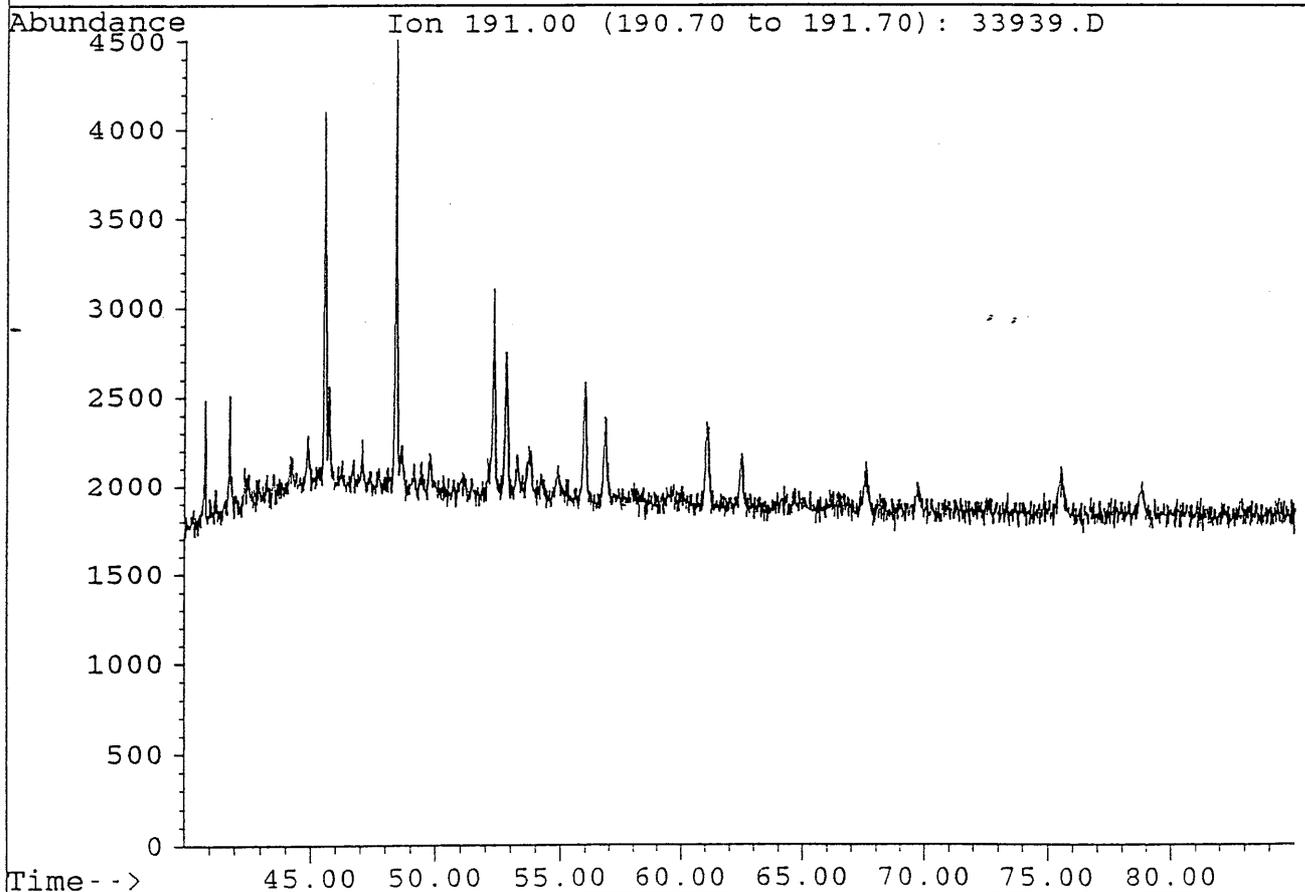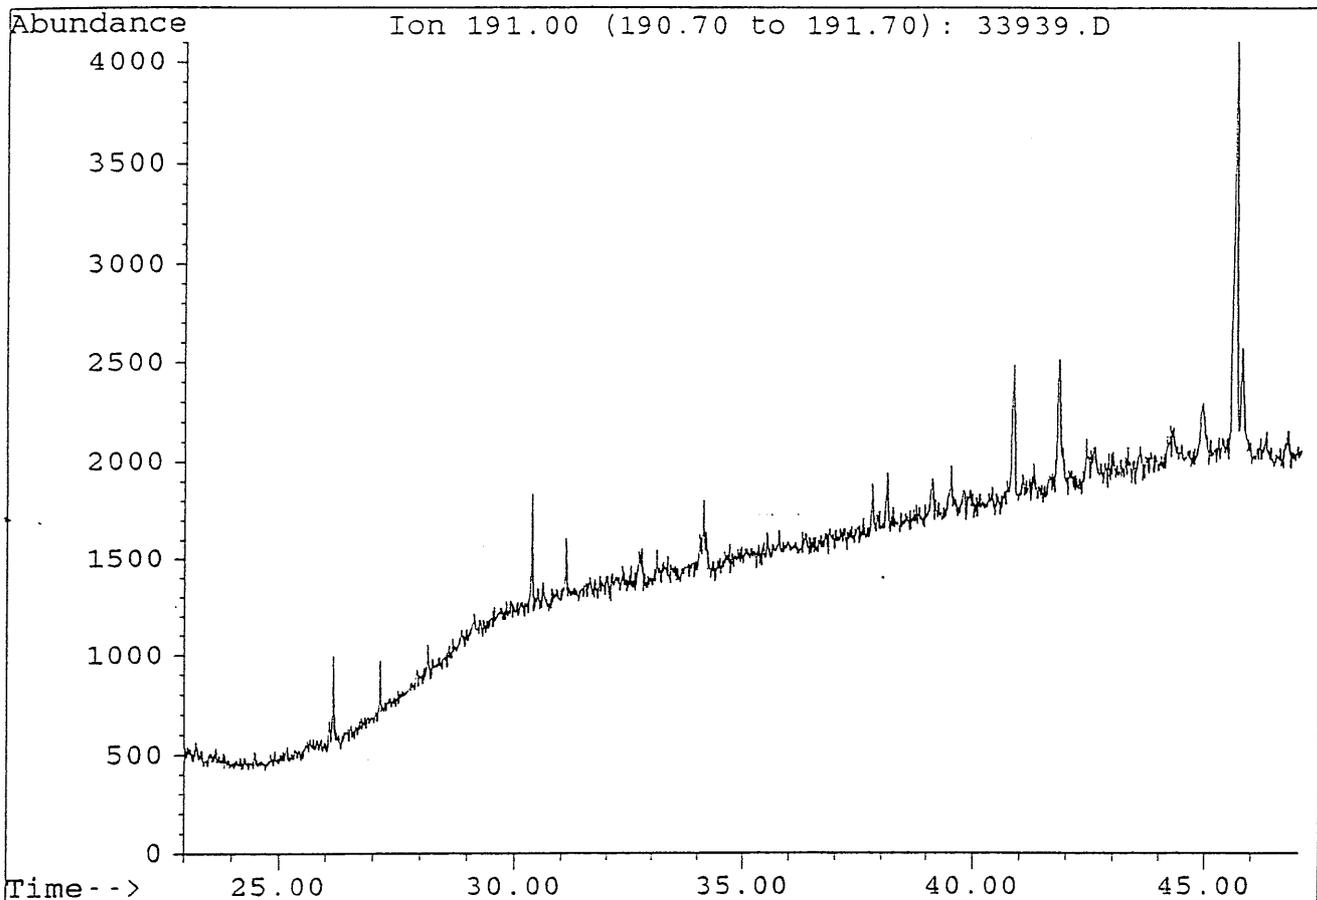


File : 33939.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

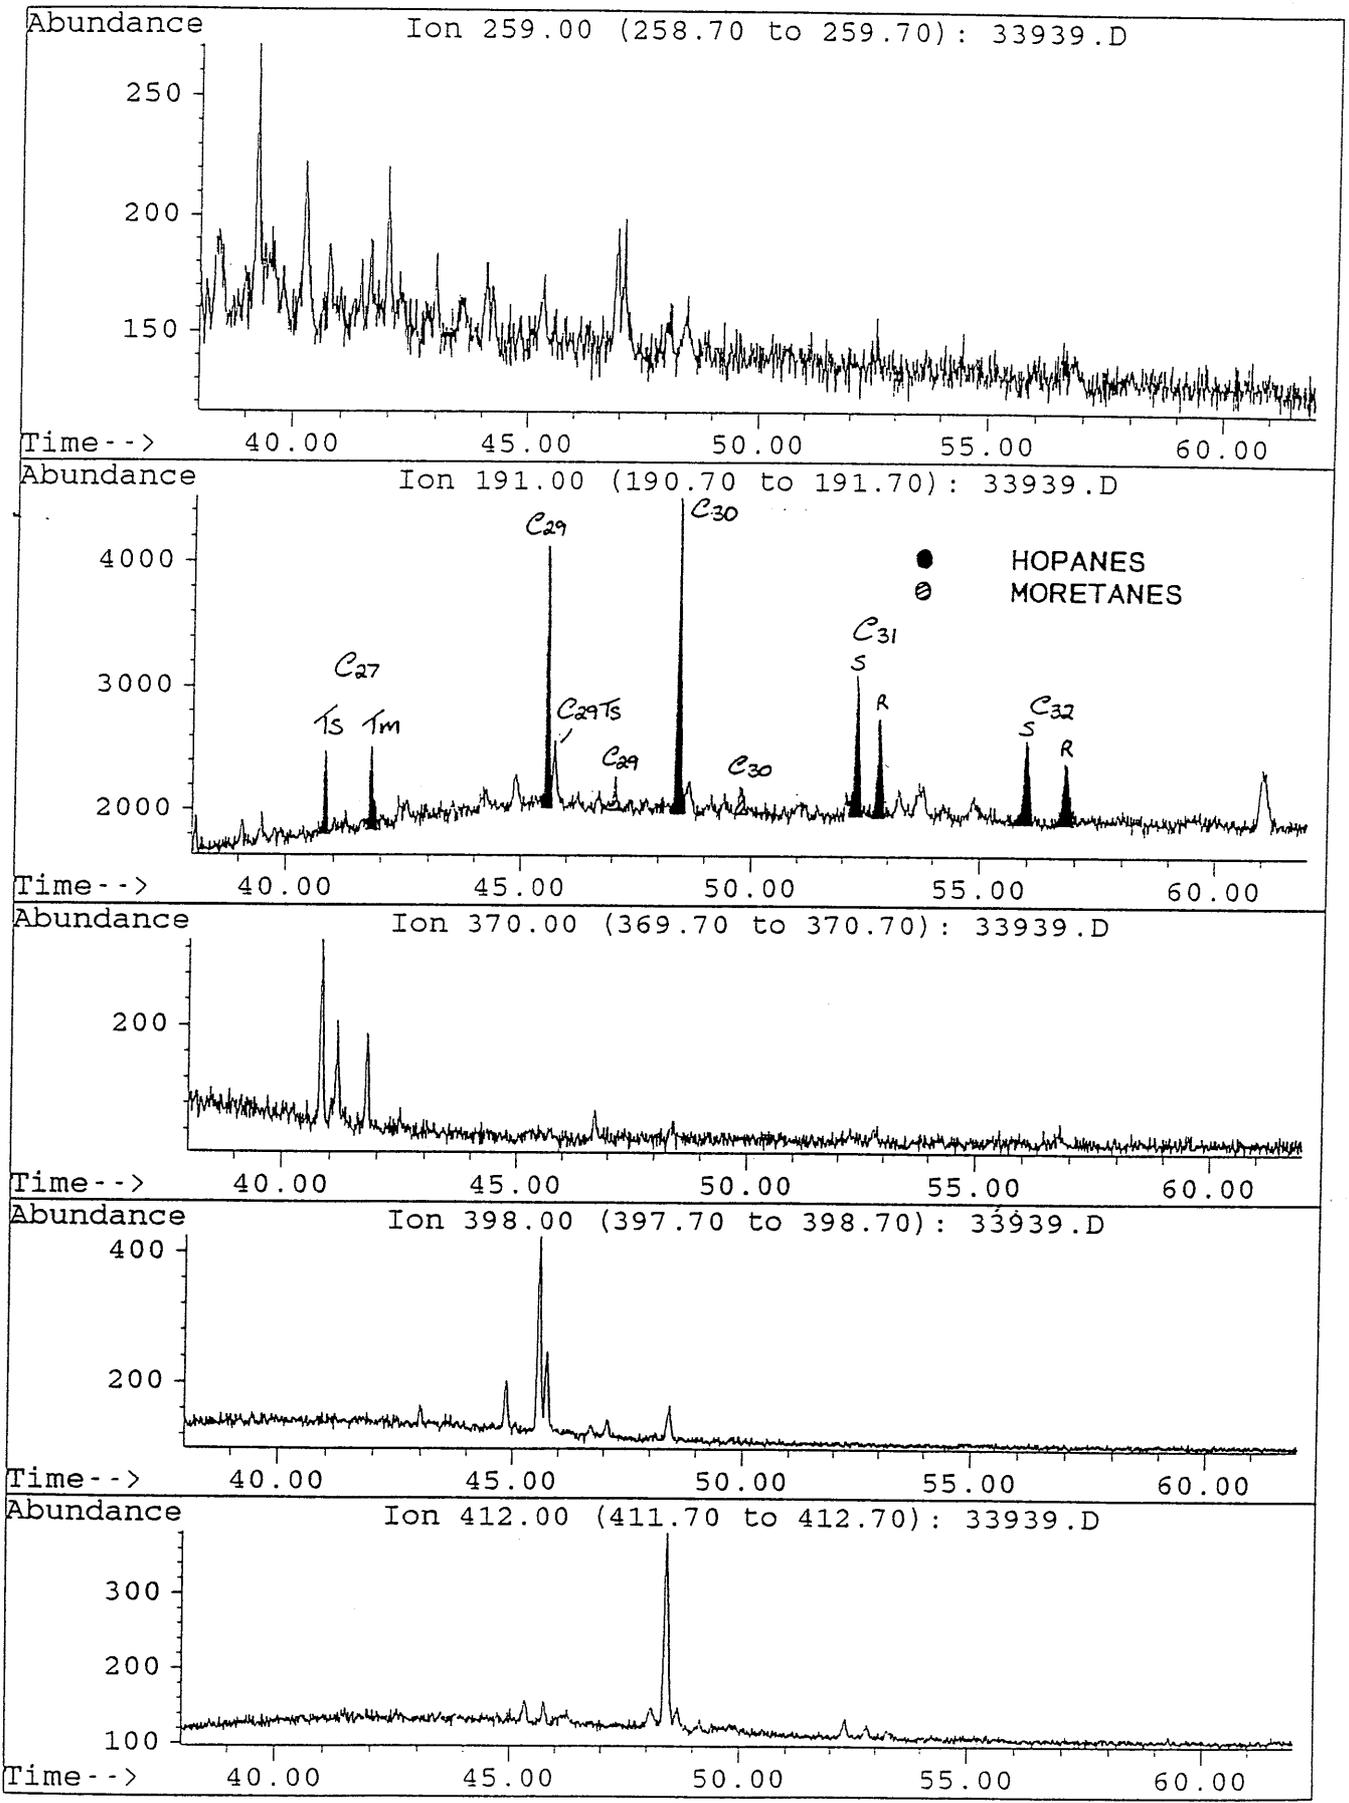


File : 33939.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

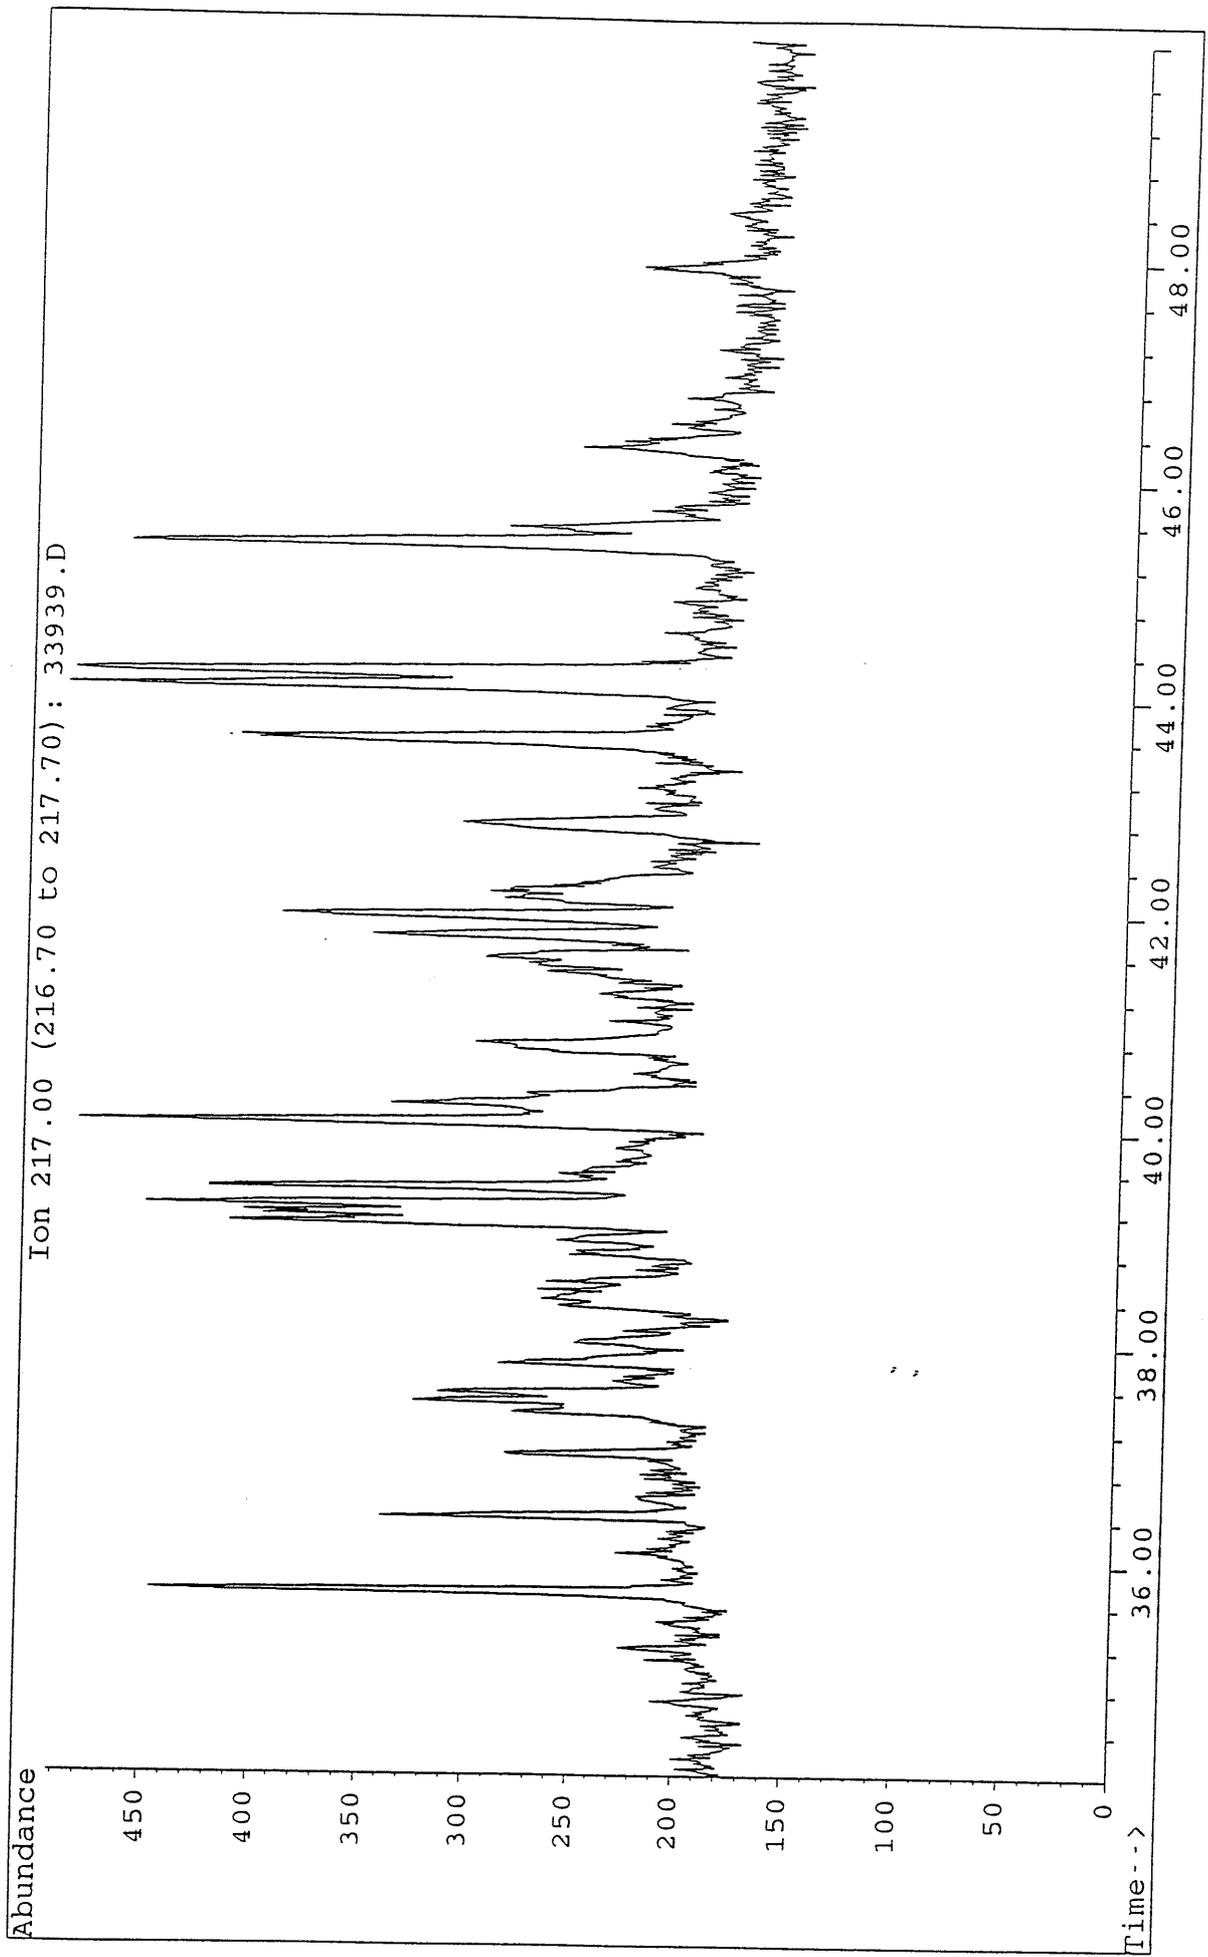


file : 33939.D
sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

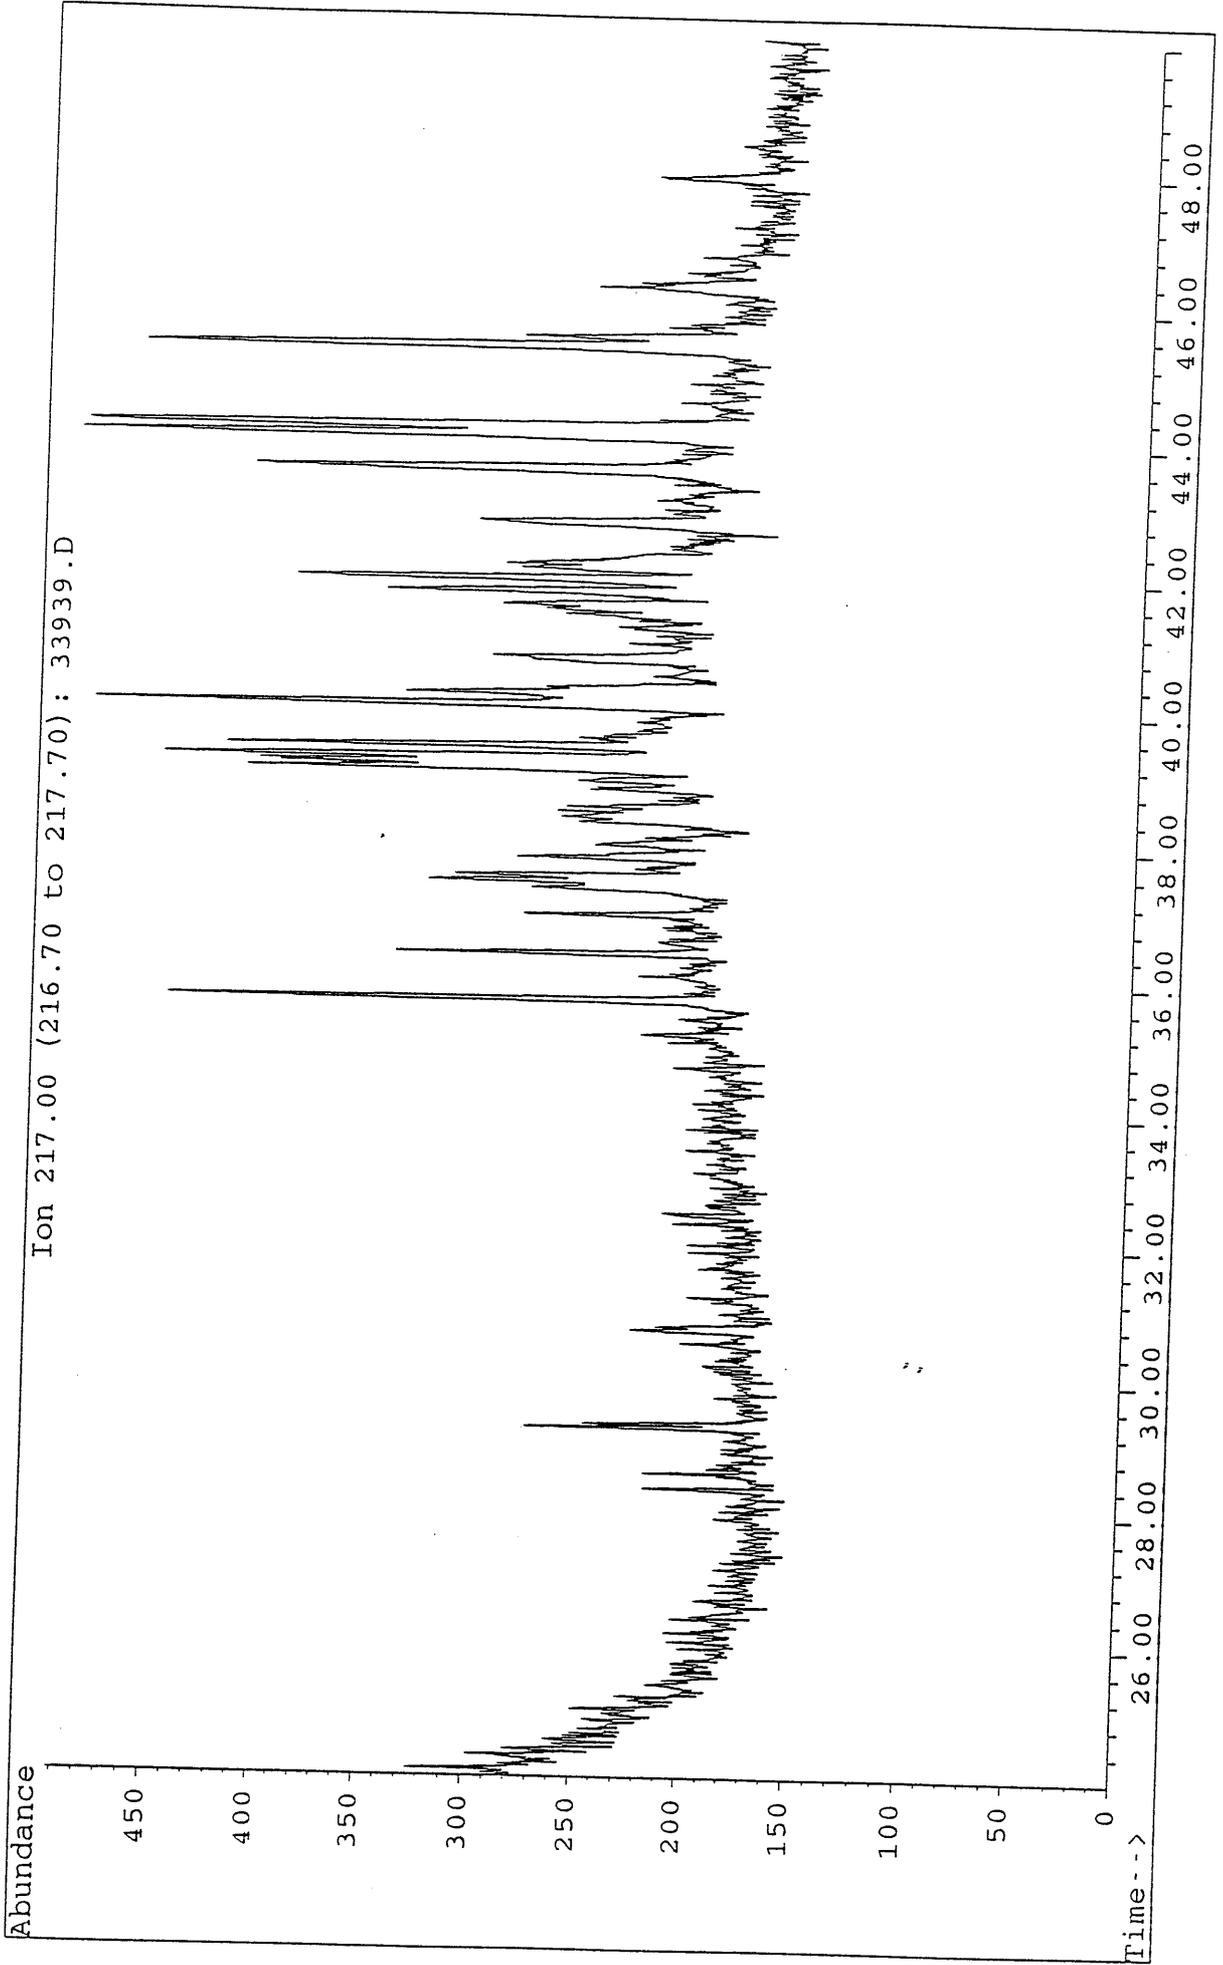

File : 33939.D
Sample : DUNBAR#1, DST#2/ CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95. GEC.

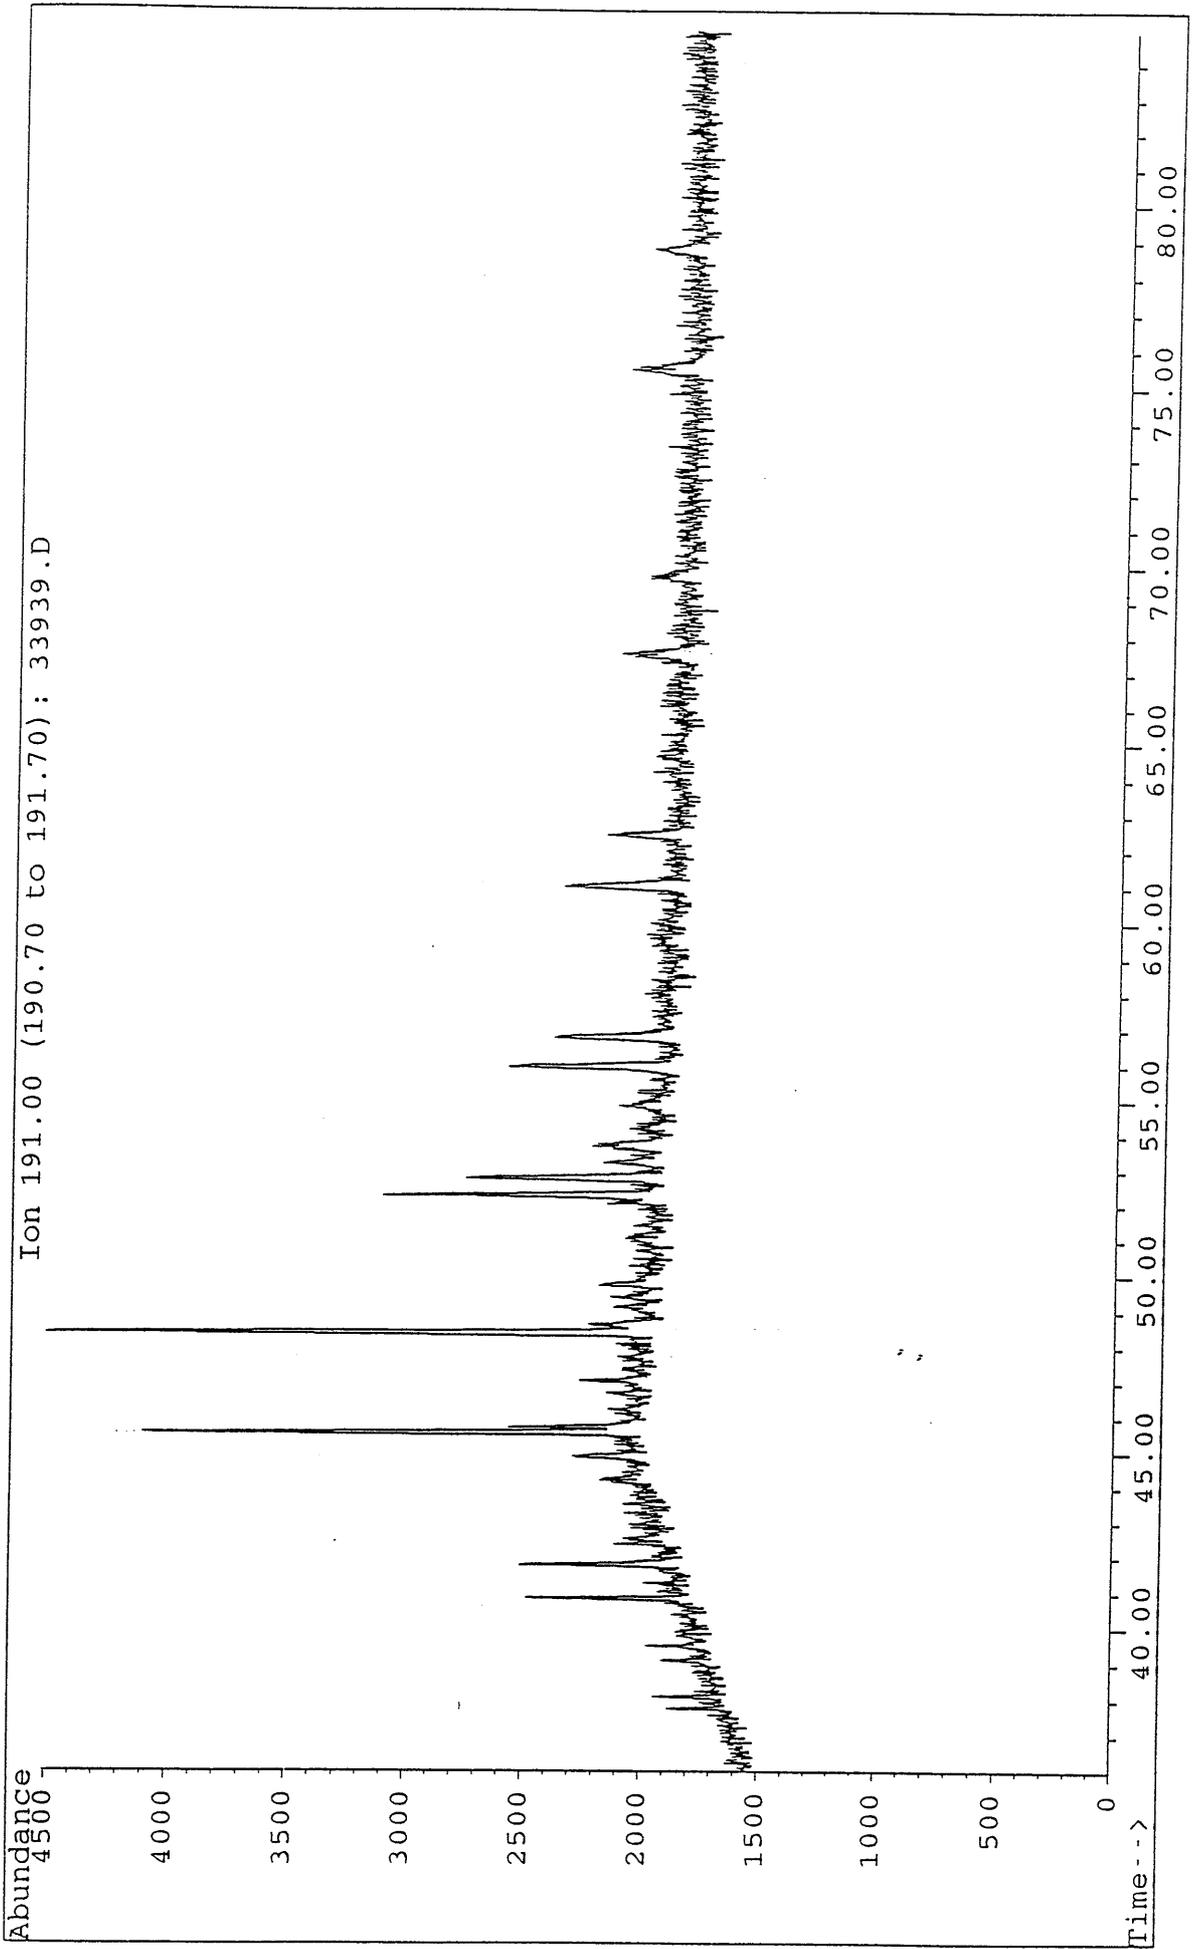

File : 33939.D
Sample : DUNBAR#1, DST#2, CONDENSATE. B/C.
Misc. Info : COL#164. 30-3-95'. GEC.

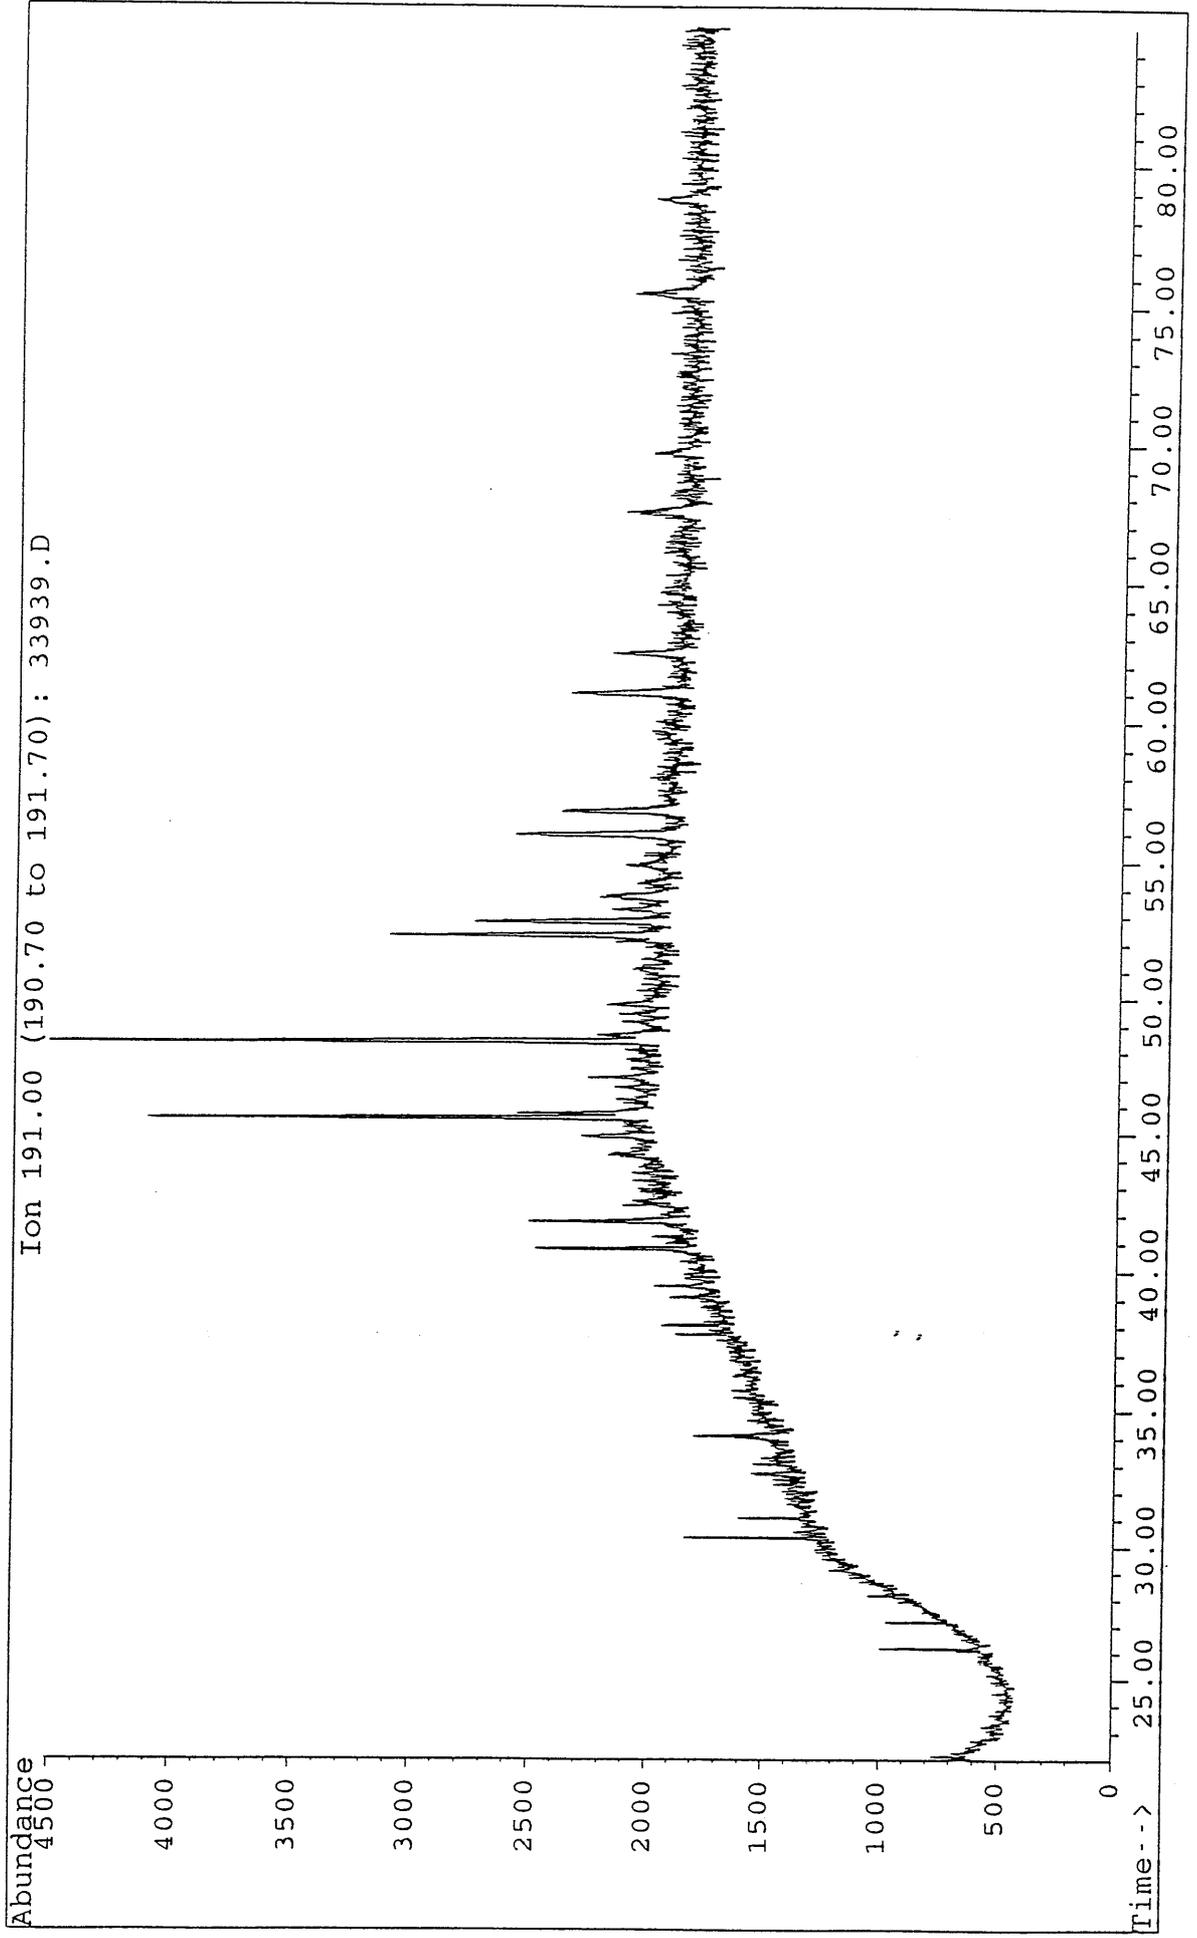

APPENDIX 10

APPENDIX 10

PALYNOLOGY REPORT

**Palynological Analysis of Dunbar-1,
Port Campbell Embayment,
Otway Basin.**

by

Alan D. Partridge

Biostrata Pty Ltd
A.C.N. 053 800 945

Biostrata Report 1995/7

21 June 1995

CONTENTS

INTERPRETATIVE DATA

Introduction	1
Table 1: Palynological Summary Dunbar-1.	1
Geological Comments.....	2
Table-2: Microplankton Abundance in Selected Samples	3
Biostratigraphy.....	4
References.....	7
Table-3: Interpretative Palynological Data for Dunbar-1.....	8
Confidence Ratings.....	9

BASIC DATA

Table 4: Basic Sample Data - Dunbar-1.....	10
Table-5: Basic Palynomorph Data for Dunbar-1.....	11
Palynomorph Range Chart for Dunbar-1	Attachment

INTERPRETATIVE DATA

Introduction

Fourteen sidewall cores samples were analysed in Dunbar-1 with the focus of the palynological investigation concentrated on the Waarre Formation and basal Belfast Mudstone. Age dating is provided for only a short 167 metres interval of the well extending from 1401.0m within the Belfast Mudstone to 1568.0m within the Eumeralla Formation. The palynological zones and ages identified and their correlations to formations or units identified in the well are summarised in Table 1 below. Additional interpretative data with zone identification and Confidence Ratings are recorded in Table 3, whilst basic data on sidewall core lithologies, sample quality and quantities, residue yields, preservation and diversity are recorded on Tables 4 and 5. All species which have been identified with binomial names are tabulated on a composite range chart for both spore-pollen and microplankton which presents the recorded assemblages in order of lowest appearances.

Table 1: Palynological Summary Dunbar-1.

AGE	UNIT	SPORE-POLLEN ZONES	MICROPLANKTON ZONES (SUBZONES)
SANTONIAN	BELFAST MUDSTONE, 1349*-1476m	<i>T. apoxyexirus</i> 1401.0m	<i>I. cretaceum</i> 1401.0m
CONIACIAN		<i>P. mawsonii</i> 1467.2-1472.3m	<i>C. striatoconus</i> 1467.2-1472.3m
TURONIAN	WAARRE FORMATION UNIT D 1476-1482m	<i>P. mawsonii</i> 1477.0-1480.2m	<i>P. infusorioides</i> 1477.0-1480.2m
	WAARRE FORMATION UNIT C 1482-1520m	<i>P. mawsonii</i> 1501.2-1505.8m	<i>P. infusorioides</i> 1501.2-1505.8m (<i>C. edwardsii</i>) 1505.8m
	WAARRE FORMATION UNITS A/B 1520-1548m	<i>P. mawsonii</i> 1520.6-1544.4m	<i>P. infusorioides</i> 1520.6-1544.4m
ALBIAN	EUMERALLA FORMATION 1548-1758m (T.D.)	<i>C. paradoxa</i> or younger 1552.7-1568.0m	NO ZONES PRESENT

* Top of Belfast Mudstone in Dunbar-1 is a fault contact.

Between 3.8 to 12.4 grams (average 8 g) of the sidewall cores were cleaned and split by the author then forwarded them to Laola Pty Ltd in Perth for processing. Moderated to high residue yields were extracted from most samples. Kerogen slides were prepared with filtered and unfiltered fractions, and where sufficient

residue was recovered separate oxidised slides were prepared from fractions concentrated from the residues using 8 and 15 micron filters. Palynomorph concentrations on the palynological slides were mostly low to moderate, while palynomorph preservation was poor to fair and only very occasionally good.

Overall spore-pollen diversity was high averaging 26+ species per sample (Table 5). Microplankton diversity was moderate averaging 13+ species per sample in the Belfast Mudstone and Unit D of the Waarre Formation between 1401-1480.2m. But diversity was low from the rest of the Waarre and underlying Eumeralla Formation where it ranged from zero to 12 species per sample with an average of less than 5 species per sample. The microplankton abundance data presented in Table 2 was obtained from counts made on slides prepared using 8 micron~~s~~ filter cloth.

Geological Comments

1. The short sequence analysed from Dunbar-1 spans the time interval of Late Albian to Santonian, and except for some minor modifications most samples can be readily assigned to the Mesozoic spore-pollen and microplankton zones defined by Helby, Morgan & Partridge (1987).
2. The spore-pollen succession analysed commences with two assemblages from the Eumeralla Formation which are no older than the *C. paradoxa* Zone and no younger than the *P. pannosus* Zone. These assemblages are overlain by the *P. mawsonii* Zone which includes all samples from Waarre Formation and basal Belfast Mudstone between 1544.4m and 1467.2m. As has been found in the recently analysed Iona-2, Langley-1, Howmains-1 and the nearby Vaughan-1 wells (Partridge 1994a, b, c, 1995) the Cenomanian *A. distocarinatus* Zone as redefined by Helby Morgan & Partridge (1987) is considered to be absent in Dunbar-1 at the unconformity between the Waarre and Eumeralla Formations. Above the *P. mawsonii* Zone there is a 66-metre gap to the shallowest sample analysed from the middle of the Belfast Mudstone which is assigned to the *T. apoxyexinus* Zone.
3. Marine microplankton were recorded ⁱⁿ from all but one of the twelve samples from ~~in~~ the Waarre Formation and overlying Belfast Mudstone (Table 5). However, as observed in the nearby Vaughan-1 well, the microplankton abundances in Units A to C of the Waarre are notably less than found in either Langley-1 or Howmains-1 suggesting that Dunbar-1, like Vaughan-1, is located closer to the palaeoshoreline. The abundances and diversity of microplankton from the overlying Unit D of the Waarre and the Belfast

Mudstone are, in contrast, interpreted to represent open marine environments.

Table-2: Microplankton Abundance in Selected Samples in Dunbar-1

SAMPLE TYPE	DEPTH (Metres)	Microplankton Zone and (Subzone)	Microplankton Abundance as % Relative to total Spore-pollen and Microplankton Count	Most abundant microplankton species as % of total Microplankton Count
SWC 24	1401.0	<i>I. cretaceum</i>	11%	<i>Heterosphaeridium</i> spp. >60%.
SWC 23	1467.2	<i>C. striatoconus</i>	12%	<i>Amosopollis cruciformis</i> ~20%.
SWC 22	1472.3	<i>C. striatoconus</i>	12%	<i>Heterosphaeridium</i> spp. >50%.
SWC 20	1477.0	<i>P. infusorioides</i>	22%	<i>Heterosphaeridium</i> spp. >25%. <i>Cribroperidinium</i> spp. >25%. <i>Amosopollis cruciformis</i> >20%.
SWC 19	1480.2	<i>P. infusorioides</i>	12%	<i>Amosopollis cruciformis</i> ~40%.
SWC 15	1505.8	(<i>C. edwardsii</i>)	10%	No species dominant in low count.
SWC 14	1520.6	Indeterminate	<1%	Microplankton too rare to count.
SWC 12	1531.5	<i>P. infusorioides</i>	<3%	No species dominant in low count.
SWC 4	1544.4	<i>P. infusorioides</i>	29%	<i>Exochosphaeridium</i> sp. ~35%. <i>Cyclonephelium</i> spp. ~20%.

4. Subdivision of the Waarre Formation into the units proposed by Buffin (1989) is provisionally suggested as follows:

Waarre Unit D:	1476-1482m
Waarre Unit C:	1482-1520m
Waarre Unit B:	1520-1534m
Waarre Unit A:	1534-1548m

These picks are consistent with palynomorph ranges recorded and units picked in Langley-1 and Vaughan-1. Like in Vaughan-1, the sidewall cores at 1501.5m and 1505.8m are considered to be no younger than the sample from core 1 at 1750m in Langley-1.

5. In Dunbar-1 the Waarre Unit D is taken as the interval below the lowest occurrence of the *C. striatoconus* Zone (or younger zones if the former is missing) to the top of the first clean sand of Unit C. On the electric logs in Dunbar-1 the top is picked at 1476m at the point of increase in the resistivity and sonic logs and at what is considered the best log break above the sample at 1477m. On the gamma ray log the top could be picked slightly lower at 1478m to correspond to a decline in the gamma ray readings. On either pick Unit D is very thin being represented by only 4 to

6 metres of section in contrast to a thickness 15 metres in Langley-1 (Partridge, 1994b) and 20 metres in Iona-2. In the nearby Vaughan-1 well a thickness of 9.5 metres was assigned to Unit D based on the comparison of the distinct spike on the sonic log at 1594m, which was correlated to a similar spike at 1479m in Dunbar-1. Unfortunately, the top of Unit D in Vaughan-1 could not be confirmed by the palynology because the most likely position for the *C. striatoconus* Zone could not be sampled by sidewall cores owing to severe caving problems at the base of the Belfast Mudstone.

6. The oldest unit penetrated in Dunbar-1 is the Eumeralla Formation between 1548-1758m (T.D.). Of the three sidewall cores over this interval only the deeper two were considered suitable to process (Table 4), but the spore-pollen assemblages extracted were poor and provide only an age range from the *C. paradoxa* to the *P. pannosus* Zones.

Biostratigraphy

The zone and age determinations are based on the Australia wide Mesozoic spore-pollen and microplankton zonation schemes described by Helby, Morgan & Partridge (1987). Author citations for most spore-pollen species can be sourced from Helby, Morgan & Partridge (1987), Dettmann (1963), Stover & Partridge (1973) or other references cited herein, whilst author citations for dinoflagellates can be found in the index of Lentin & Williams (1993). Species names followed by "ms" are unpublished manuscript names.

***Tricolporites apoxyexinus* spore-pollen Zone and *Isabelidinium cretaceum* microplankton Zone.**

Interval: 1401.0 metres.

Age: Santonian.

The shallowest sample analysed is assigned to this zone on the presence of the eponymous species *Tricolporites apoxyexinus* and the associated secondary index species *Latrobosporites amplus* and *L. ohaiensis*. In composition the sample is characterised by the incoming of significant angiosperm pollen comprising >19% of the spore-pollen count. The most abundant angiosperms are small varieties of *Proteacidites* spp. at 9% and *Australopollis obscurus* at 5%. The sample also contains common microplankton which are assigned to the *I. cretaceum* Zone on the presence of frequent specimens of both *Amphidiadema denticulata* and *Isabelidinium rotundatum* ms and rare specimens of *Isabelidinium thomasii* in an assemblage dominated by *Heterosphaeridium* spp.

***Phyllocladidites mawsonii* spore-pollen Zone**

(formerly the *Clavifera triplex* Zone).

Interval: 1467.2-1544.4 metres (77+ metres).

Age: Turonian-Coniacian.

The eleven samples assigned to the *P. mawsonii* Zone can be subdivided into two subzones based mainly on the range of *Hoegisporis trinalis* ms.

The lower subzone is represented by the six samples between 1505.8-1544.4m and probably should also include the sample at 1501.2m, which gave a high residue yield with unfortunately only a very low concentration of palynomorphs. The subzone is characterised by the consistent and occasionally frequent occurrence of *Hoegisporis trinalis* ms and *Appendicisporites distocarinatus* associated with rare *Stoverisporites microverrucatus*. Other species considered diagnostic of this lower subzone were either rare or not recorded in Dunbar-1. Although the eponymous species *Phyllocladidites mawsonii* was not recorded to overlap with *H. trinalis* ms this is not of concern as the occurrence of *P. mawsonii* near the base of its range is both very rare and variable. The same comments are true for the base range of *Clavifera triplex* in the Otway Basin which in this well was found as deep as 1535.9m before the deepest occurrence of *P. mawsonii* at 1477m. As this is the reverse of the situation in the other wells recently analysed it would surely be refuted if additional slides were prepared and examined.

The upper subzone is characterised by the extension of the ranges of *Rugulatisporites admirabilis* ms and *Laevigatosporites musa* ms above the last occurrence of *H. trinalis* ms and an increase in abundance of the gymnosperm pollen *Cupressacites* sp. and *Dilwynites* spp. The occurrence of the distinctive spore *Clavifera vultuosus* ms at the top of the zone in the two samples containing the dinoflagellate *Conosphaeridium striatoconus* suggests that a further subdivision of the *P. mawsonii* Zone may be possible.

Overall the *P. mawsonii* Zone assemblages are very similar those recorded in other recent wells examined (*loc. cit.*). A character which distinguishes all assemblages from the *P. mawsonii* Zone from those in the underlying Eumeralla Formation is the consistent and common occurrence of *Gleicheniidites circinidites* in nearly all samples.

Conosphaeridium striatoconus* microplankton Zone.*Interval: 1467.2-1472.3 metres** (5+ metres).**Age: Coniacian.**

Two samples are assigned to this zone on the occurrence of the eponymous species *C. striatoconus* and absence of both *Kiokansium polytes*, characteristic of the underlying *P. infusorioides* Zone, and species of *Odontochitina* and *Isabelidium* diagnostic of the immediately younger zones. The moderate diversity assemblages recorded from the two samples are dominated by *Heterosphaeridium* spp. and *Amosopollis cruciformis* and lack other species considered diagnostic of the zone.

Palaeohystrichophora infusorioides* microplankton Zone.*Interval: 1477.0-1544.4 metres** (67+ metres).**Age: Turonian.**

The samples identified as belonging to the *P. infusorioides* Zone, like others recently analysed from the Port Campbell Embayment (Partridge, 1994a, b, c; 1995), are assigned to the zone on negative evidence. All lack the key index species of the underlying *D. multispinum* Zone, yet lie below the FAD (First Appearance Datum) for *Conosphaeridium striatoconus* which defines the next youngest zone. In Dunbar-1 the total assemblage recorded from the zone ~~is~~ comprised of 25+ dinoflagellate and 6+ algal or acritarch species, all of which are known to have long ranges extending into both older and younger zones. Confidence in the zone assignment is therefore dependant, firstly, on the fact that the composite assemblage from the zone can be considered to have a high diversity yet still lack older or younger index species and, secondly, because it reproduces similar results obtained the other recently analysed wells.

Cribroperidinium edwardsii* Subzone.*Interval: 1505.8.0 metres****Age: Turonian.**

The *Cribroperidinium edwardsii* Subzone was originally recognised and defined with the concept of an acme zone in the Iona-2 and Langley-1 wells (Partridge 1994a, b). However, in Dunbar-1 the zone is not clearly identified. Although *C. edwardsii* occurs as the most prominent *Cribroperidinium* species at 1505.8m, it is not the dominant or even the most conspicuous species in the sample. Nevertheless, this sample is the best candidate for the zone. Other occurrences include only a tentative identification of *C. edwardsii* at 1531.5m and its presence as rare specimens amongst a similar but non-verrucate *Cribroperidinium*

species at 1477m. This latter sample is not typical of concept the *C. edwardsii* acme in Iona-2 and Langley-1 as it contains abundances of both *Heterosphaeridium* spp. and *Amosopollis cruciformis*, which ⁱⁿ other wells occur above the *C. edwardsii* acme. Similar difficulties with identification of the subzone were reported from the nearby Vaughan-1 (Partridge, 1995). It would appear the difficulty with identifying the subzone is related to the overall reduction in abundance of microplankton through the lower part of the Waarre Formation in these two wells.

***Coptospora paradoxa* spore-pollen Zone or younger.**

Interval: 1552.7?-1568.0 metres.

Age: Late Albian.

The two samples analysed from the Eumeralla Formation are no older than the *C. paradoxa* Zone on presence of the eponymous species in the deeper sample, but could just as easily belong to the younger *P. pannosus* Zone as both assemblages are poor. The lithological character supports the assignment along with the frequent occurrence of *Corallina torosa* in the shallower sample, as this is a typical character of Eumeralla assemblages analysed from the *P. pannosus* Zone.

References

- BUFFIN, A.J., 1989. Waarre Sandstone development within the Port Campbell Embayment. *APEA J.* 29 (1), 299-311.
- DETTMANN, M.E., 1963. Upper Mesozoic microfloras from southeastern Australia. *Proc. R. Soc. Vict.* 77, 1-148.
- HELBY, R., MORGAN, R. & PARTRIDGE, A.D., 1987. A palynological zonation of the Australian Mesozoic. *Mem. Ass. Australas. Palaeontols* 4, 1-94.
- LENTIN, J.K. & WILLIAMS, G.L., 1993. Fossil Dinoflagellates: Index to genera and species, 1993 Edition. *AASP Contribution Series No. 28*, 1-856.
- PARTRIDGE, A.D., 1994a. Palynological analysis of Iona-2 in Port Campbell Embayment, Otway Basin. *Biostrata Report 1994/4*, 1-25.
- PARTRIDGE, A.D., 1994b. Palynological analysis of Langley-1, Port Campbell Embayment, Otway Basin. *Biostrata Report 1994/11*, 1-28.
- PARTRIDGE, A.D., 1994c. Palynological analysis of Howmains-1, Port Campbell Embayment, Otway Basin. *Biostrata Report 1994/13*, 1-22.
- PARTRIDGE, A.D., 1995. Palynological analysis of Vaughan-1, Port Campbell Embayment, Otway Basin. *Biostrata Report 1995/5*, 1-14.
- STOVER, L.E. & PARTRIDGE, A.D., 1973. Tertiary and late Cretaceous spores and pollen from the Gippsland Basin, southeastern Australia. *Proc. R. Soc. Vict.* 85, 237-286.

Table-3: Interpretative Palynological Data for Dunbar-1, Otway Basin.

Sample	Depth Metres	Spore-Pollen Zone	*CR	Microplankton Zones and (Subzone)	*CR	Comments and Key Species
SWC 24	1401.0	<i>T. apoxyexinus</i>	B4	<i>I. cretaceum</i>	B3	FADs for <i>Isabelidium rotundatum</i> ms and <i>Amphidiadema denticulata</i> .
SWC 23	1467.2	<i>P. mawsonii</i>	B2	<i>C. striatoconus</i>	B3	LAD of <i>C. striatoconus</i> with <i>Clavifera vultuosus</i> ms
SWC 22	1472.3	<i>P. mawsonii</i>	B2	<i>C. striatoconus</i>	B2	FADs for <i>Conosphaeridium striatoconus</i> & <i>C. vultuosus</i> ms.
SWC 20	1477.0	<i>P. mawsonii</i>	B4	<i>P. infusorioides</i>	B3	LADs of <i>Kiokanstum polypes</i> and <i>Rugulatisporites admirabilis</i> ms. Assemblage contains common <i>Cribroperidinium</i> sp.
SWC 19	1480.2	<i>P. mawsonii</i>	B2	<i>P. infusorioides</i>	B4	LAD of <i>Laevigatisporites musa</i> ms.
SWC 16	1501.2	<i>P. mawsonii</i>	B4			LAD of <i>Appendicisporites distocarinatus</i> in sample with low fossil concentration.
SWC 15	1505.8	<i>P. mawsonii</i> (<i>H. trinalis</i>)	B2	<i>P. infusorioides</i> (<i>C. edwardsii</i>)	B3	LAD of <i>Hoegisporites trinalis</i> ms
SWC 14	1520.6	<i>P. mawsonii</i> (<i>H. trinalis</i>)	B3			Similar to overlying sample, but lacking key microplankton.
SWC 12	1531.5	<i>P. mawsonii</i> (<i>H. trinalis</i>)	B2	<i>P. infusorioides</i>	B4	<i>Cribroperidinium edwardsii</i> possibly present.
SWC 9	1535.9	<i>P. mawsonii</i> (<i>H. trinalis</i>)	B3			Very low yield with <i>H. trinalis</i> present.
SWC 8	1538.3	<i>P. mawsonii</i>	B5			Low yield sample lacking key index species.
SWC 4	1544.4	<i>P. mawsonii</i> (<i>H. trinalis</i>)	B2	<i>P. infusorioides</i>	B2	Typical basal Waarre microplankton assemblage. FAD <i>H. trinalis</i> ms and <i>R. admirabilis</i> ms.
SWC 2	1552.7	Indeterminate				Frequent <i>Corallina torosa</i> and marked jump in maturation suggests sample is from Eumeralla Formation
SWC 1	1568.0	<i>C. paradoxa</i> or younger.				<i>Coptospora paradoxa</i> frequent without younger index species.

*CR = Confidence Ratings
LAD = Last Appearance Datum
FAD = First Appearance Datum

Confidence Ratings

The Confidence Ratings assigned to the zone identifications on Table-4 are quality codes used in the STRATDAT relational database being developed by the Australian Geological Survey Organisation (AGSO) as a National Database for interpretive biostratigraphic data. Their purpose is to provide a simple relative comparison of the quality of the zone assignments. The alpha and numeric components of the codes have been assigned the following meanings:

Alpha codes: Linked to sample type

- A** Core
- B** Sidewall core
- C** Coal cuttings
- D** Ditch cuttings
- E** Junk basket
- F** Miscellaneous/unknown
- G** Outcrop

Numeric codes: Linked to fossil assemblage

- 1 Excellent confidence:** High diversity assemblage recorded with key zone species.
- 2 Good confidence:** Moderately diverse assemblage recorded with key zone species.
- 3 Fair confidence:** Low diversity assemblage recorded with key zone species.
- 4 Poor confidence:** Moderate to high diversity assemblage recorded without key zone species.
- 5 Very low confidence:** Low diversity assemblage recorded without key zone species.

BASIC DATA

Table 4: Basic Sample Data - Dunbar-1, Otway Basin.

SAMPLE TYPE	DEPTH (Metres)	REC (cm)	LITHOLOGY	SAMPLE WT (g)	RESIDUE YIELD
SWC 24	1401.0	4.1	Dark brown-grey mainly homogeneous claystone. Well cleaned	11.1	High
SWC 23	1467.2	4.0	Dark brown homogeneous claystone. No obvious glauconite. Well cleaned	10.2	High
SWC 22	1472.3	4.2	Dark brown grey homogeneous claystone. No obvious glauconite. Well cleaned	11.8	High
SWC 20	1477.0	3.4	Dark brown grey claystone, trace glauconite and pyrite, very fine. Small shark tooth observed on broken surface. Well cleaned.	12.4	Moderate
SWC 19	1480.2	2.3	Medium grey to brown pyritic claystone. Pyrite nodule 7mm diam. and shelly fossil fragments present. Well cleaned.	6.9	Moderate
SWC 16	1501.3	3.4	Light grey very coarse sandstone with 2mm thick carbonaceous laminae. Moderately well cleaned.	7.6	High
SWC 15	1505.8	2.3	Medium grey claystone. Sample soft, mud penetrated. Poorly cleaned.	7.1	High
SWC 14	1520.6	3.0	Dark grey claystone with minor <2mm white sandstone laminae. Moderately well cleaned, some mud penetration.	8.4	High
SWC 12	1531.5	<2.0	Medium brown soft claystone badly mud contaminated. Not cleaned.	5.4	High
SWC 9	1535.9	3.0	Light brown grey fine grained sandstone with argillaceous matrix and lithic grains. Sample very soft but well cleaned.	7.6	Low
SWC 8	1538.3	2.6	Light brown grey very fine sandstone. Similar to SWC 9. Sample soft but well cleaned.	7.0	Low
SWC 4	1544.4	2.5	Dark brown grey homogeneous claystone with 3mm laminae of medium grey sandstone. Well cleaned.	8.4	Moderate
SWC 3	1548.2	3.0	Light grey fine grained sandstone with white argillaceous matrix. Not processed.		
SWC 2	1552.7	2.0	Medium grey fine grained sandstone with argillaceous matrix with irregular clasts of medium grey claystone. Moderately well cleaned.	3.8	Low
SWC 1	1568.0	<1.5	Medium grey brown subfossil claystone. Mud penetrated. Poorly cleaned.	4.3	High

Table-5: Basic Palynomorph Data for Dunbar-1, Otway Basin.

SAMPLE TYPE	DEPTH (Metres)	Palynomorph Concentration	Palynomorph Preservation	Number S-P Species*	Microplankton Abundance	Number MP Species*
SWC 24	1401.0	Moderate	Fair	32+	Common	11+
SWC 23	1467.2	Moderate	Fair	33+	Common	9+
SWC 22	1472.3	Moderate	Poor-fair	40+	Common	16+
SWC 20	1477.0	Moderate	Fair	34+	Abundant	20+
SWC 19	1480.2	Low	Poor-fair	29+	Common	11+
SWC 16	1501.3	Very low	Fair	11+	NR	
SWC 15	1505.8	Low	Fair	31+	Common	10+
SWC 14	1520.6	Moderate	Fair-good	34+	Very rare	2+
SWC 12	1531.5	Moderate	Fair-good	32+	Frequent	6+
SWC 9	1535.9	Low	Poor-good	16+	Very rare	1+
SWC 8	1538.3	Low	Poor	19+	Very rare	1+
SWC 4	1544.4	High	Poor	31+	Abundant	12+
SWC 2	1552.7	Low	Very poor	11+	NR	
SWC 1	1568.0	Moderate	Very poor	15+	Frequent	2+

***Diversity:** Very low = 1-5 species
 Low = 6-10 species
 Moderate = 11-25 species
 High = 26-74 species
 Very high = 75+ species
 NR = Not recorded in sample

PE900752

This is an enclosure indicator page.
The enclosure PE900752 is enclosed within the
container PE900923 at this location in this
document.

The enclosure PE900752 has the following characteristics:

ITEM_BARCODE = PE900752
CONTAINER_BARCODE = PE900923
 NAME = Palynomorph Range Chart
 BASIN = OTWAY
 PERMIT = PPL/1
 TYPE = WELL
 SUBTYPE = DIAGRAM
DESCRIPTION = Palynomorph Range Chart, Relative
 Abundance by Lowest Appearance,
 (enclosure from Well Completion Report)
 for Dunbar-1
REMARKS =
DATE_CREATED =
DATE_RECEIVED =
 W_NO = W1119
 WELL_NAME = Dunbar-1
CONTRACTOR =
CLIENT_OP_CO = GFE Resources

(Inserted by DNRE - Vic Govt Mines Dept)

ENCLOSURES

PE600732

This is an enclosure indicator page.
The enclosure PE600732 is enclosed within the
container PE900923 at this location in this
document.

The enclosure PE600732 has the following characteristics:

- ITEM_BARCODE = PE600732
- CONTAINER_BARCODE = PE900923
- NAME = Composite Well log
- BASIN = OTWAY
- PERMIT = PPL/1
- TYPE = WELL
- SUBTYPE = COMPOSITE_LOG
- DESCRIPTION = Composite Well log (enclosure from WCR)
for Dunbar-1
- REMARKS =
- DATE_CREATED = 1/04/95
- DATE_RECEIVED =
- W_NO = W1119
- WELL_NAME = Dunbar-1
- CONTRACTOR = GFE Resources
- CLIENT_OP_CO =

(Inserted by DNRE - Vic Govt Mines Dept)

PE604390

This is an enclosure indicator page.
The enclosure PE604390 is enclosed within the
container PE900923 at this location in this
document.

The enclosure PE604390 has the following characteristics:

ITEM_BARCODE = PE604390
CONTAINER_BARCODE = PE900923
 NAME = Formation Evaluation Log
 BASIN = OTWAY BASIN
 PERMIT = PP/L1
 TYPE = WELL
 SUBTYPE = MUD_LOG
DESCRIPTION = Formation Evaluation Log (enclosure 2
 from WCR) for Dunbar-1
REMARKS =
DATE_CREATED = 26/03/95
DATE_RECEIVED =
 W_NO = W1119
 WELL_NAME = DUNBAR-1
CONTRACTOR = BAKER HUGHS INTEQ
CLIENT_OP_CO = GFE RESOURCES LTD

(Inserted by DNRE - Vic Govt Mines Dept)

PE600734

This is an enclosure indicator page.
The enclosure PE600734 is enclosed within the
container PE900923 at this location in this
document.

The enclosure PE600734 has the following characteristics:

- ITEM_BARCODE = PE600734
- CONTAINER_BARCODE = PE900923
 - NAME = Gas Ratio Analysis Log
 - BASIN = OTWAY
 - PERMIT = PPL/1
 - TYPE = WELL
 - SUBTYPE = WELL_LOG
- DESCRIPTION = Gas Ratio Analysis Log (enclosure from
WCR) for Dunbar-1
- REMARKS =
- DATE_CREATED =
- DATE_RECEIVED =
- W_NO = W1119
- WELL_NAME = Dunbar-1
- CONTRACTOR = Baker Hughes Inteq
- CLIENT_OP_CO = GFE Resources

(Inserted by DNRE - Vic Govt Mines Dept)

PE600735

This is an enclosure indicator page.
The enclosure PE600735 is enclosed within the
container PE900923 at this location in this
document.

The enclosure PE600735 has the following characteristics:

ITEM_BARCODE = PE600735
CONTAINER_BARCODE = PE900923
NAME = Complex Lithology Model
BASIN = OTWAY
PERMIT = PPL/1
TYPE = WELL
SUBTYPE = WELL_LOG
DESCRIPTION = Complex Lithology Model (enclosure from
WCR) for Dunbar-1
REMARKS =
DATE_CREATED = 18/01/96
DATE_RECEIVED =
W_NO = W1119
WELL_NAME = Dunbar-1
CONTRACTOR = GFE Resources
CLIENT_OP_CO = GFE Resources

(Inserted by DNRE - Vic Govt Mines Dept)