

Rig: ISDL 175  
Field: Fortescue  
Location: Bass Strait  
Well: FTA A17A  
Company: ESSO Australia Pty Ltd

Location	
Total depth:	3036.0 m
Spud date:	02-Sep-07
Runs:	3 To 4
Permanent datum:	Mean Sea Level
Log measured from:	Drill Floor
Depth reference:	Driller's Depth
	Elev.: 0.0 m
	42.5 m above Perm. datum

Service Order no.	X = E 611,592.60 m	Longitude	Latitude
07ASQ0020	Y = N 5,748,240.31 m	E 148° 16' 41.155"	S 38° 24' 25.599"

Depth logged:	727.5 m	To	3025.6 m	Mag decl:	13.208 deg.	Other services:
Date logged:	09-Sep-07	To	14-Sep-07	Mag dip:	-68.860 deg.	See Remarks

Bore hole record				Casing record			
Hole size	from	to	Size	Density	from	to	
8.5 in.	763.0 m	3036.0 m	10.75 in.	40.5 lb/ft	21.0 m	656.0 m	
		</					

Surface equipment		Software record		
Unit	ESSO Office Unit	IDEAL W/s	ID12_0c_12	
Depth system	PDA	SPM	hspm_12_0c_04	
		LWD	See Remarks	
		MWD	See Remarks	

Run number		3	4							
Bit size	in.	8.5	8.5							
Bit start depth	m	763.0	812.0							
Bit end depth	m	812.0	3036.0							
Top interval logged	m	727.5	776.7							
Bottom interval logged	m	801.6	3025.6							
Begin log: time		15:04	02:10							
Begin log: date		09-Sep-07	11-Sep-07							
End log: time		20:51	17:48							
End log: date		09-Sep-07	14-Sep-07							
<b>Mud data</b>										
Depth	m	812.0	3036.0							
Type		Accolade SBM	Accolade SBM							
Mud weight	ppg	10.60	10.65							
Solids	%	13.5	15.0							
Chlorides	mg/L	44,673	43,918							
Rm	ohm.m@°C	n/a	n/a							
Rmf	ohm.m@°C	n/a	n/a							
Rmc	ohm.m@°C	n/a	n/a							

Potassium	%	n/a	n/a								
<b>Environmental data</b>											
<b>GR</b>											
Mud weight	ppg	10.60	10.65								
Bit size	in.	8.5	8.5								
<b>Resistivity</b>											
<b>Neutron porosity</b>											
Hole Size	in.	8.5	8.5								
Mud weight	ppg	10.60	10.65								
Temperature	°C	47.0	90.0								
Mud salinity	ppk	58.368	57.942								
Formation salinity		n/a	n/a								
Recording rate 1	SEC	5 (ADN, SON)	5 (ADN, SON)								
Recording rate 2	SEC	6 (ARC)	6 (ARC)								
Filtering GR		3 pts	3 pts								
Filtering density		3 pts	3 pts								
Filtering Neutron		3 pts	3 pts								
Company representative		D. Daniels	G. Campbell								
Schlumberger D&M Personnel		M. Y. Tan	M. Amarasena	M. Lu	C. Soper	M. How					

<p style="text-align: center;"><b>DISCLAIMER</b></p> <p>THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE OF AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.</p>											
<b>OTHER SERVICES FOR RUN 3</b> Directional Drilling Directional Surveys Annular Pressure & Temperature Shock & Vibrations				<b>OTHER SERVICES FOR RUN 4</b> Directional Drilling Directional Surveys Annular Pressure & Temperature Shock & Vibrations				<b>OTHER SERVICES FOR RUN</b>			
<b>REMARKS: RUN NUMBER 3</b> Depth is referenced to Driller's Depth.  Gamma ray is corrected for mud weight, tool size and bit size.  Resistivity is borehole compensated and environmentally corrected.  Neutron porosity is corrected for the effects of borehole size (bit size), temperature, mud salinity, and mud hydrogen index (a factor of mud weight, mud temperature and pressure).  Neutron porosity is calculated using a limestone matrix density of 2.71 g/cm3.  POOH due to loss of MWD signal.				<b>REMARKS: RUN NUMBER 4</b> Depth is referenced to Driller's Depth.  Gamma ray is corrected for mud weight, tool size and bit size.  Resistivity is borehole compensated and environmentally corrected.  Neutron porosity is corrected for the effects of borehole size (bit size), temperature, mud salinity, and mud hydrogen index (a factor of mud weight, mud temperature and pressure).  Neutron porosity is calculated using a limestone matrix density of 2.71 g/cm3  POOH due to reaching TD of FTA A17A.				<b>REMARKS: RUN NUMBER</b>			

<b>EQUIPMENT DESCRIPTION</b>											
<b>RUN 3</b>				<b>RUN 4</b>				<b>RUN</b>			

## DOWNHOLE EQUIPMENT

## DOWNHOLE EQUIPMENT

6-3/4" adnVISION\*  
DHS: 8.3A02  
Blade OD: 8-1/4"  
S/N: 373

Neutron F 35.51  
Neutron N 35.35  
Density S 34.40  
Density L 34.31  
UltraSonic 33.92  
R-O Port 33.16

37.13

6-3/4" adnVISION\*  
DHS: 8.3A02  
Blade OD: 8-1/4"  
S/N: AD41

Neutron F 35.31  
Neutron N 35.15  
Density S 34.20  
Density L 34.11  
UltraSonic 33.72  
R-O Port 32.96

37.13

6-3/4" sonicVISION\*  
DHS: 6.6B04  
S/N: 649

Delta-T 27.88  
R-O port 27.48

31.15

6-3/4" sonicVISION\*  
DHS: 6.6B04  
S/N: 630

Delta-T 27.57  
R-O port 27.17

30.94

8-3/8" ILS  
S/N: S-31746-4

23.71

8-3/8" ILS  
S/N: OSS060654C

23.35

6-3/4" TeleScope  
MDC: FA27  
MEC: AB-232  
MDI: CA-2084  
MVC: PMVC-AA-109

D&I 18.48  
MVC 17.83

22.82

6-3/4" TeleScope  
MDC: VC64  
MEC: AB-373  
MDI: CA-1841  
MVC: PMVC-AA-282

D&I 17.89  
MVC 17.24

22.24

8-3/4" ILS  
S/N: OSS0701135

R-O Port 11.51  
T5 11.41  
T3 11.10  
T1 10.80

14.82

6-3/4" arcVISION\*  
DHS: 9.3b13  
S/N: FY68

Gamma Ray 10.44  
Receiver 10.39  
T2 10.14  
T4 9.83  
ARC APRS 9.68

13.82

8-3/4" ILS  
S/N: OSS0701135

R-O Port 11.51  
T5 11.41  
T3 11.10  
T1 10.80

14.82

6-3/4" arcVISION\*  
DHS: 9.3b13  
S/N: 1191

Gamma Ray 10.44  
Receiver 10.39  
T2 10.14  
T4 9.83  
ARC APRS 9.68

13.75

6-3/4" PowerDrive Xceed\*  
S/N: 109

7.91

6-3/4" PowerDrive Xceed\*  
S/N: 111

7.91

8-1/2" Reed Hycalog PDC Bit  
S/N: 215733

0.00  
0.25

8-1/2" Reed Hycalog PDC Bit  
S/N: 215733

0.00  
0.25

Maximum string diameter 8-1/2 in.

All lengths in Meters

Maximum string diameter 8-1/2 in.

All lengths in Meters

Variable Name	Variable Description	Run Name & Value	
Run Number		3	4
General Information			
BHT_RM	Bottom Hole Temperature (RM)	47.000000	90.000000
BSAL_RM	Mud Salinity (RM)	58.367577	57.291042
BS_RM	Bit Size (RM)	8.500000	8.500000
COEF_M	User Defined FEXP in Clean Sand	1.650000	1.650000
C_WS	Overpressure correction to Sw and M	1.000000	1.000000
FEXP	Formation Factor Exponent (RM)	2.000000	2.000000
FNUM	Formation Factor Enumerator (RM)	1.000000	1.000000
FPHI_RM	Formation Factor Porosity Source (RM)	XPLOT	XPLOT
MST_RM	Mud Sample temperature (RM)	23.88889	23.88889
MW_RM	Mud Weight (RM)	10.600000	10.650000
OBFM_RM	Oil Based Mud (RM)	YES	YES
RHOF_RM	Mud Filtrate Density (RM)	1.000000	1.000000
RHOM_RM	Matrix density (RM)	2.710000	2.710000
RMS_RM	Resistivity of Mud Sample (RM)	1000.000000	1000.000000
RWA_COMP_M	Rwa computation model	BASIC	BASIC
RWA_DEN_AD	Rwa Density Input ADN	ROBB	ROBB
RWA_DEN_CD	Rwa Density Input CDN	RHOB	RHOB
RWA_DEN_IN	Rwa Density Input	ROBB	ROBB
RWA_FORM_M	Rwa computation formation model	CLASTIC	CLASTIC
RWA_RES_IN	Rwa computation resistivity input	P34H	P34H
RWS_RM	Resistivity of Connate Water (RM)	1.000000	1.000000
SHT_RM	Surface Hole Temperature (RM)	10.000000	10.000000
TD_RM	Total Measured Depth (RM)	812.000000	3036.00000
TWS_RM	Temperature of Connate Water (RM)	23.88889	23.88889
VF_ILLI	Fraction of illite in shales	0.500000	0.500000
VF_KAOL	Fraction of kaolinite in shales	0.500000	0.500000
VF_MONT	Fraction of montmorillonite in shales	0.000000	0.000000
XPDM_RM	Cross plot density porosity multiplier	0.675000	0.675000
XPNM_RM	Cross plot neutron porosity multiplier	0.325000	0.325000
ARC			
LWD_RM/STATION_FILE/	PARAMETERStation Time-frame file name	Station	Station
A12A	ARC Air Cal Attenuation From T1 at 2 MHz	8.980860	8.459310
A14A	ARC Air Cal Attenuation From T1 at 400 KHz	8.986440	8.437310
A22A	ARC Air Cal Attenuation From T2 at 2 MHz	5.964700	6.484980
A24A	ARC Air Cal Attenuation From T2 at 400 KHz	5.966310	6.515550
A32A	ARC Air Cal Attenuation From T3 at 2 MHz	5.607090	5.085840
A34A	ARC Air Cal Attenuation From T3 at 400 KHz	5.602970	5.054970
A42A	ARC Air Cal Attenuation From T4 at 2 MHz	3.871990	4.389600
A44A	ARC Air Cal Attenuation From T4 at 400 KHz	3.869330	4.413140
A52A	ARC Air Cal Attenuation From T5 at 2 MHz	4.157310	3.635930
A54A	ARC Air Cal Attenuation From T5 at 400 KHz	4.162690	3.617580
ABNT	Abnormal Transmitter Indicator	No_Tx_Failed	No_Tx_Failed
ADHS	ARC Down Hole Software Version	No_Tx_Failed	No_Tx_Failed
ANISO_COMP	Anisotropy Computation Option	YES	YES
APICG	ARC5 Gamma Ray Gain Factor	1.039250	1.095470
APIG	ARC Gamma Ray API Gain Factor	-1.000000	-1.000000
ATMP_ARC	ARC Select Temperature Channel	Annulus_Temp	Annulus_Temp
ATRN	ARC Tool Run Number	3	4
ATSN	ARC Tool Serial Number	Annulus_Temp	Annulus_Temp
AZMF	Formation DIP Azimuth	0.000000	0.000000
BH_COMPUTE	Borehole Inversion Computation Option	YES	YES
CALG	ARC Gamma Ray Cal Gain Factor	1.039250	1.095470
CALI_SLCT	ARC Caliper Selection	BITSIZE	BITSIZE
CDPTH_ARC	Process Start Depth	100.000000	100.000000
DIELEC_COM	Dielectric Computation Option	YES	YES
DIPF	Formation DIP Angle	0.000000	0.000000
ERRCT	Percentage Error Cutoff	4.500000	4.500000
GRSH	GR Shale (Invasion Computation Cutoff)	1000.000000	1000.000000
HIGH_BLEND	High Resistivity Threshold for Blending	2.000000	2.000000
INCLIN_B0	ARC Bias Constant (mg)	0.000000	0.000000
INCLIN_B1	ARC Bias First-order Coefficient (mg/degC)	0.000000	0.000000
INCLIN_B2	ARC Bias Secod-order Coeeficient (mg/degC)	0.000000	0.000000
INCLIN_B3	ARC Bias Third-order Coeeficient (mg/degC)	0.000000	0.000000
INCLIN_C0	ARC Current Scale Factor Constant (mA/g)	1.000000	1.000000
INCLIN_C1	ARC Scale First-order Coeeficient (mA/g/degC)	0.000000	0.000000
INCLIN_C2	ARC Scale Second-order Coeeficient (mA/g/degC)	0.000000	0.000000
INCLIN_C3	ARC Scale Third-order Coeeficient (mA/g/degC)	0.000000	0.000000
INVAS_COMP	Invasion Computation Option	YES	YES
JSD_ARC	ARC Acquisition start date	YES	YES
KPER	Potassium Concentration (RM)	0.000000	0.000000
LOW_BLEND	Low Resistivity Threshold for Blending	1.000000	1.000000
MSWS	ARC Wizard Model Switch Window	5.000000	5.000000
MULTIEFFEC	Multi Effect Option	YES	YES
P12A	ARC Air Cal Phase-Shift From T1 at 2 MHz	1.019090	1.831860
P14A	ARC Air Cal Phase-Shift From T1 at 400 KHz	-0.350909	-0.359529
P22A	ARC Air Cal Phase-Shift From T2 at 2 MHz	-0.927967	-1.713500
P24A	ARC Air Cal Phase-Shift From T2 at 400 KHz	0.284876	0.241835
P32A	ARC Air Cal Phase-Shift From T3 at 2 MHz	0.923579	1.759360
P34A	ARC Air Cal Phase-Shift From T3 at 400 KHz	-0.322901	-0.329207
P42A	ARC Air Cal Phase-Shift From T4 at 2 MHz	-0.977645	-1.751440
P44A	ARC Air Cal Phase-Shift From T4 at 400 KHz	0.287438	0.229570
P52A	ARC Air Cal Phase-Shift From T5 at 2 MHz	0.906331	1.735070
P54A	ARC Air Cal Phase-Shift From T5 at 400 KHz	-0.357818	-0.326719
POFFSET_AR	ARC: Pressure Offset	0.000000	0.000000
PRTD	Preferred Resistivity Log for Rt Display while Multi-Effects	P34B	P34B
PSOF_ADJ_T	ARC: User Input Phase offset	0.000000	0.000000

RESTIK	ARC resistivity tick source	Phase	Phase
SHIG	ARC High Shock Risk Level	0.500000	0.500000
SHT_RM	Ground Level Temperature (Mud-Line When Offshore ) (RM)	10.000000	10.000000
SMED	ARC Medium Shock Risk Level	0.330000	0.330000
SMIN	ARC Minimum Shock Risk Level	0.160000	0.160000
SUPD	ARC Real Time Shock Update Rate	30.000000	30.000000
TCODE_ARC	ARC Tool File Code	30.000000	30.000000
TSIZ_ARC	ARC Tool Size	6.750000	6.750000
UNIFORM_CO	Uniform Rock Option	YES	YES
VERS_ARC	ARC Down hole software version Number	9.300000	9.300000
WRK	Way to Report Potassium Concentration (RM)	K_by_Wgt_%	K_by_Wgt_%

### ISONIC

FP_SD	First Sample delay	400.00	400.00
STC_CF	Center frequency of Filter	13.00	13.00
STC_BW	Bandwidth (kHz)	Default	Default
STC_RWI	Receiver waveform ignored	None	None
PM_TOFF	Tool Time offset from surface system	0.00	0.00
DT_COH	Delta-T Coherence Cutoff Value	0.70	0.70
PPC_PF	Porosity Formula	Raymer-Hunt	Raymer-Hunt
PPC_PS	Sonic Porosity Source	DTRA	DTRA
PPC_MDT	Matrix Delta-T	47.60	47.60
PPC_FDT	Fluid Delta-T	189.00	189.00

### ADN

ADN_CHASSI	ADN Chassis Type String	ADN	ADN
ADN_COLLAR	ADN Collar Type String	ADN	ADN
ADN_STAB_S	ADN Stabilizer Type String	ADN	ADN
ALPHA_COMP	Perform Density Enhanced Vertical Resolution process ?	YES	YES
ALPHA_COMP	Perform Neutron Enhanced Vertical Resolution process ?	YES	YES
AVE_ADN	ADN/Array Channels: perform averaging(RM) :	YES	YES
A_DHS	ADN Down Hole Software Version String	YES	YES
CHI_RM	Caliper High limit from BS (RM)	3.000000	3.000000
CLO_RM	Caliper Low limit from BS (RM)	0.000000	0.000000
DEVI	Well Section Deviation	26.219999	35.270000
DTIK_SEL	ADN: Density Tick Channel Name	LSAZ	LSAZ
DTMUD	Delta-T for Mud	208.699997	210.020004
DYN_IMG_CO	Generate Dynamic Normalized Image?	YES	YES
ECC_CORR_A	Perform Eccentering Correction for TNPH?	YES	YES
ENVCOR	Neutron Quadrant Processing: Environmental Correction?	YES	YES
EVRL	EVR Process averaging number of samples (RM)	49	49
FCD	Future Casing (Outer) Diameter	0.000000	0.000000
GCSE	Generalized Caliper Selection	BS	BS
HPS	ADSE-EB (High Pressure Inconel Chassis)?	NO	NO
IBS	Integral Blade Stabilizer Collar?	YES	YES
IDQT	Image Derived Quality Threshold	1.000000	1.000000
IHVS	Integrated Hole Volume Start Value(RM)	0.000000	0.000000
IMAGE_MAX_	Image SOA (Quadrant) Right Scale	2.500000	2.500000
IMAGE_MAX_	Image PEF(Segment) Right Scale	6.000000	6.000000
IMAGE_MAX_	Image RHOB(Segment) Right Scale	2.650000	2.650000
IMAGE_MIN_	Image SOA (Quadrant) Left Scale	0.000000	0.000000
IMAGE_MIN_	Image PEF(Segment) Left Scale	2.000000	2.000000
IMAGE_MIN_	Image RHOB(Segment) Left Scale	2.050000	2.050000
JSD_ADN	ADN Acquisition start date	2.050000	2.050000
LITHO_TYPE	Lithology (RM)	LIME	LIME
N1FTU_6_RM	ADN: Neutron Bank 1 Far Tubes used :	1-2-3	1-2-3
N2FTU_6_RM	ADN: Neutron Bank 2 Far Tubes used :	1-2-3	1-2-3
NNTU_RM	ADN Neutron Near Banks Used	1-2	1-2
NTIK_SEL	ADN: Neutron Tick Channel Name	FR11	FR11
SOCNL	Standoff Distance of the CNL Tool	1.000000	1.000000
SSIZ_ADN	ADN Stabilizer Size	8.250000	8.250000
STOH	ADN Density Top of Hole Sector (Left Boundary):	SECTOR_0	SECTOR_0
TRPM_RM	Average Tool Rotational Speed	20.000000	20.000000
USMIN_RM	ADN:Minimum Ultrasonic standoff (RM)	0.180000	0.180000
USWF_RM	ADN:Process Ultrasonic Waveform?	YES	YES
VERS_ADN	ADN Downhole Software Version	8.300000	8.300000
WSDI	Window Size of Dynamic Normalization Image	15.000000	15.000000





Schlumberger Drilling & Measurements


Parameter Insert Header Software version 2.0c

## IDEAL Version: ID12\_OC\_11

IDF


Format: VISION Resistivity 2MHz		Vertical Scale: 1:200		Graphics File Created: 19-Sep-2007 15:13	
	ARC Phase-Shift Resistivity 40-in. at 2 MHz (P40H)		ARC Attenuation Resistivity 40-in. at 2 MHz (A40H)		
	0.2	(OHMM) 2000	0.2	(OHMM) 2000	
	ARC Phase-Shift Resistivity 34-in. at 2 MHz (P34H)		ARC Attenuation Resistivity 34-in. at 2 MHz (A34H)		
	0.2	(OHMM) 2000	0.2	(OHMM) 2000	
Rate of Penetration, Averaged over Last 5ft (ROP5 RM)		ARC Phase-Shift Resistivity 28-in. at 2 MHz (P28H)		ARC Attenuation Resistivity 28-in. at 2 MHz (A28H)	

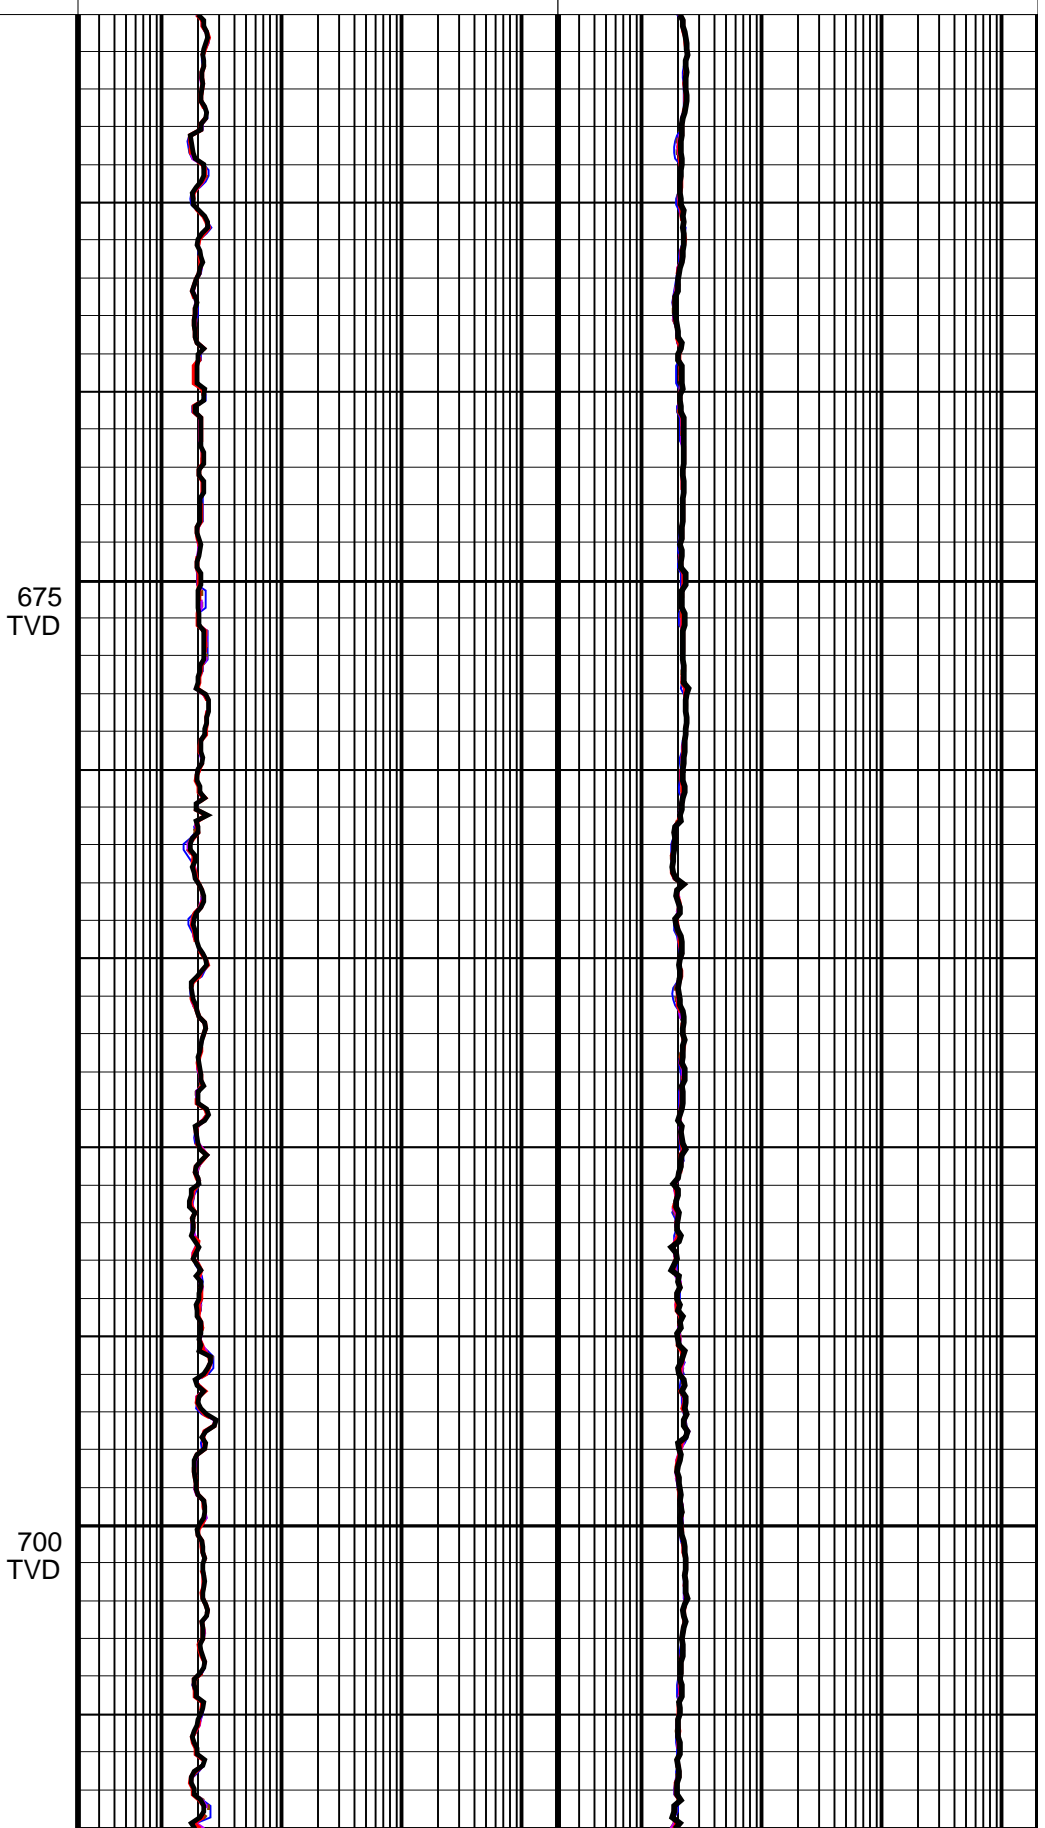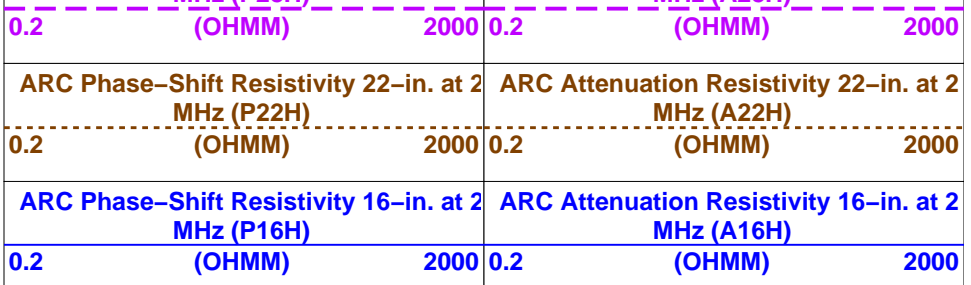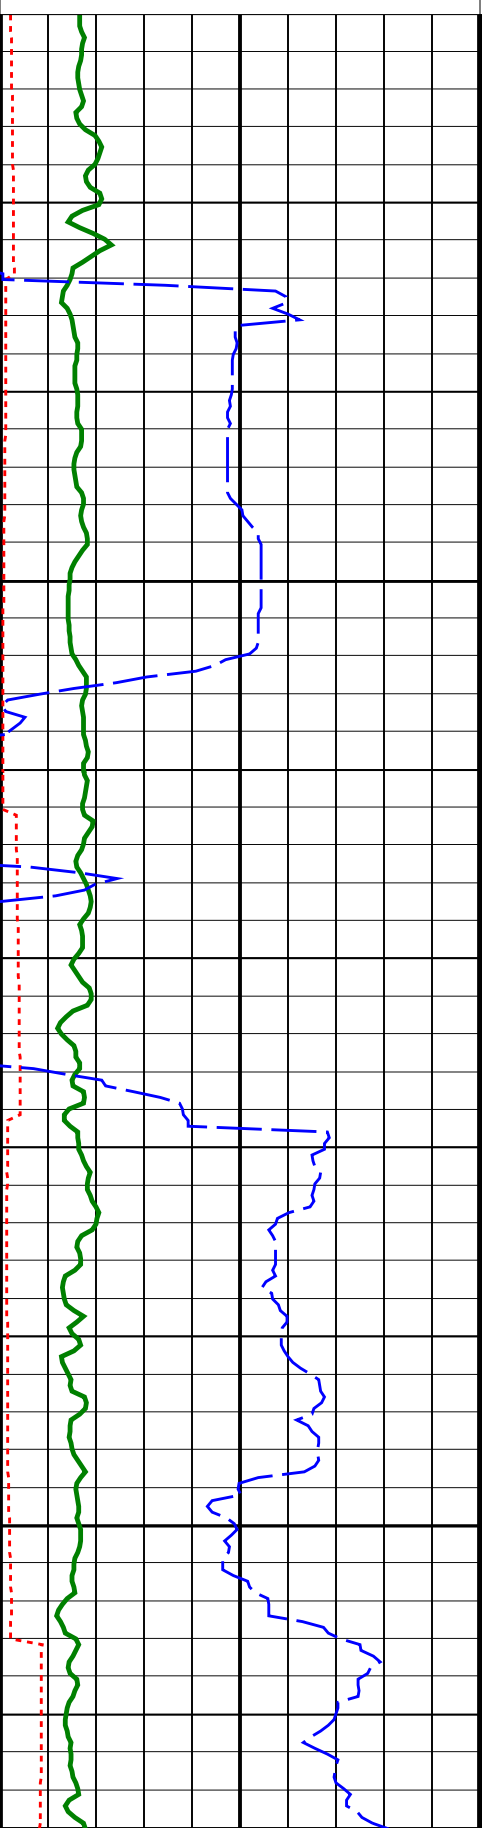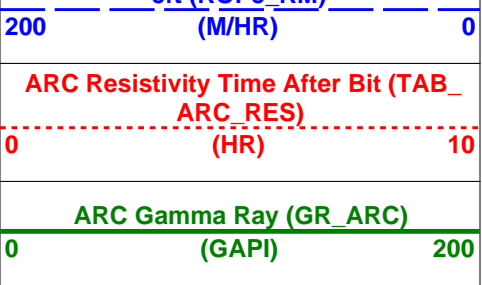


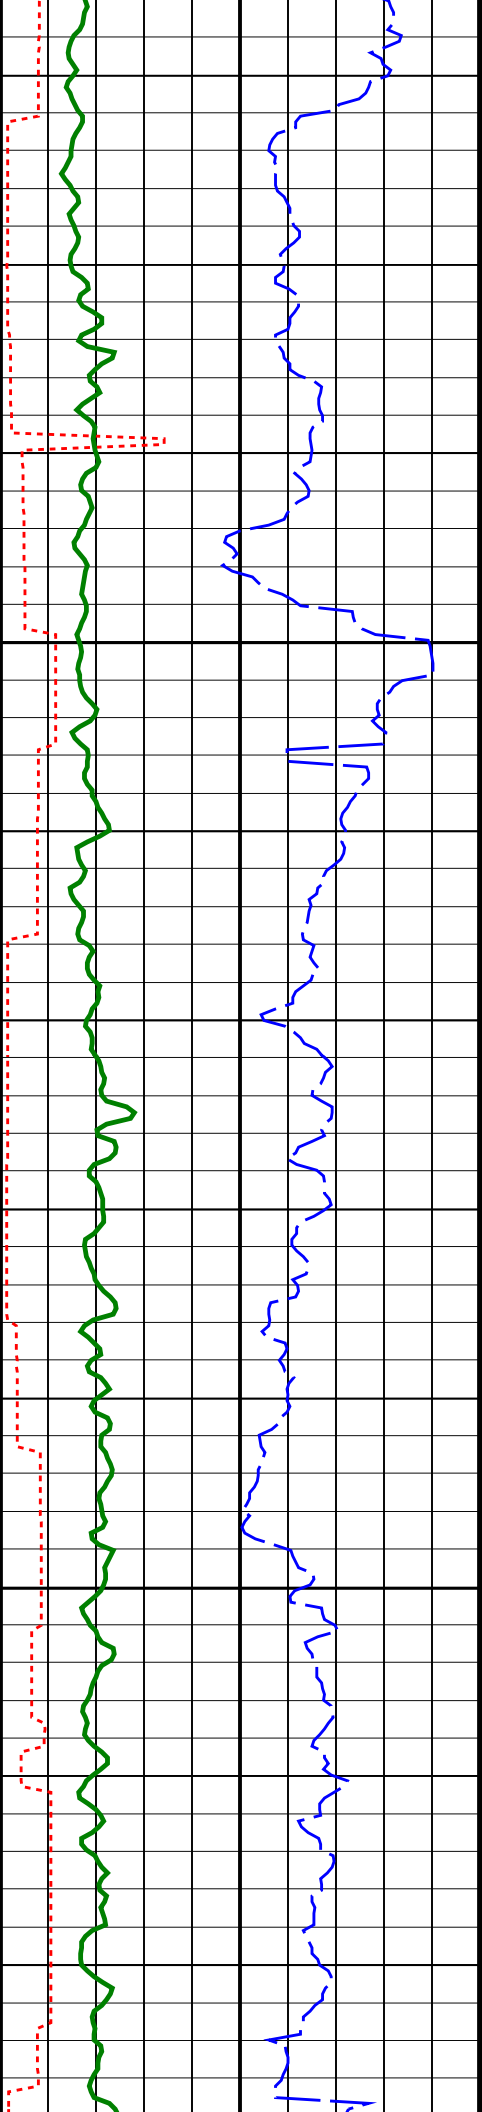

725  
TVD


750  
TVD

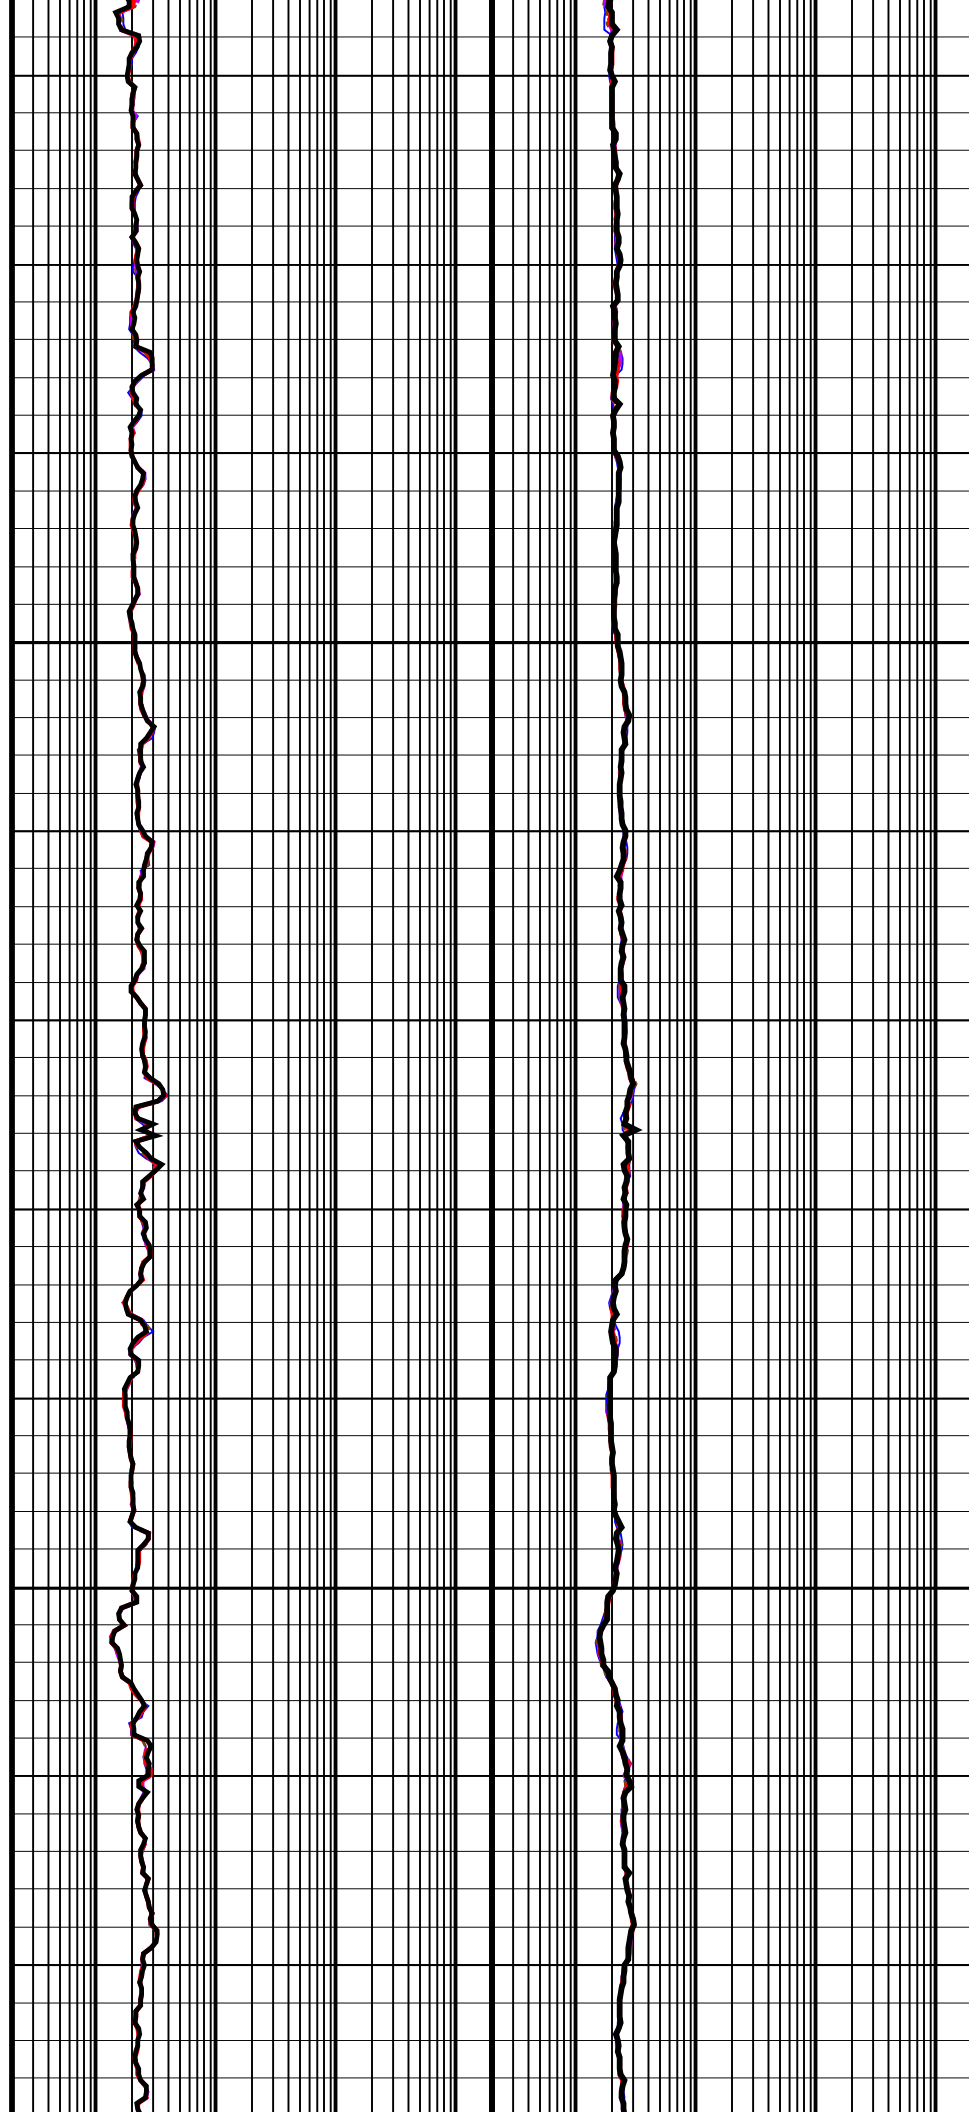

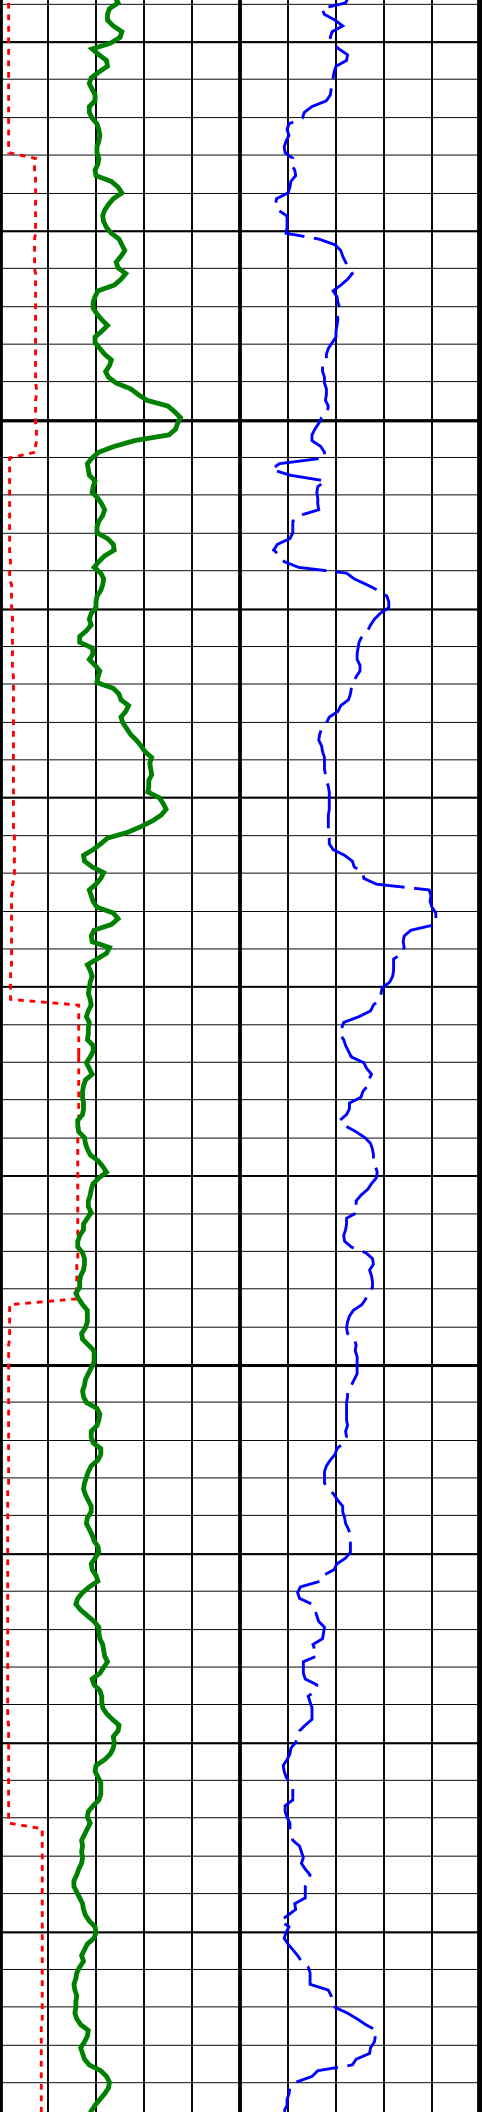


775  
TVD

800  
TVD

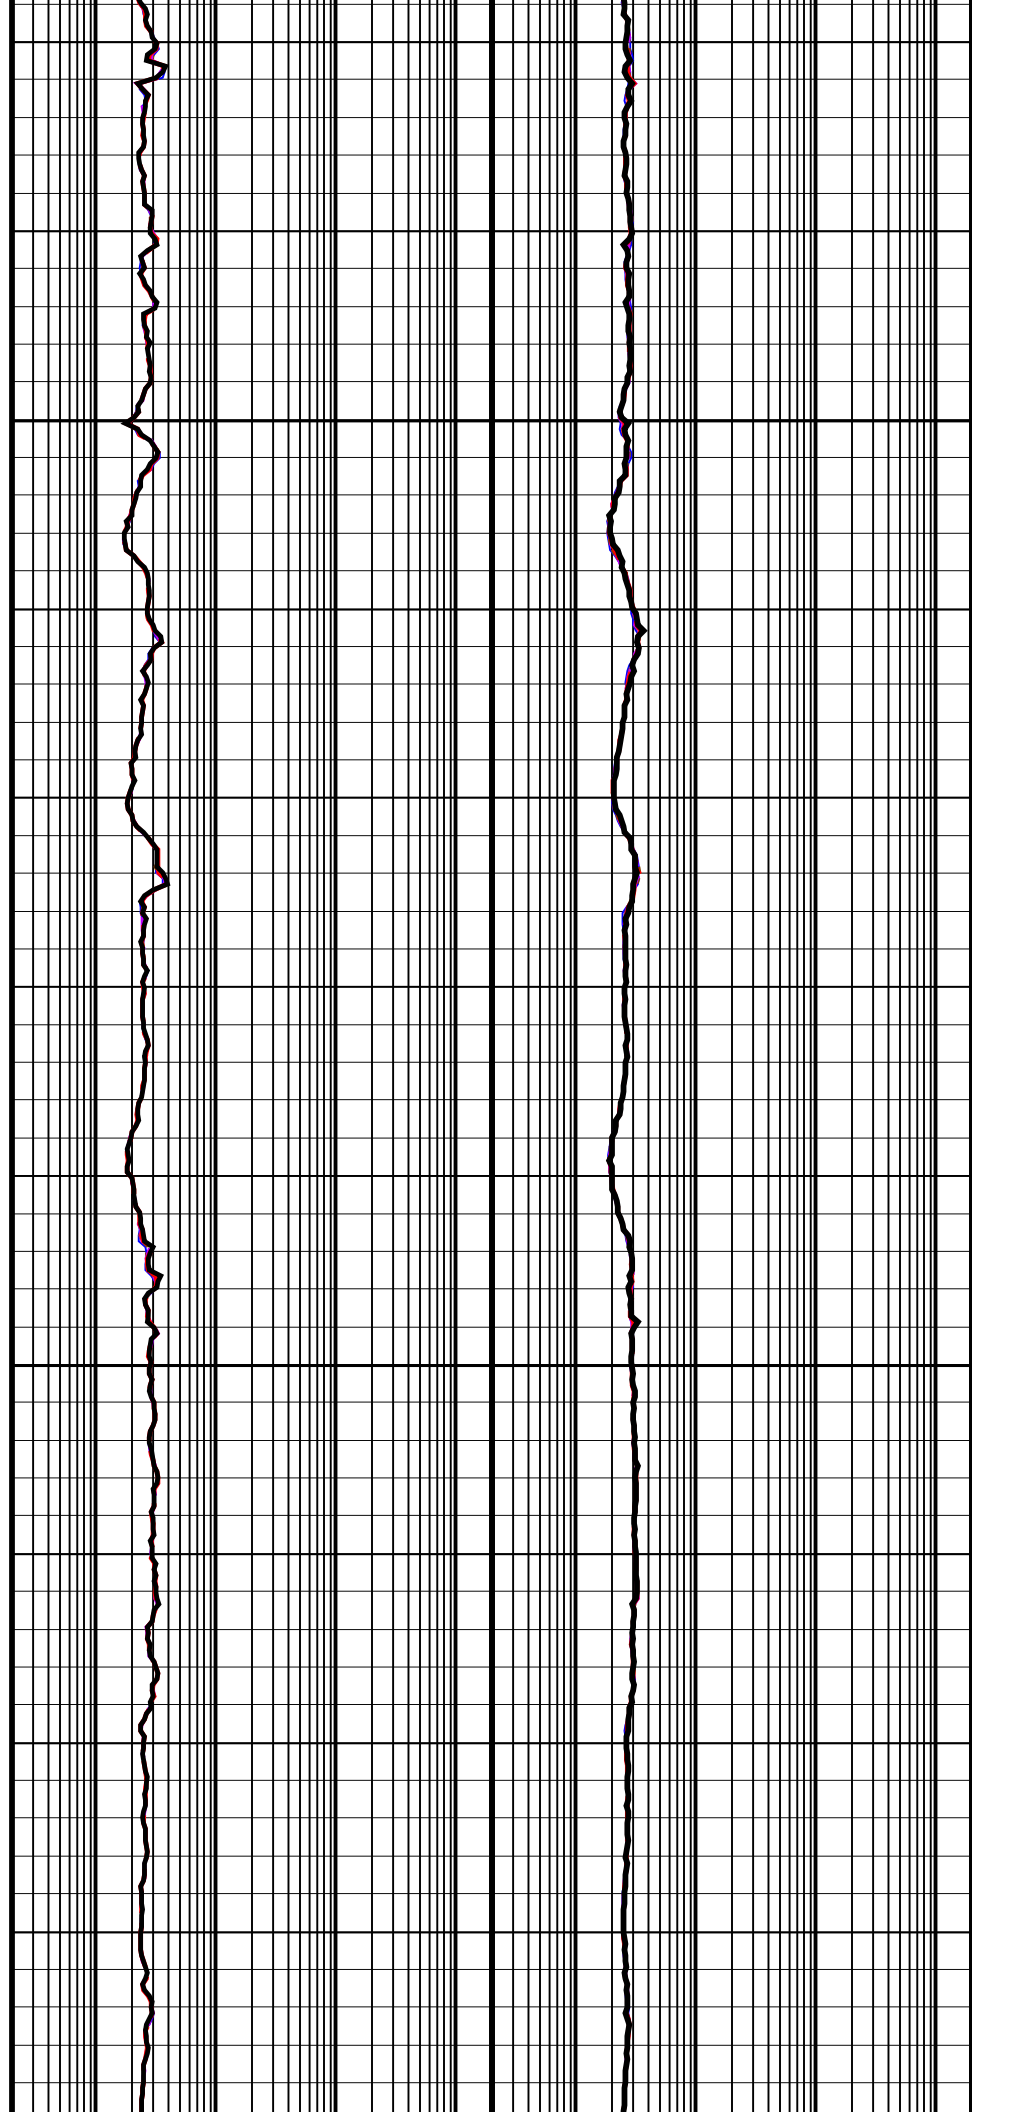




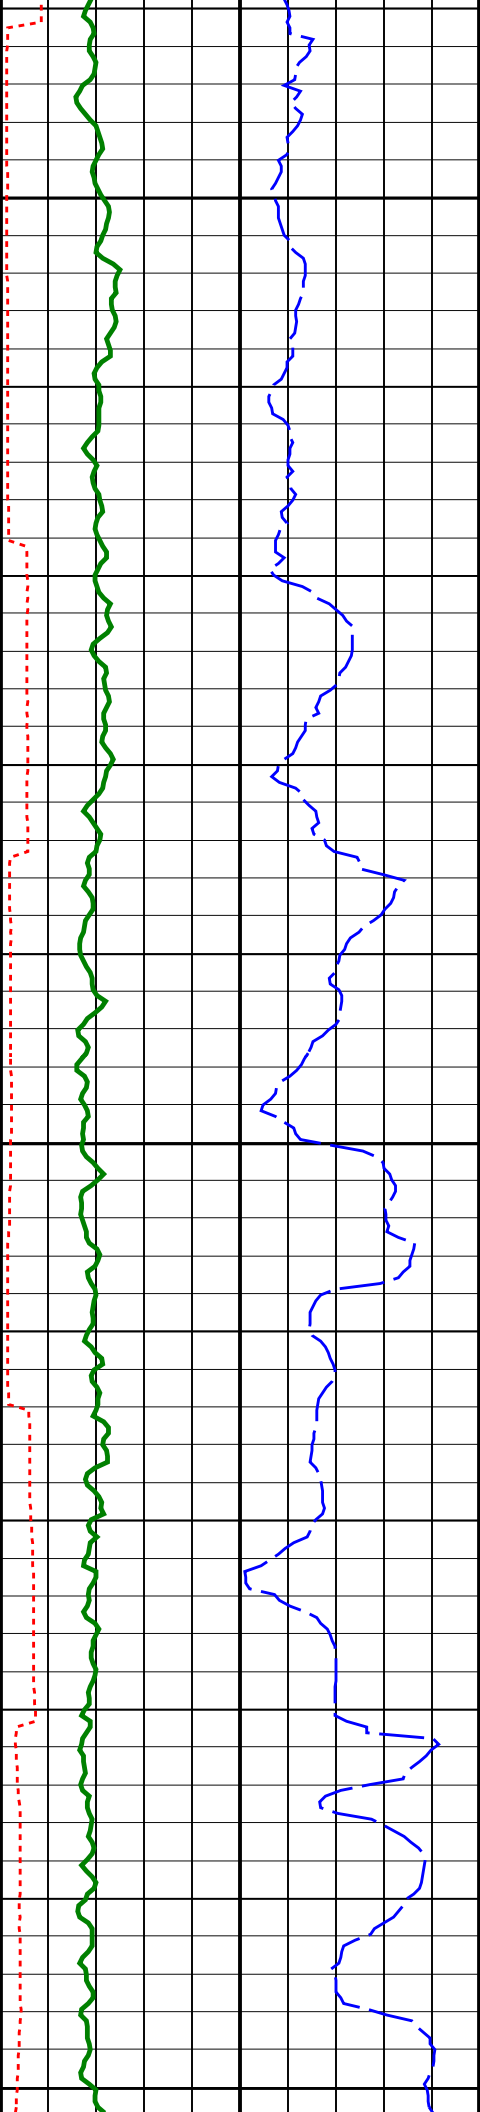


825  
TVD

850  
TVD

875

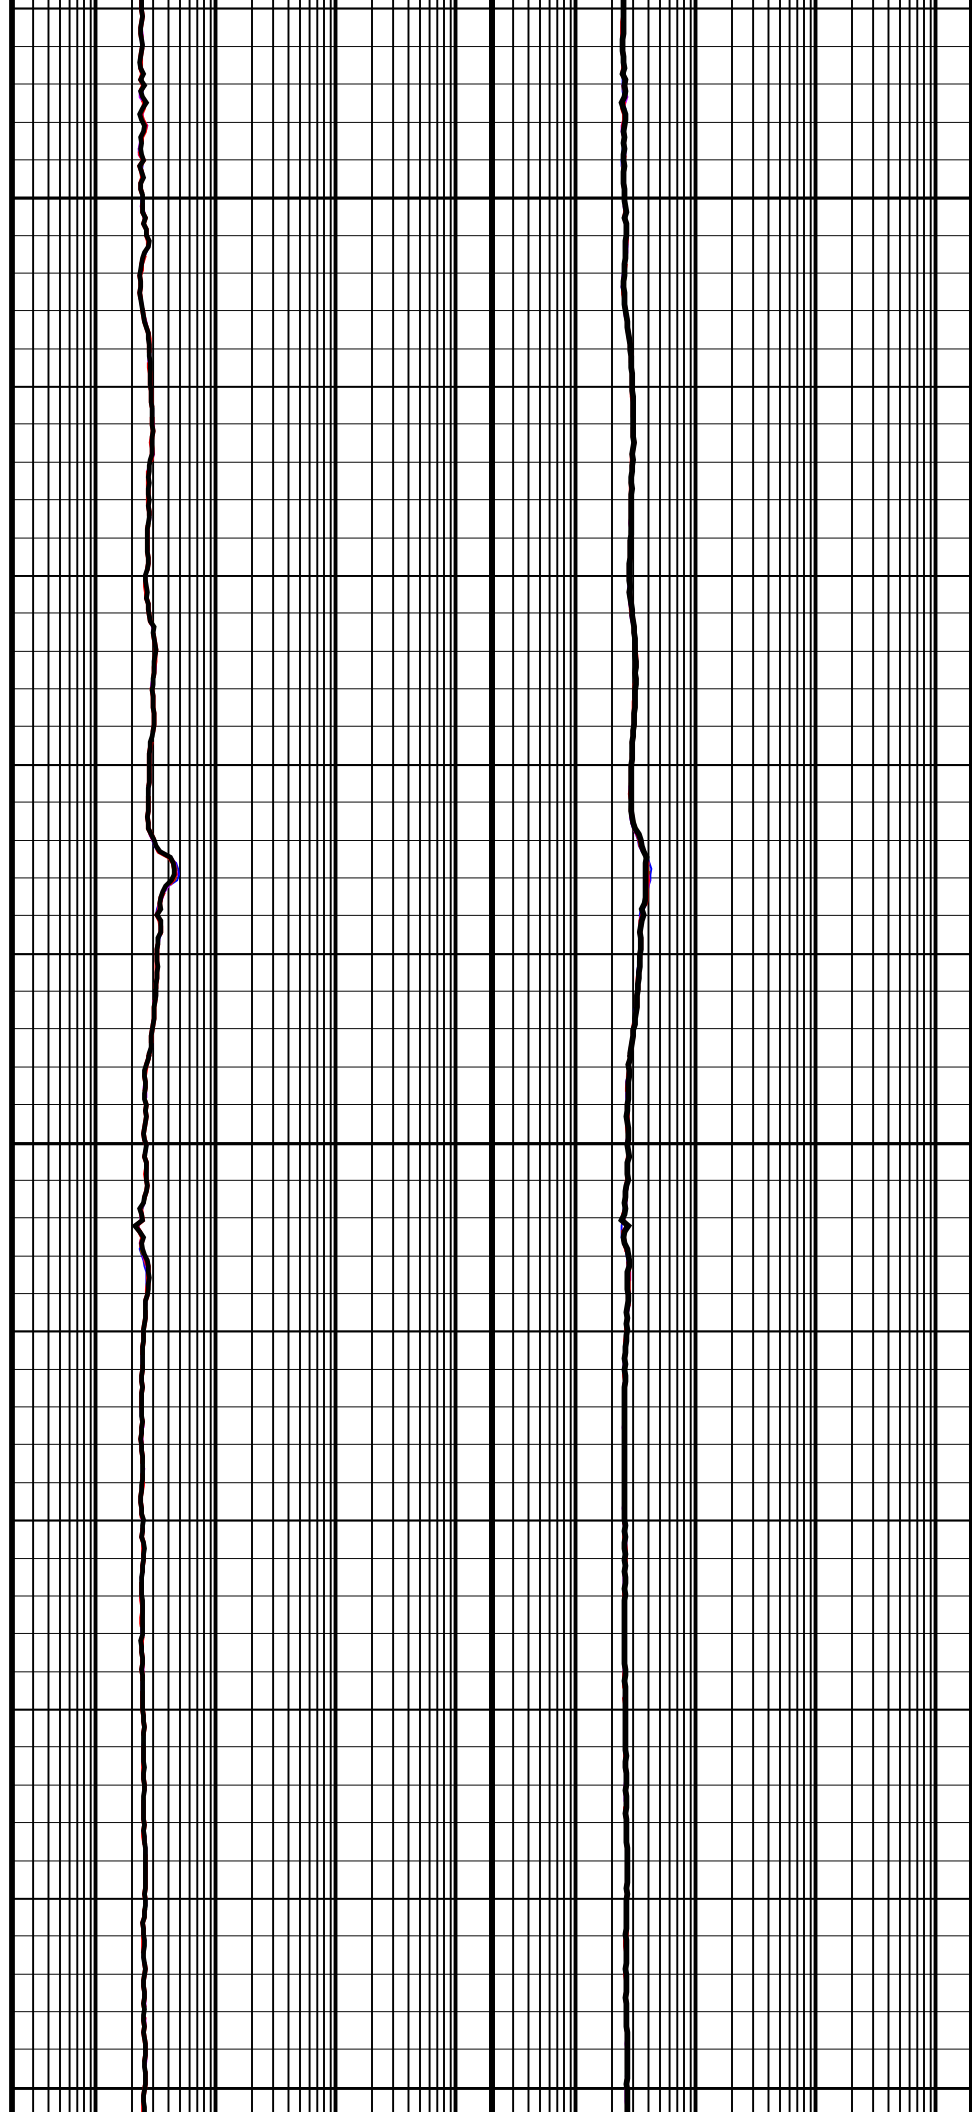


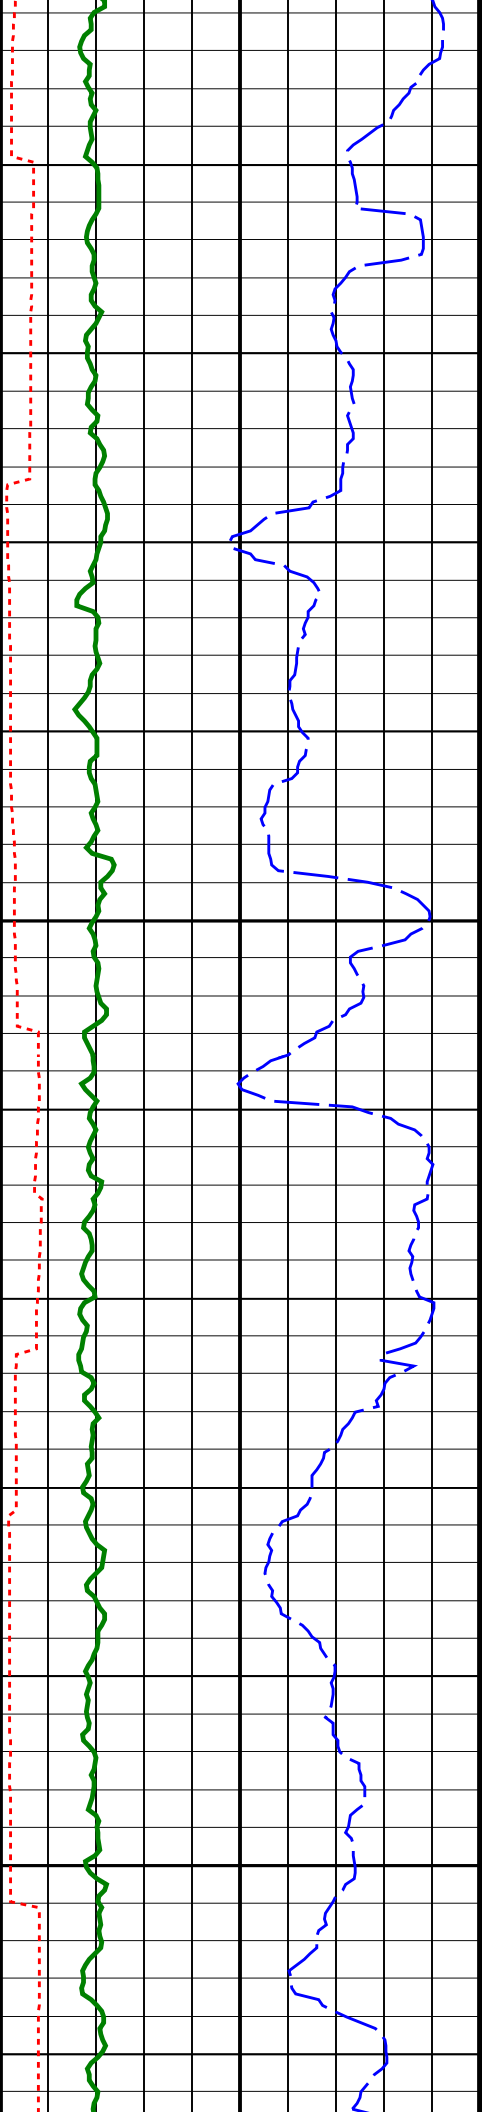


TVD

900  
TVD


925  
TVD

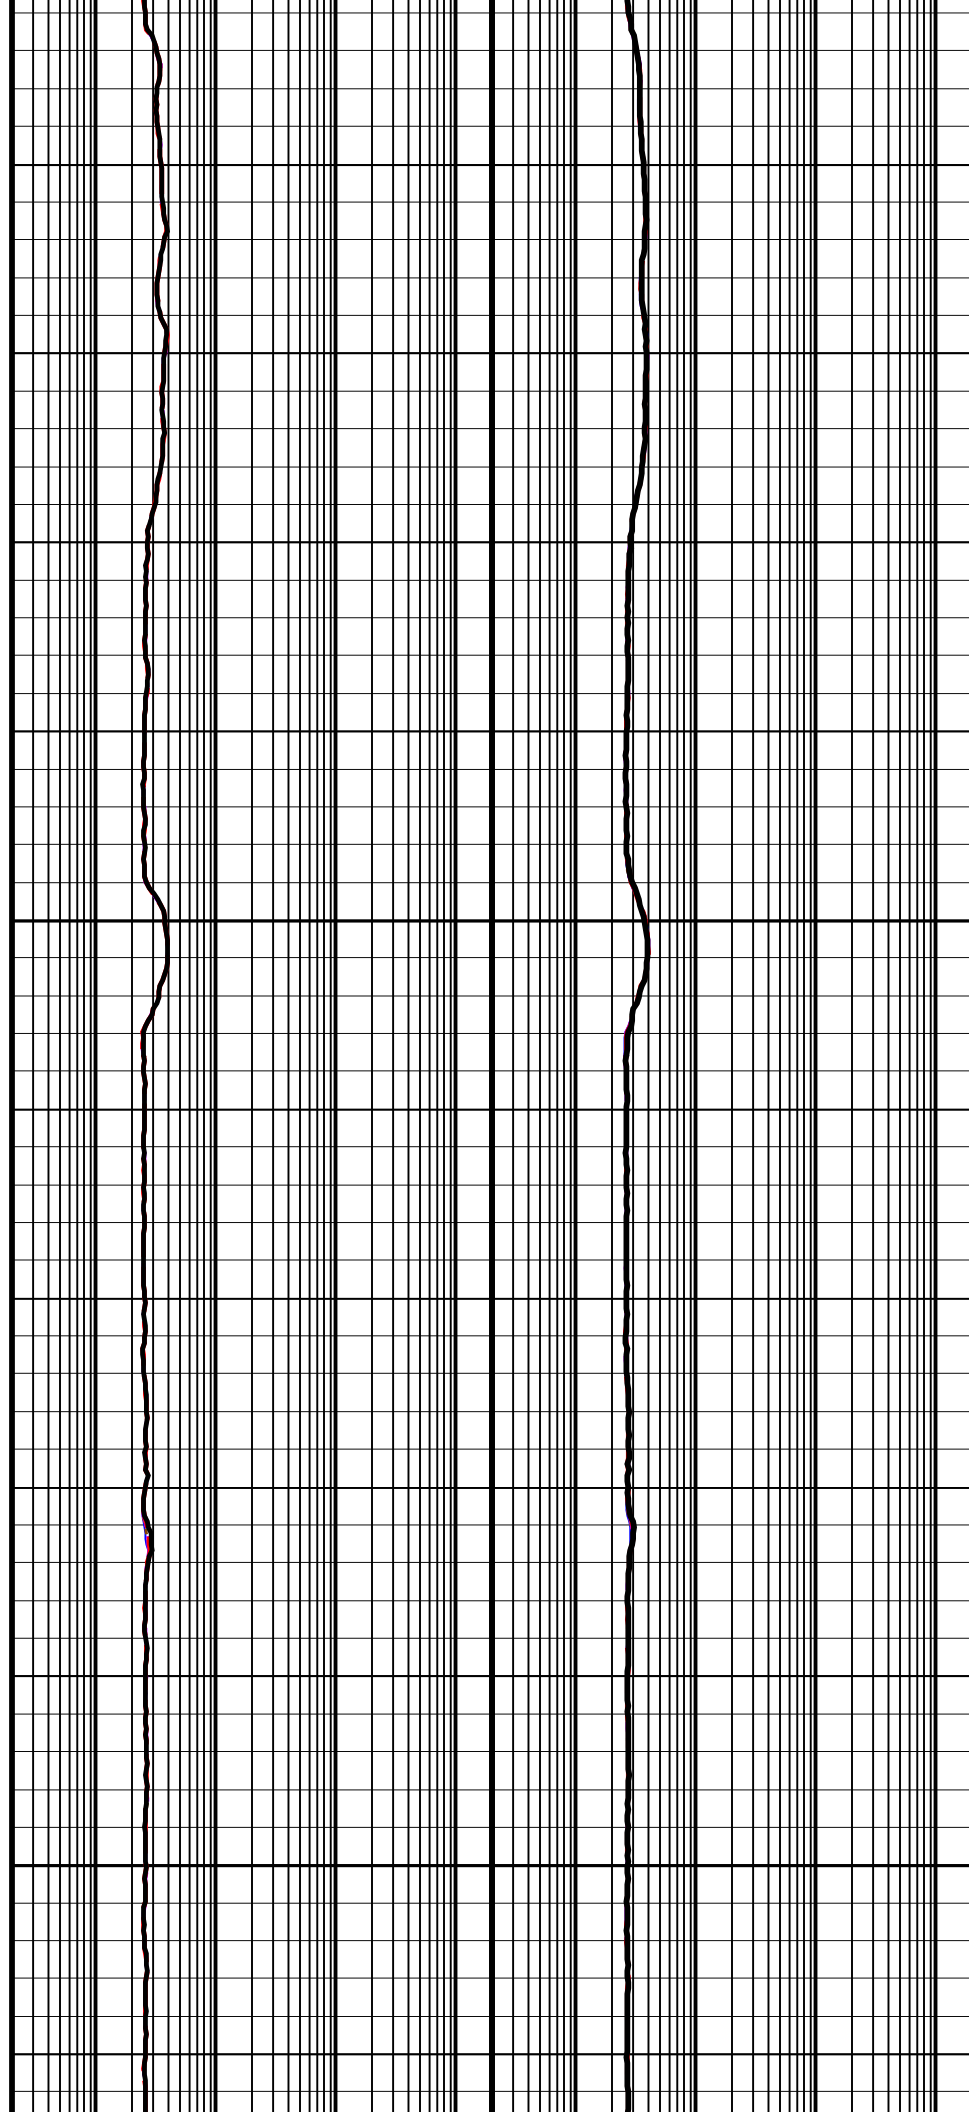


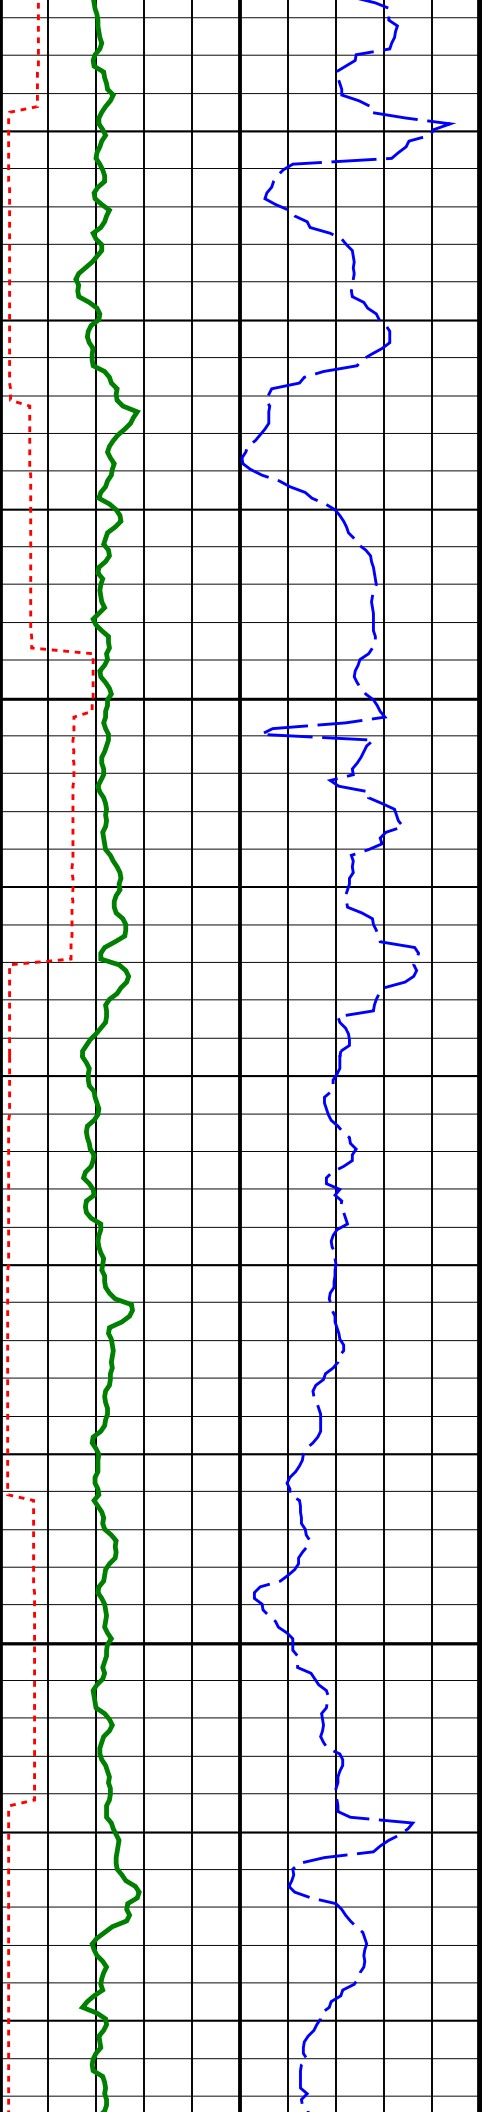

950  
TVD


975  
TVD

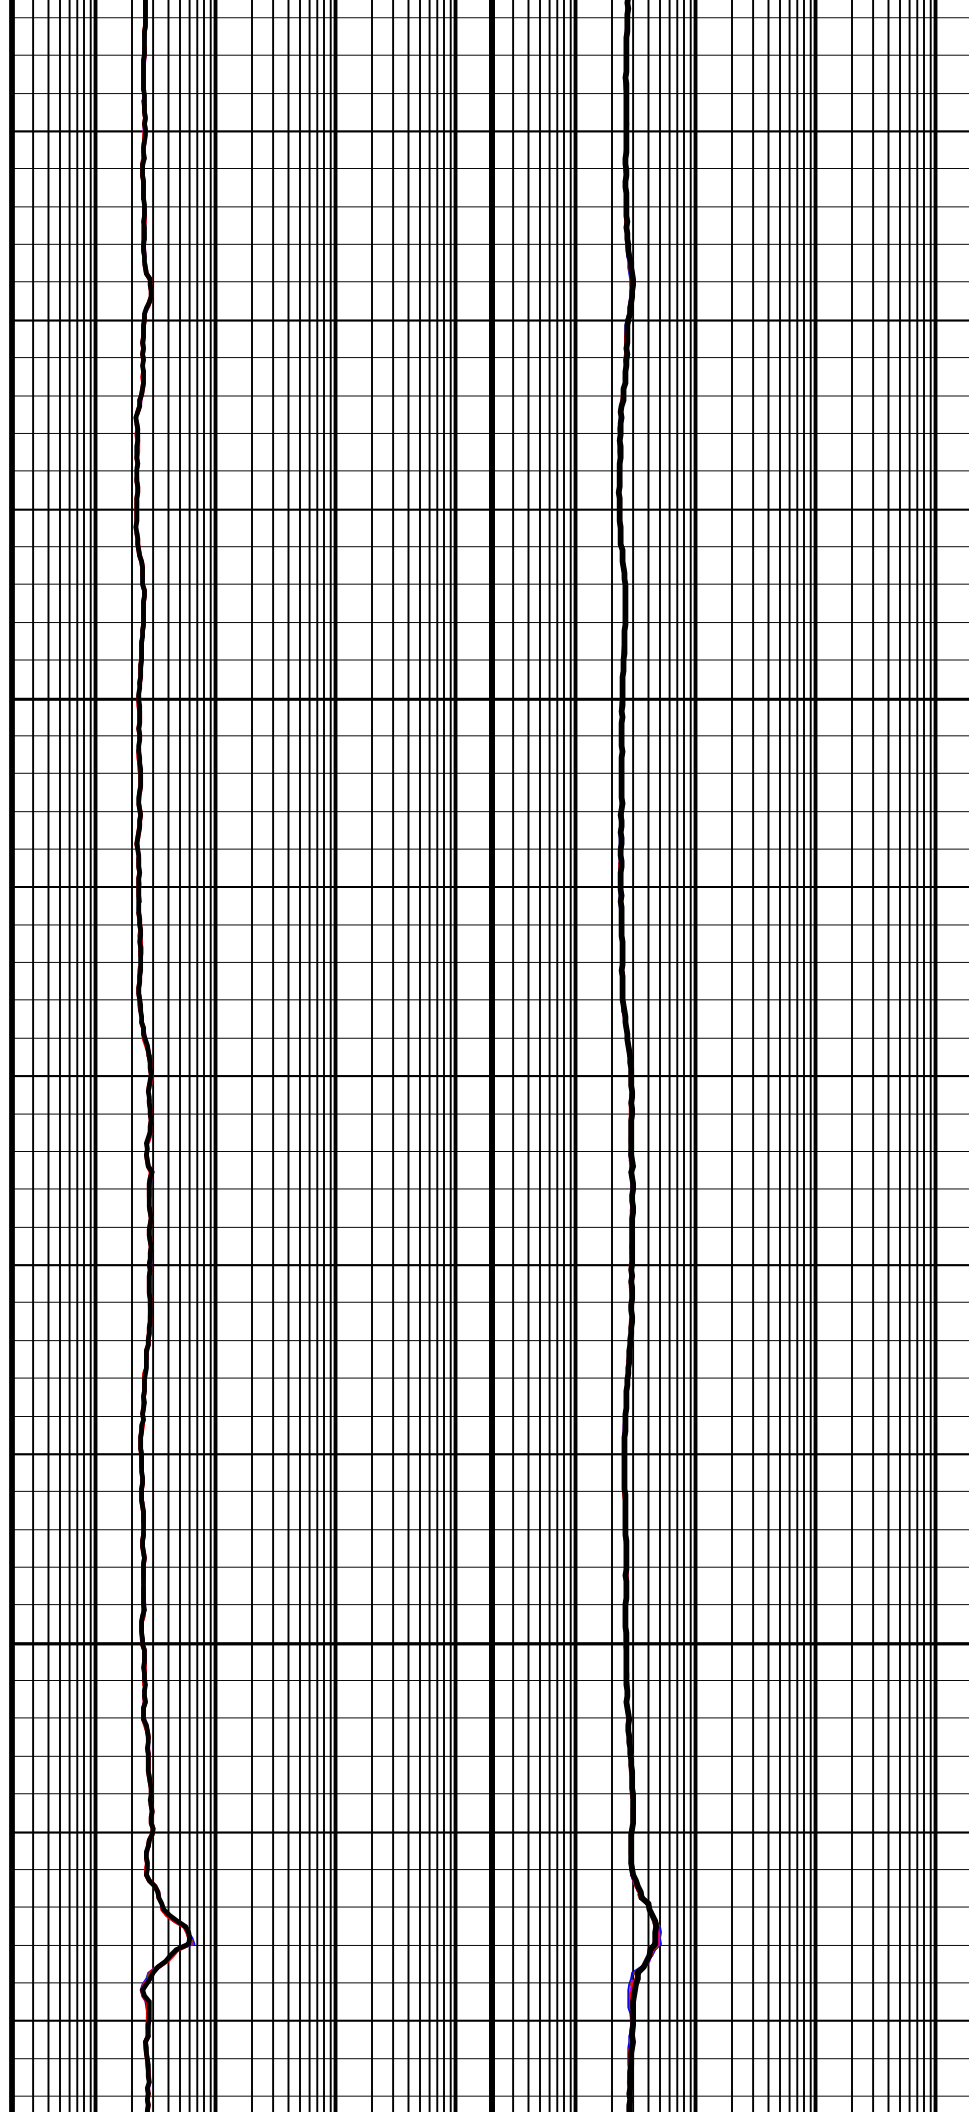


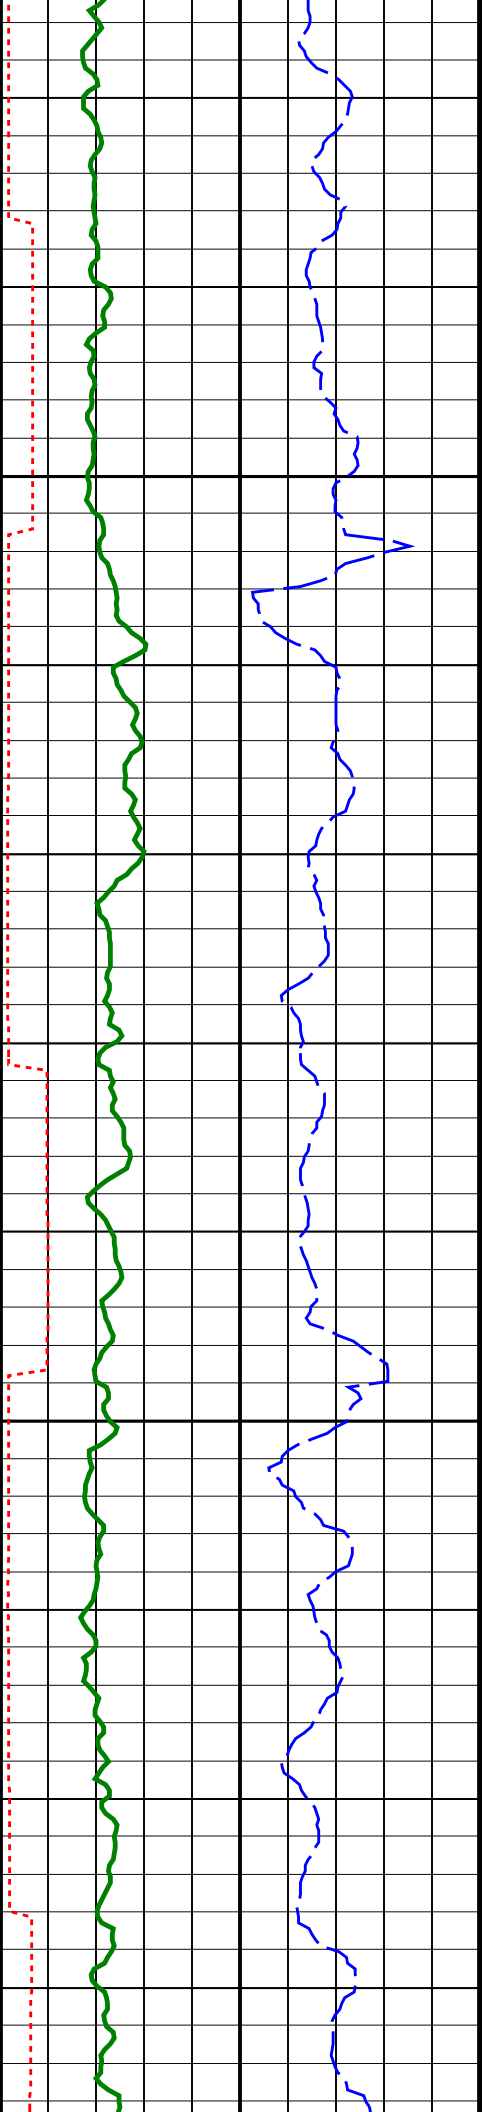

1000  
TVD


1025  
TVD

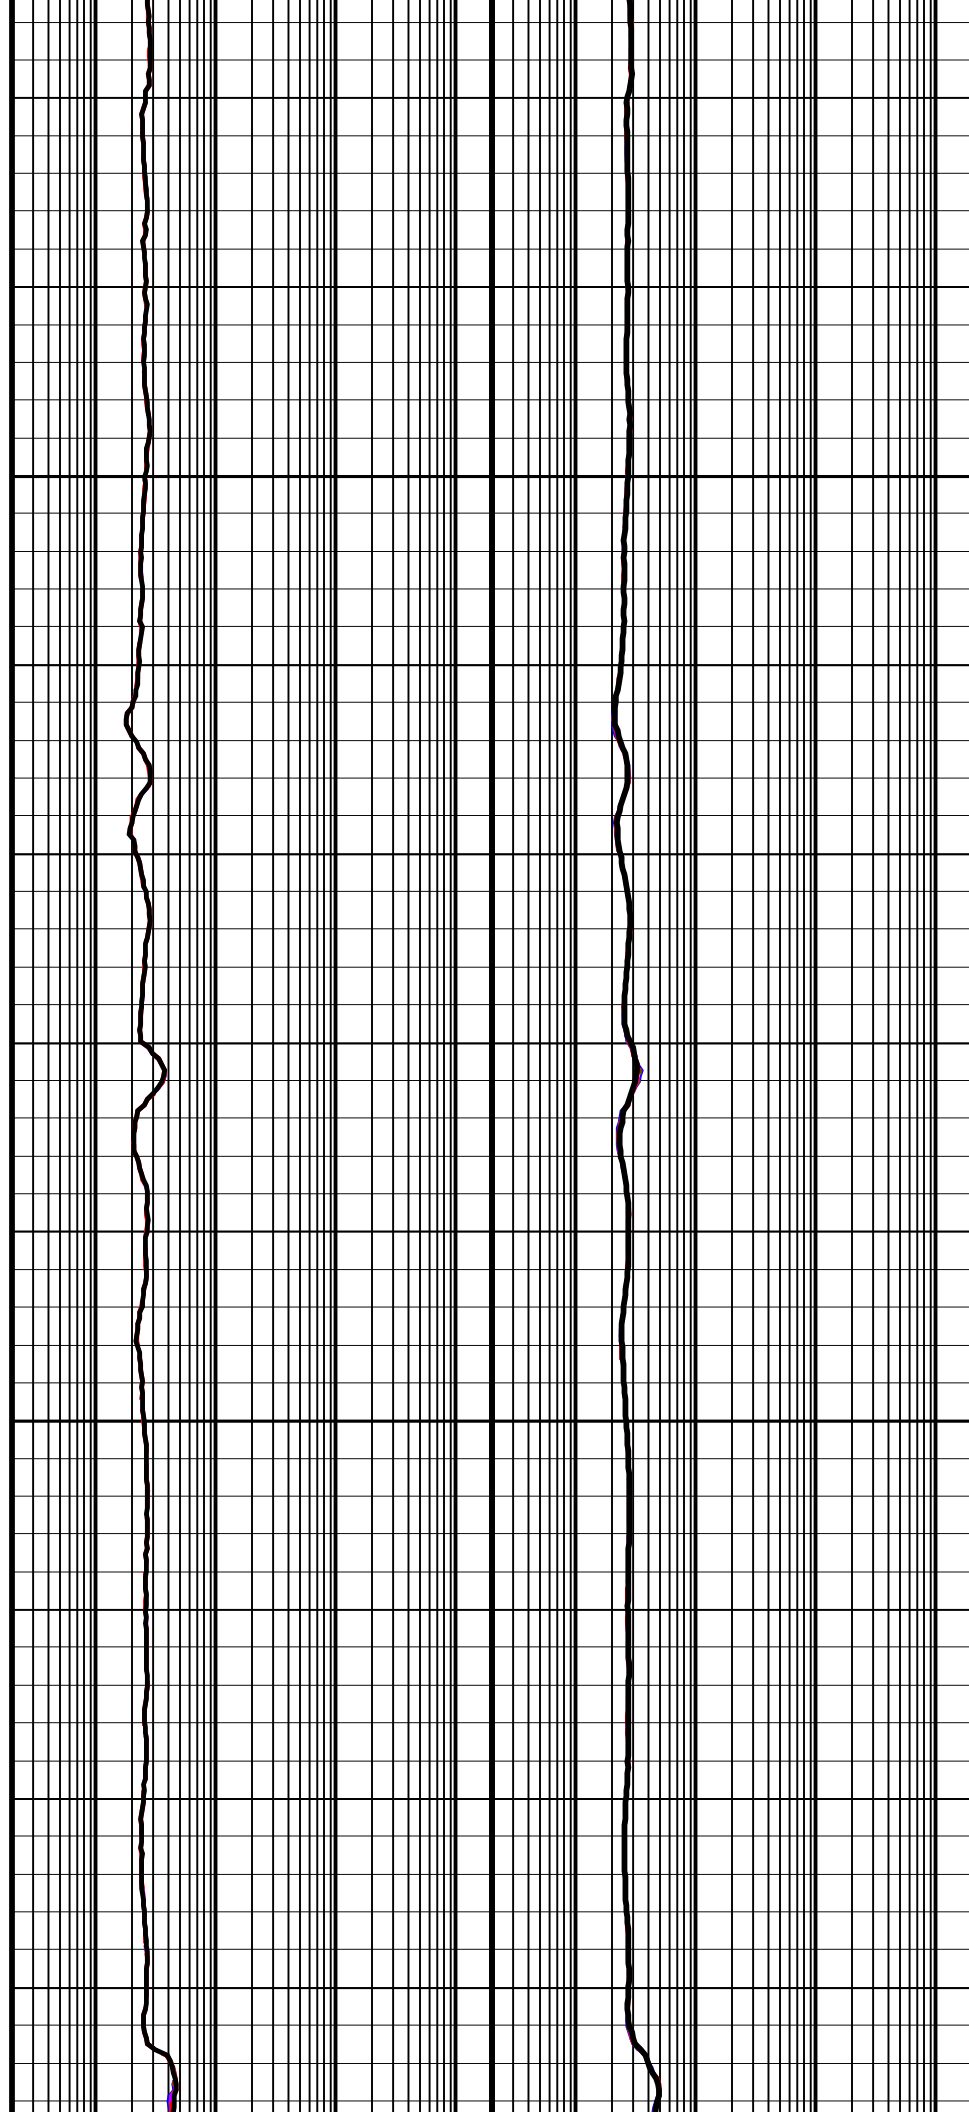


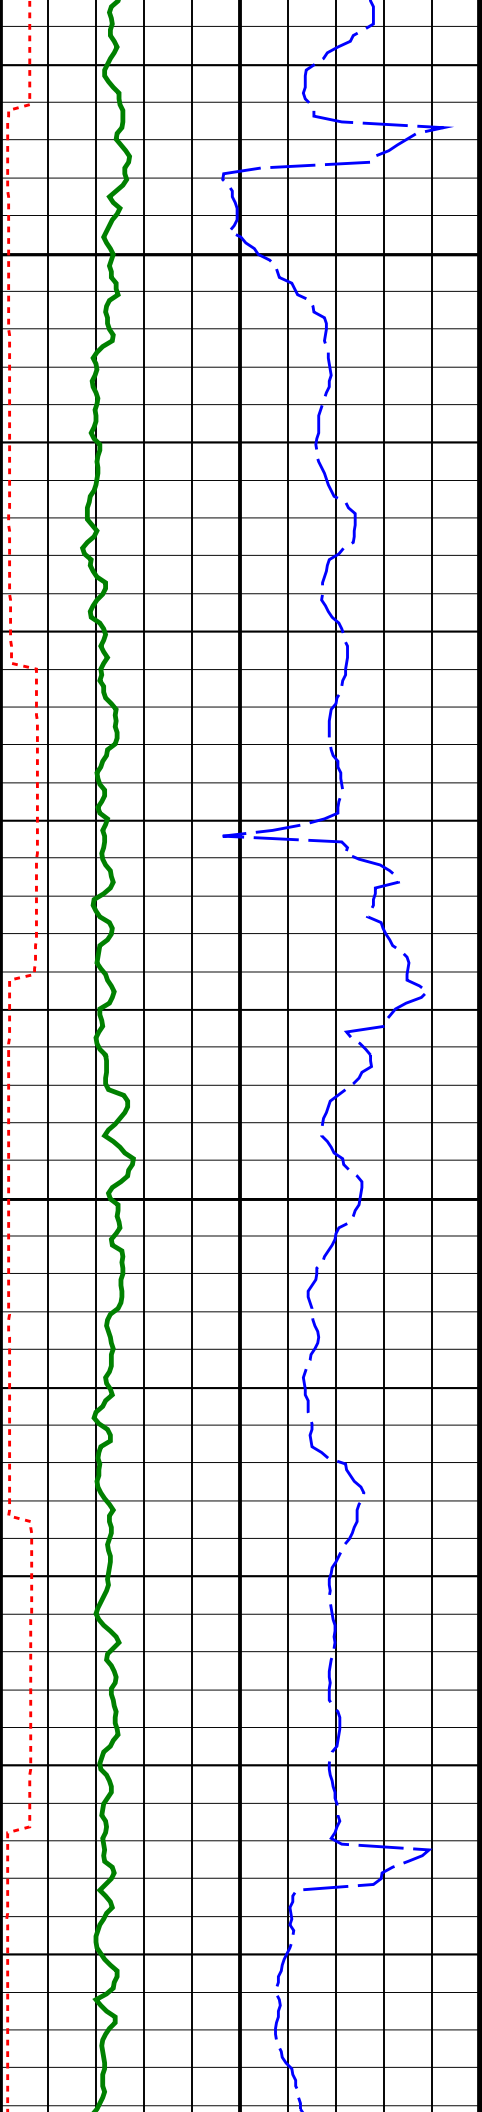

1050  
TVD

1075  
TVD

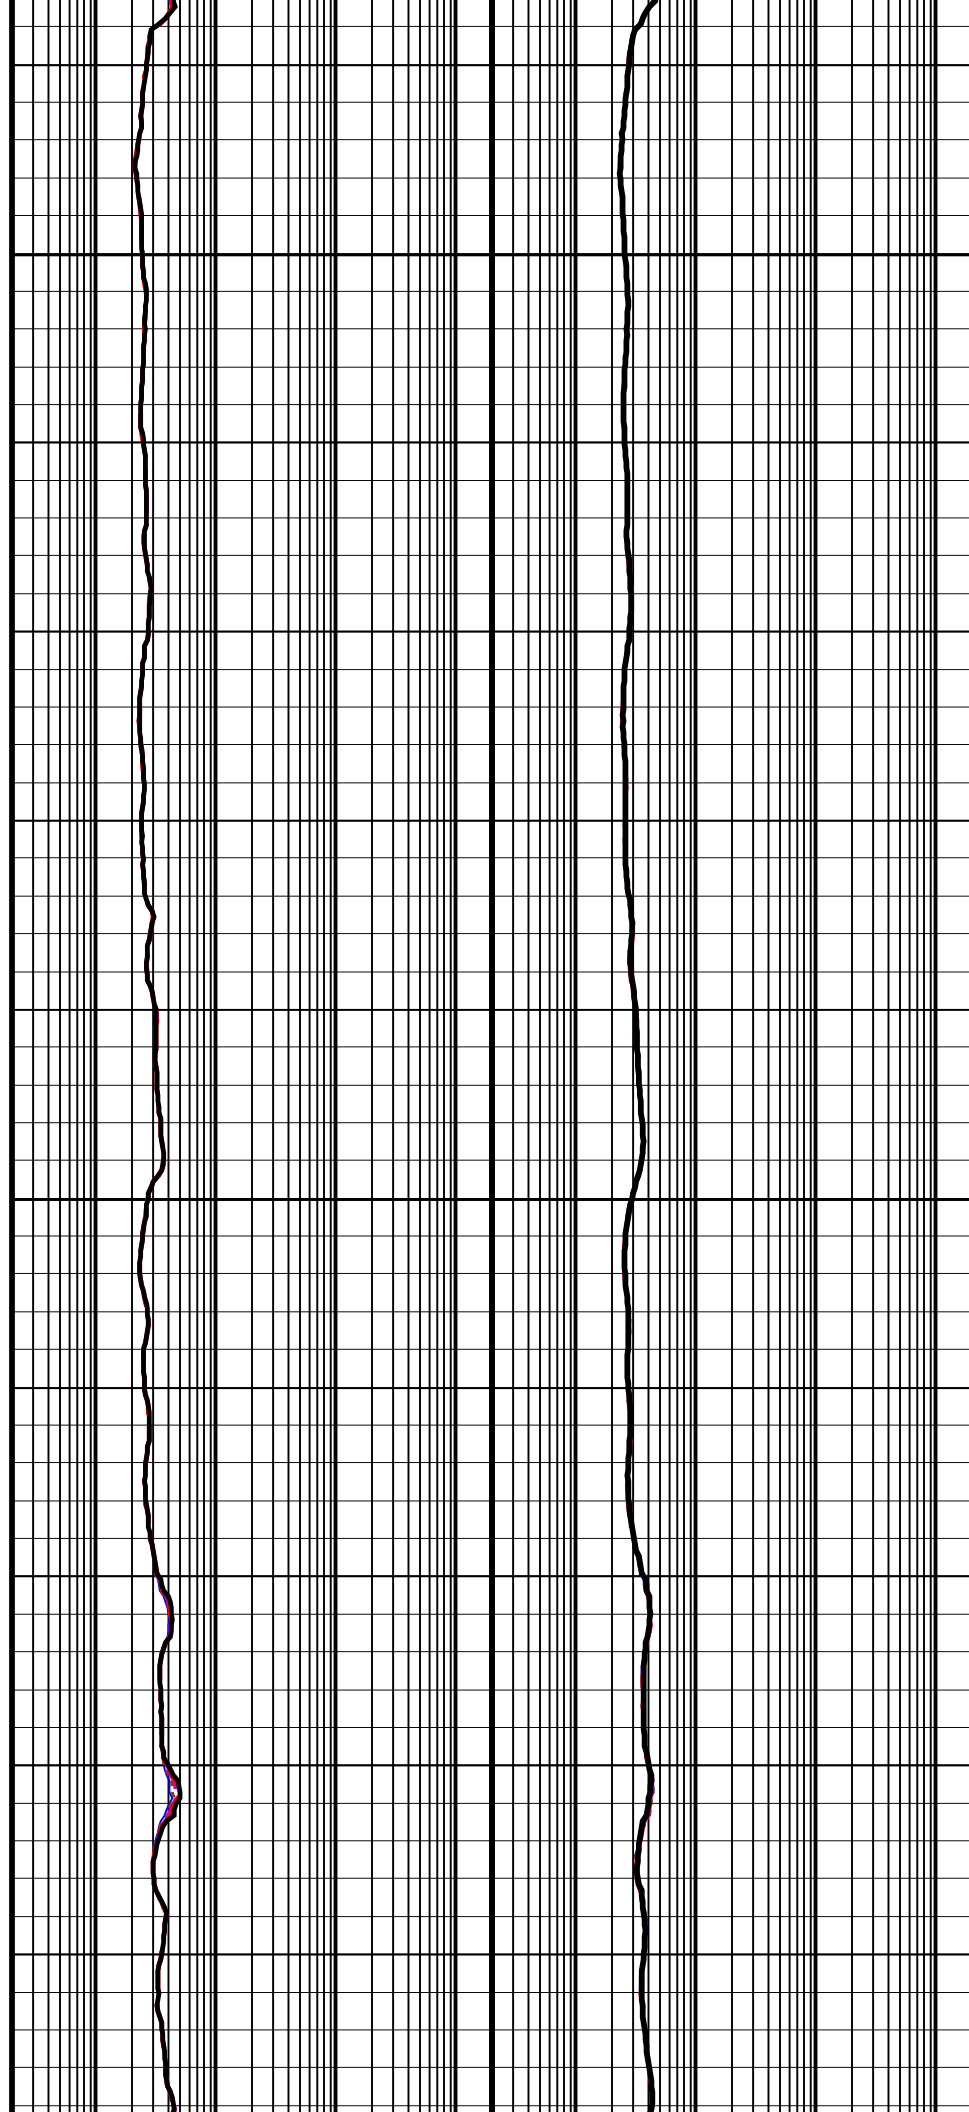


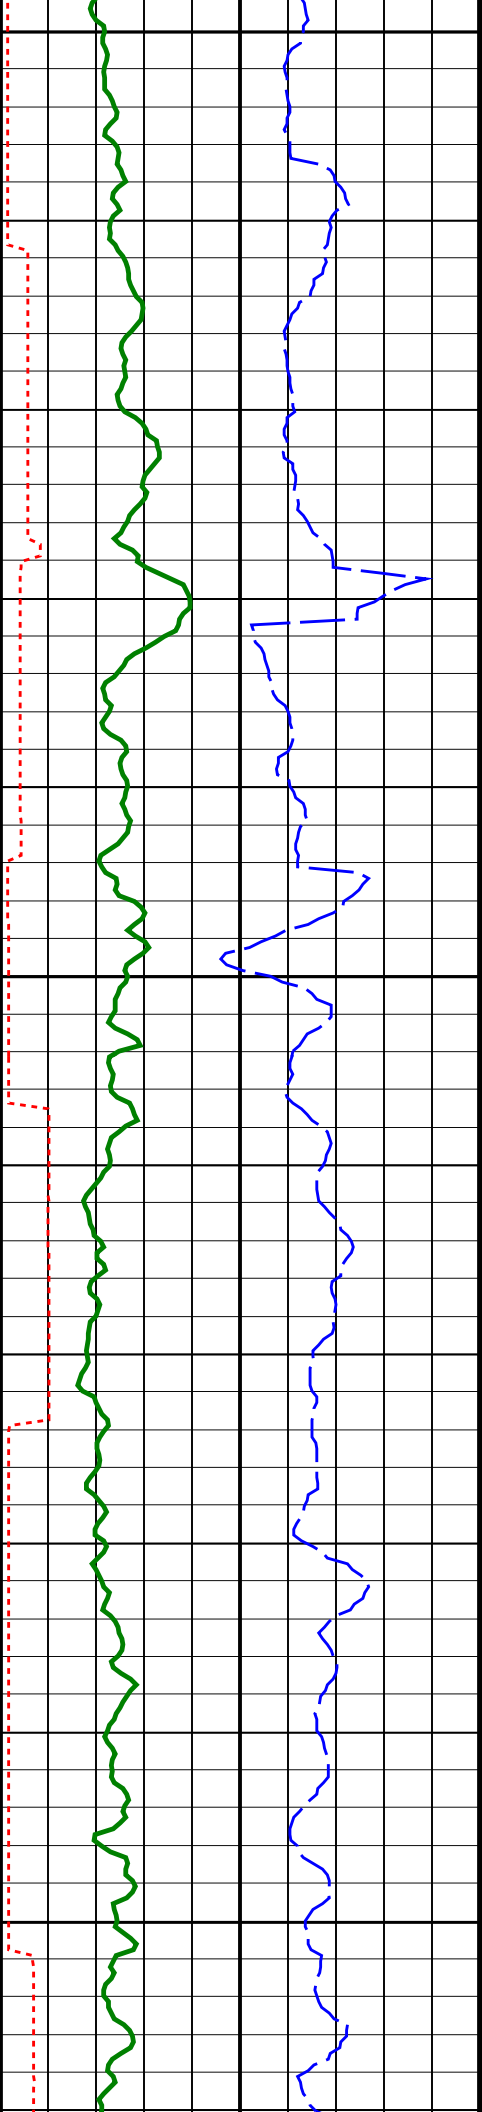


1100  
TVD

1125  
TVD


1150  
TVD

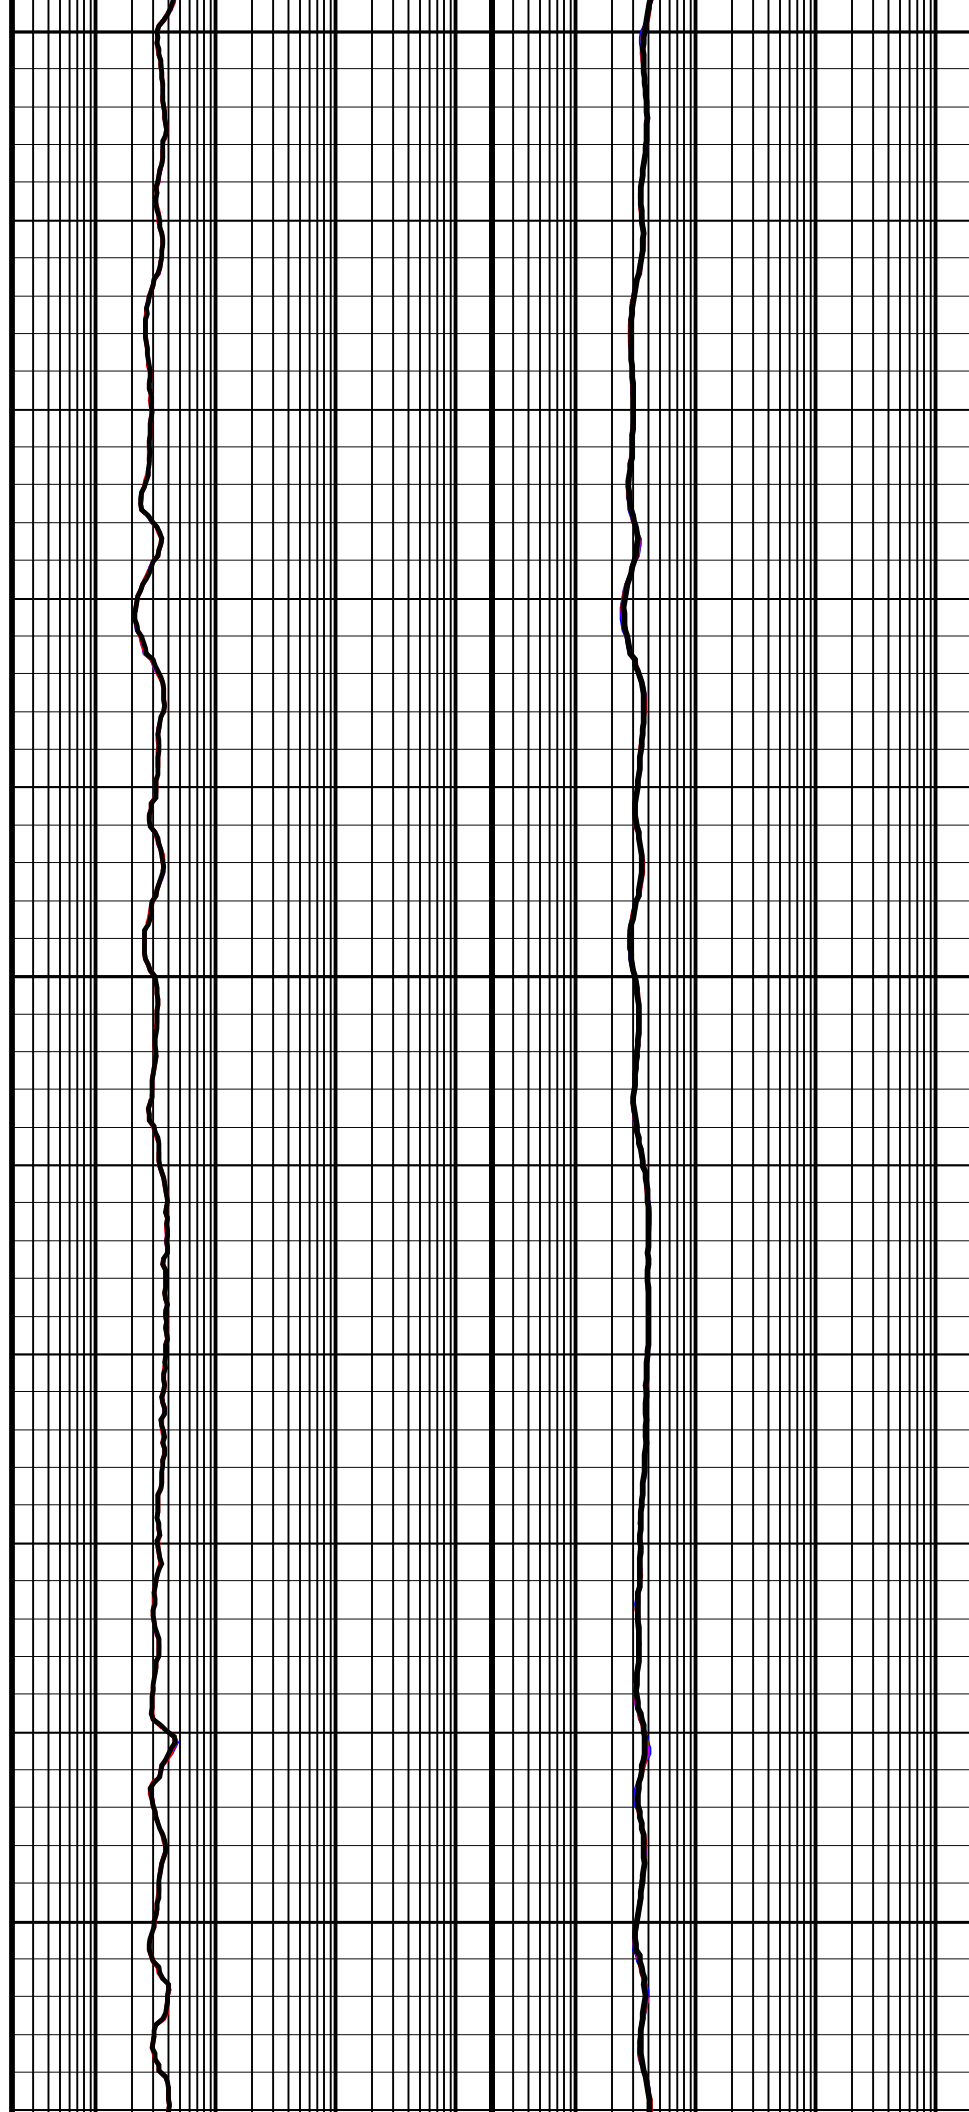


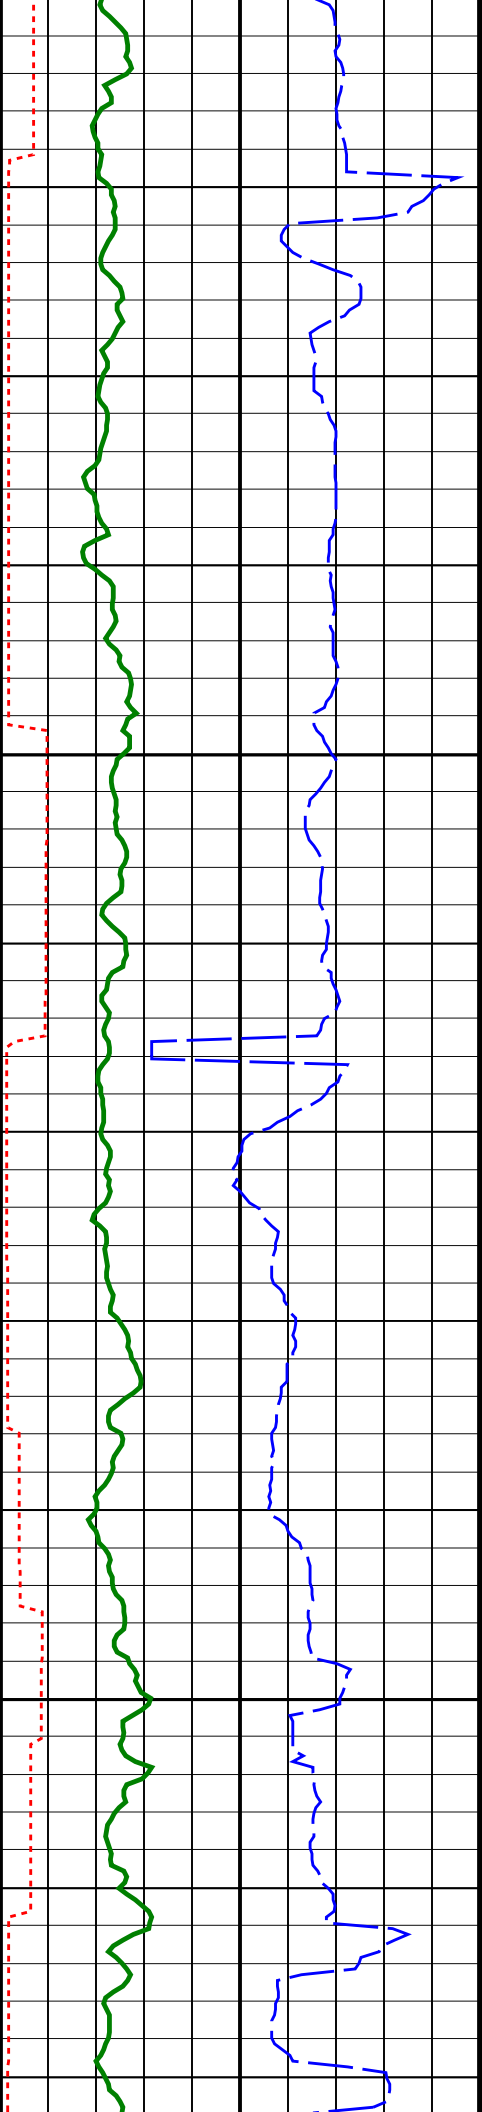

1175  
TVD


1200  
TVD

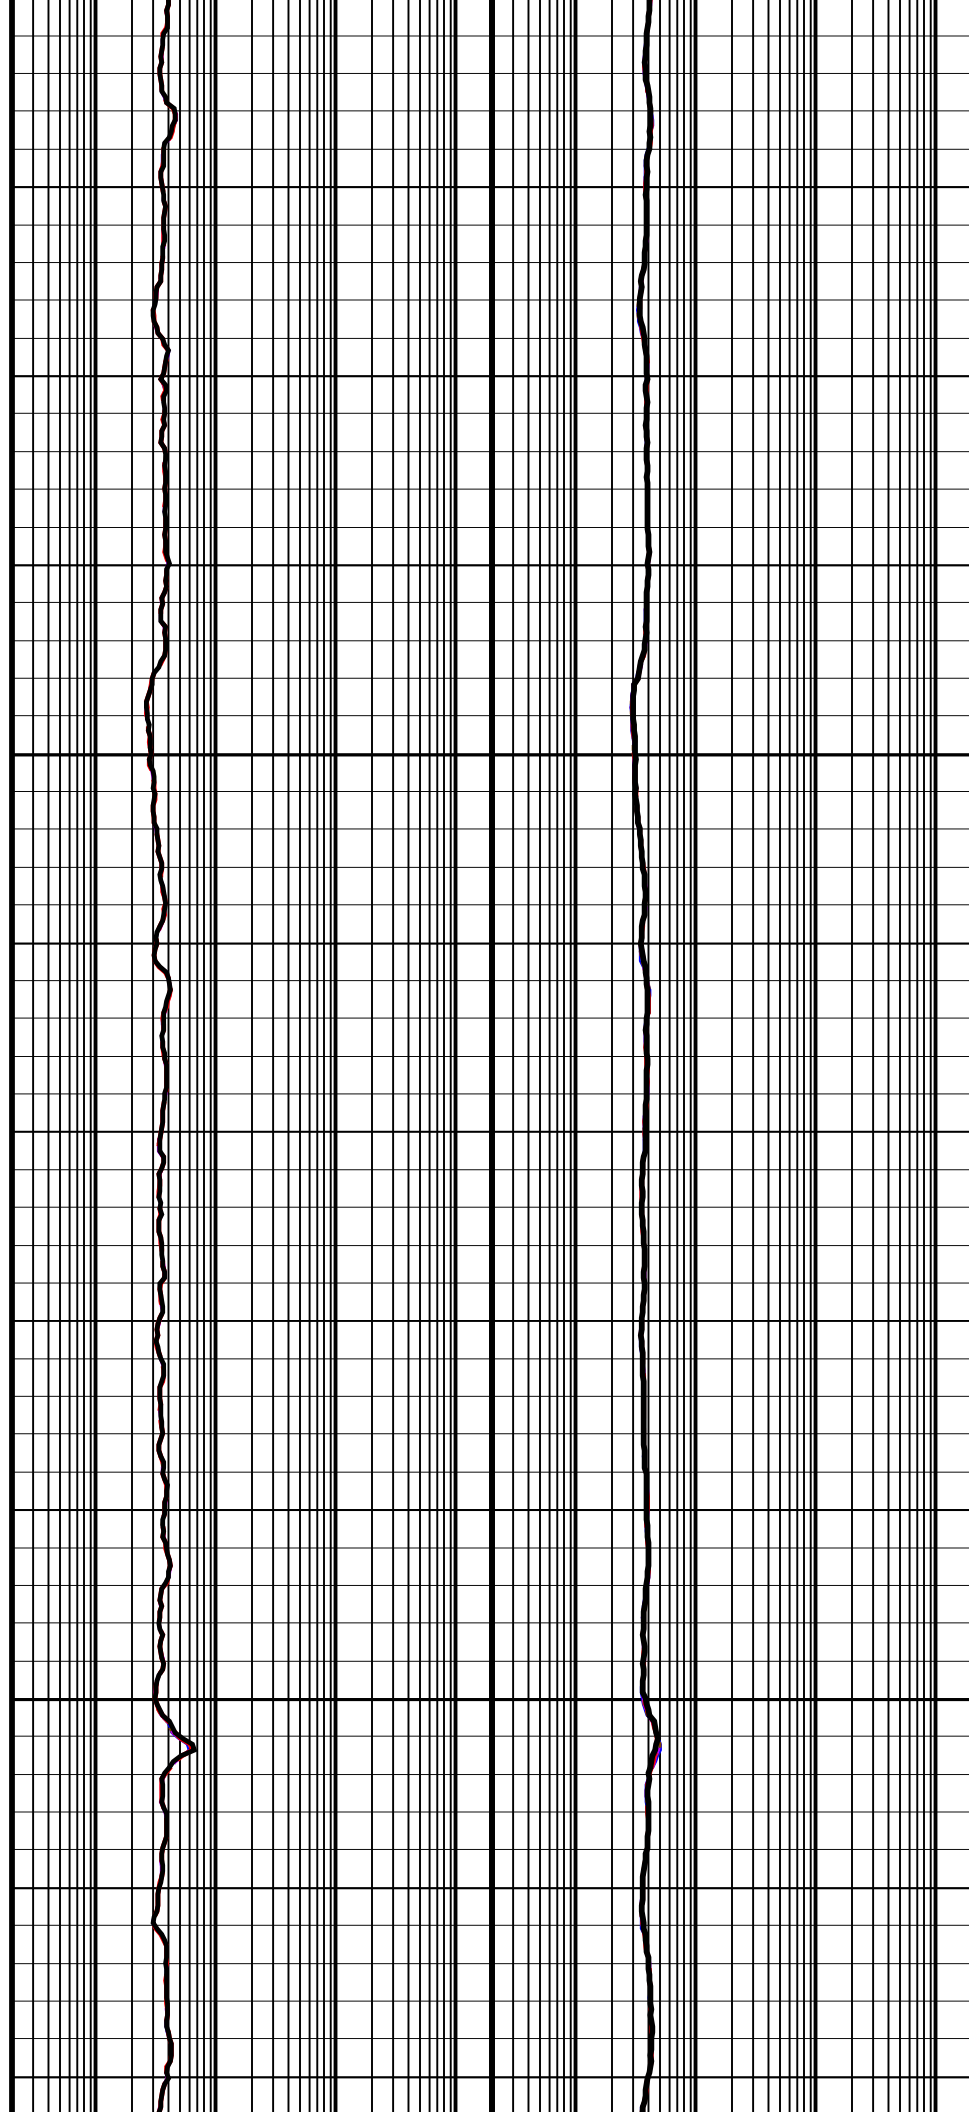

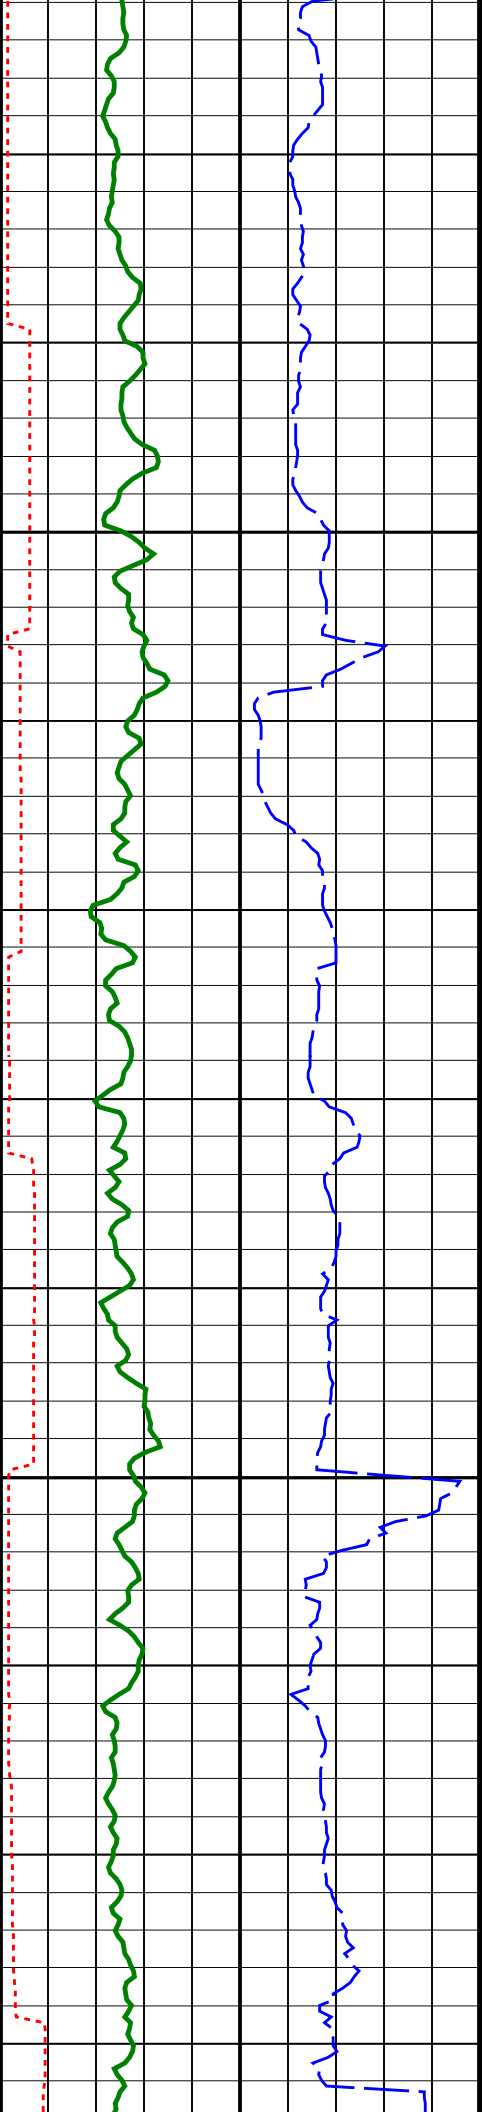


1225  
TVD

1250  
TVD

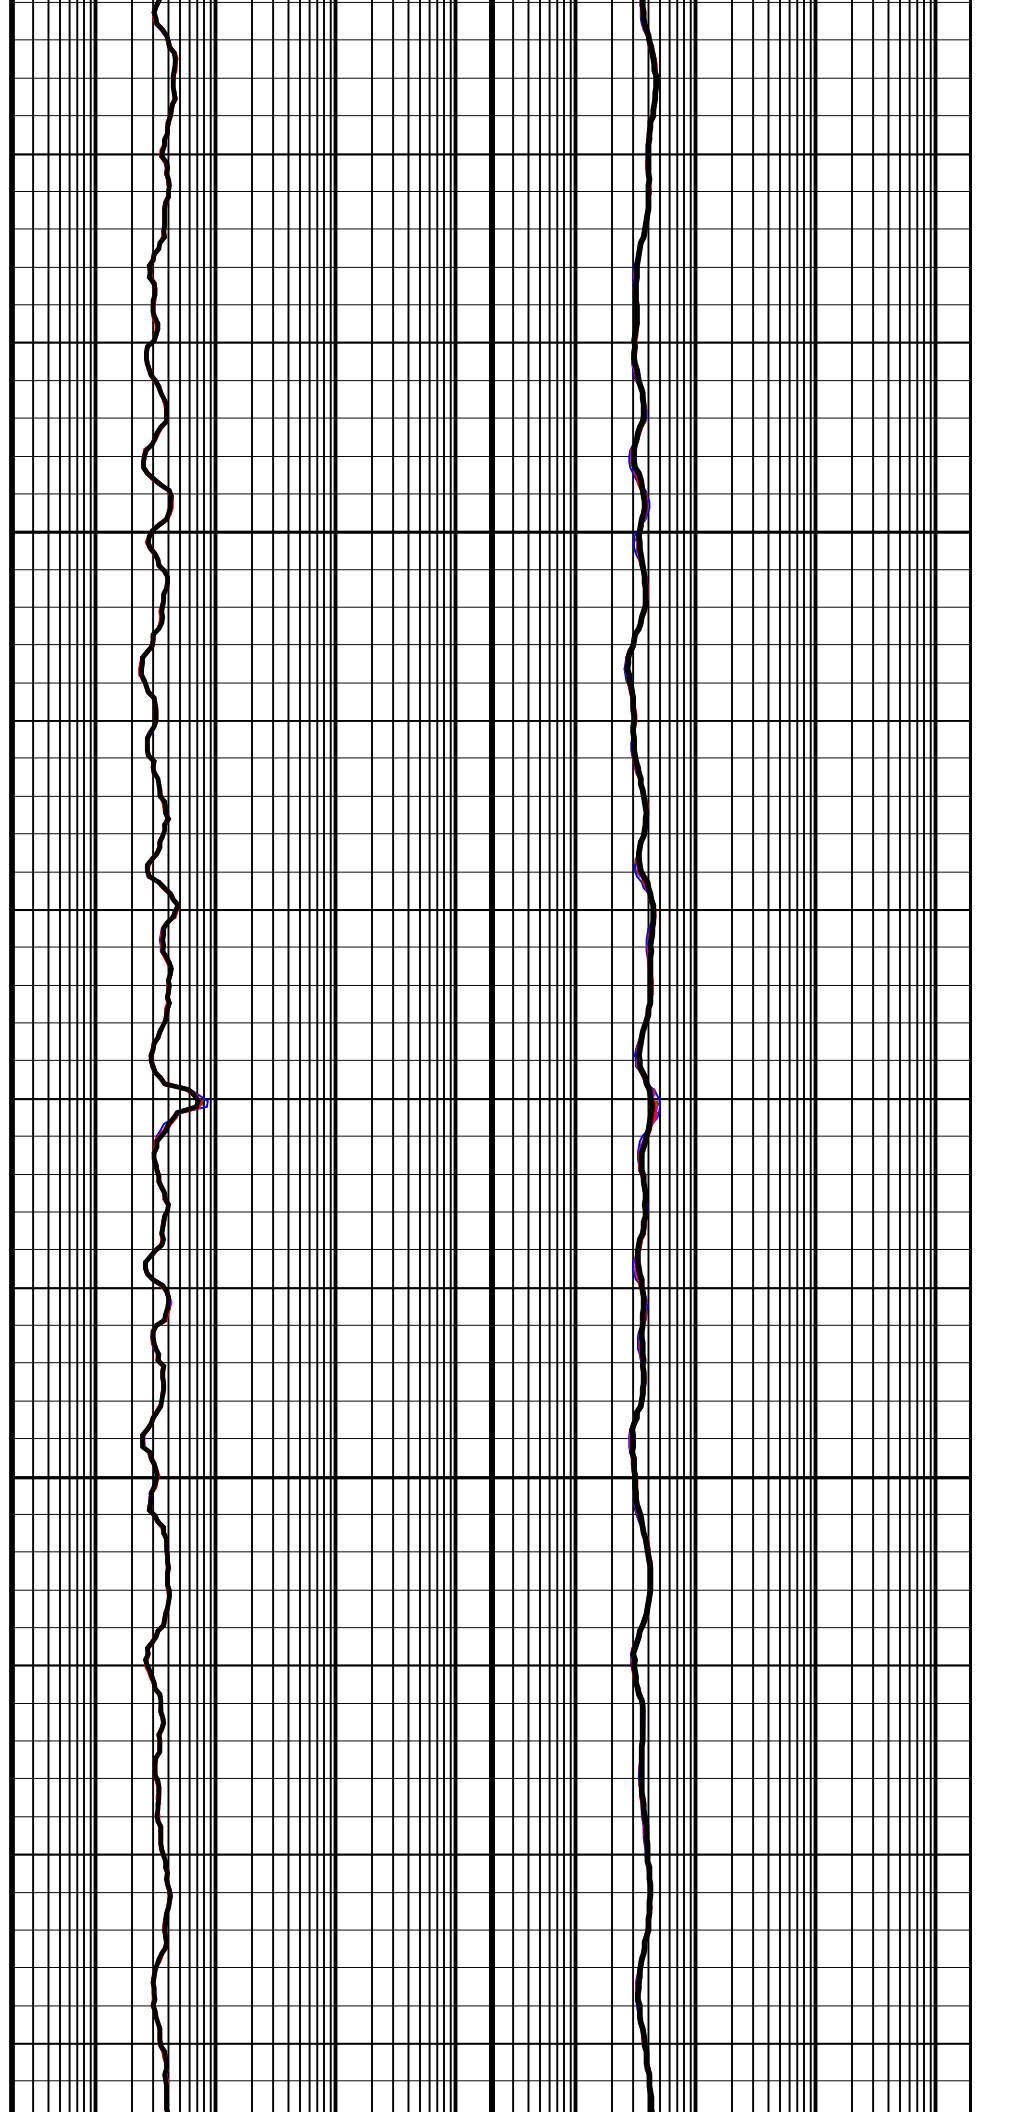





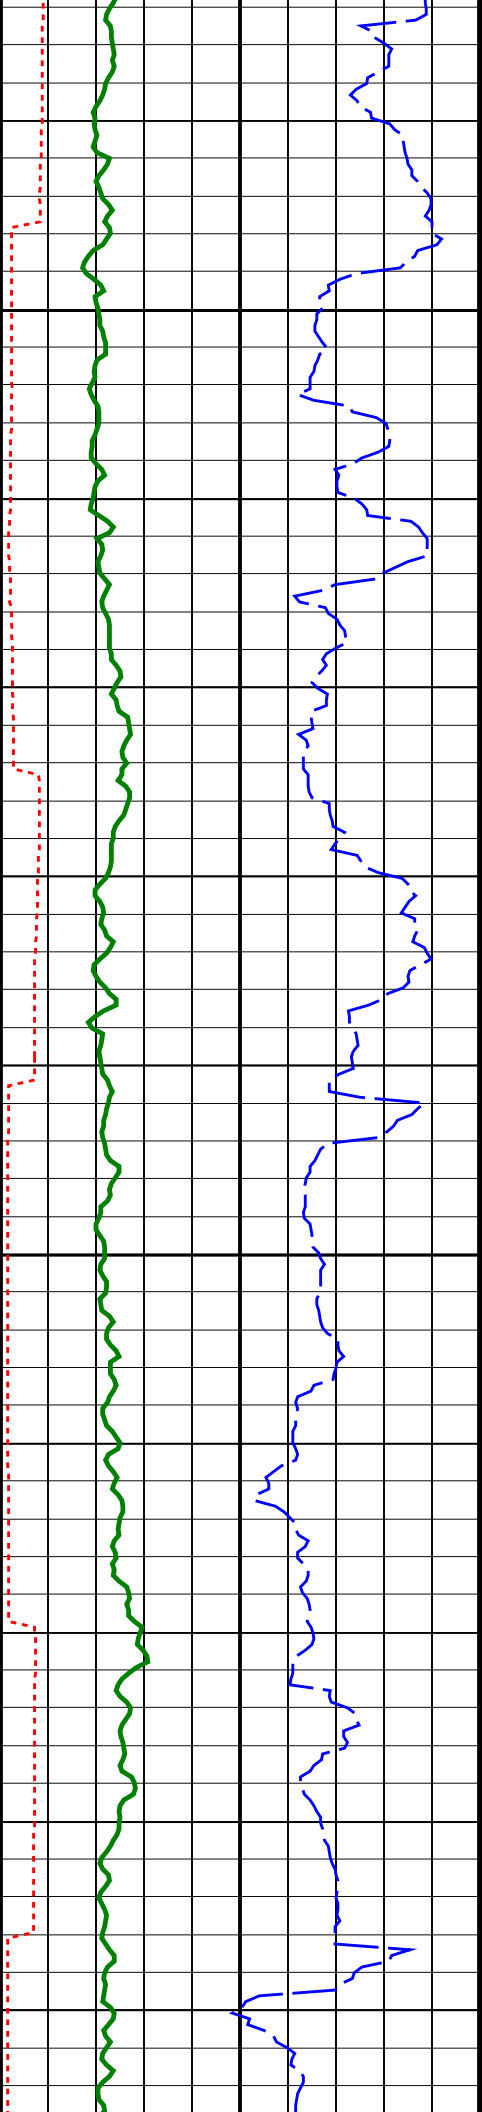

1275  
TVD

1300  
TVD

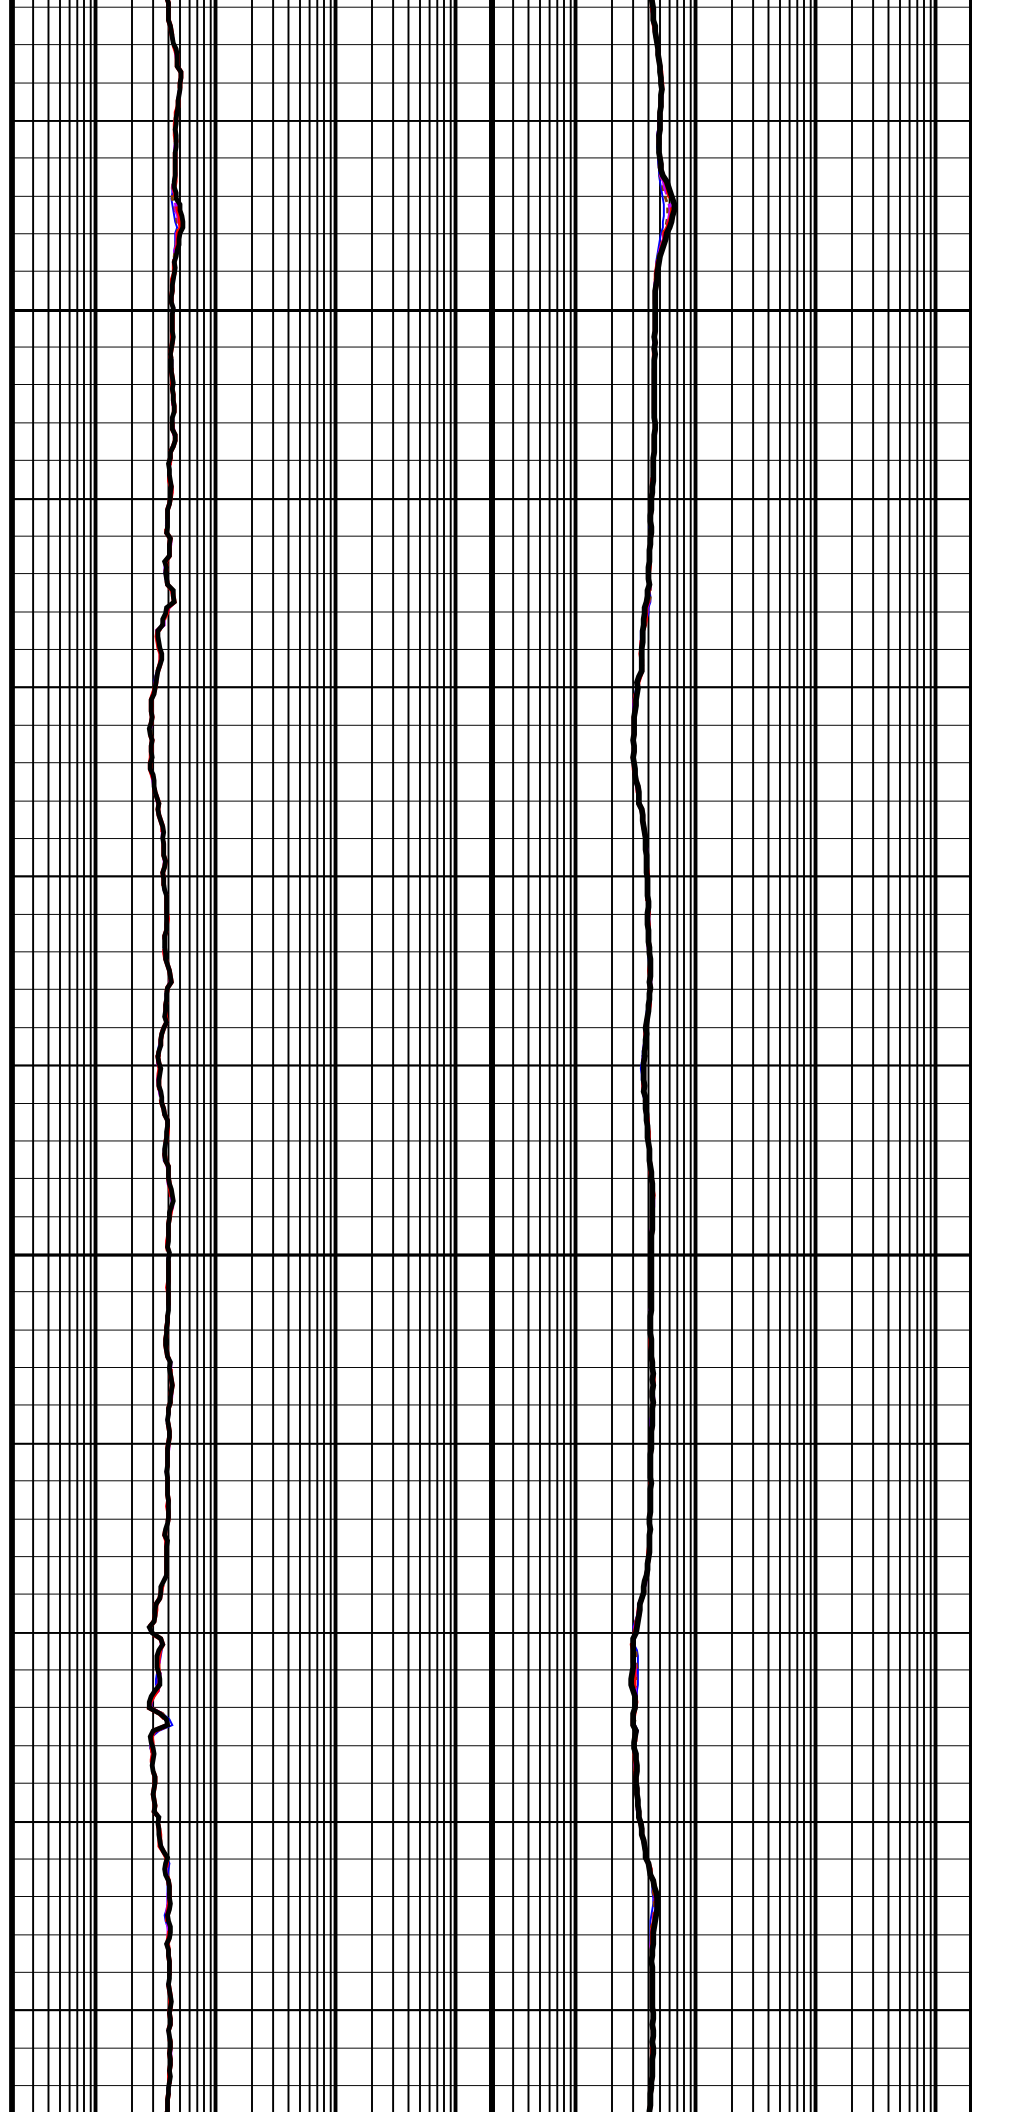


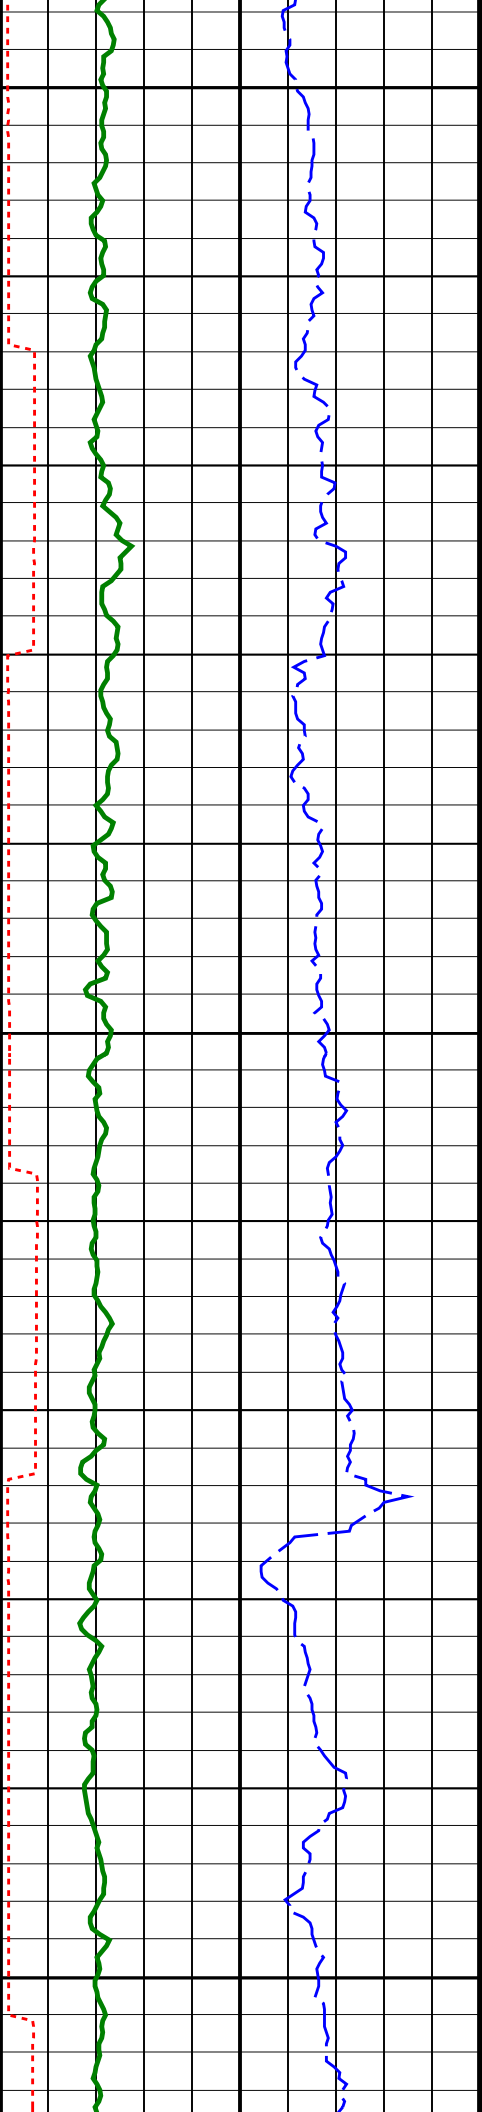


1325  
TVD

1350  
TVD


1375  
TVD

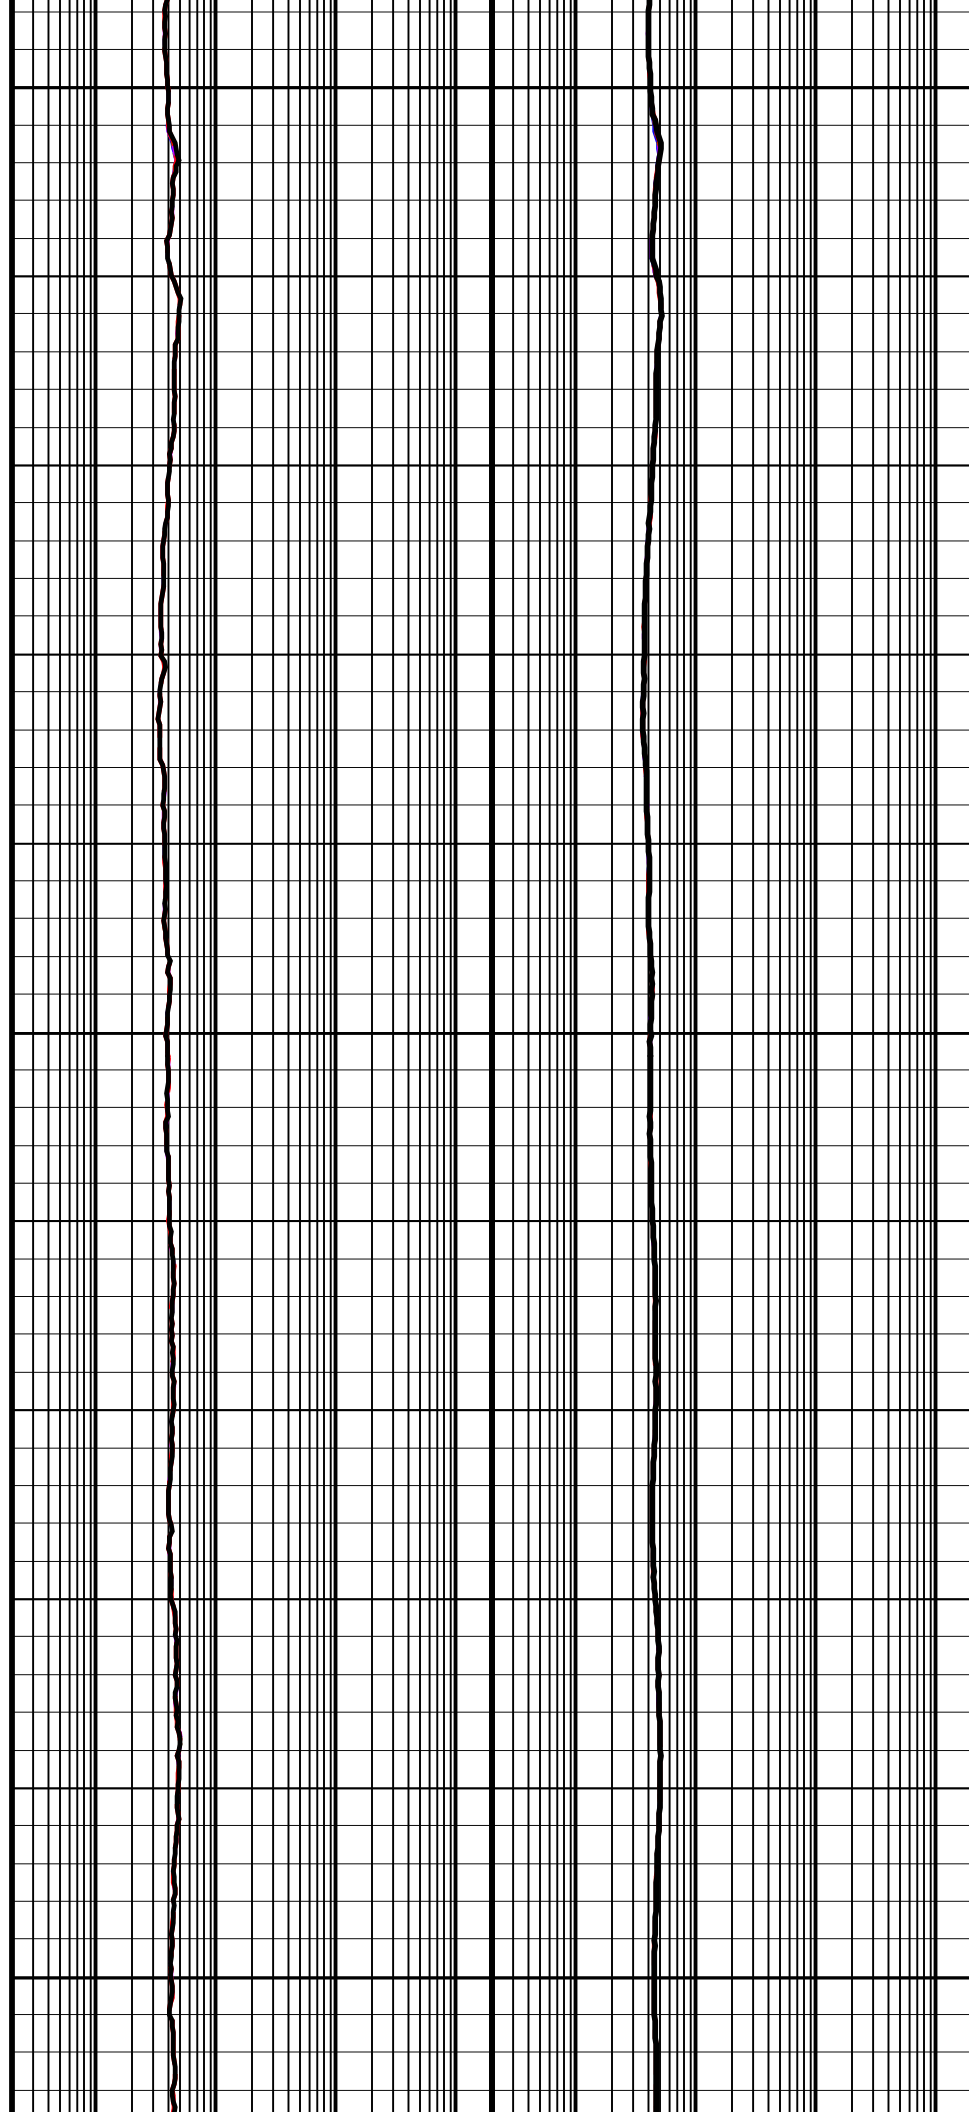


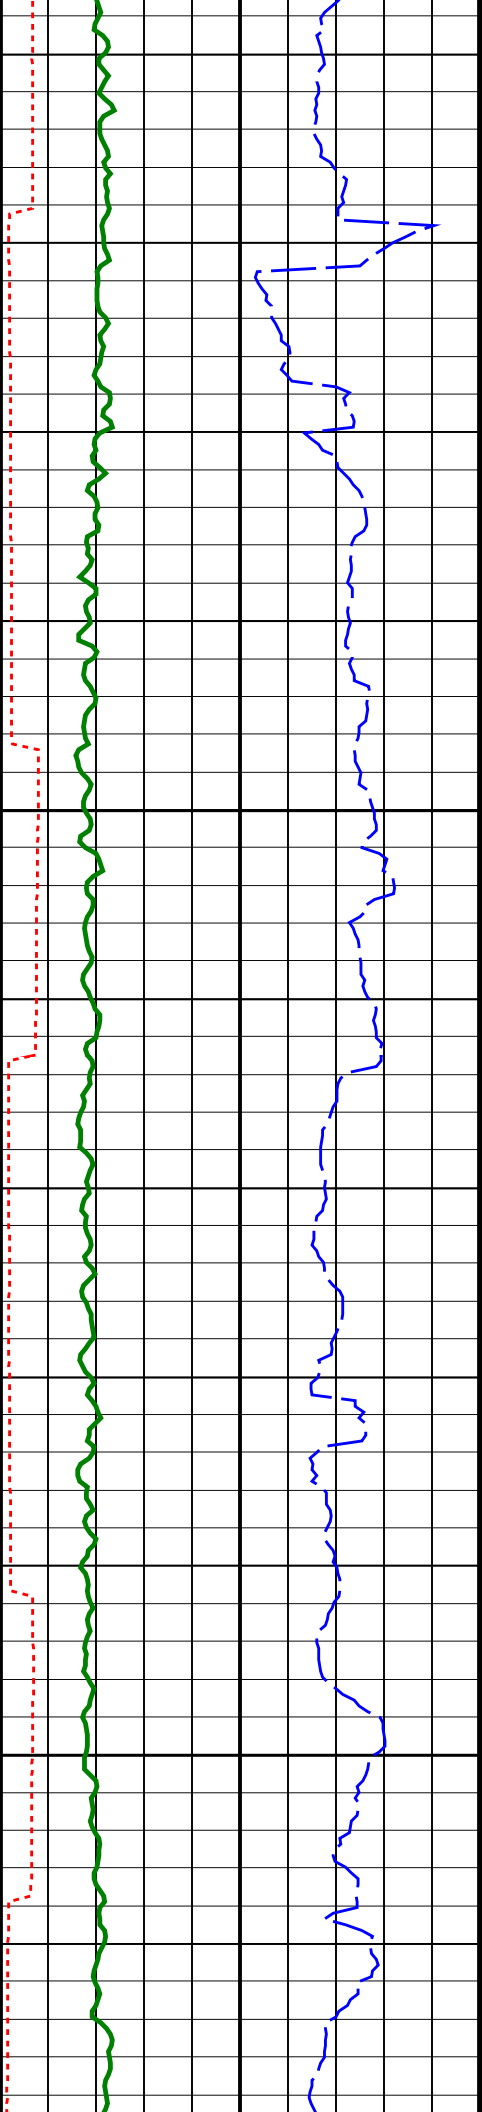

1400  
TVD


1425  
TVD

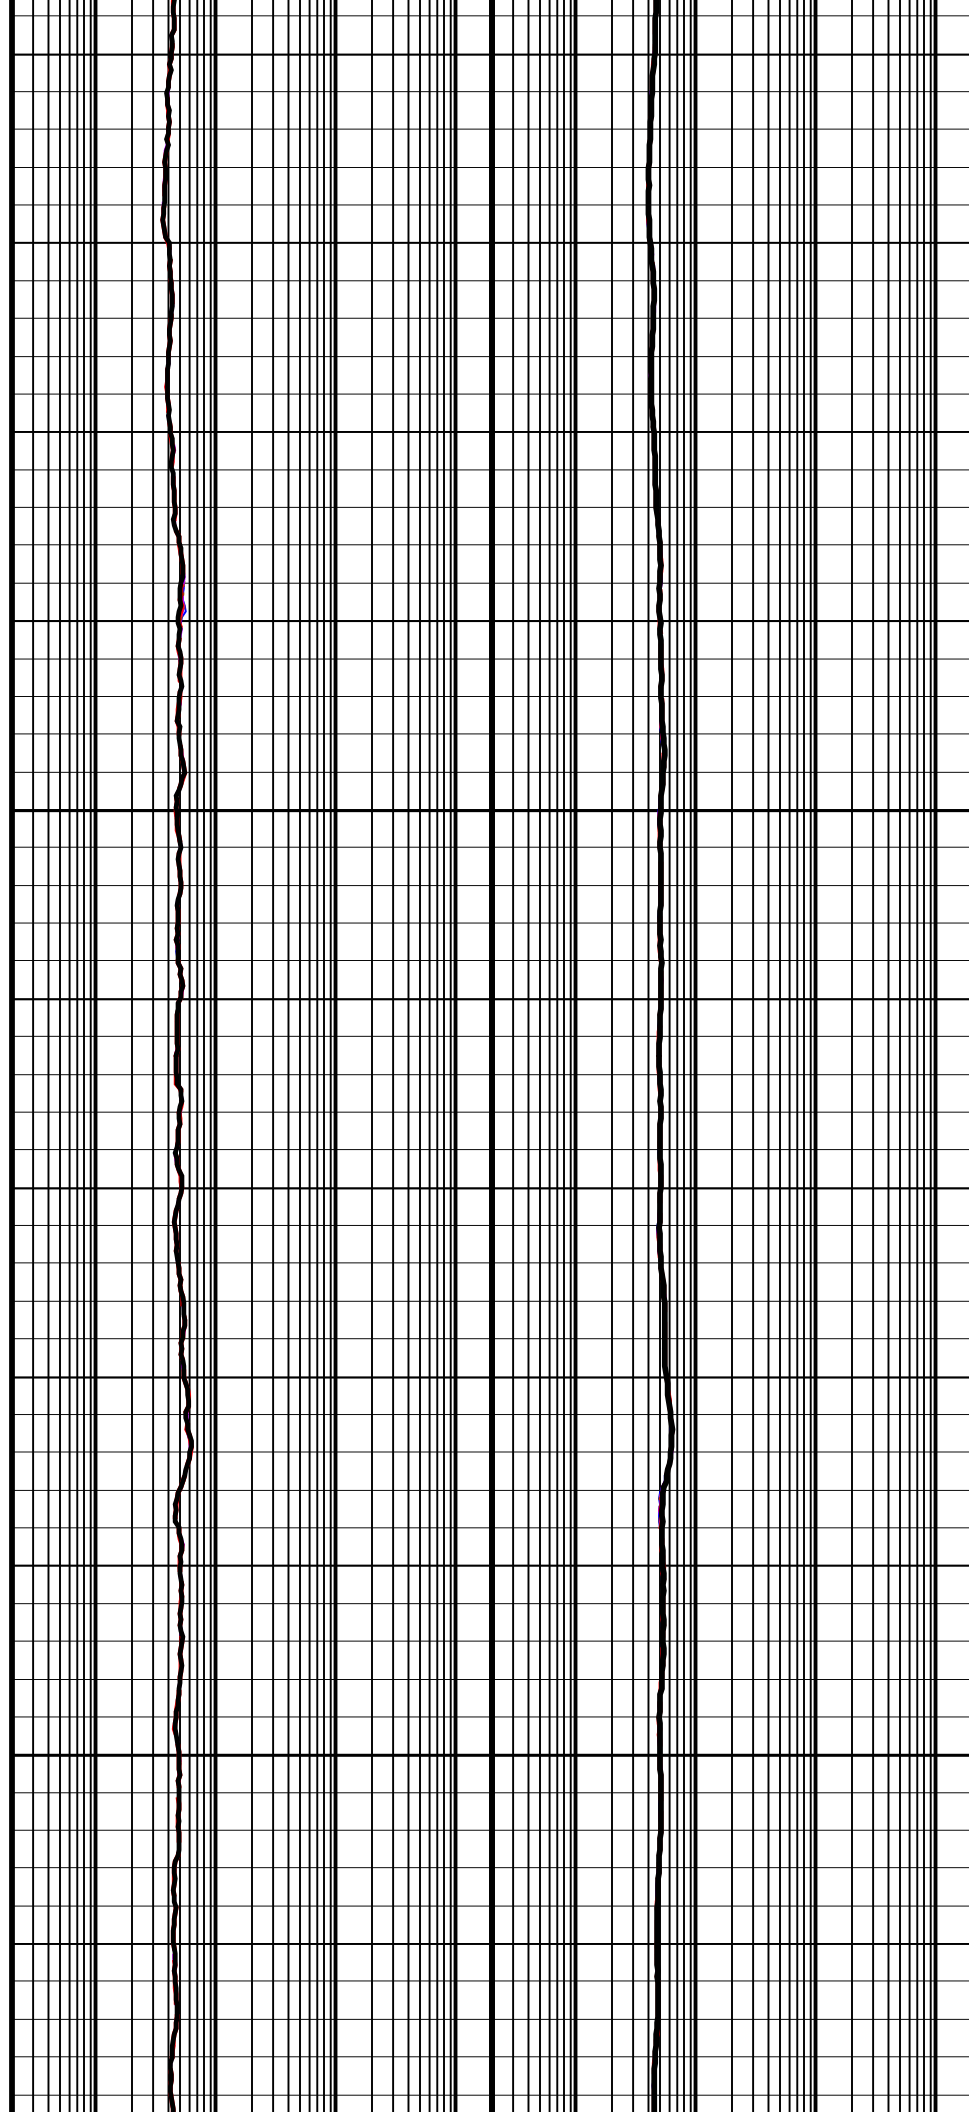


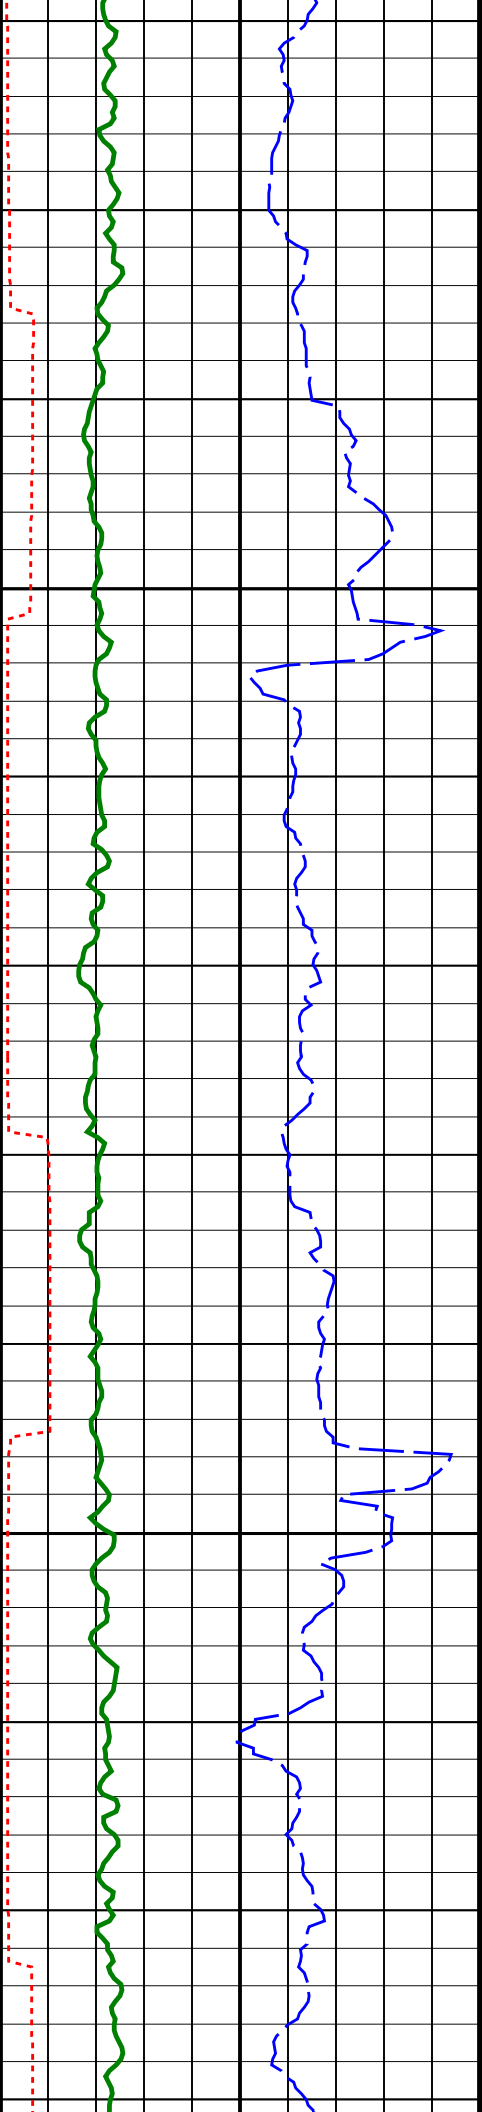

1450  
TVD


1475  
TVD

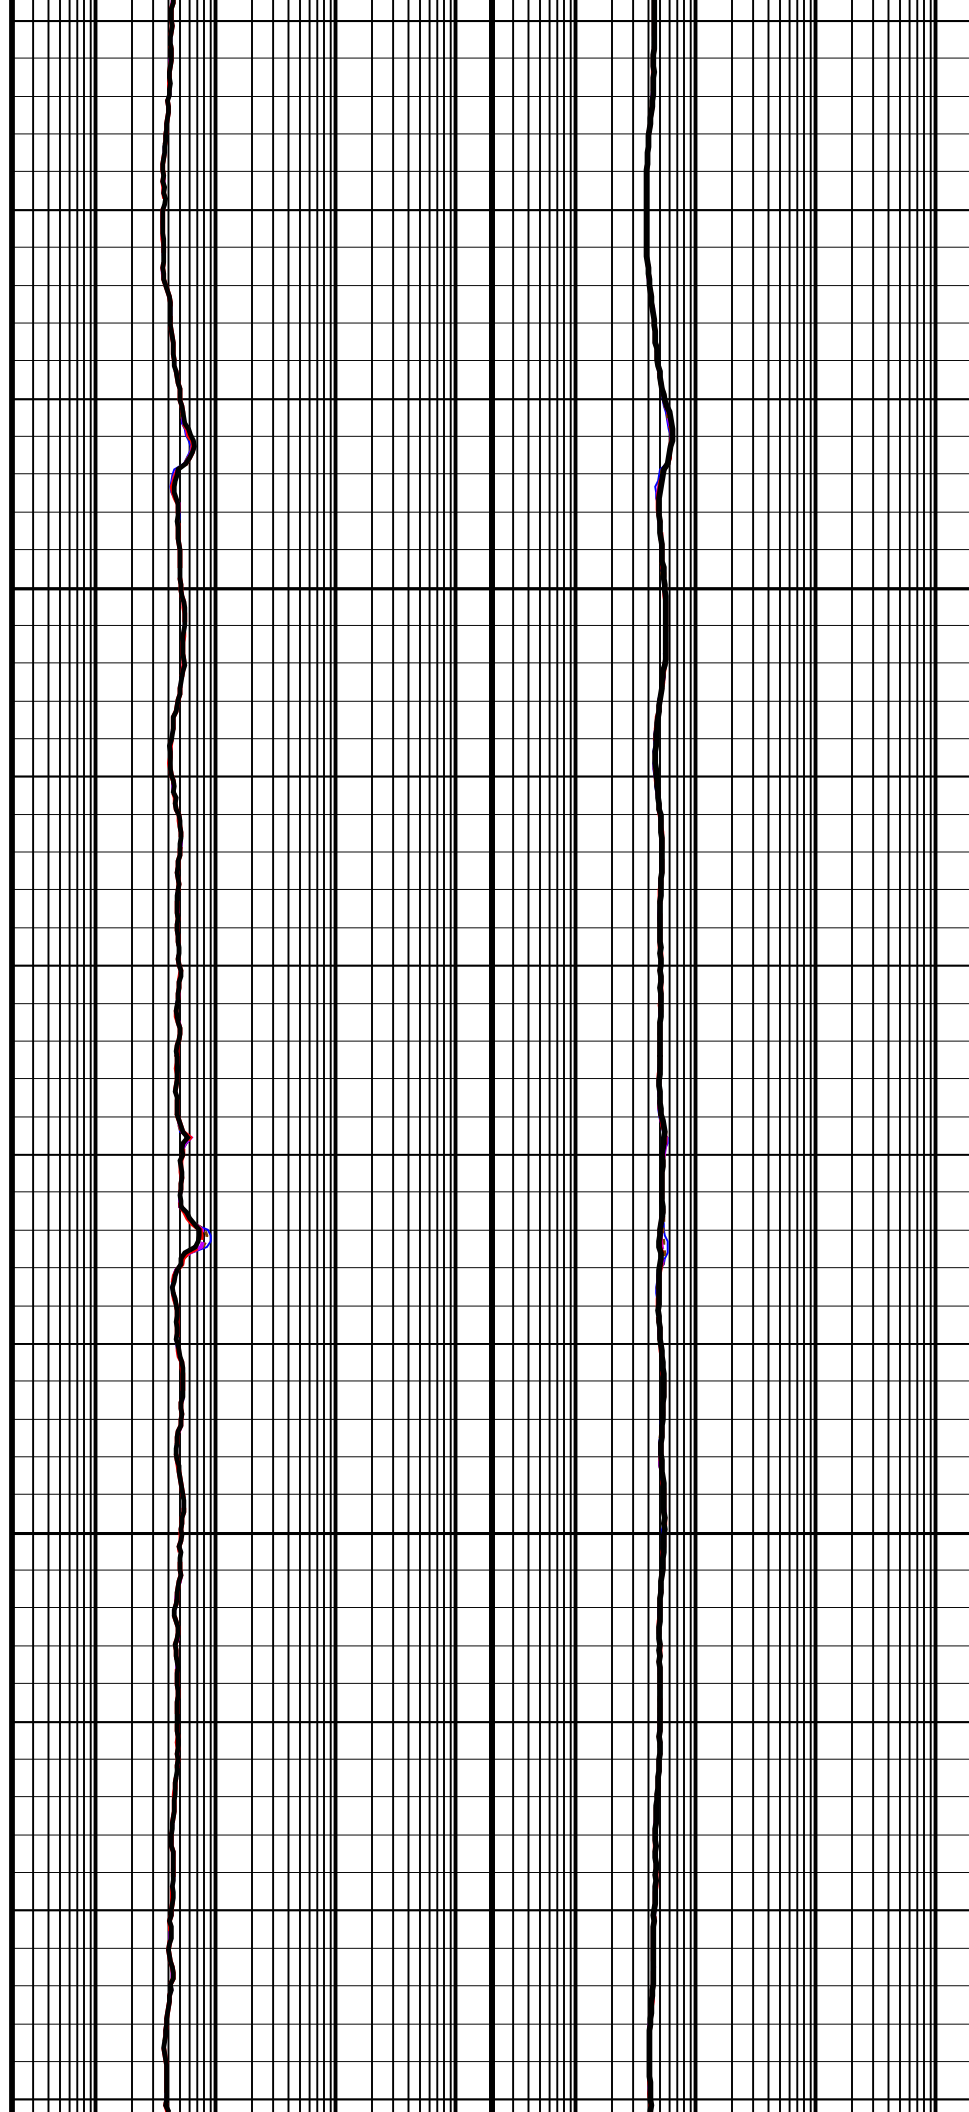


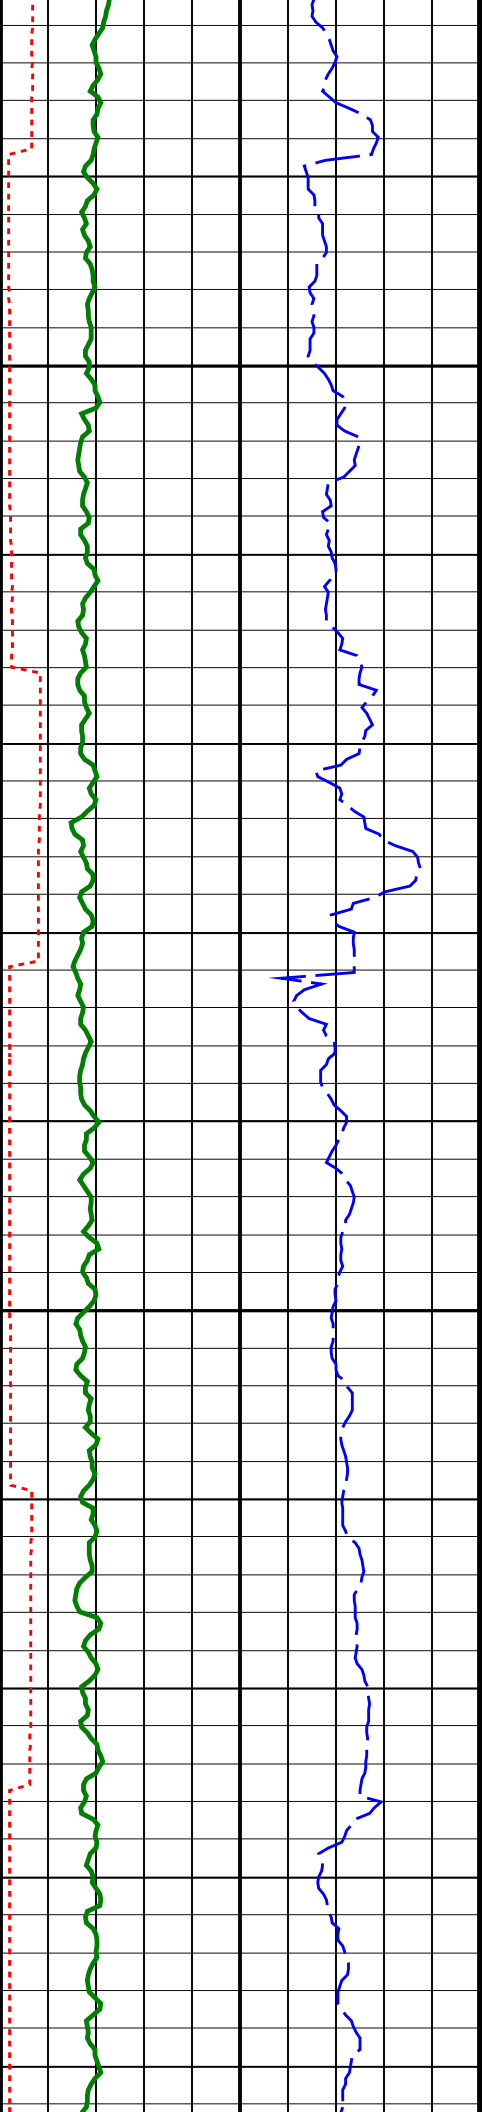


1500  
TVD

1525  
TVD

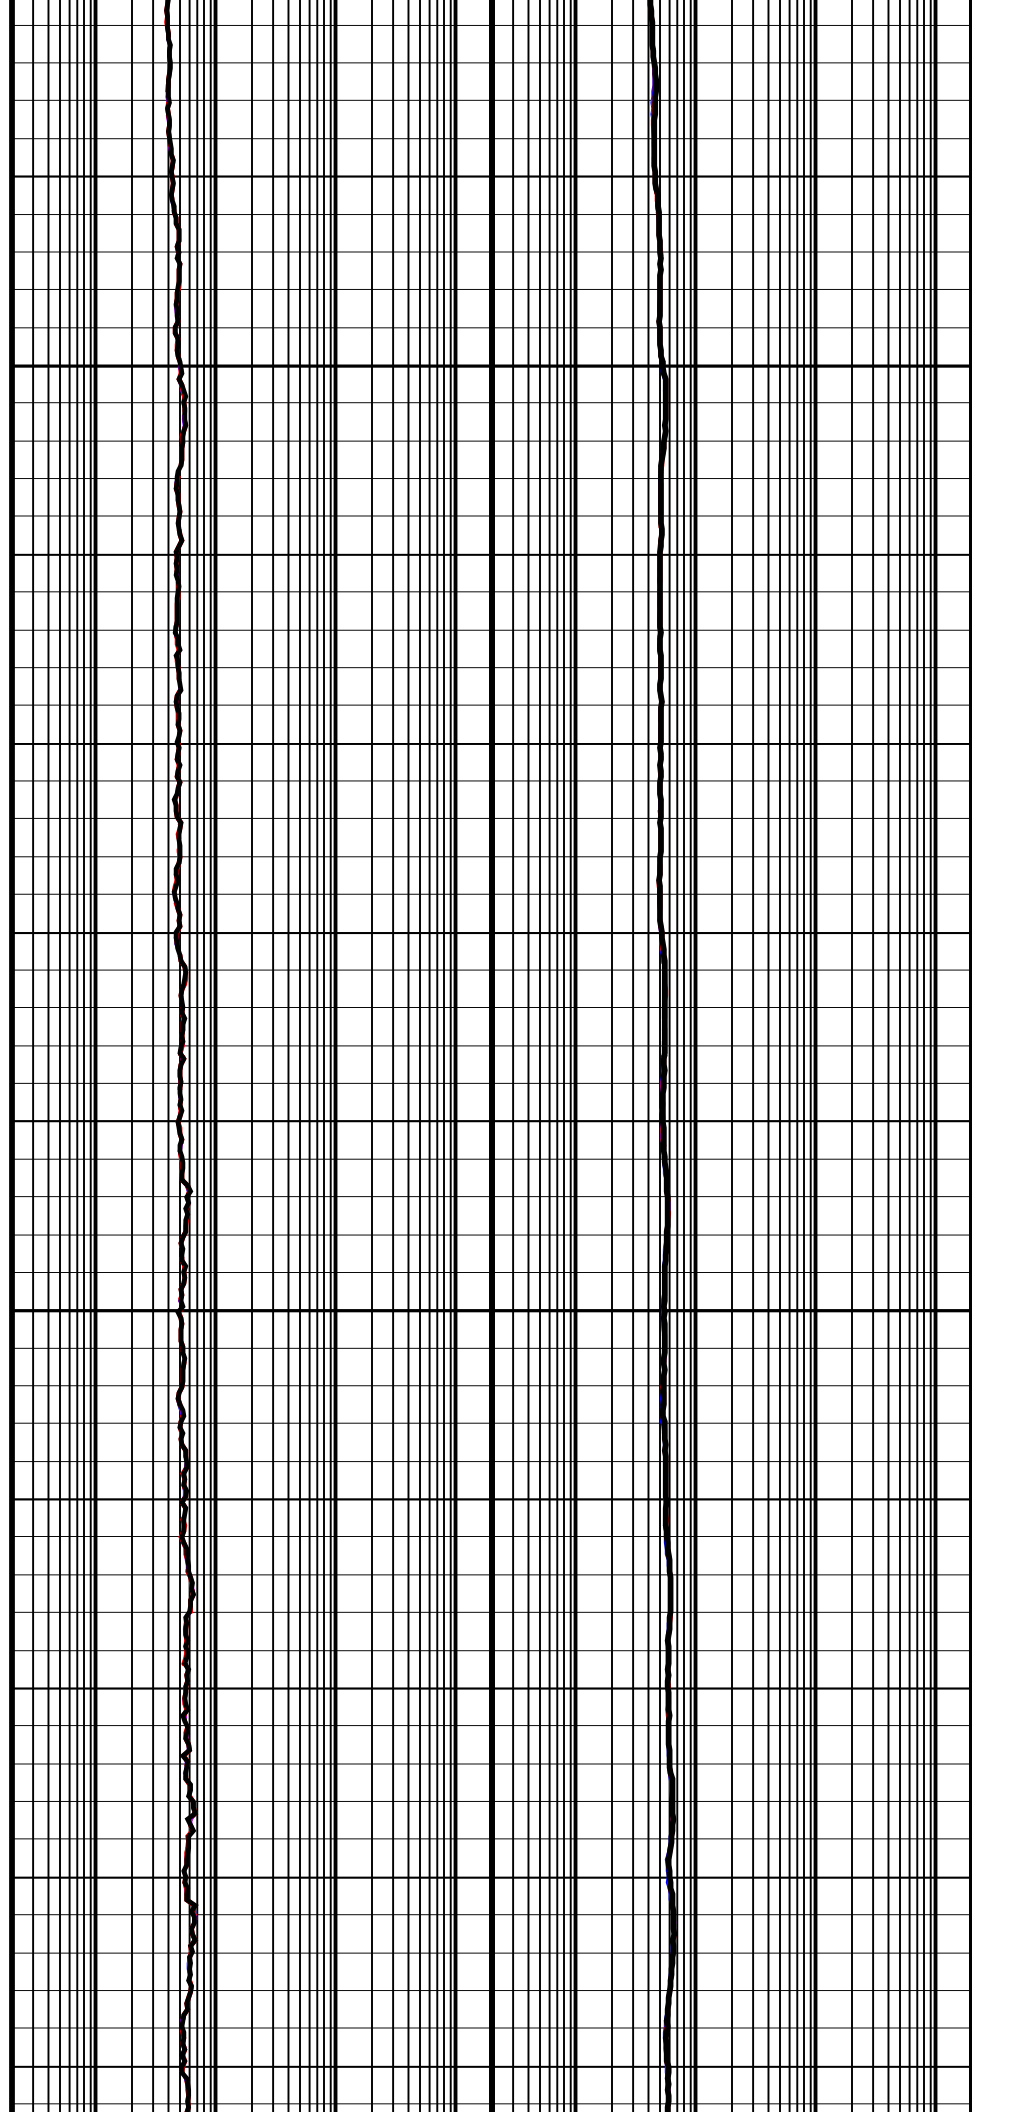


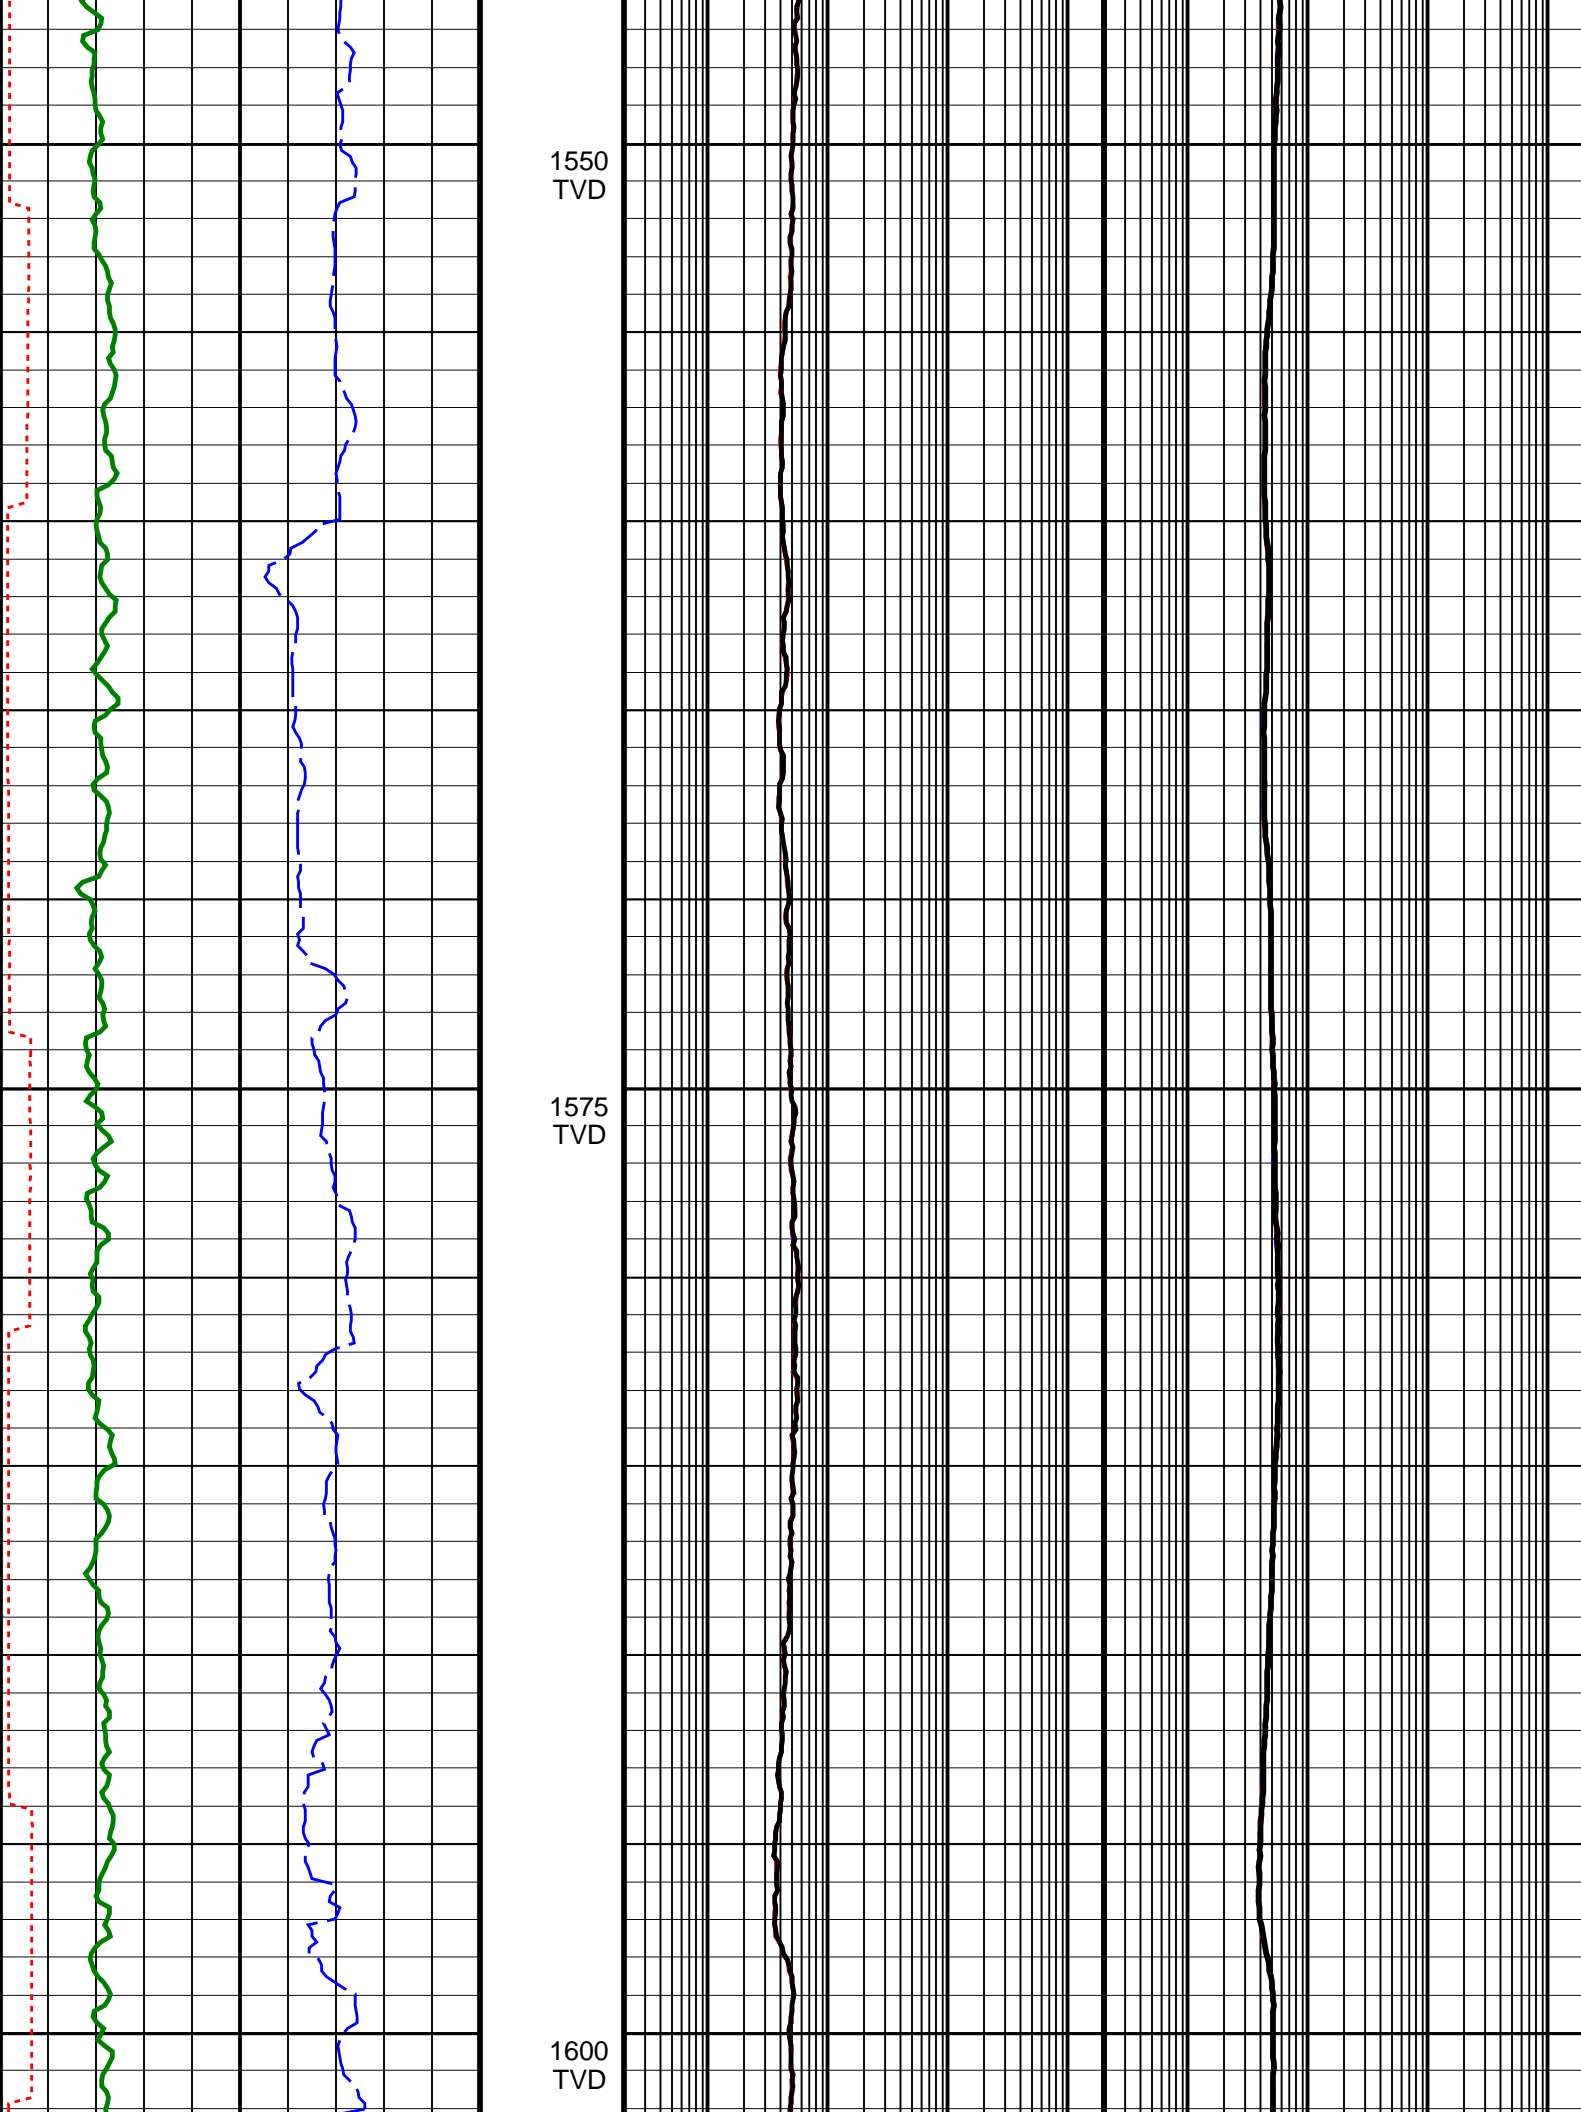


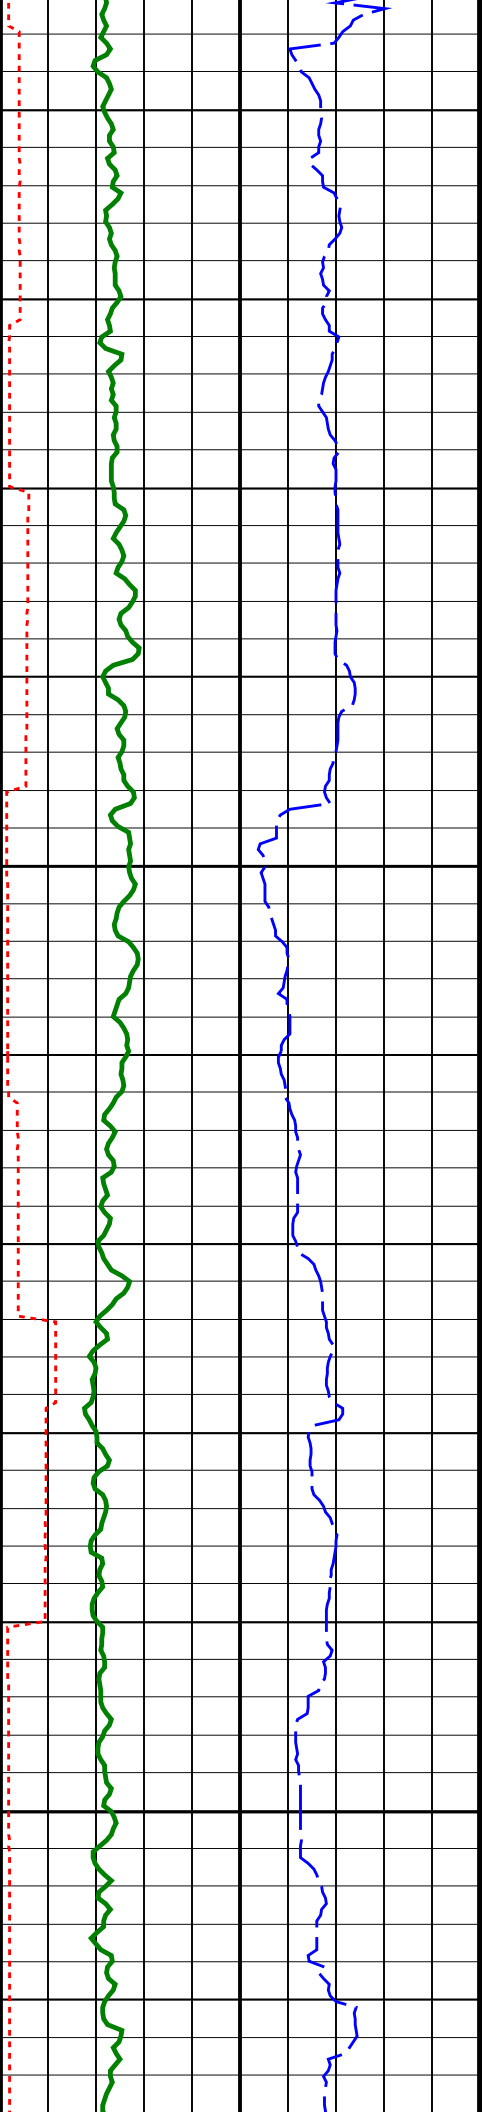

1625  
TVD


1650  
TVD

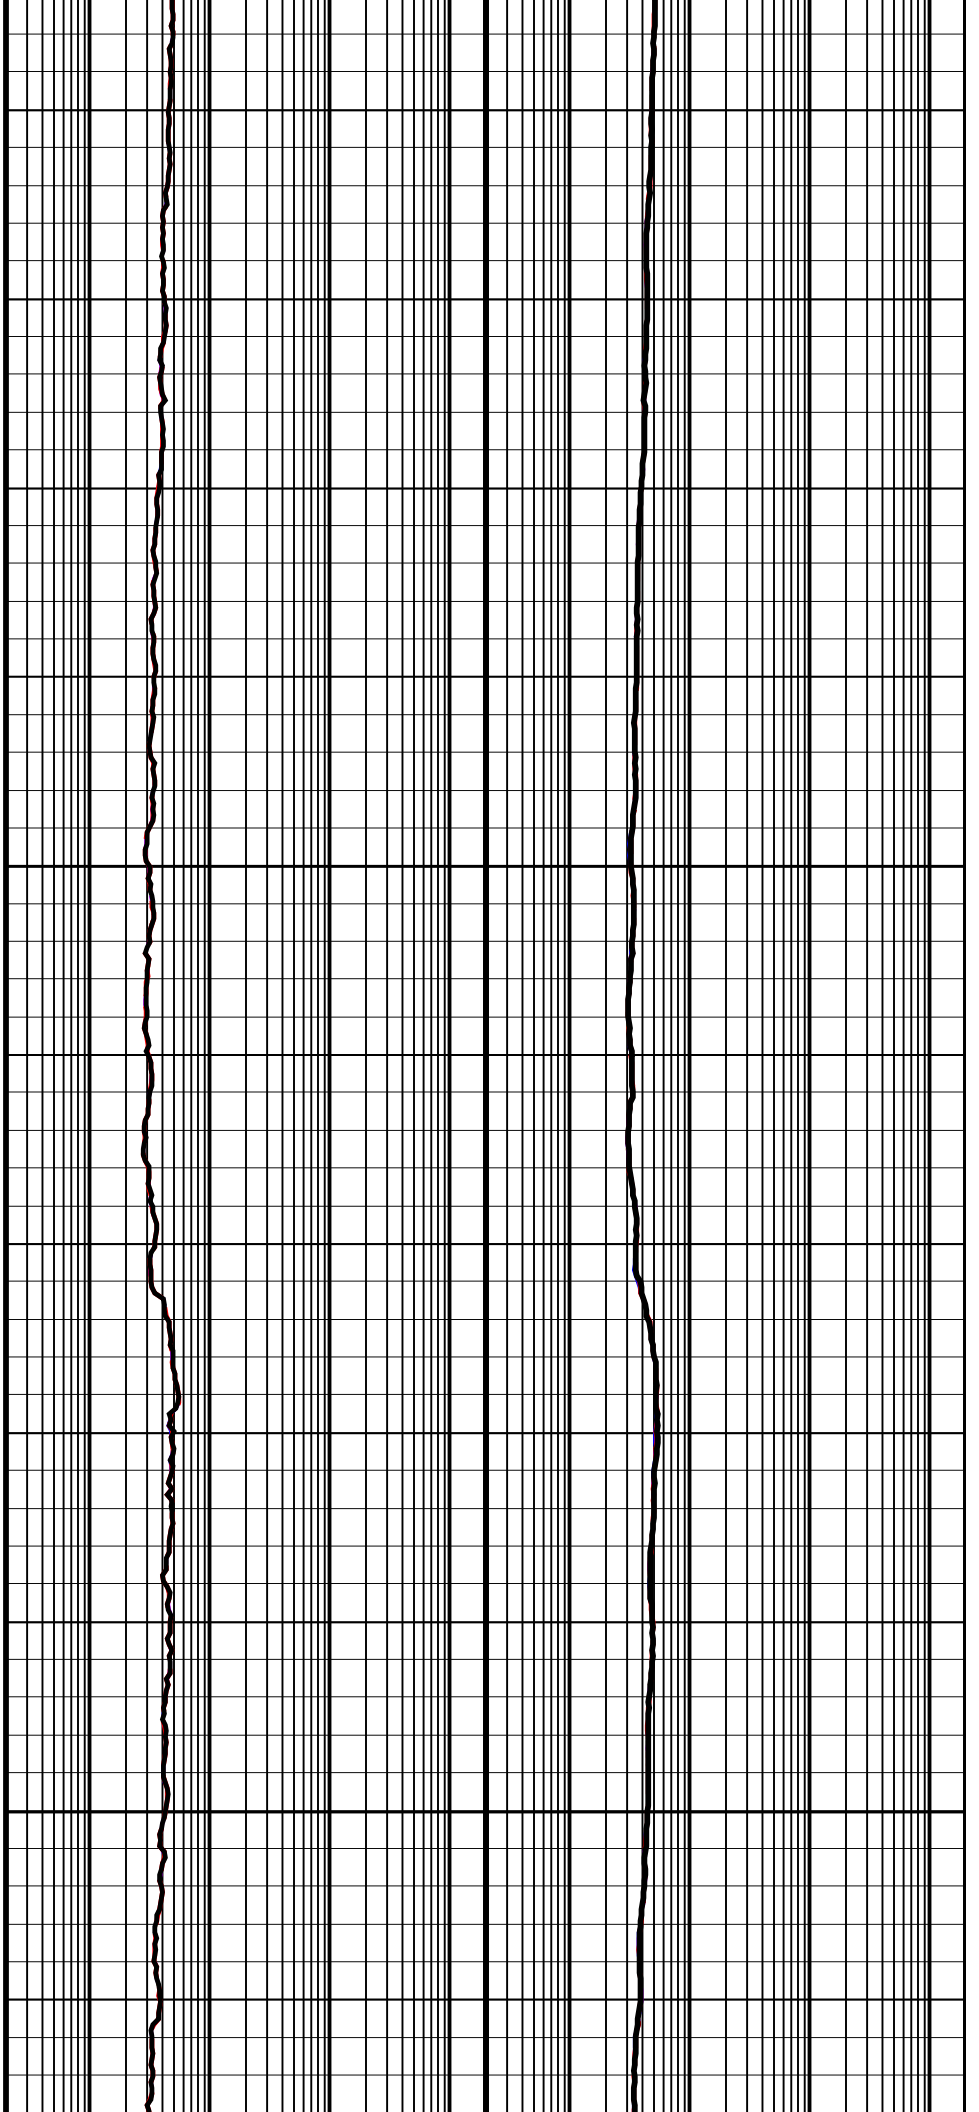

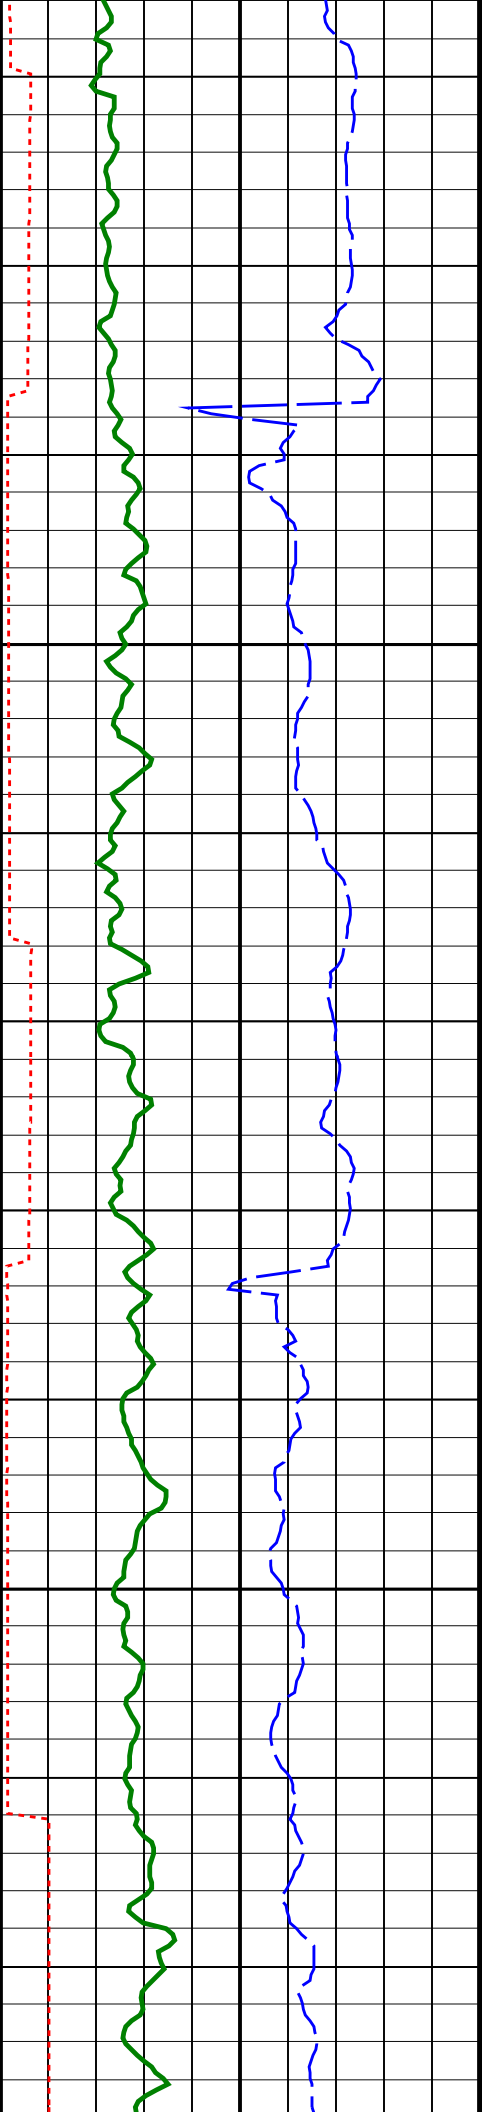


1675  
TVD

1700  
TVD

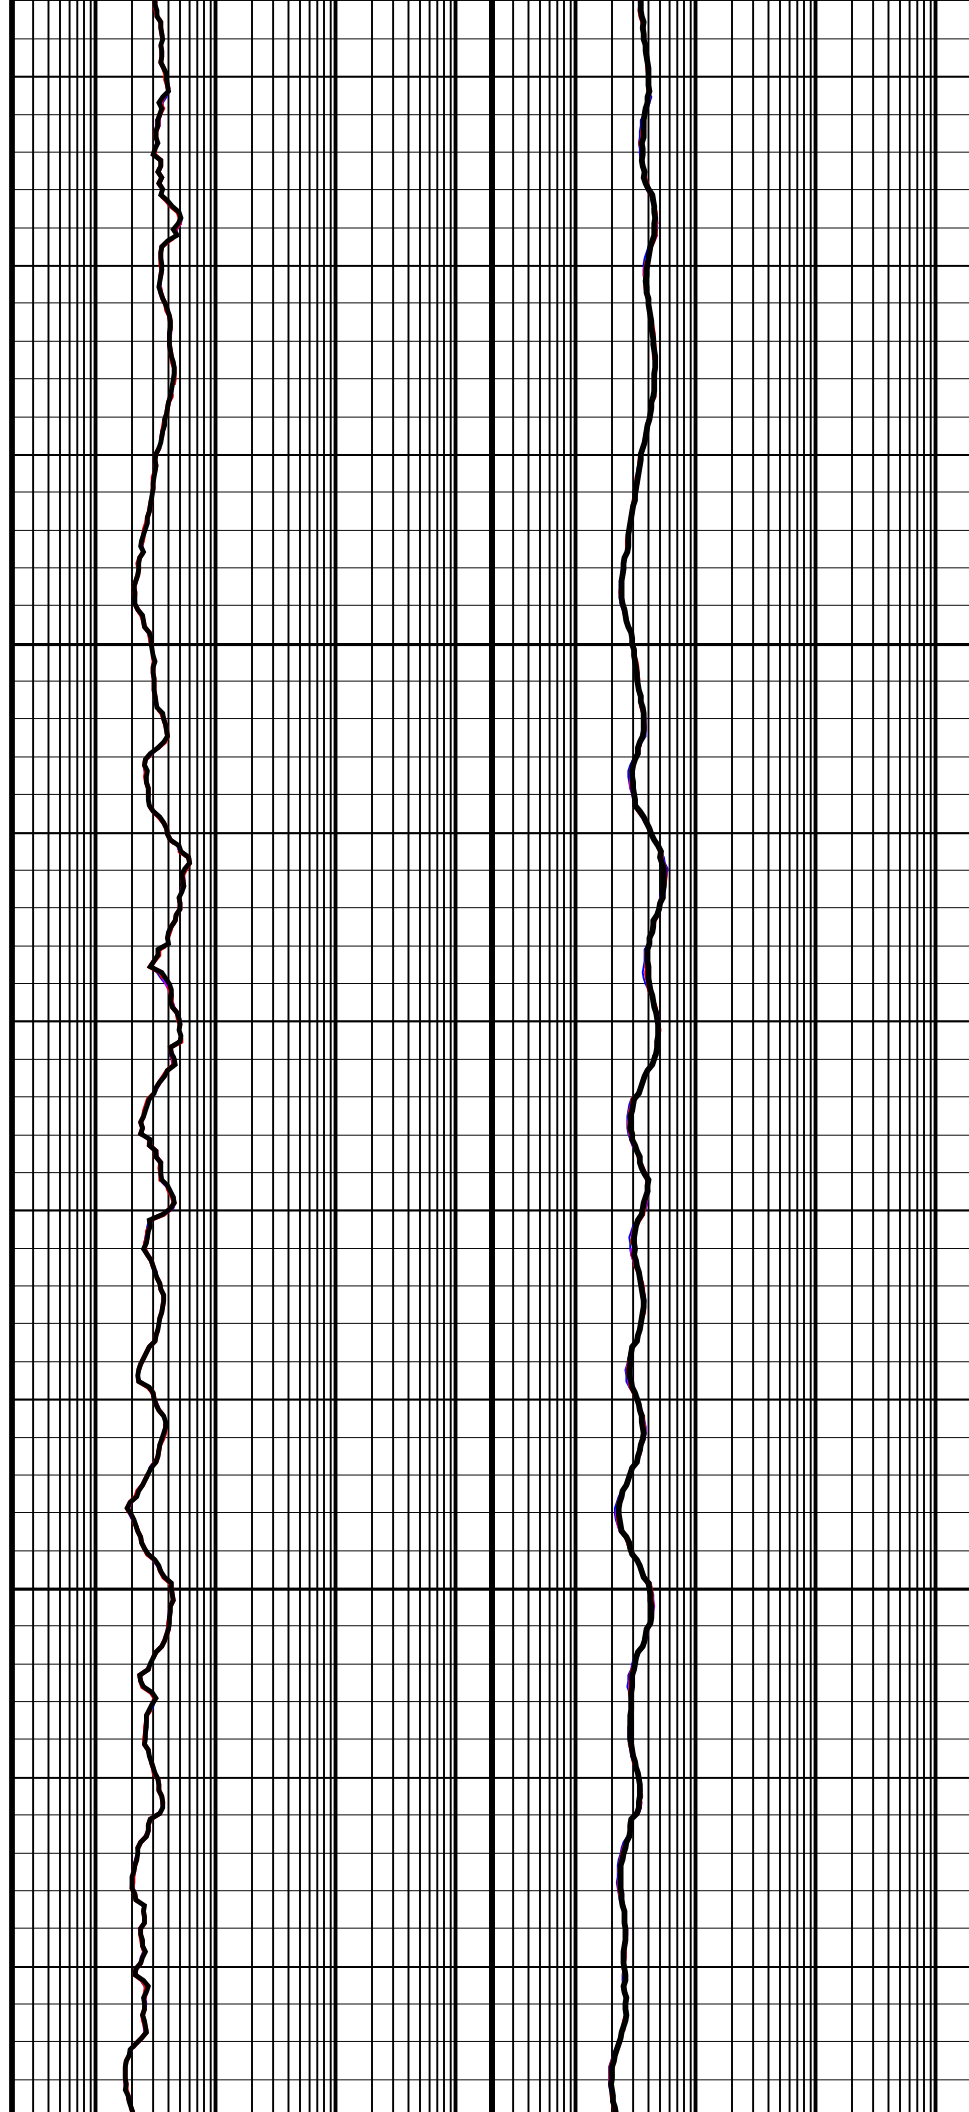





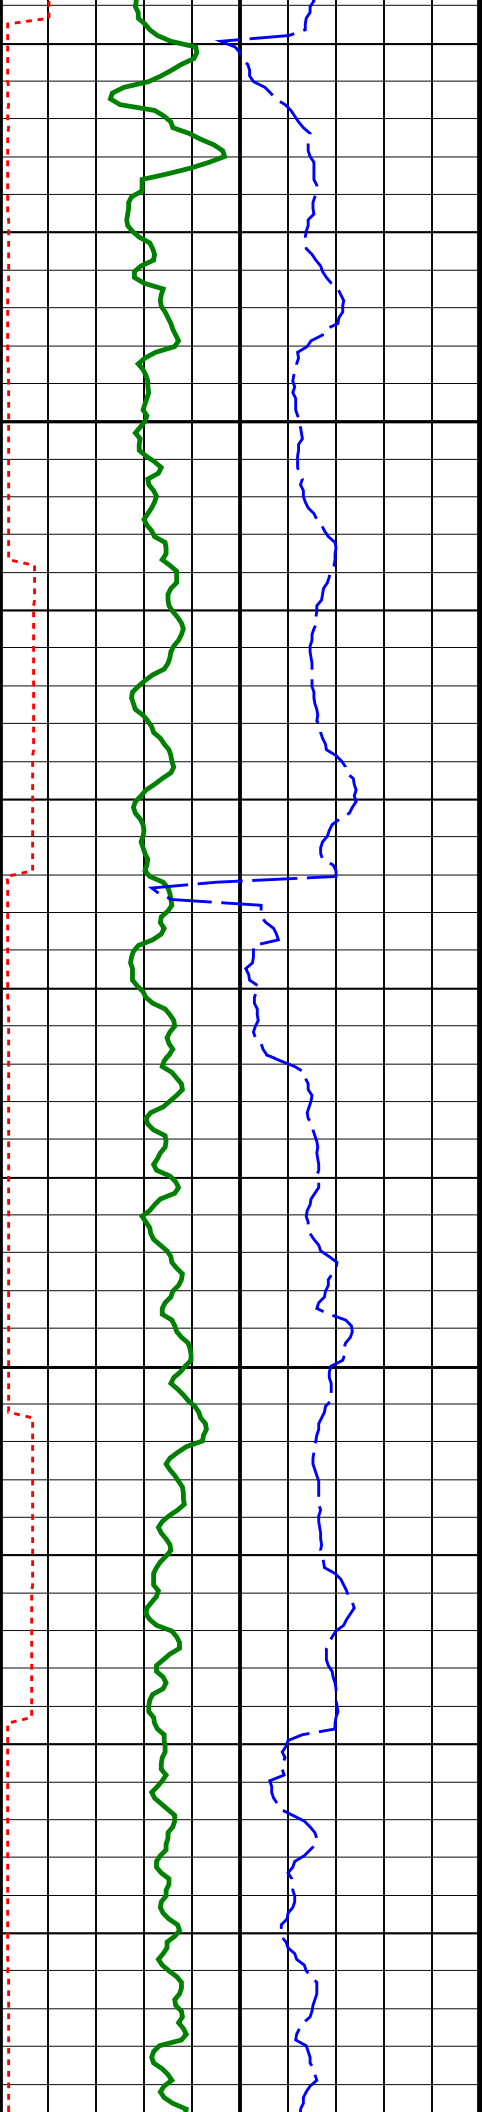

1725  
TVD

1750  
TVD

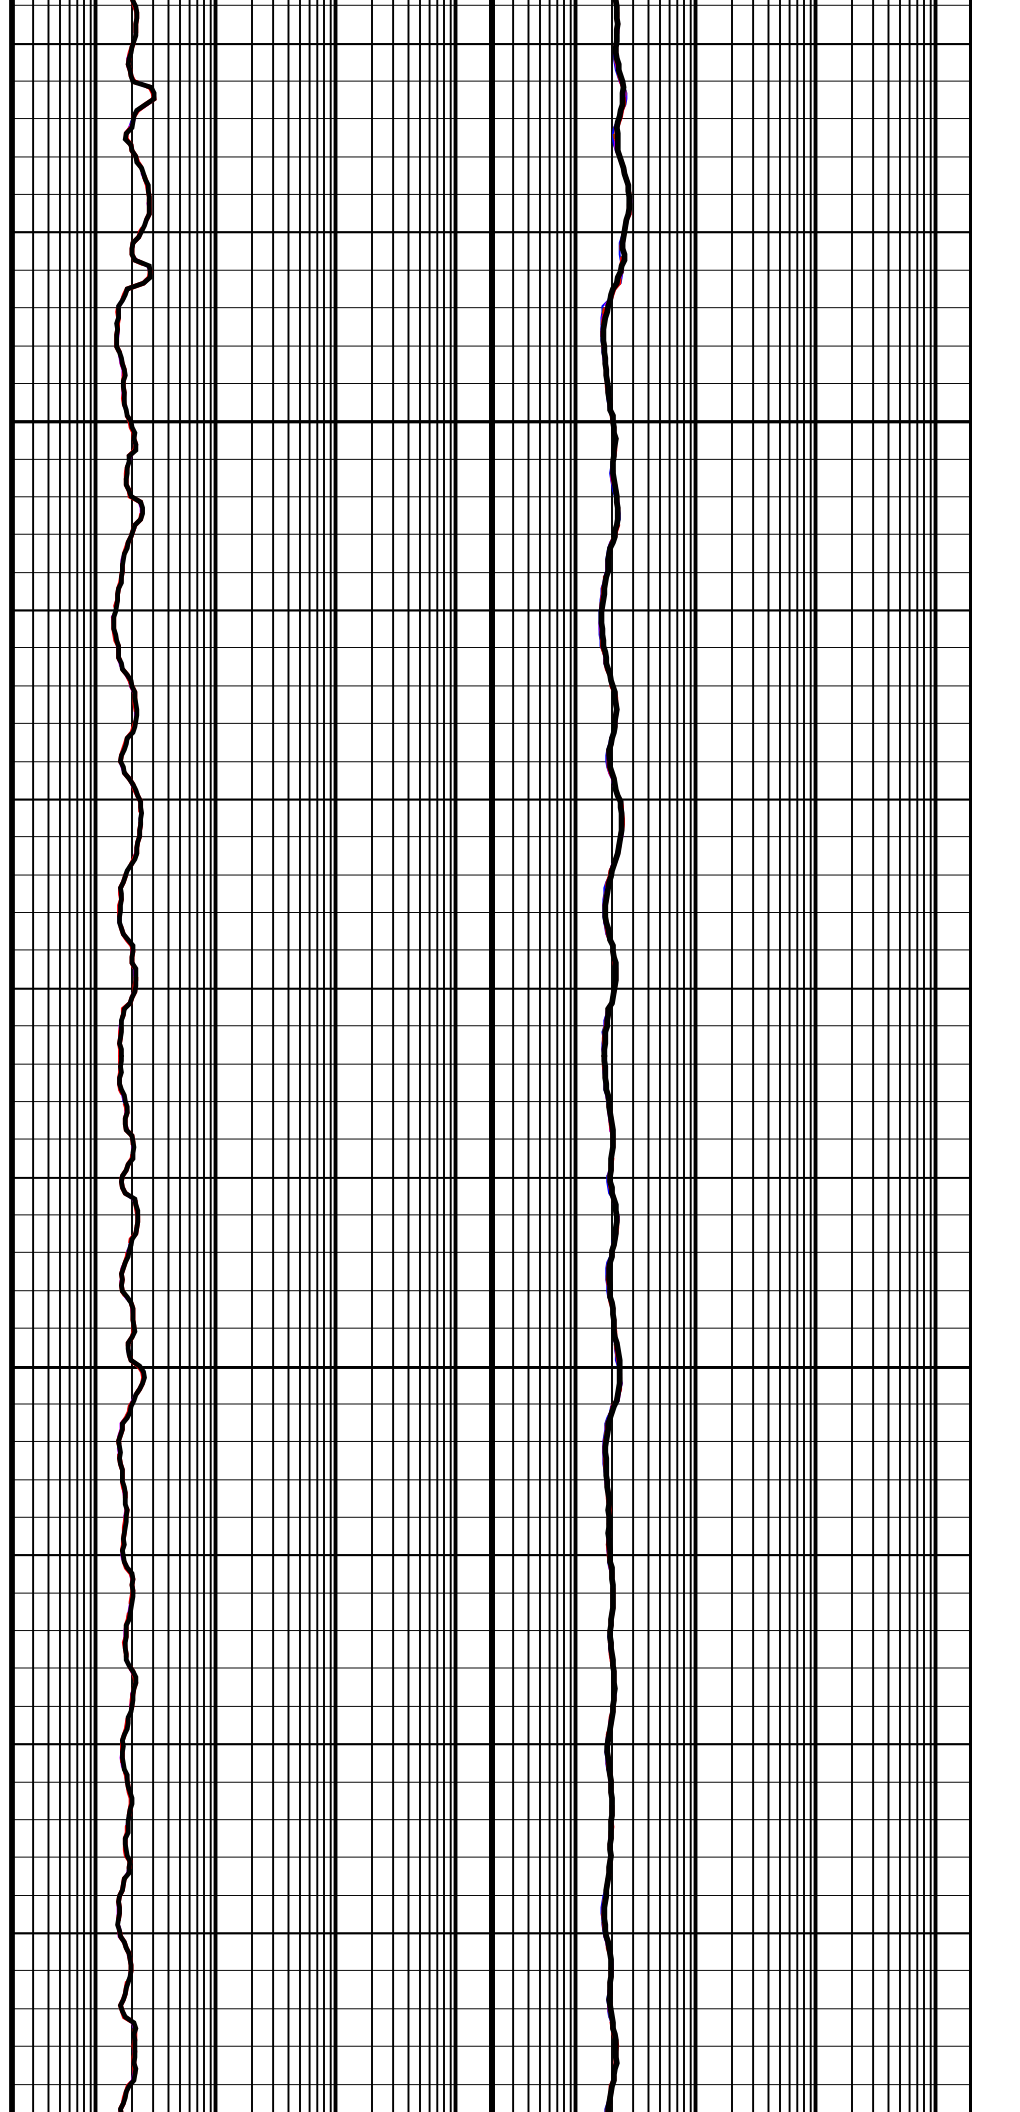


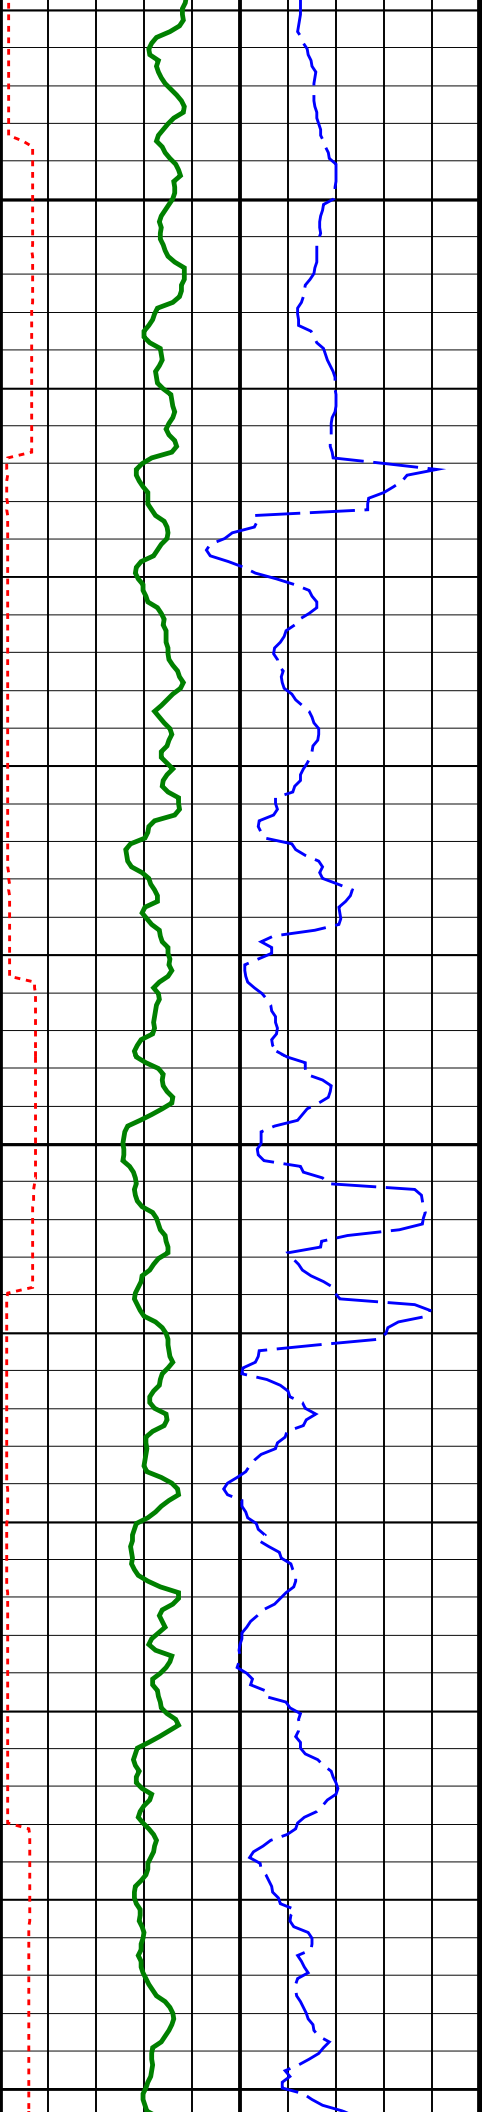


1775  
TVD

1800  
TVD

1825

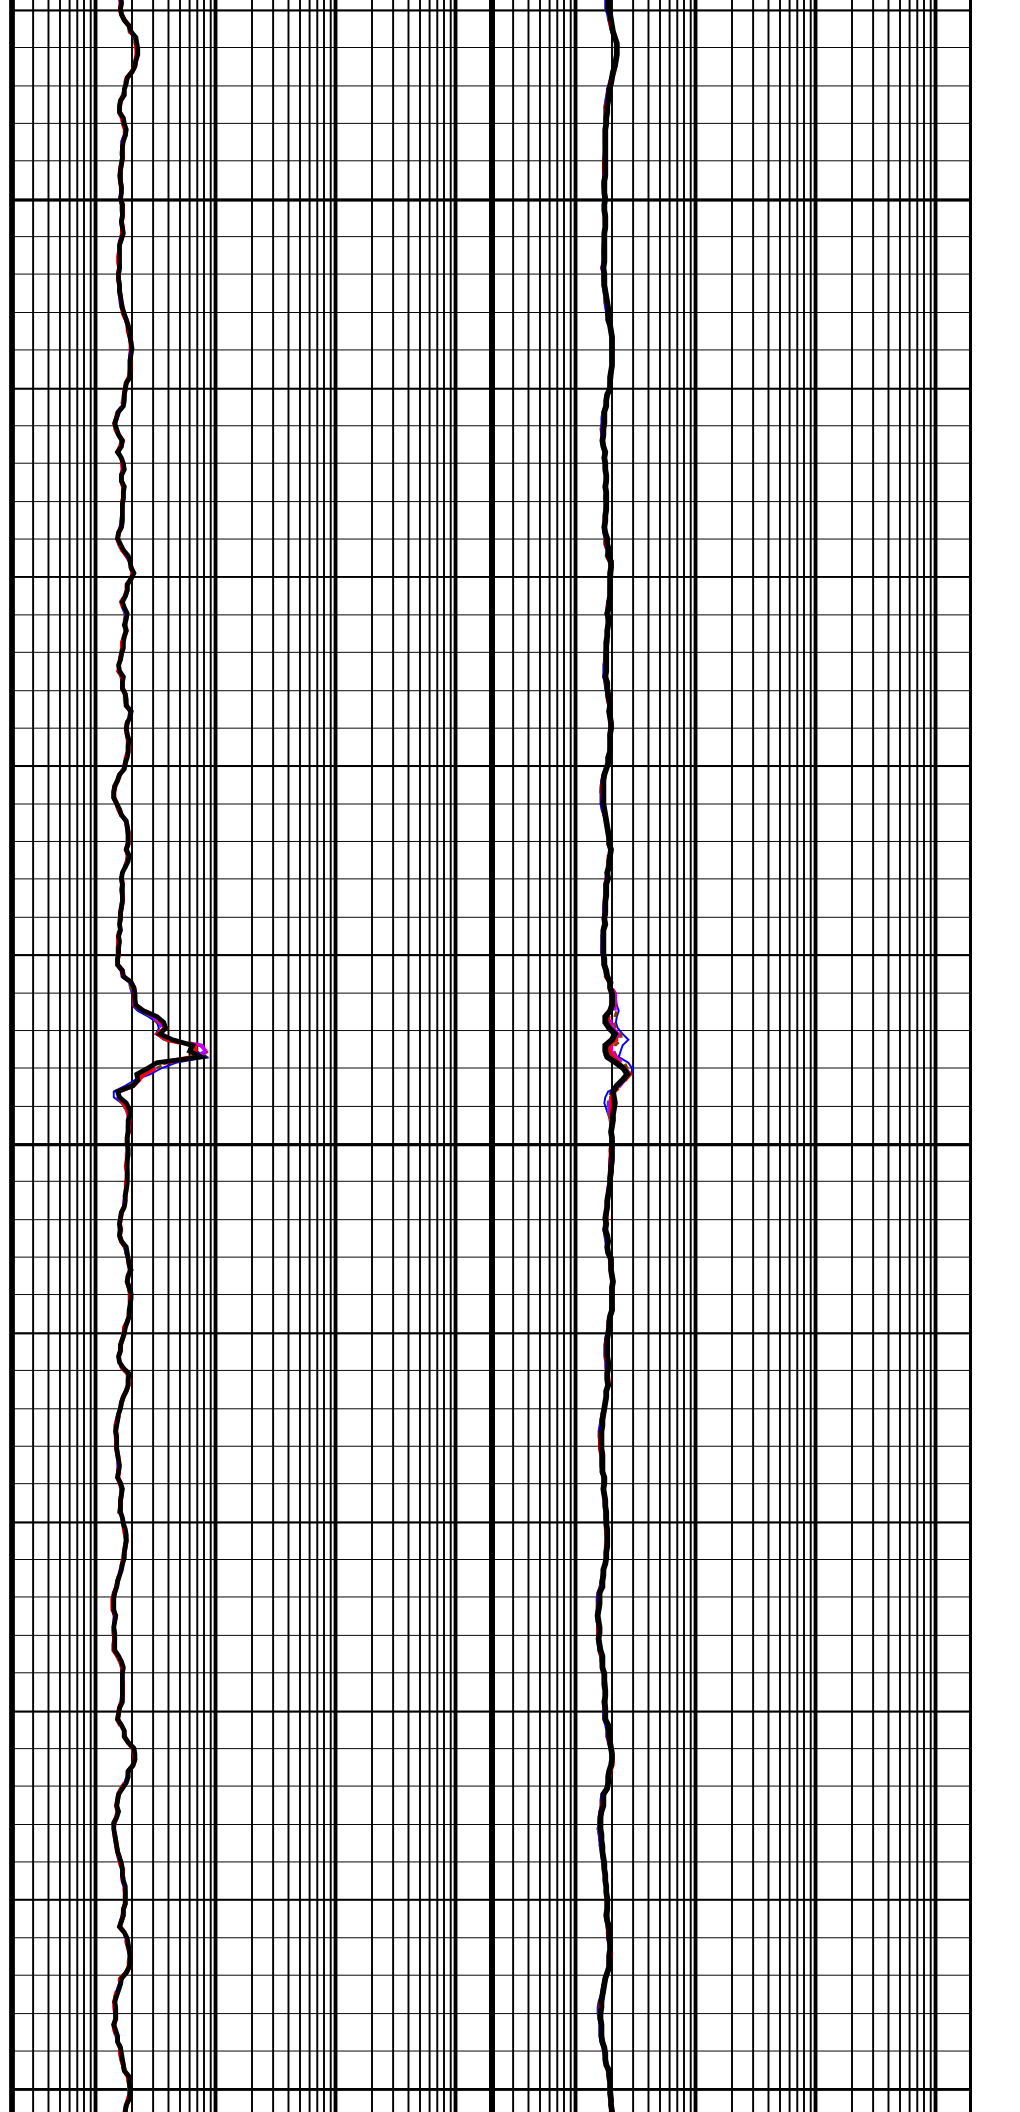


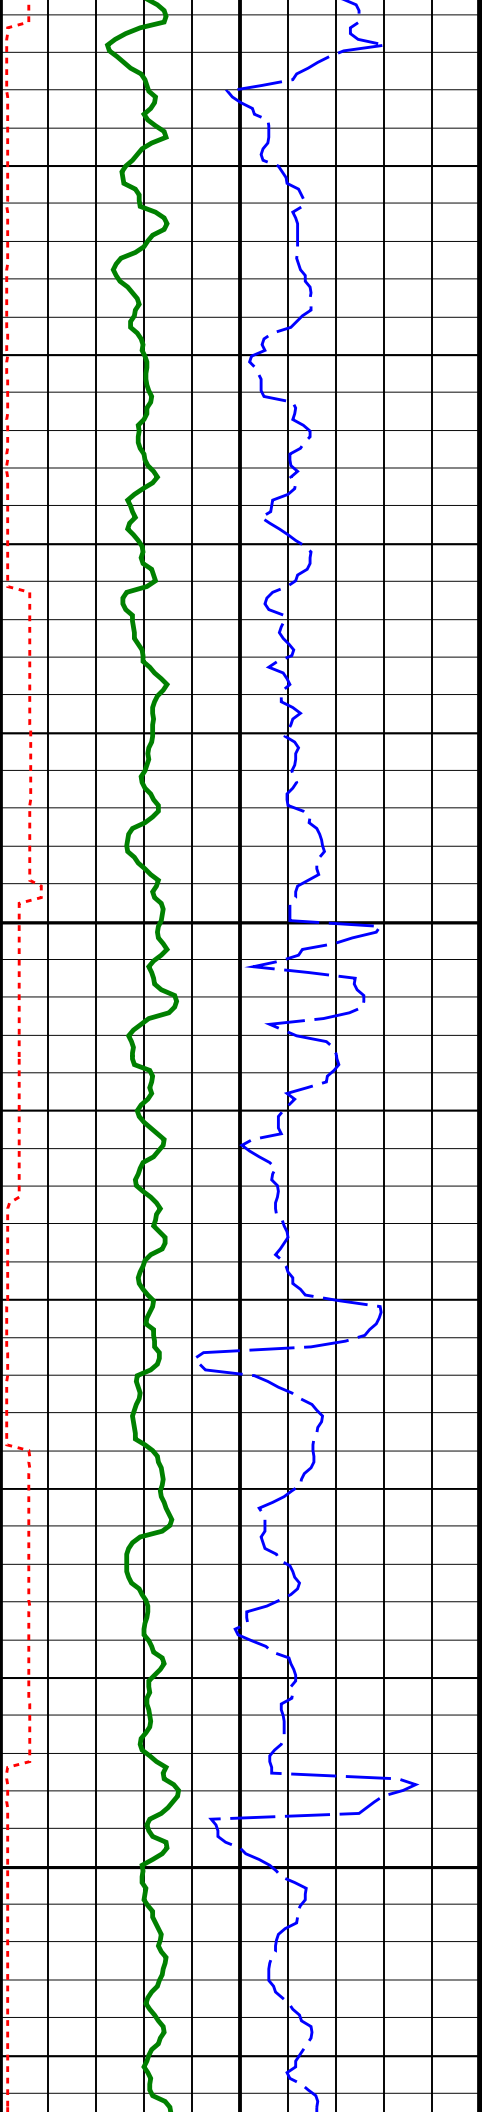

1820  
TVD


1850  
TVD


1875  
TVD

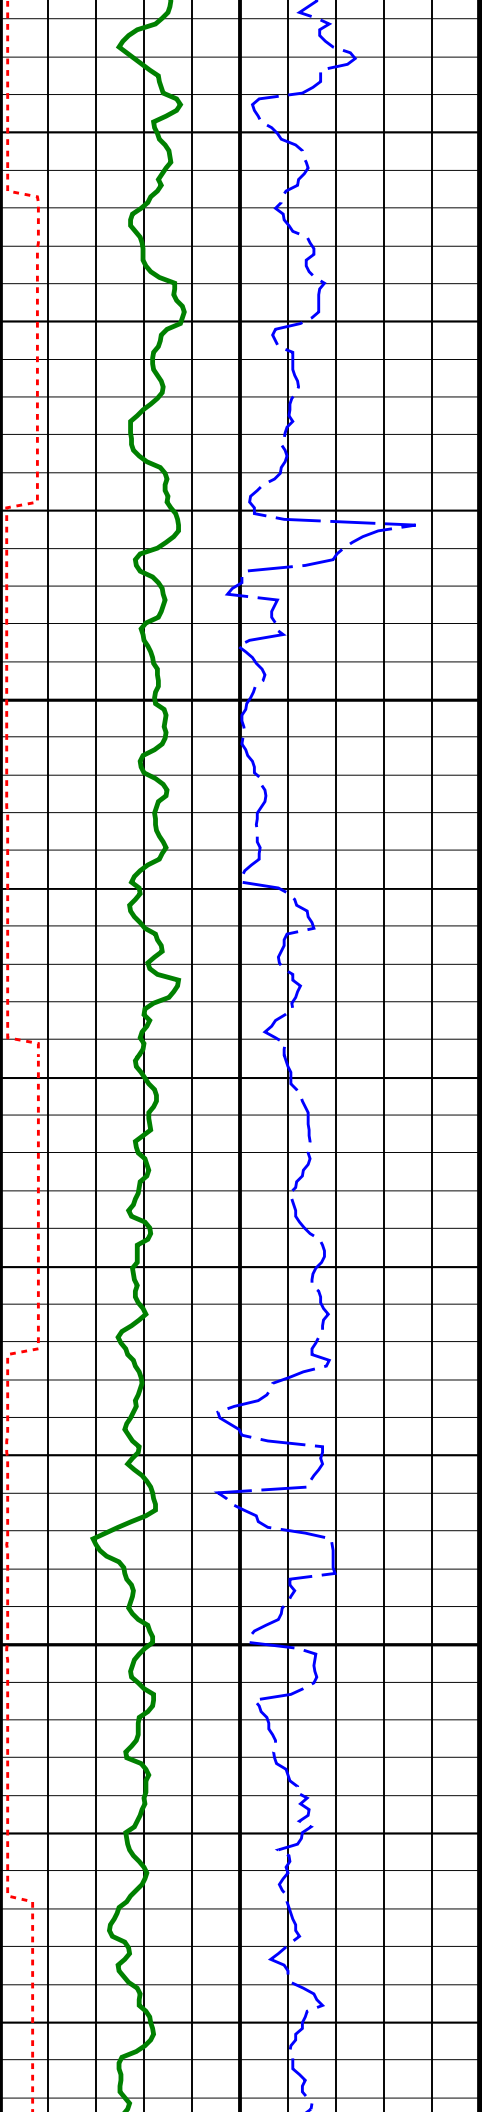

1900  
TVD


1925  
TVD

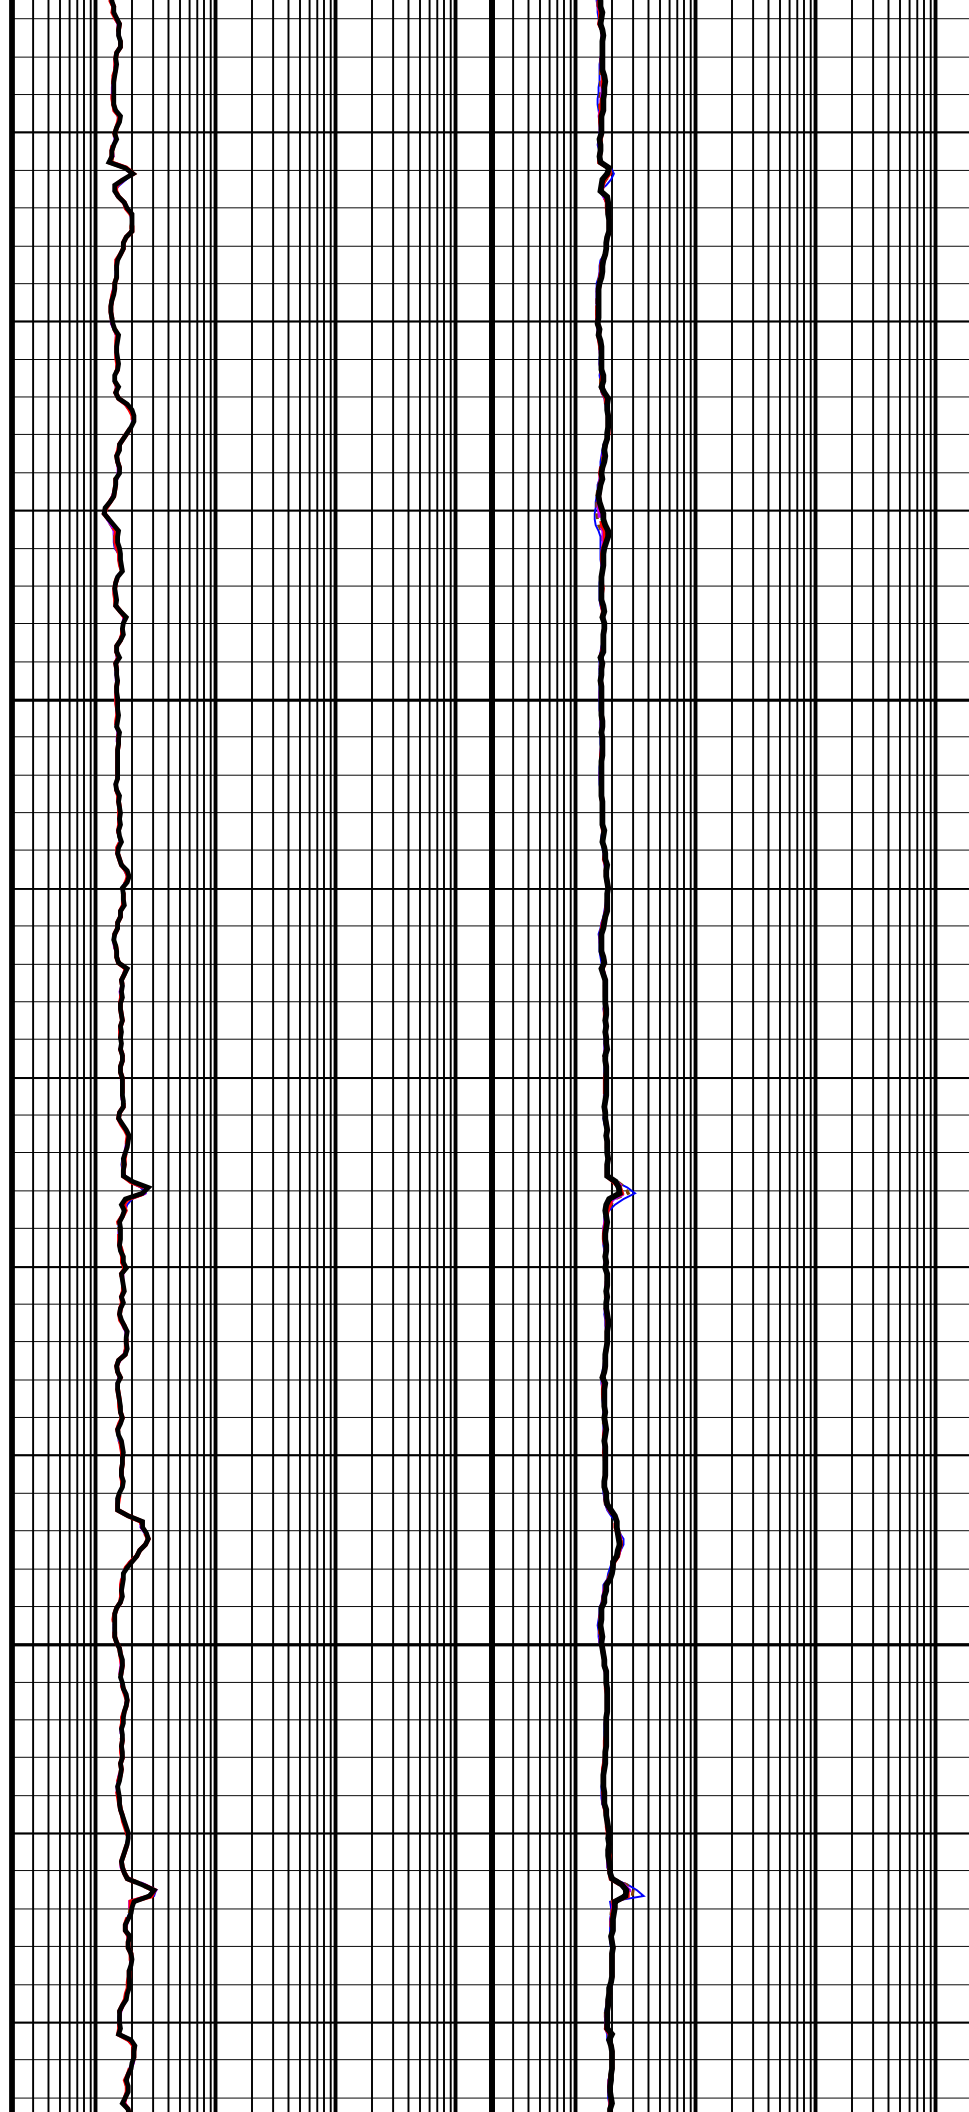


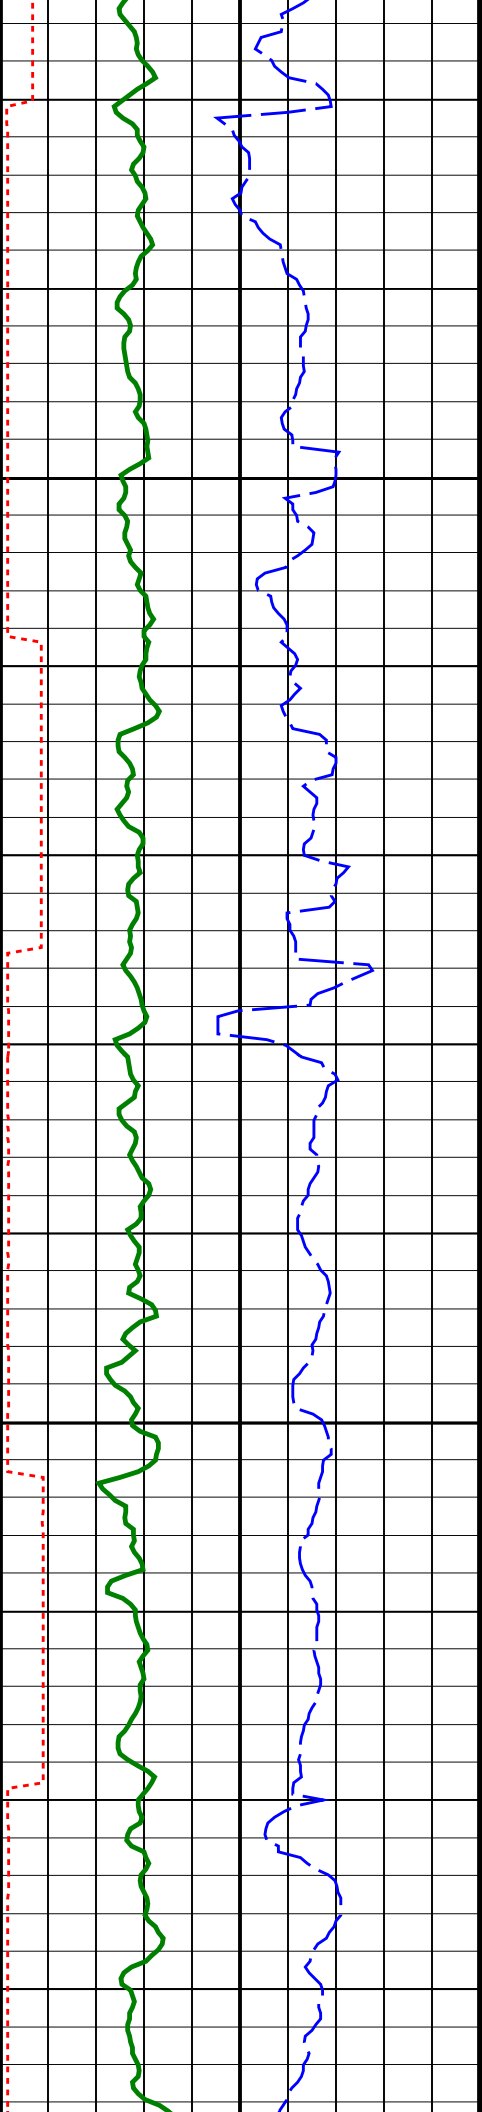

1950  
TVD


1975  
TVD

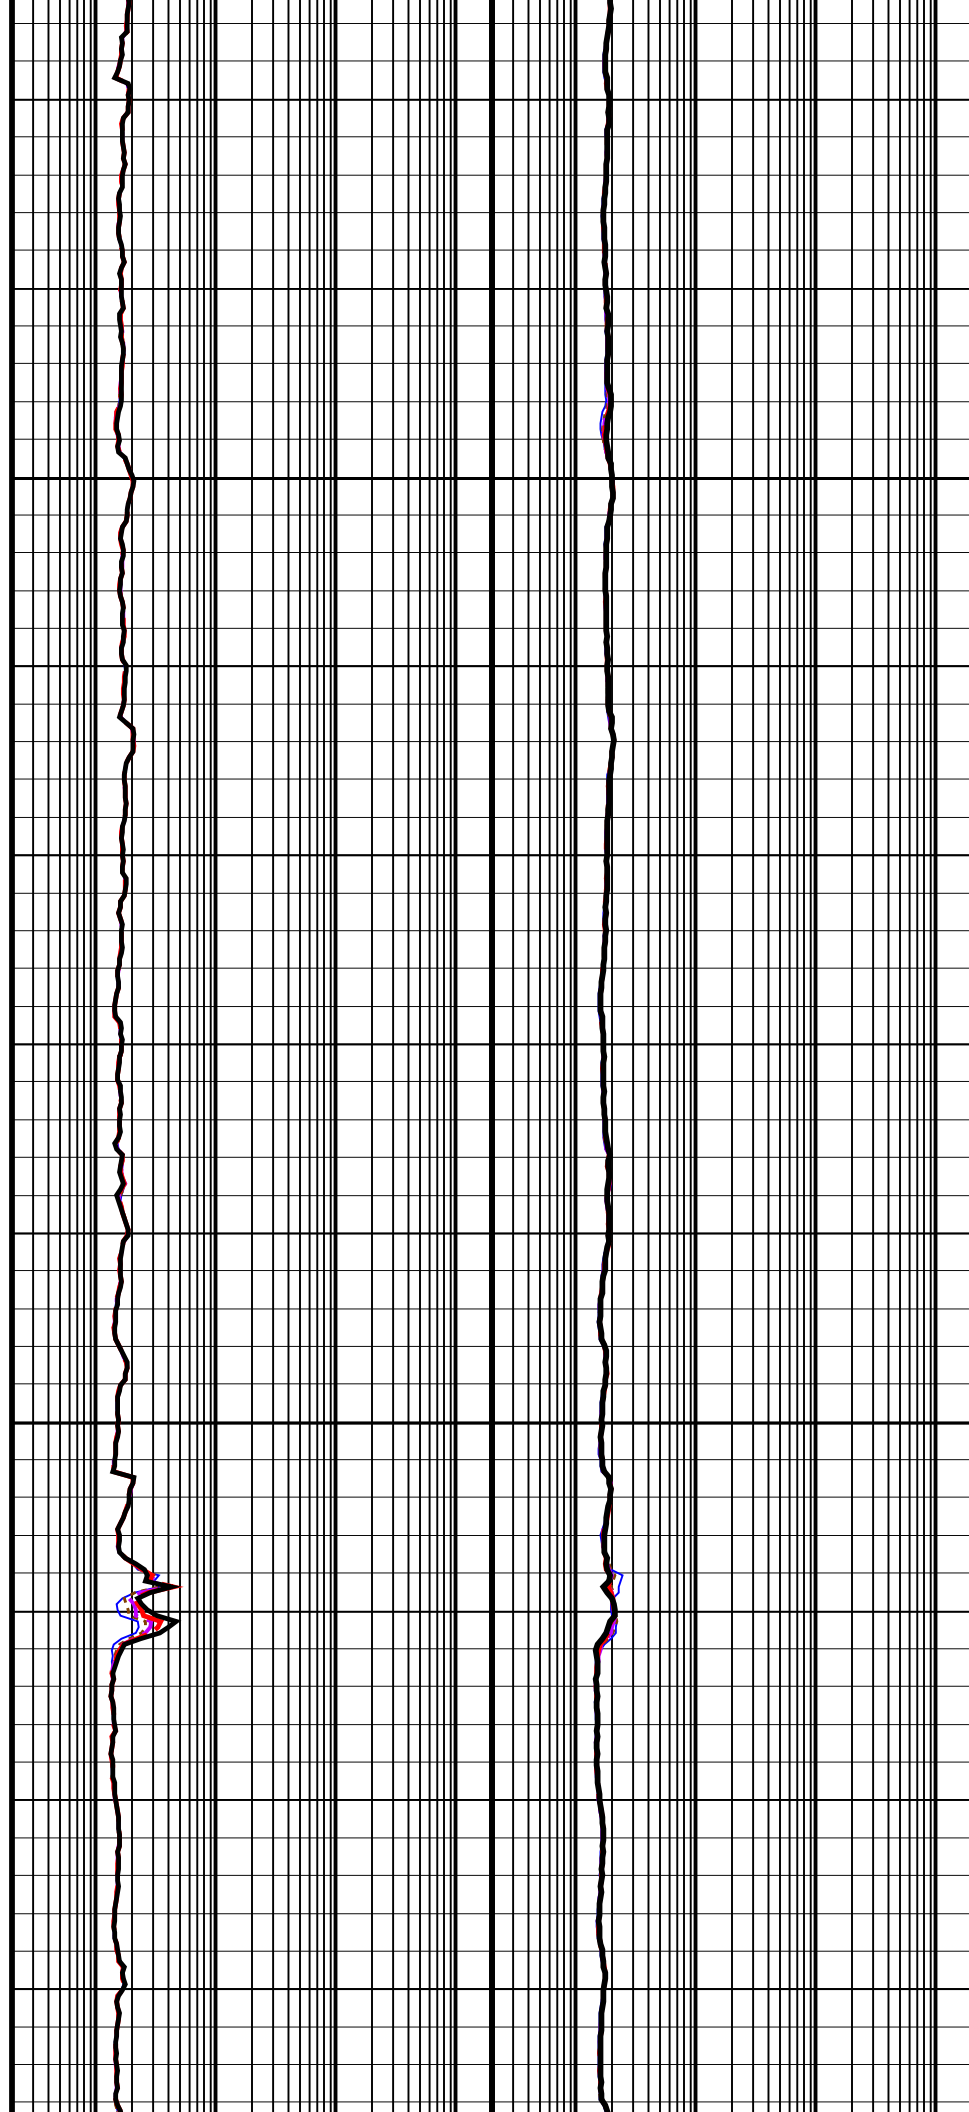


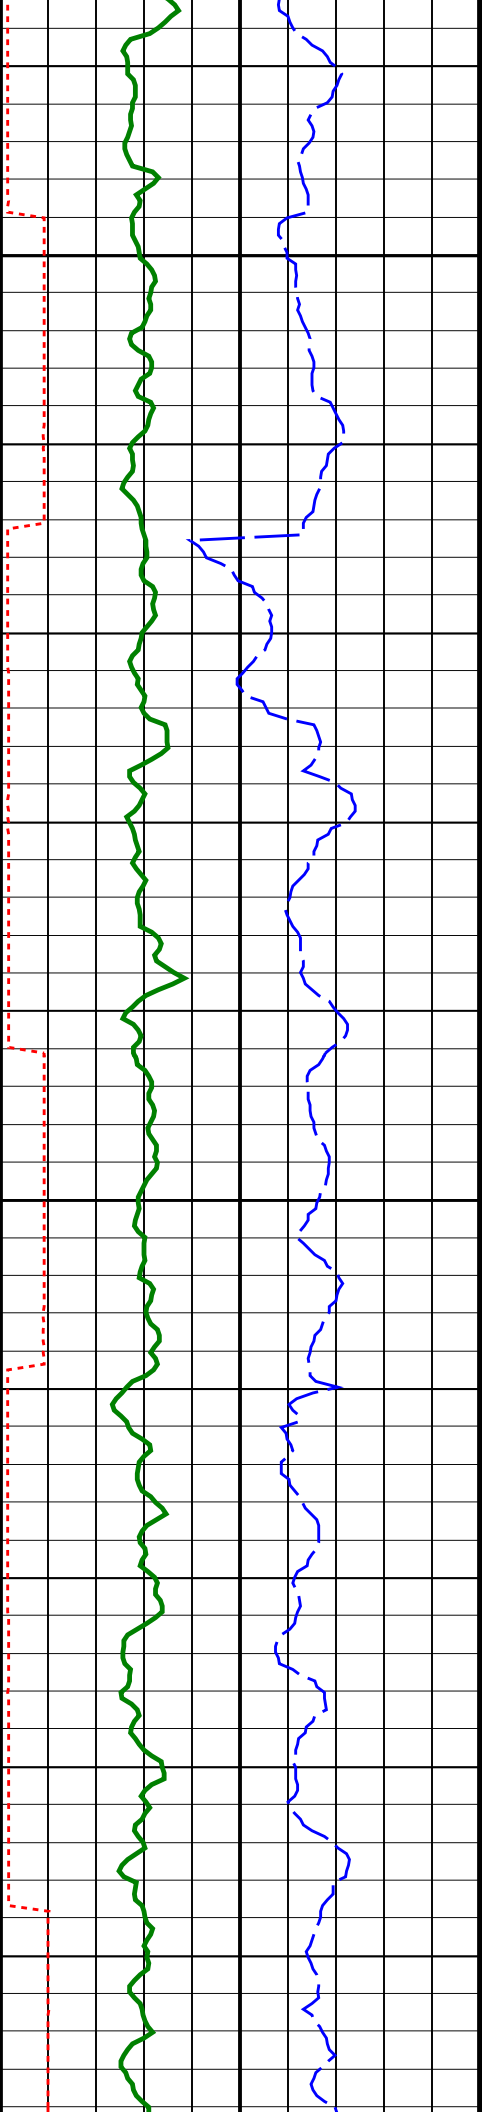

2000  
TVD

2025  
TVD

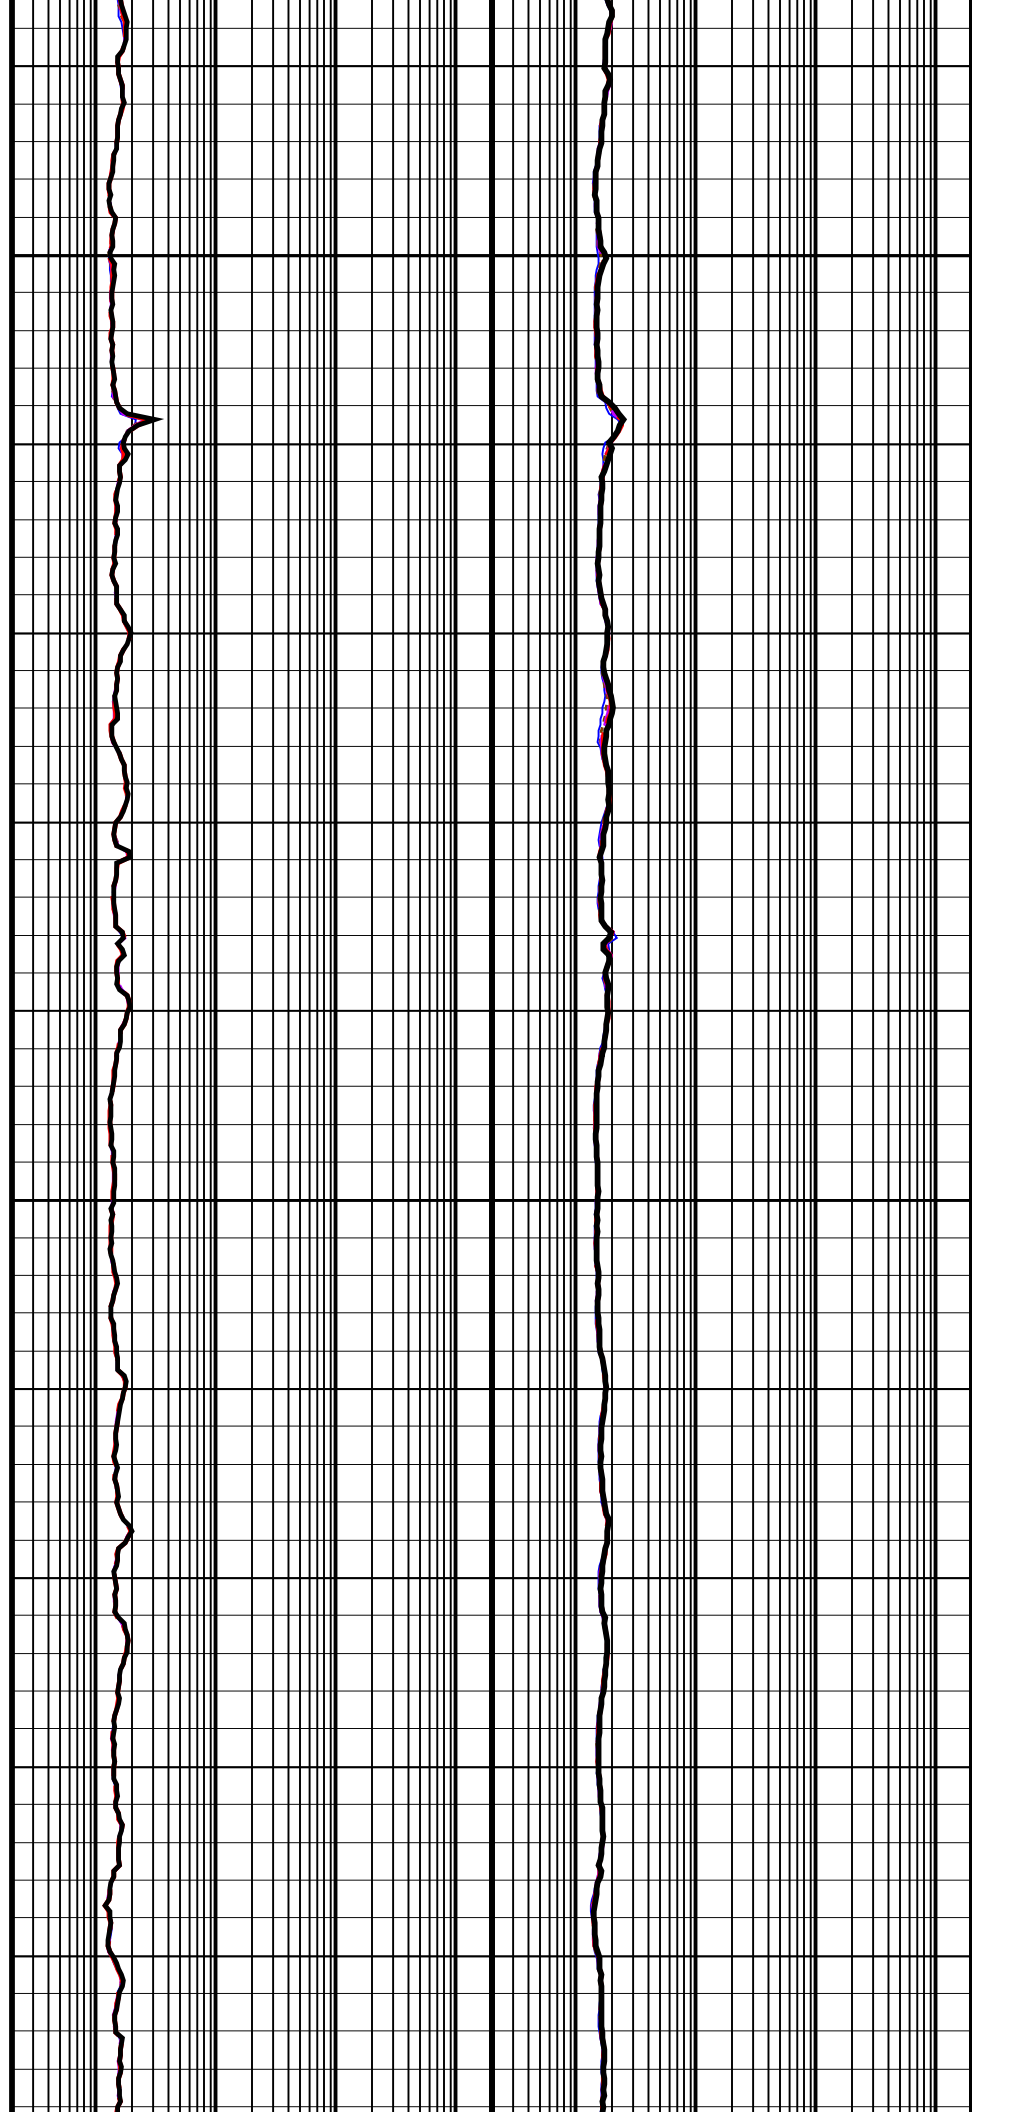


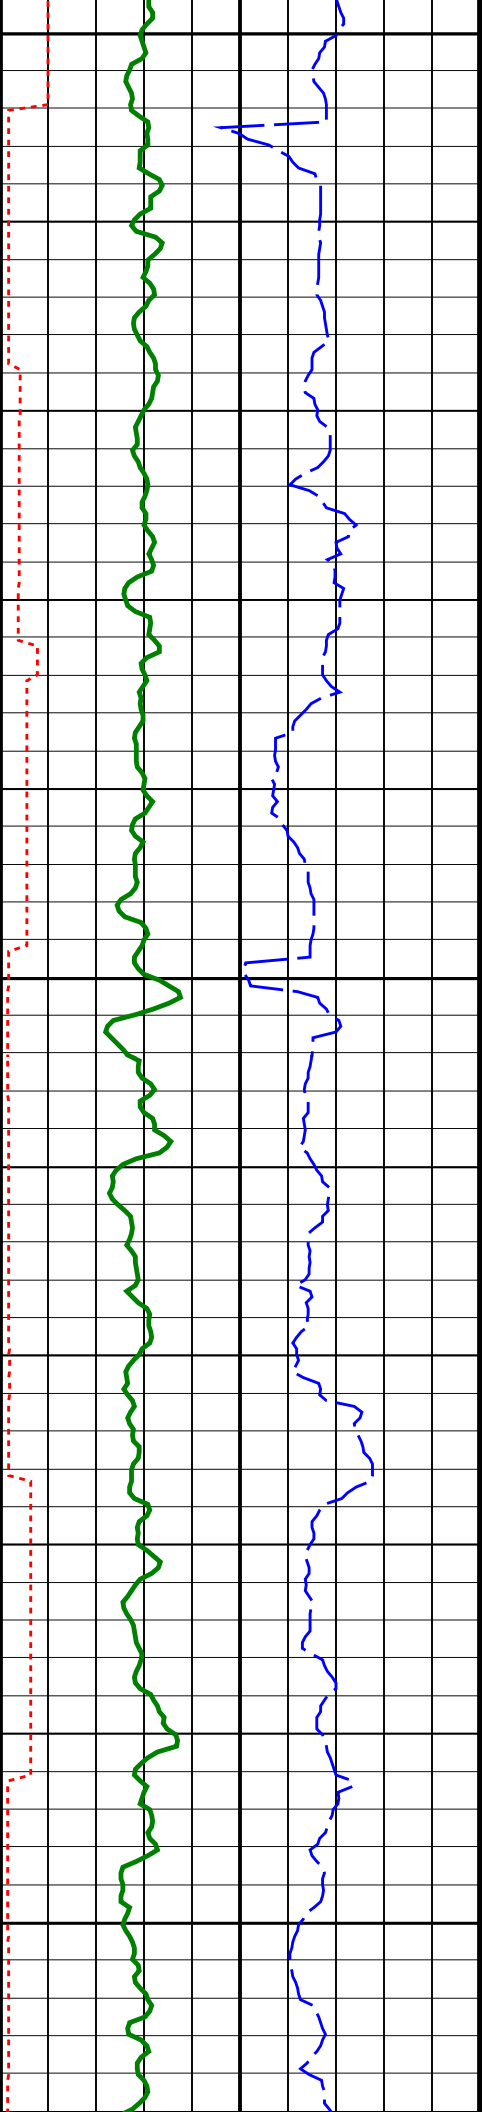


2050  
TVD

2075  
TVD


2100  
TVD

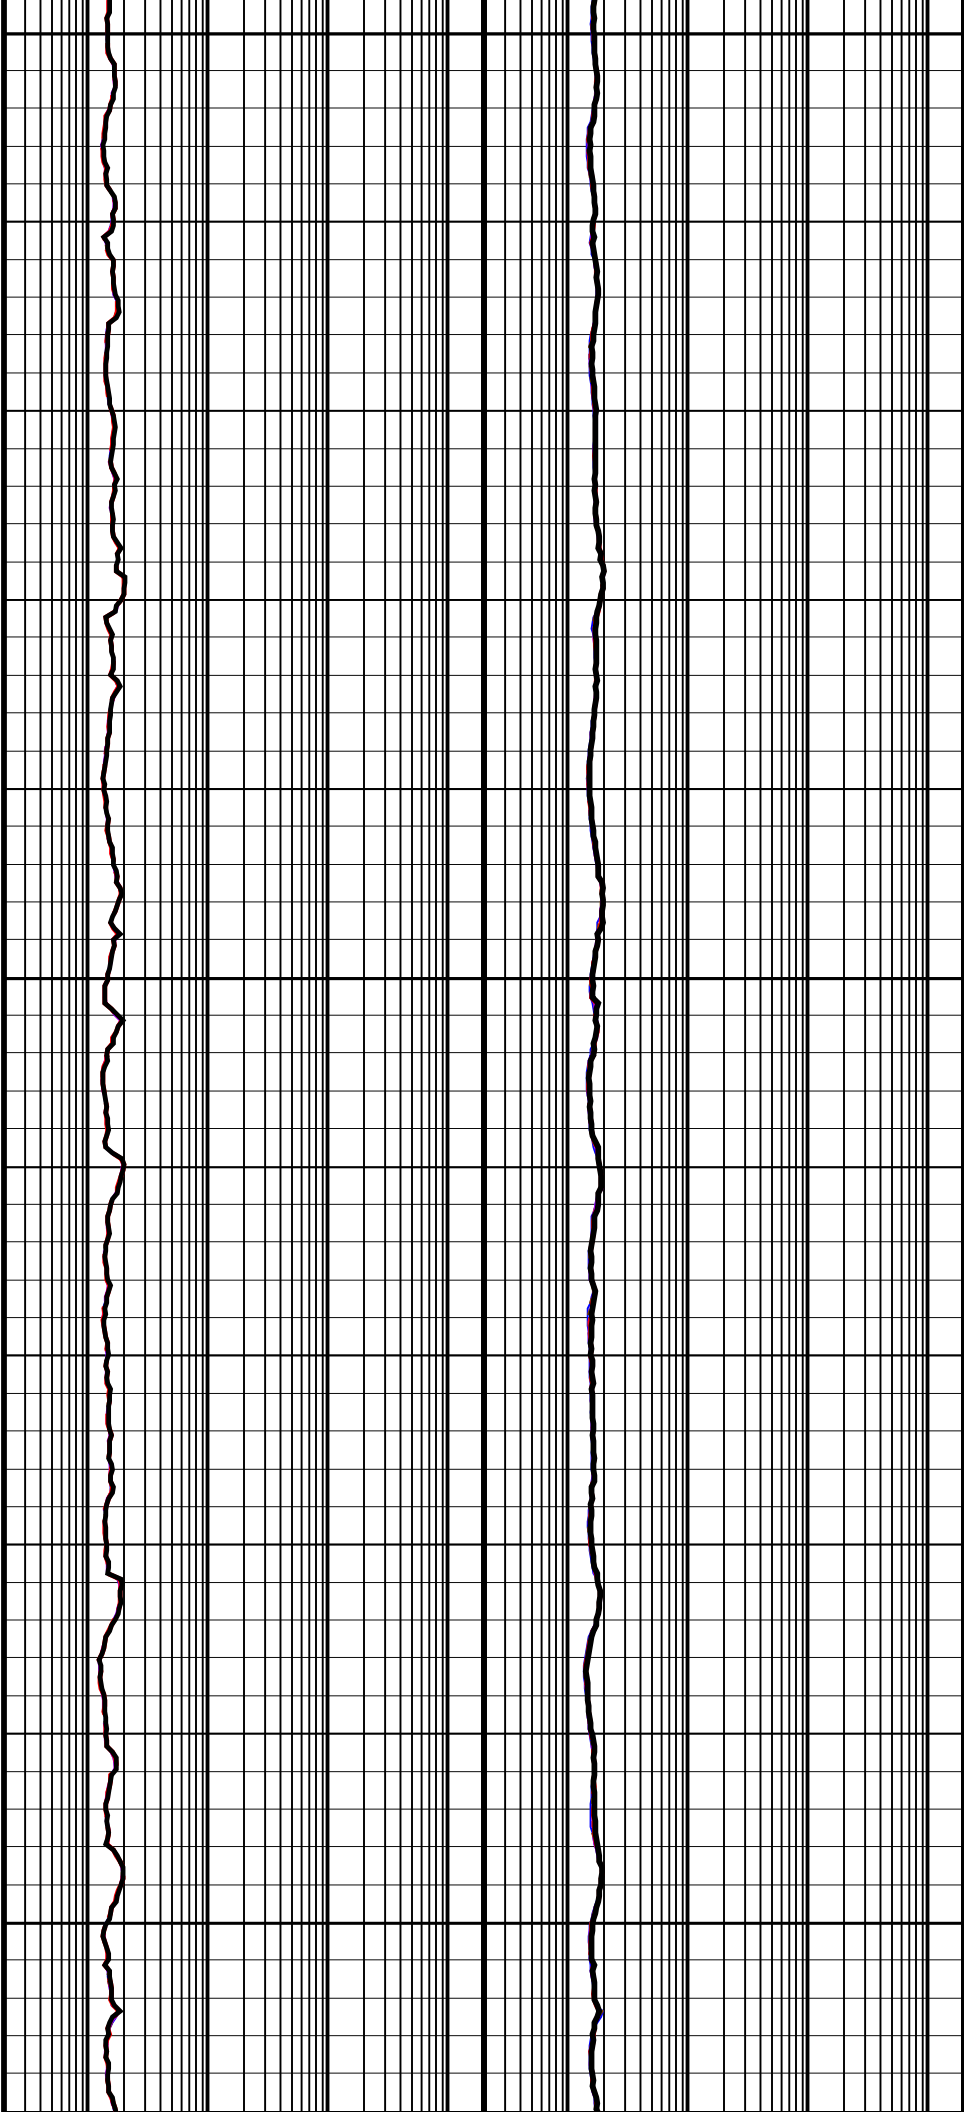

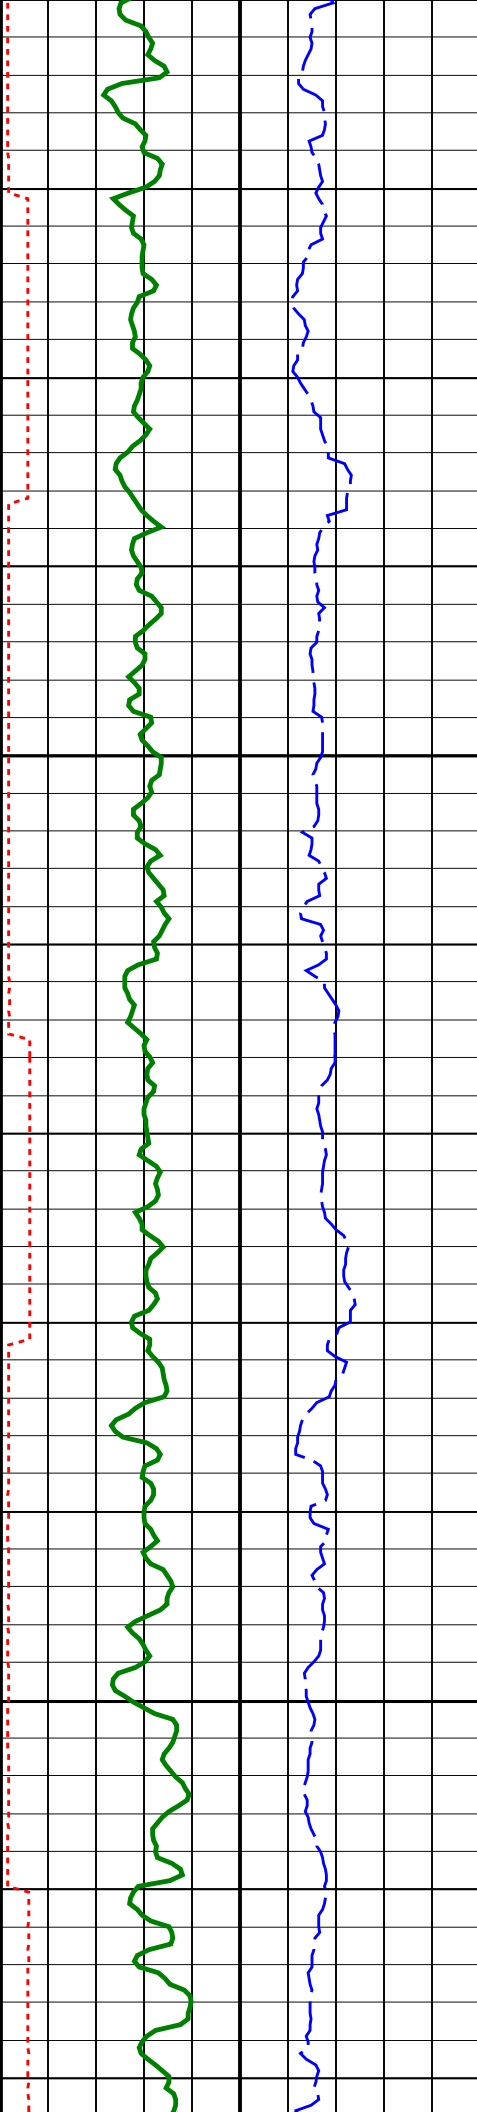


2125  
TVD

2150  
TVD

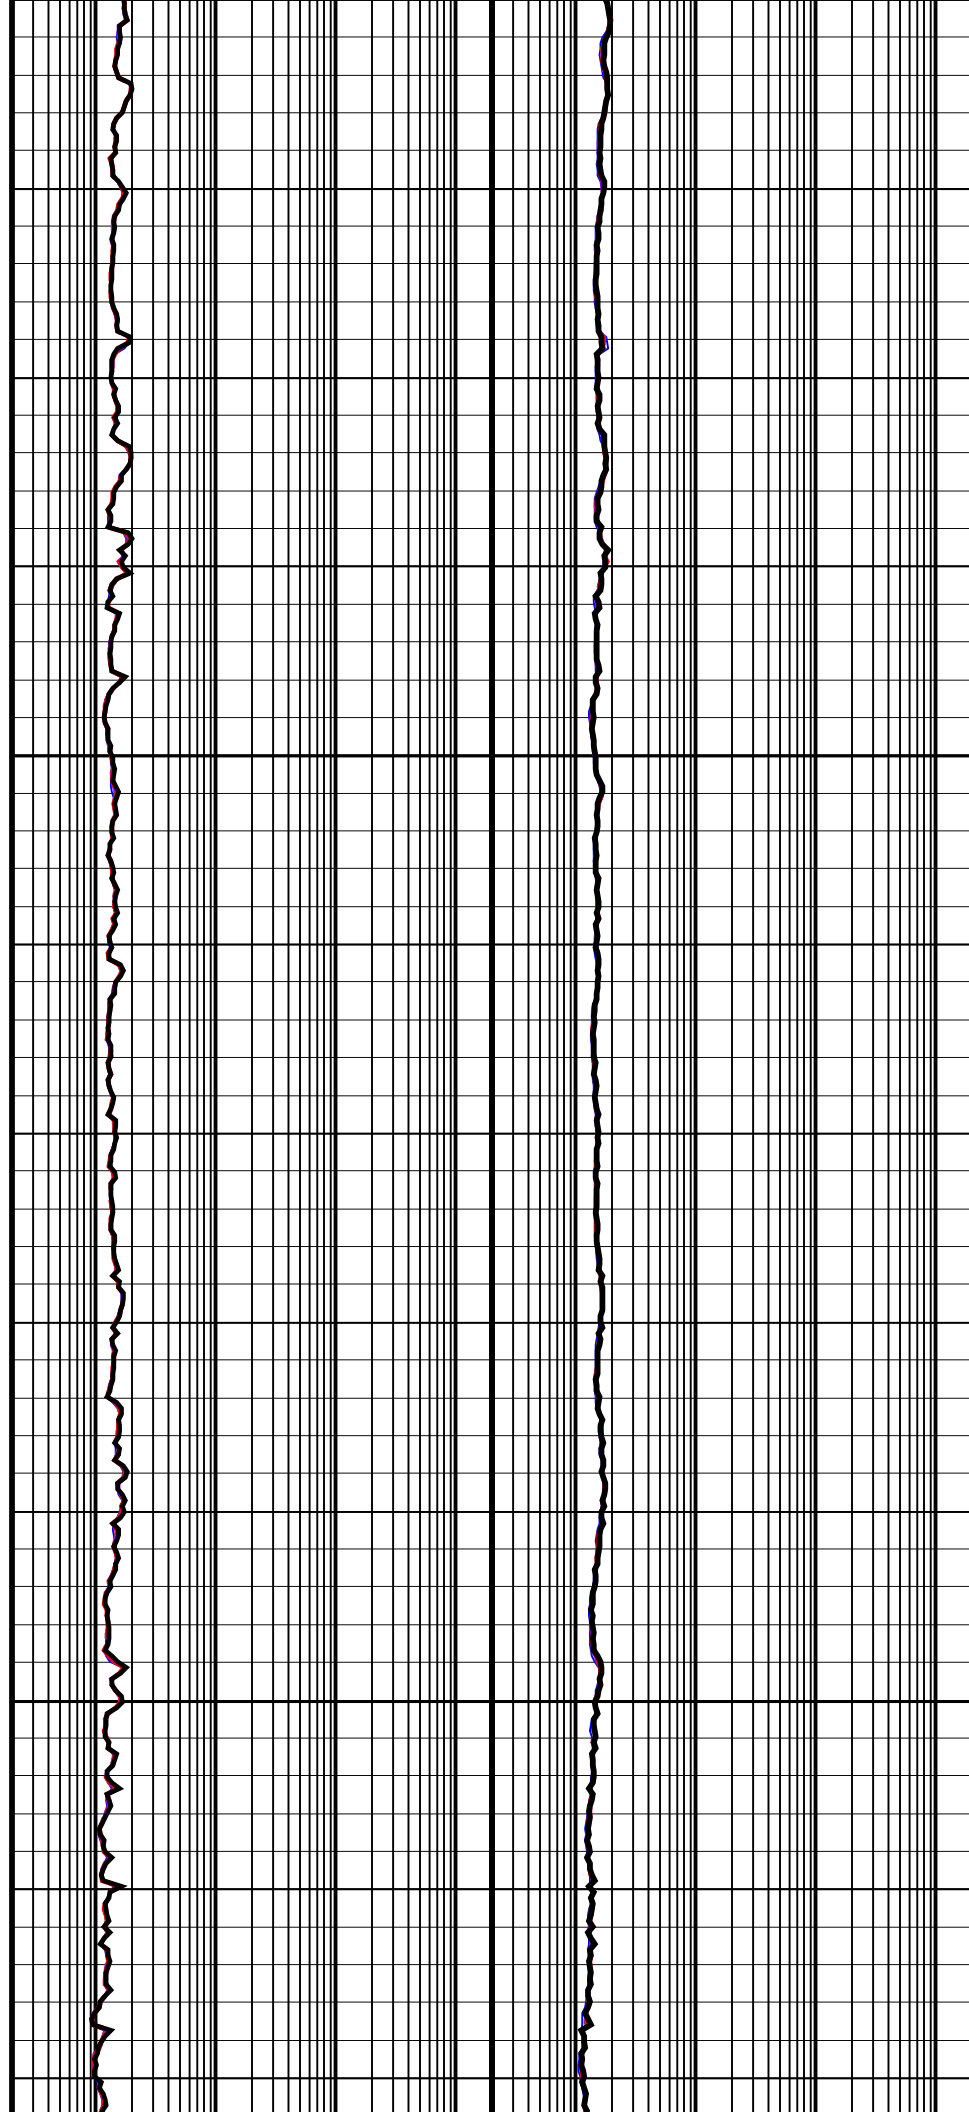





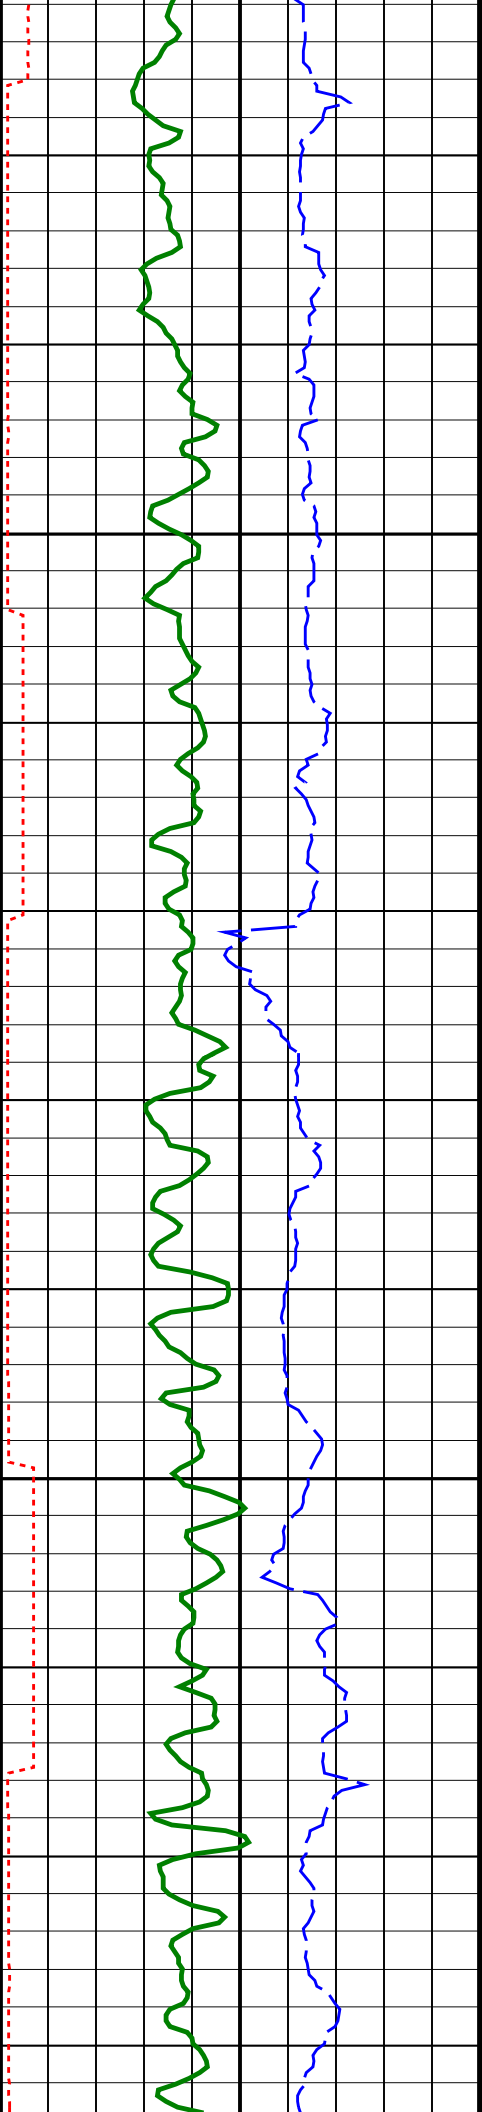

2175  
TVD


2200  
TVD


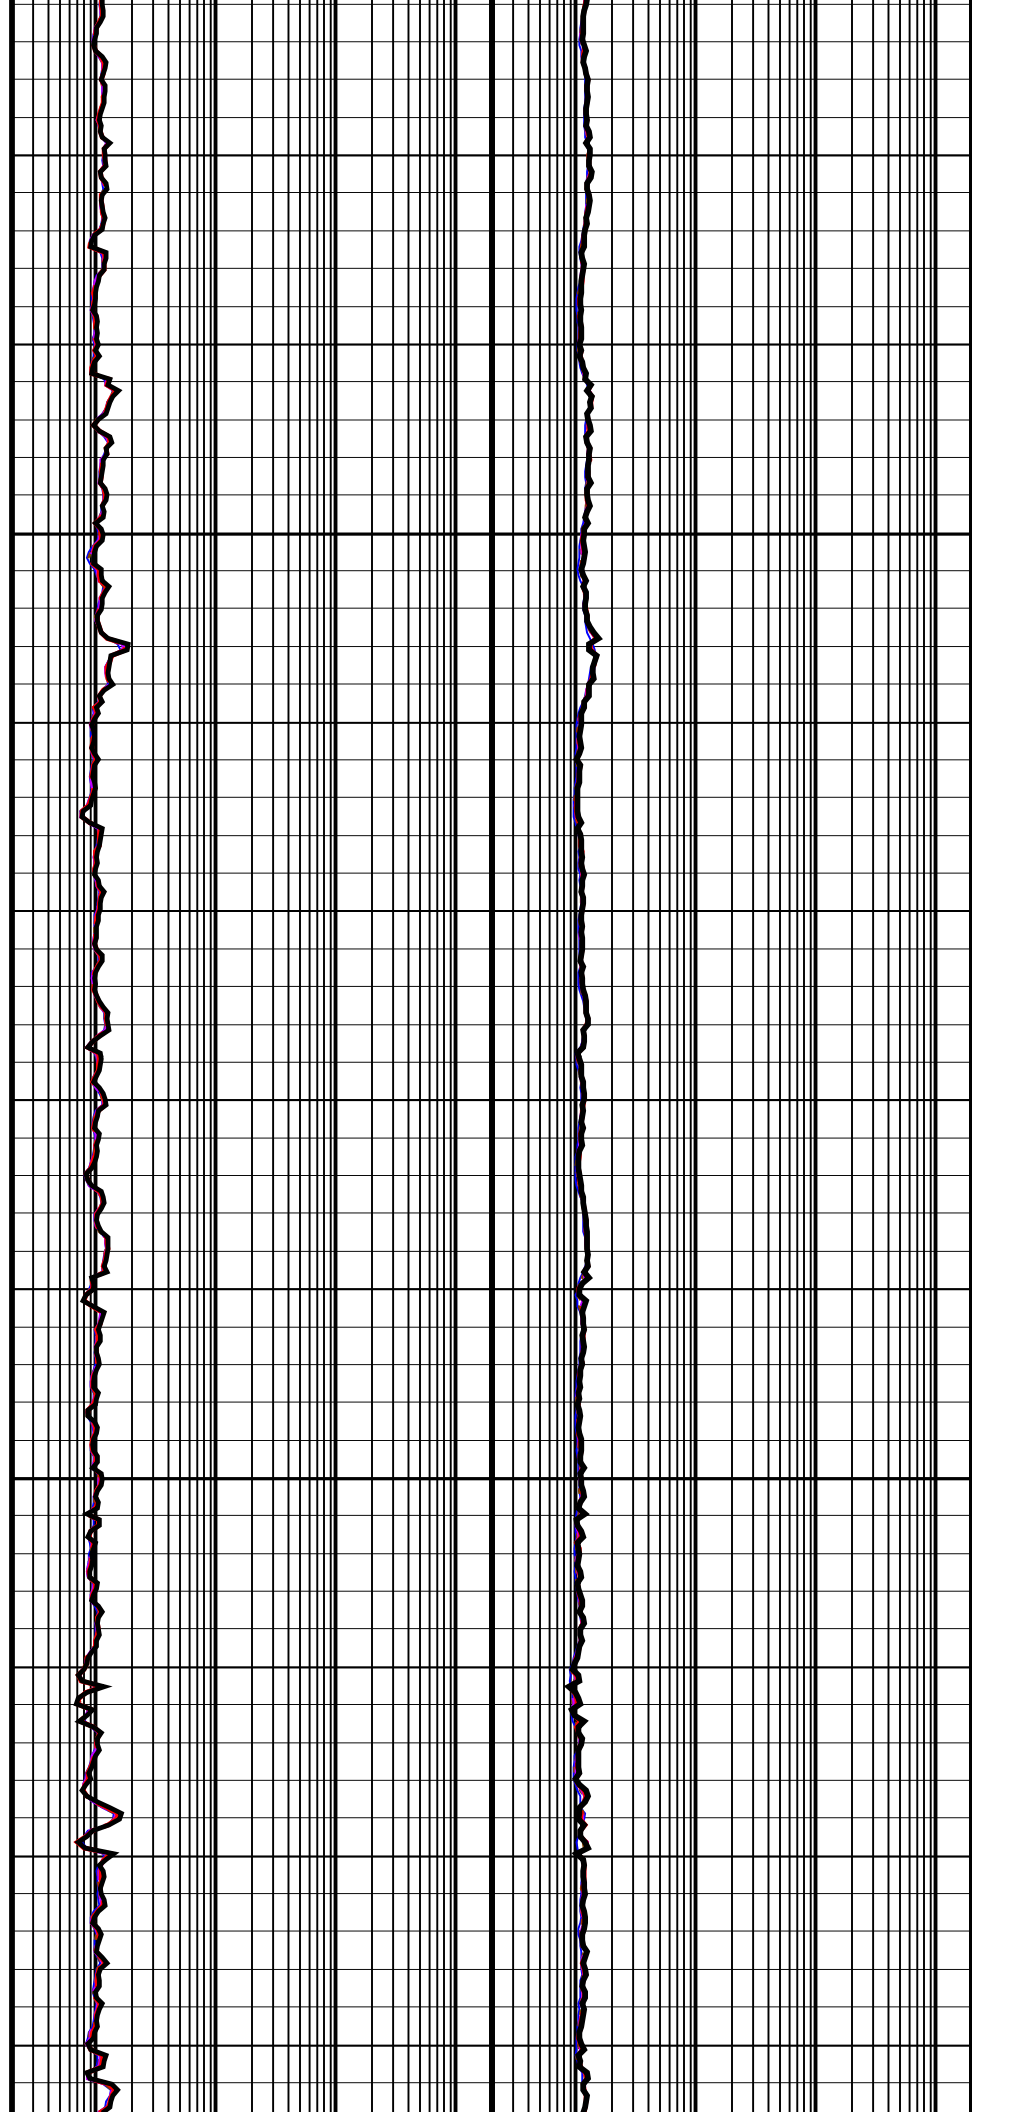


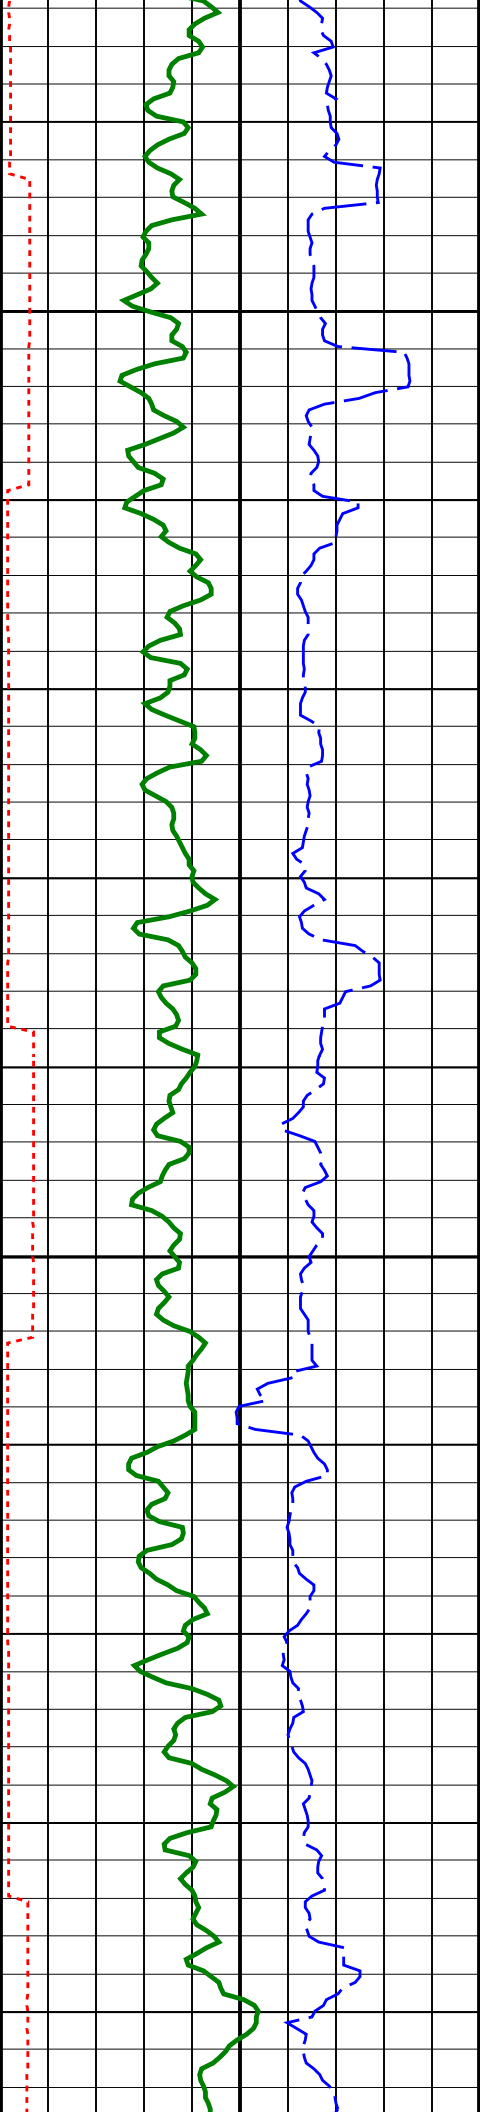


2225  
TVD

2250  
TVD

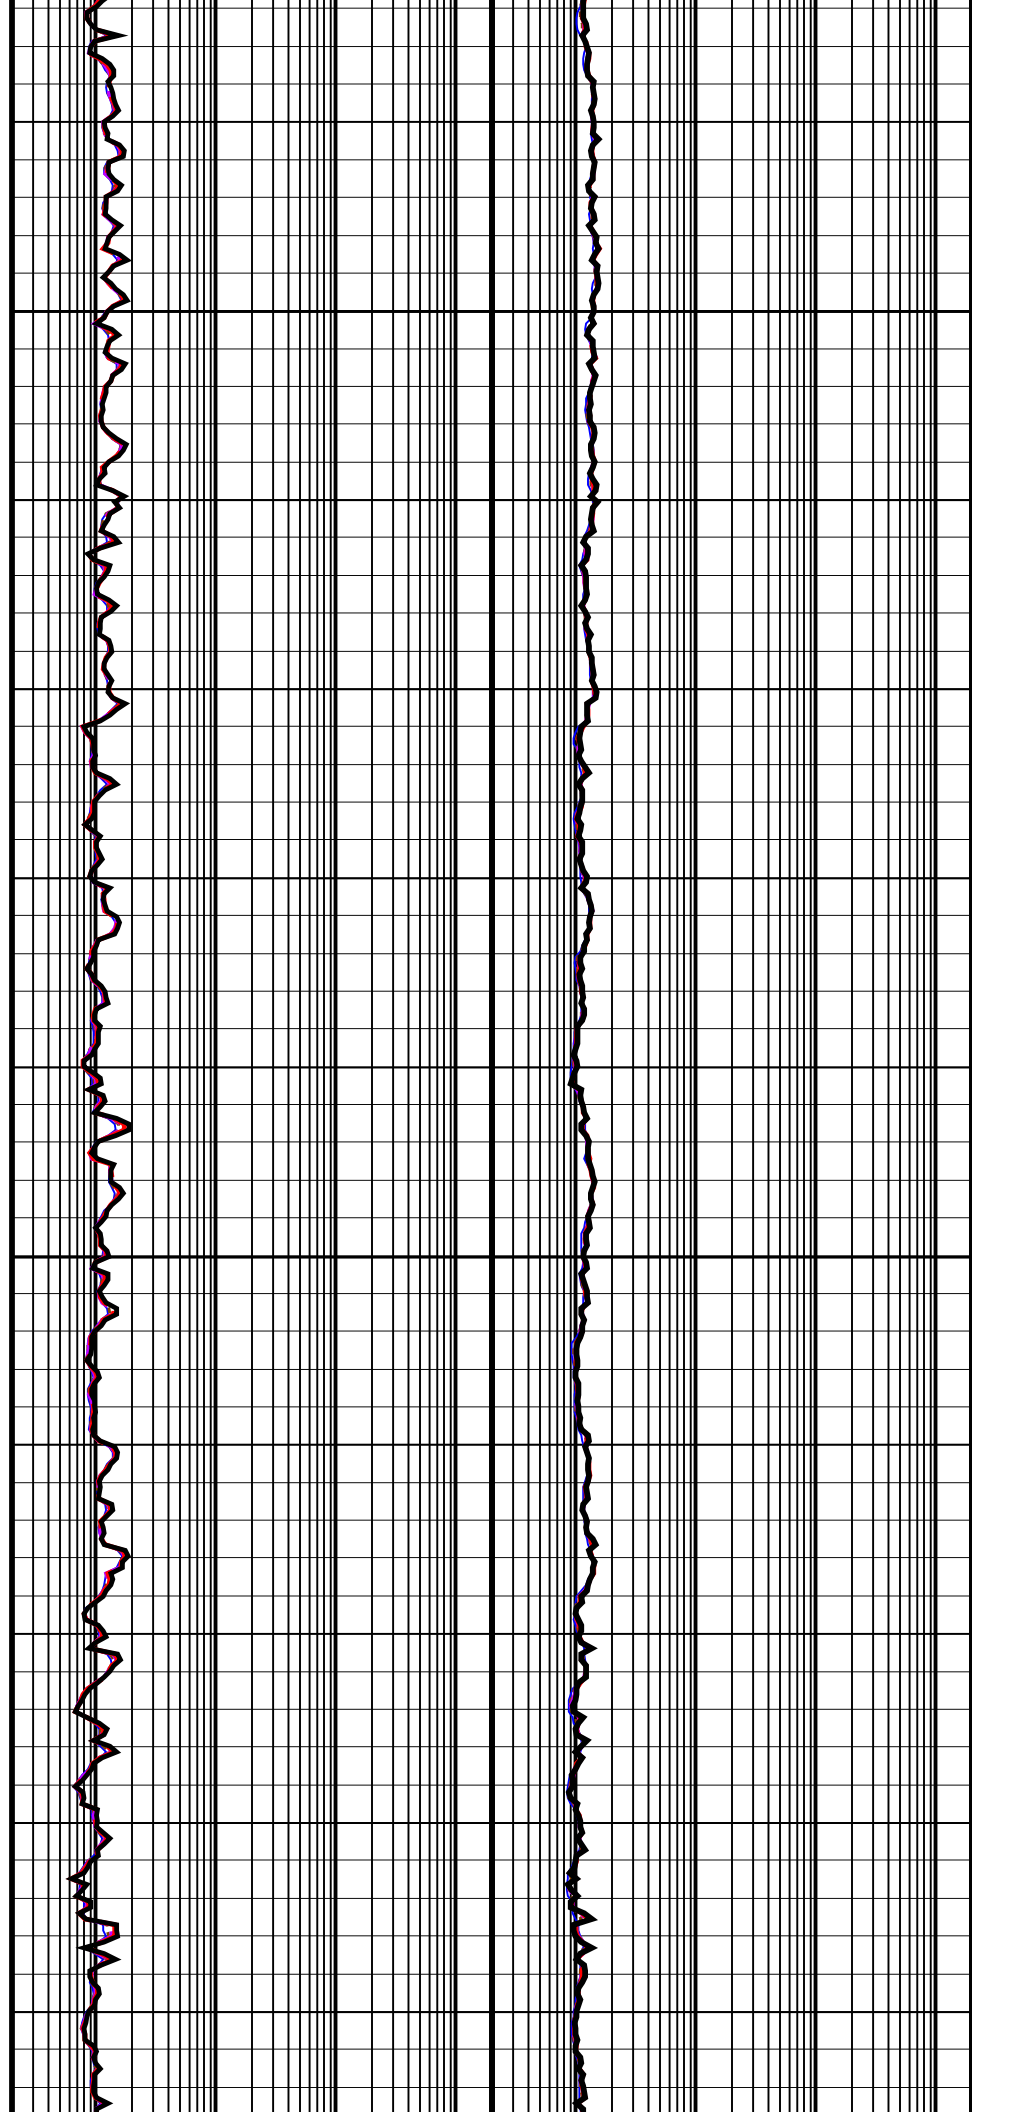


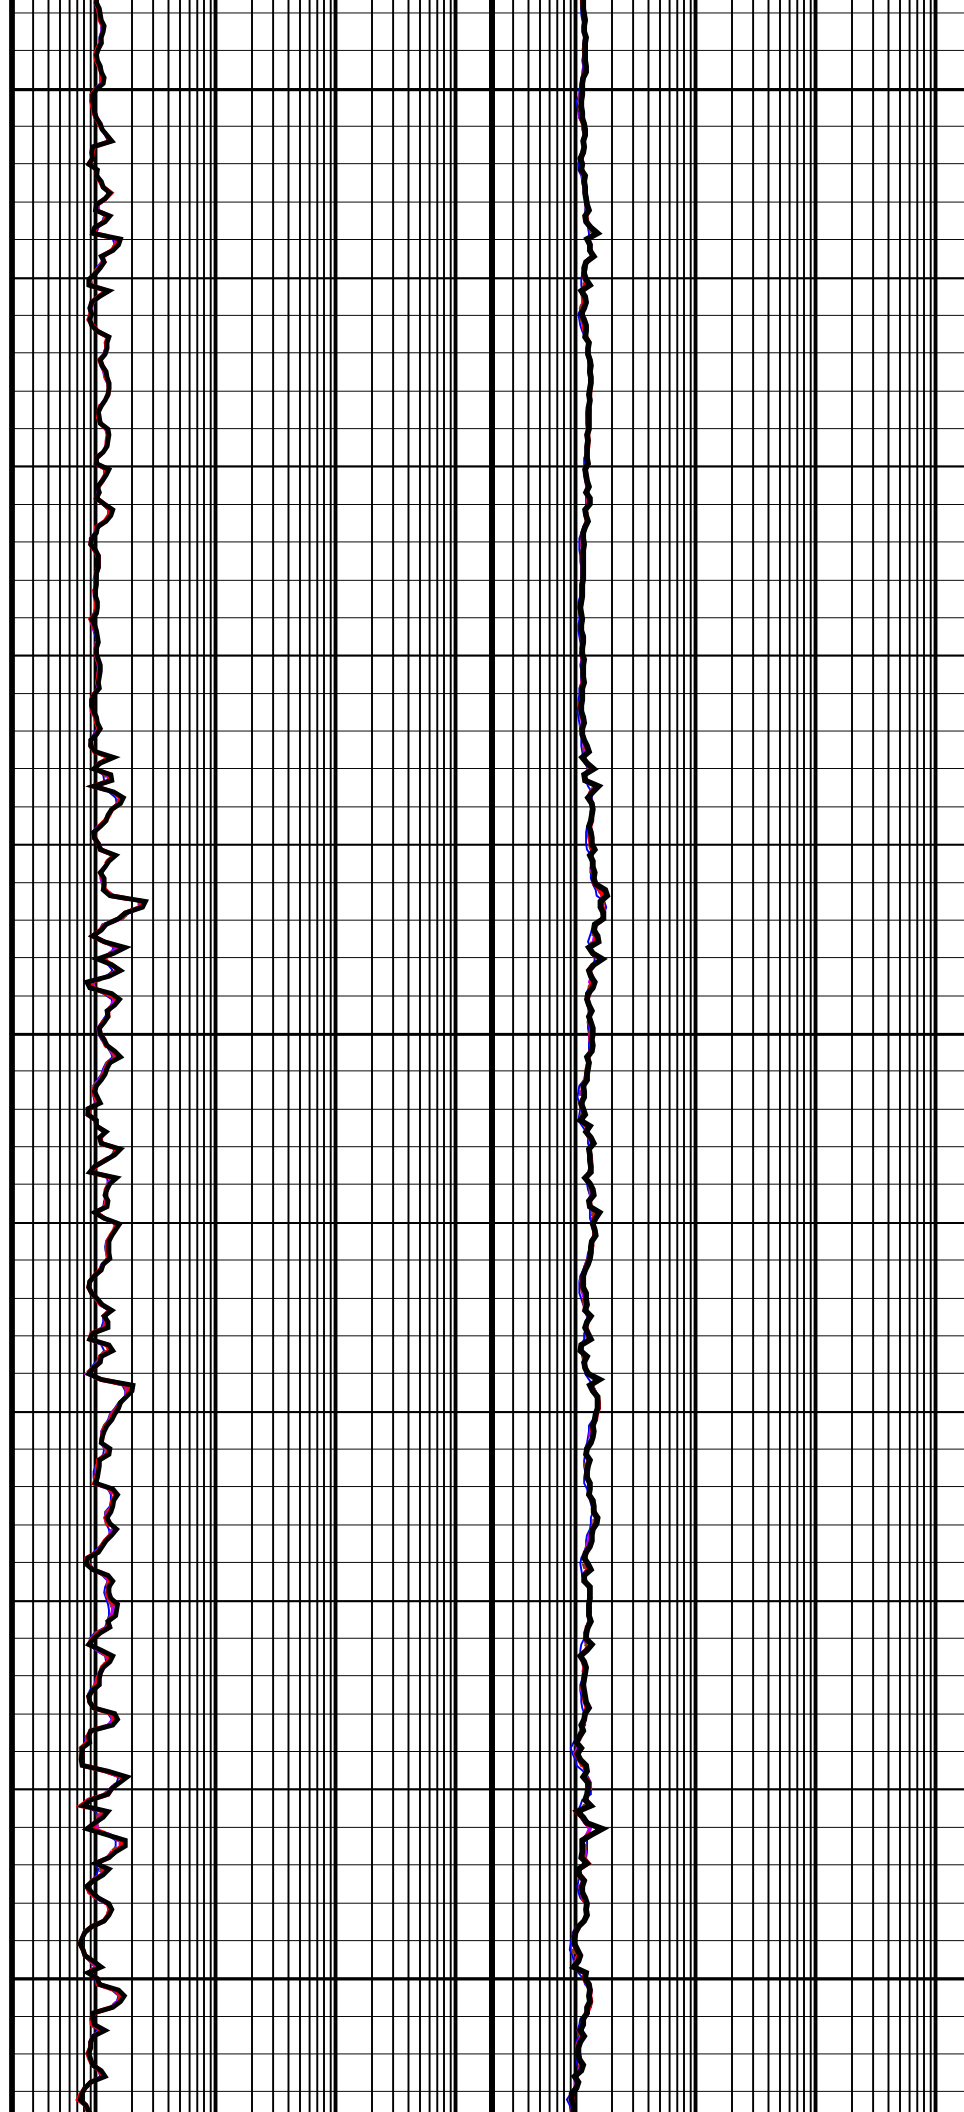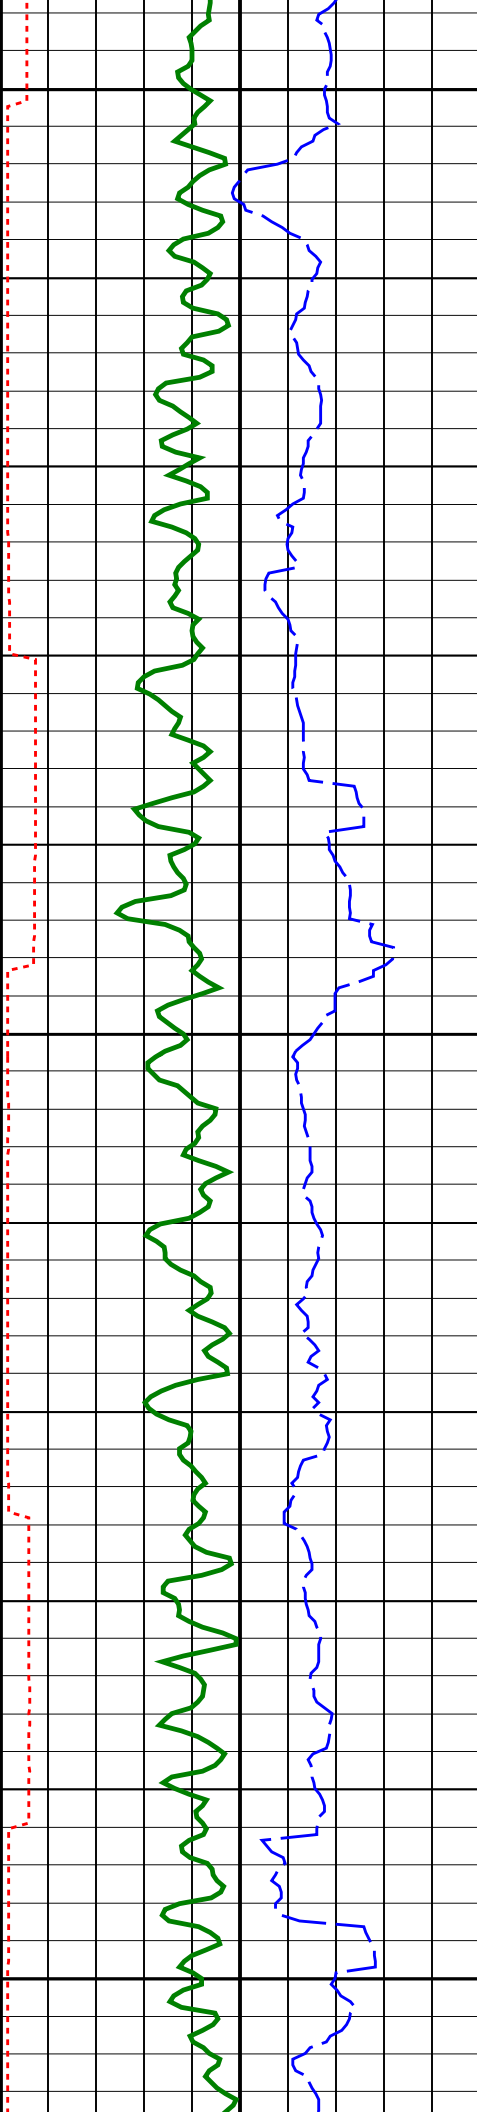


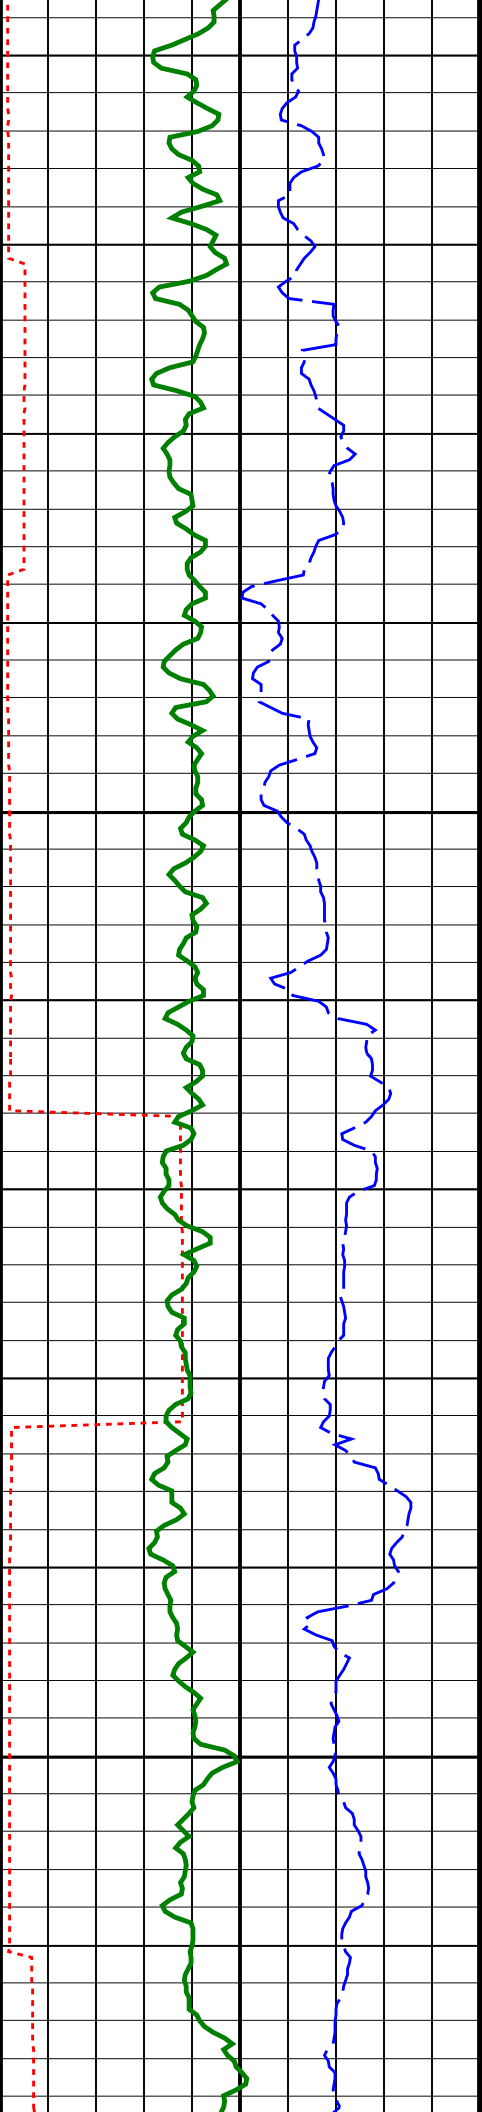

2350  
TVD


2375  
TVD

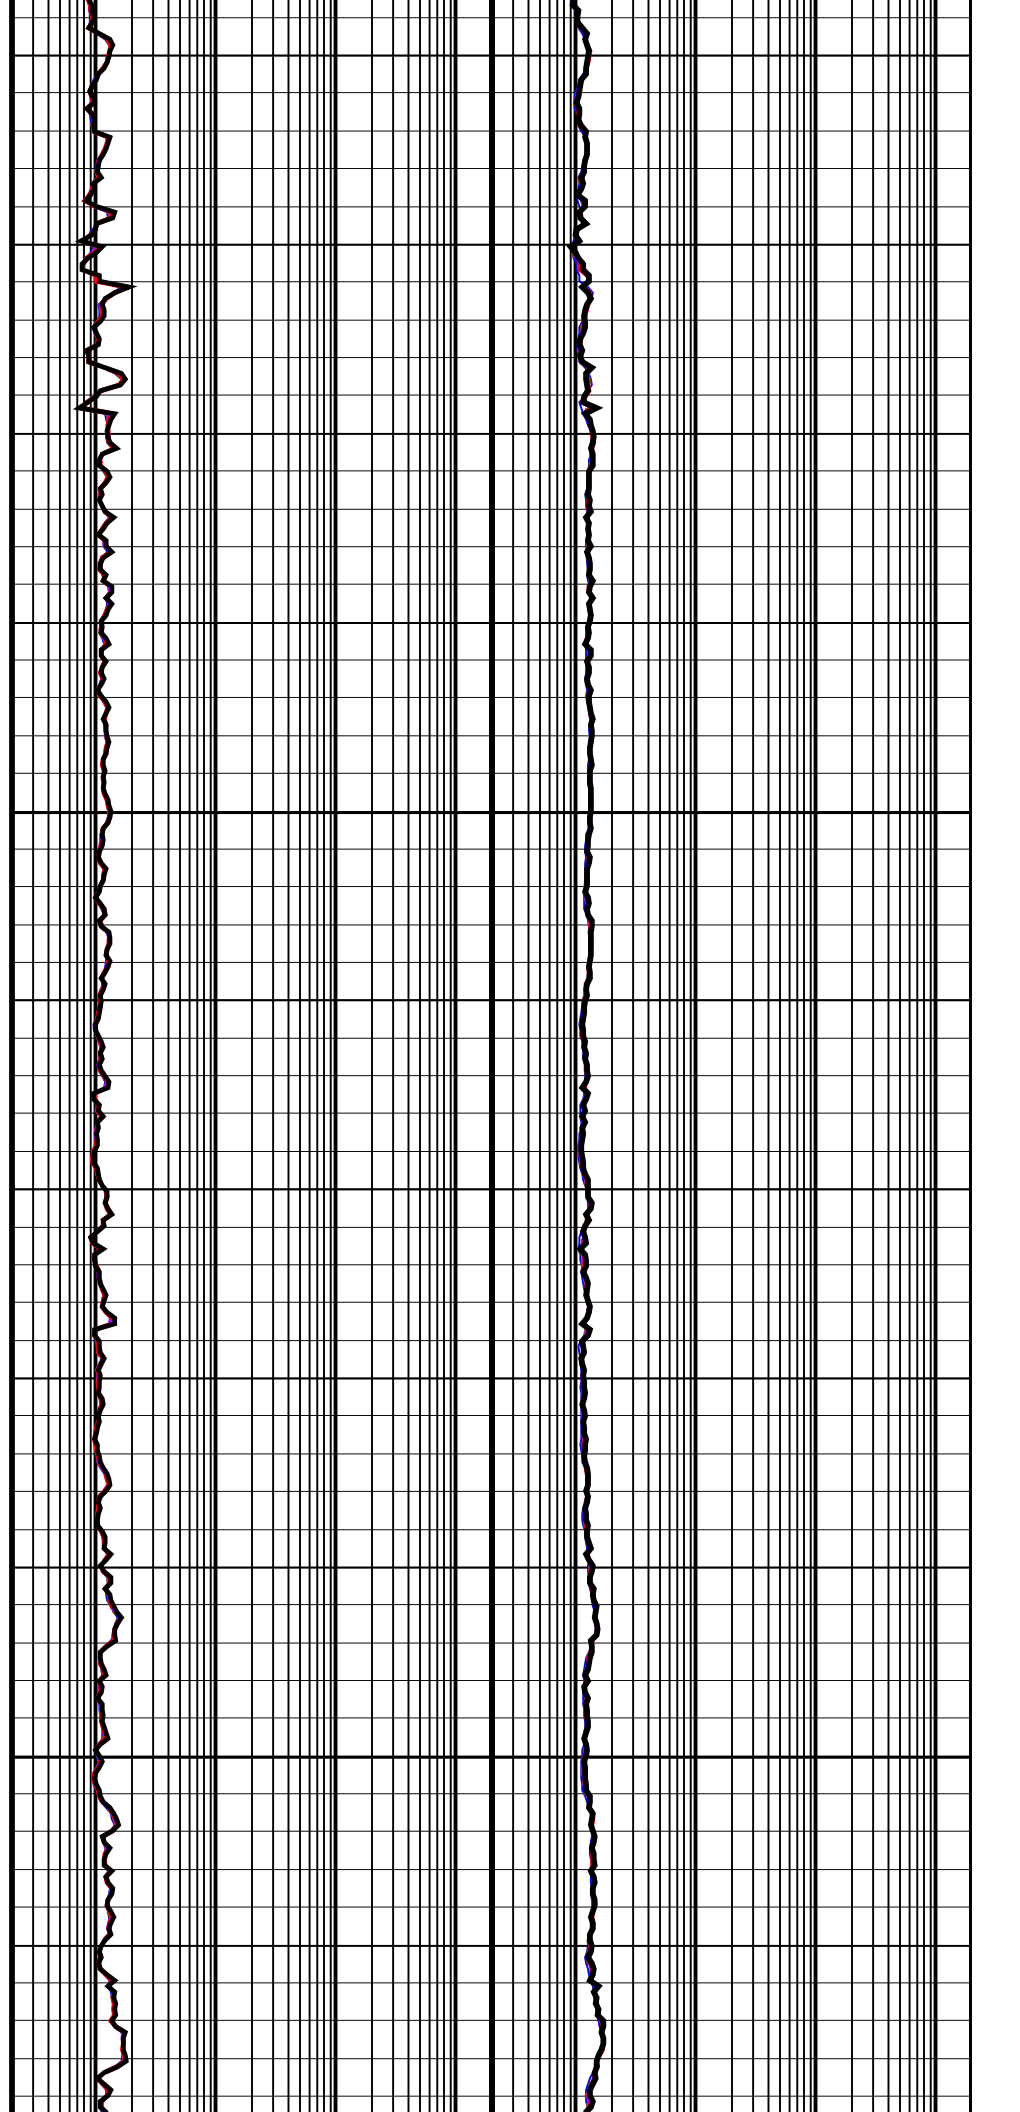


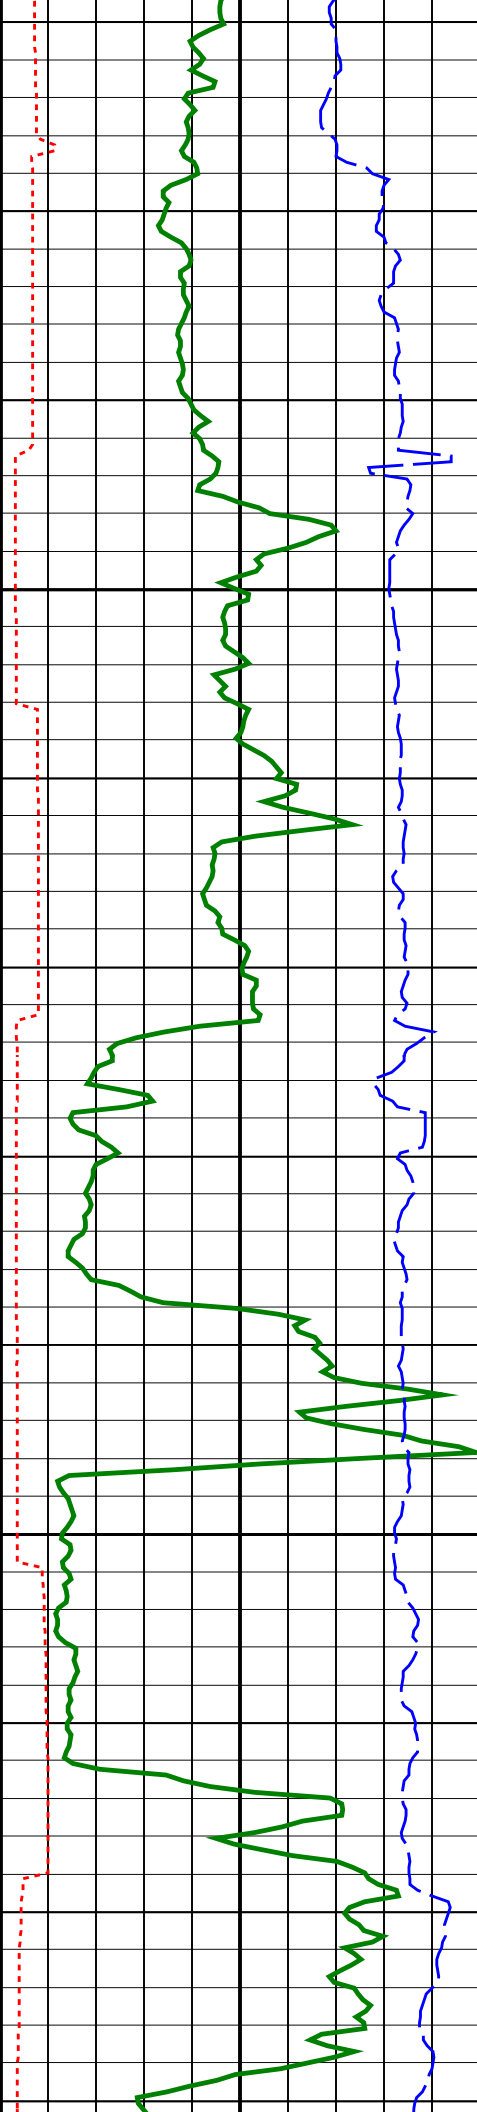

2400  
TVD

2425  
TVD

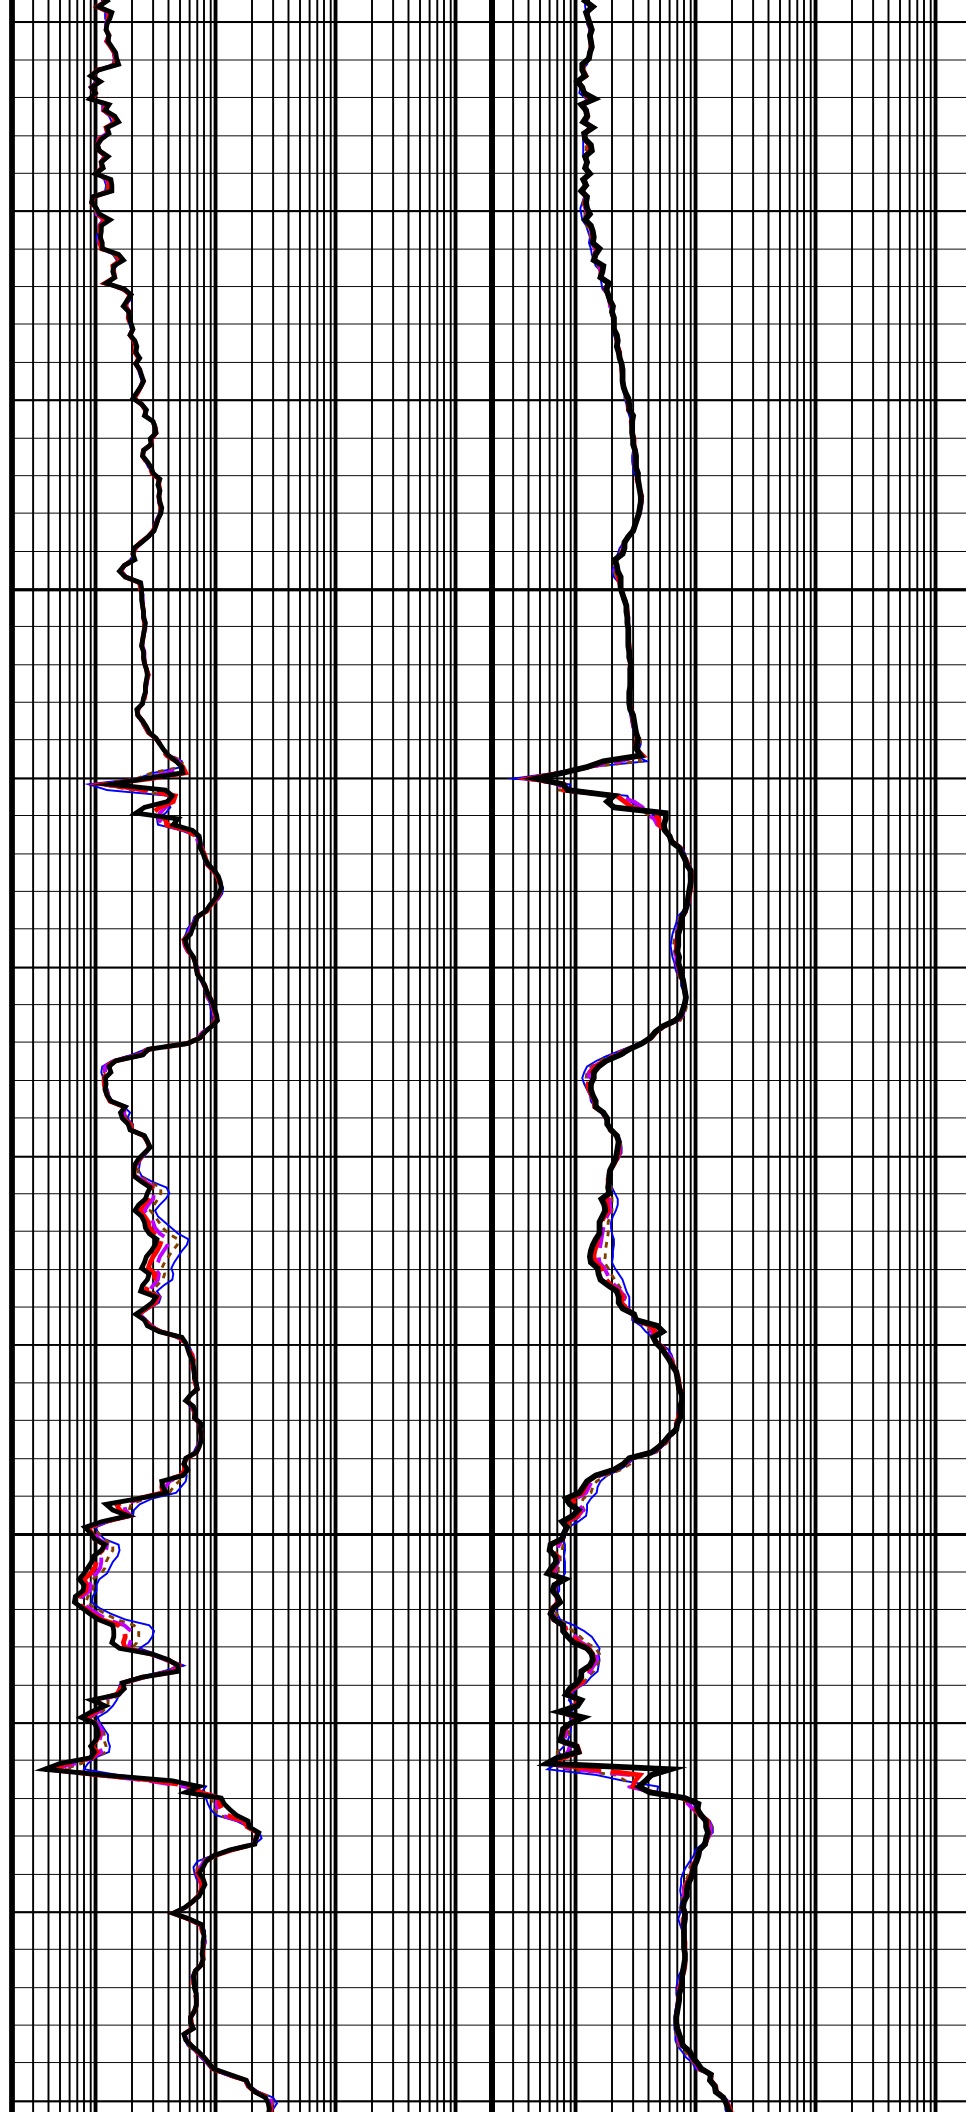


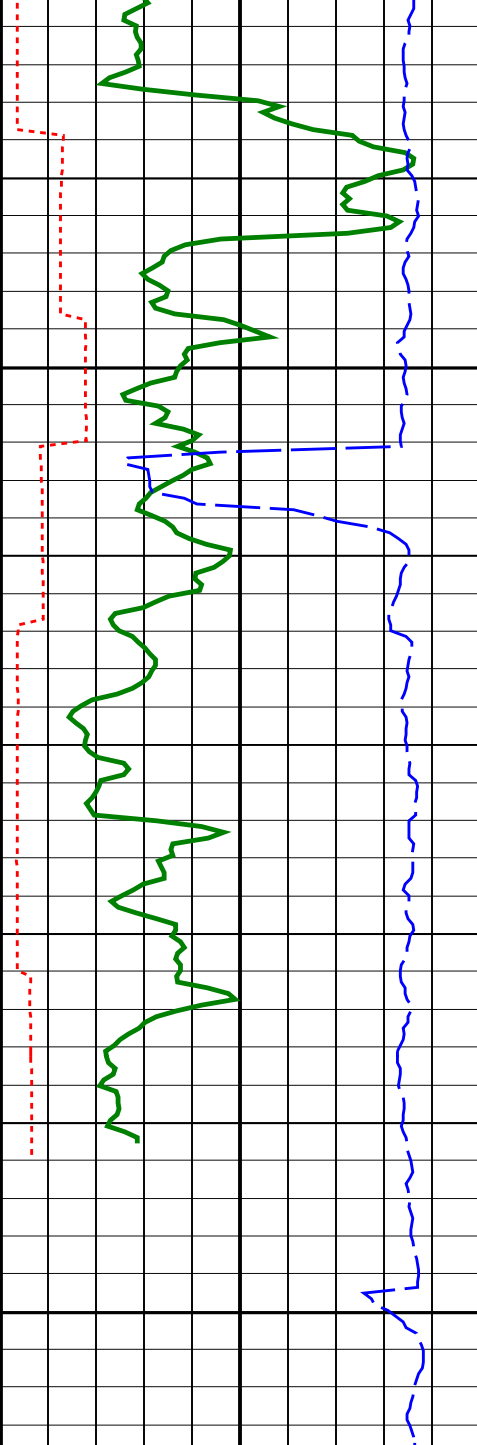

2450  
TVD

2475  
TVD

ARC Gamma Ray (GR_ARC)		
0	(GAPI)	200
ARC Resistivity Time After Bit (TAB_ARC_RES)		
0	(HR)	10
Rate of Penetration, Averaged over Last 5ft (ROP5_RM)		
200	(M/HR)	0

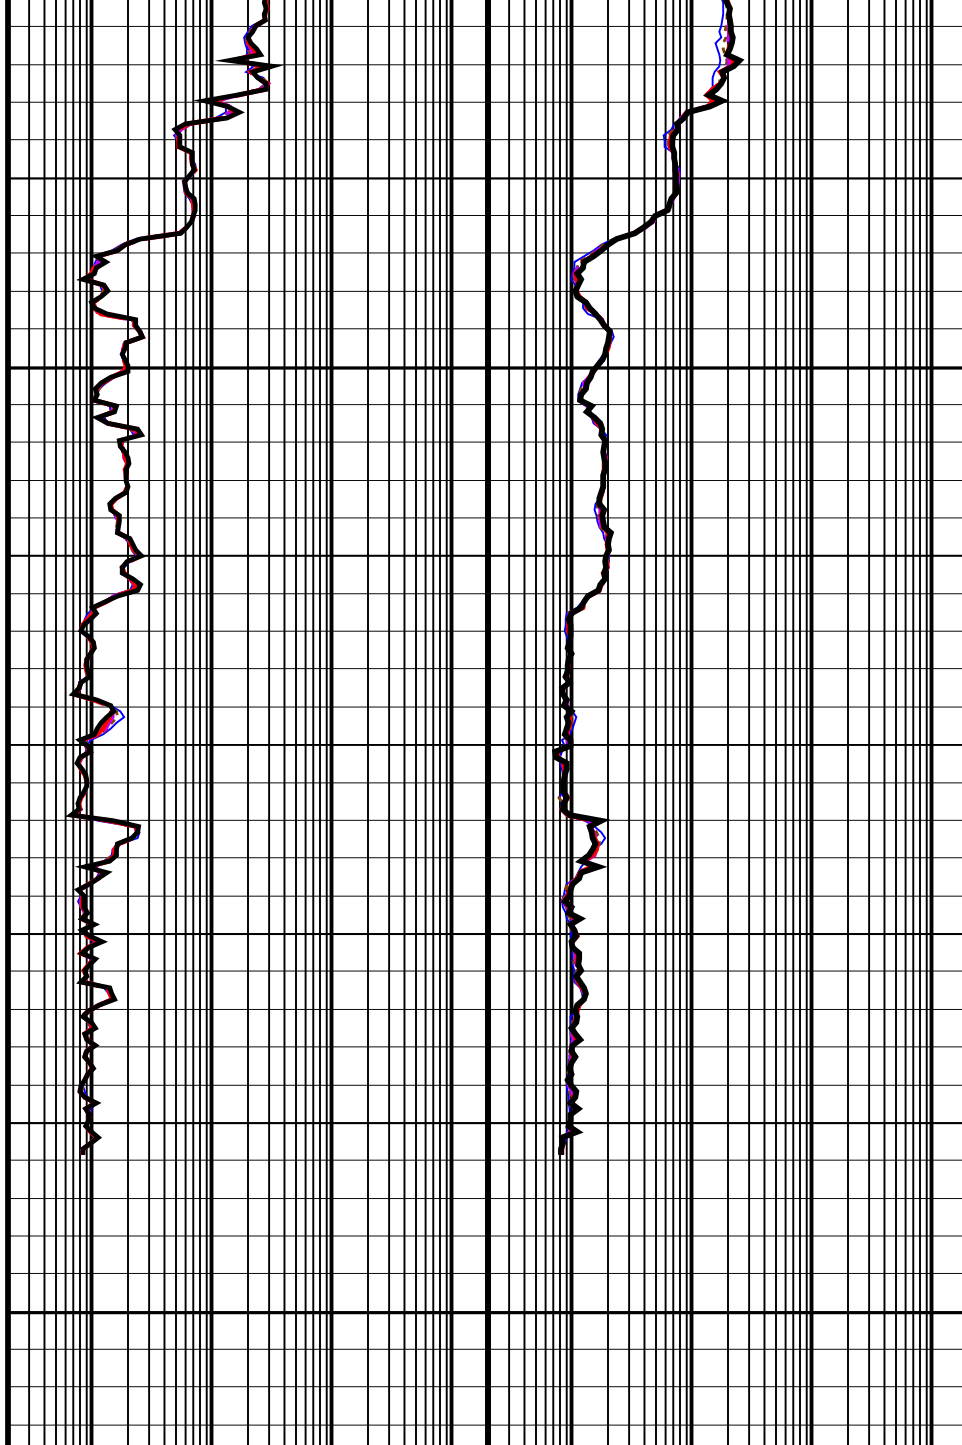

ARC Phase-Shift Resistivity 16-in. at 2 MHz (P16H)		
0.2	(OHMM)	2000
ARC Attenuation Resistivity 16-in. at 2 MHz (A16H)		
0.2	(OHMM)	2000
ARC Phase-Shift Resistivity 22-in. at 2 MHz (P22H)		
0.2	(OHMM)	2000
ARC Attenuation Resistivity 22-in. at 2 MHz (A22H)		
0.2	(OHMM)	2000
ARC Phase-Shift Resistivity 28-in. at 2 MHz (P28H)		
0.2	(OHMM)	2000
ARC Attenuation Resistivity 28-in. at 2 MHz (A28H)		
0.2	(OHMM)	2000
ARC Phase-Shift Resistivity 34-in. at 2 MHz (P34H)		
0.2	(OHMM)	2000
ARC Attenuation Resistivity 34-in. at 2 MHz (A34H)		
0.2	(OHMM)	2000
ARC Phase-Shift Resistivity 40-in. at 2 MHz (P40H)		
0.2	(OHMM)	2000
ARC Attenuation Resistivity 40-in. at 2 MHz (A40H)		
0.2	(OHMM)	2000

## 6.75-in. Azimuthal Density Neutron / Equipment Identification

Primary Equipment:  
 Tool Name and Serial Number  
 Collar Type and Serial Number  
 Chassis Type and Serial Number  
 Stabilizer Type and Serial Number  
 Neutron Logging Source  
 Density Logging Source  
 Stabilizer Size  
 Calibration Status

ADN6 – CA 373  
 ADDC – AA  
 ADSE – EA  
 IBS  
 NSR – M 181  
 GSR – J/Z 2152  
 8.25-in.  
 Valid

Master: 6-Jul-2007 23:40

## 6.75-in. Azimuthal Density Neutron Calibration

## Density: Magnesium Block

Phase	LS window 3 – Mg CPS	Value	Phase	SS window 1 – Mg CPS	Value	Phase	SS window 3 – Mg CPS	Value
Master		1234	Master		3101	Master		7425
	250.0 (Minimum) 4125 (Nominal) 8000 (Maximum)			700.0 (Minimum) 9350 (Nominal) 18000 (Maximum)			2500 (Minimum) 23750 (Nominal) 45000 (Maximum)	

Master: 6-Jul-2007 23:40

## 6.75-in. Azimuthal Density Neutron Calibration

## Density: Aluminum Block

Phase	LS window 3 – Al CPS	Value	Phase	SS window 1 – Al CPS	Value	Phase	SS window 3 – Al CPS	Value
Master		183.8	Master		1555	Master		4633
	50.00 (Minimum) 725.0 (Nominal) 1400 (Maximum)			500.0 (Minimum) 4250 (Nominal) 8000 (Maximum)			1500 (Minimum) 15750 (Nominal) 30000 (Maximum)	

Master: 6-Jul-2007 23:40

## 6.75-in. Azimuthal Density Neutron Calibration

## Density: Background

Phase	LS window 3 – Background CPS	Value	Phase	SS window 1 – Background CPS	Value	Phase	SS window 3 – Background CPS	Value
Master		50.04	Master		117.0	Master		519.0
	15.00 (Minimum) 82.50 (Nominal) 150.0 (Maximum)			40.00 (Minimum) 220.0 (Nominal) 400.0 (Maximum)			150.0 (Minimum) 825.0 (Nominal) 1500 (Maximum)	

Master: 6-Jul-2007 23:40

## 6.75-in. Azimuthal Density Neutron Calibration

## Density: Water Block Check

Phase	Long spacing water density G/C3	Value	Phase	Short spacing water density G/C3	Value
Master		1.040	Master		1.151
	1.024 (Minimum) 1.039 (Nominal) 1.054 (Maximum)			1.096 (Minimum) 1.126 (Nominal) 1.156 (Maximum)	

Master: 6-Jul-2007 23:40

## 6.75-in. Azimuthal Density Neutron Calibration

## Neutron: 3-Point Calibration

Phase	Far 1 tube 1 Air Point Measure CPS	Value	Phase	Far 1 tube 1 Rod Point Measure CPS	Value	Phase	Far 1 tube 1 H2O Point Measure CPS	Value
Master		17.64	Master		4.361	Master		2.045
	13.30 (Minimum) 19.05 (Nominal) 24.70 (Maximum)			3.400 (Minimum) 4.857 (Nominal) 6.200 (Maximum)			1.600 (Minimum) 2.363 (Nominal) 3.100 (Maximum)	
Phase	Far 1 tube 2 Air Point Measure CPS	Value	Phase	Far 1 tube 2 Rod Point Measure CPS	Value	Phase	Far 1 tube 2 H2O Point Measure CPS	Value
Master		18.63	Master		4.548	Master		2.193
	13.30 (Minimum) 19.05 (Nominal) 24.70 (Maximum)			3.400 (Minimum) 4.857 (Nominal) 6.200 (Maximum)			1.600 (Minimum) 2.363 (Nominal) 3.100 (Maximum)	
Phase	Far 1 tube 3 Air Point Measure CPS	Value	Phase	Far 1 tube 3 Rod Point Measure CPS	Value	Phase	Far 1 tube 3 H2O Point Measure CPS	Value
Master		17.55	Master		4.417	Master		2.165
	13.30 (Minimum) 19.05 (Nominal) 24.70 (Maximum)			3.400 (Minimum) 4.857 (Nominal) 6.200 (Maximum)			1.600 (Minimum) 2.363 (Nominal) 3.100 (Maximum)	
Phase	Far 2 tube 1 Air Point Measure CPS	Value	Phase	Far 2 tube 1 Rod Point Measure CPS	Value	Phase	Far 2 tube 1 H2O Point Measure CPS	Value
Master		17.33	Master		4.720	Master		2.210
	13.30 (Minimum) 19.05 (Nominal) 24.70 (Maximum)			3.400 (Minimum) 4.857 (Nominal) 6.200 (Maximum)			1.600 (Minimum) 2.363 (Nominal) 3.100 (Maximum)	
Phase	Far 2 tube 2 Air Point Measure CPS	Value	Phase	Far 2 tube 2 Rod Point Measure CPS	Value	Phase	Far 2 tube 2 H2O Point Measure CPS	Value
Master		18.63	Master		4.693	Master		2.260
	13.30 (Minimum) 19.05 (Nominal) 24.70 (Maximum)			3.400 (Minimum) 4.857 (Nominal) 6.200 (Maximum)			1.600 (Minimum) 2.363 (Nominal) 3.100 (Maximum)	

<div><div></div></div>					<div><div></div></div>					<div><div></div></div>							
13.30 (Minimum)		19.05 (Nominal)		24.70 (Maximum)		3.400 (Minimum)		4.857 (Nominal)		6.200 (Maximum)		1.600 (Minimum)		2.363 (Nominal)		3.100 (Maximum)	
Phase	Far 2 tube 3 Air	Point Measure		CPS	Value	Phase	Far 2 tube 3 Rod	Point Measure		CPS	Value	Phase	Far 2 tube 3 H2O	Point Measure		CPS	Value
Master		<div><div></div></div>			17.85	Master		<div><div></div></div>			4.397	Master		<div><div></div></div>			2.199
13.30 (Minimum)		19.05 (Nominal)		24.70 (Maximum)		3.400 (Minimum)		4.857 (Nominal)		6.200 (Maximum)		1.600 (Minimum)		2.363 (Nominal)		3.100 (Maximum)	
Phase	Near 1 tube 1 Air	Point Measure		CPS	Value	Phase	Near 1 tube 1 Rod	Point Measure		CPS	Value	Phase	Near 1 tube 1 H2O	Point Measure		CPS	Value
Master		<div><div></div></div>			478.6	Master		<div><div></div></div>			763.5	Master		<div><div></div></div>			336.3
345.0 (Minimum)		487.5 (Nominal)		595.0 (Maximum)		535.0 (Minimum)		768.8 (Nominal)		925.0 (Maximum)		230.0 (Minimum)		343.7 (Nominal)		430.0 (Maximum)	
Phase	Near 2 tube 1 Air	Point Measure		CPS	Value	Phase	Near 2 tube 1 Rod	Point Measure		CPS	Value	Phase	Near 2 tube 1 H2O	Point Measure		CPS	Value
Master		<div><div></div></div>			484.6	Master		<div><div></div></div>			758.4	Master		<div><div></div></div>			337.5
345.0 (Minimum)		487.5 (Nominal)		595.0 (Maximum)		535.0 (Minimum)		768.8 (Nominal)		925.0 (Maximum)		230.0 (Minimum)		343.7 (Nominal)		430.0 (Maximum)	

Master: 6-Jul-2007 23:40														
6.75-in. Azimuthal Density Neutron Calibration														
Neutron: Water Block Check														
Phase	Far Neutron water porosity PU										Value			
Master														99.51
	90.00 (Minimum)					100.0 (Nominal)						125.0 (Maximum)		

6.75-in. Array Resistivity Compensated / Equipment Identification														
Primary Equipment:														
Tool Name and Serial Number										ARC6 – BA 460				
ARC675 Calibration Status										Valid				

Master: 6-Jul-2007 11:12														
6.75-in. Array Resistivity Compensated Calibration														
Resistivity: Air														
Phase	Phase-Shift T1			Value	Phase	Phase-Shift T2			Value	Phase	Phase-Shift T3			Value
Master				1.019	Master				-0.9280	Master				0.9236
	-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)			-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)			-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)	
Phase	Phase-Shift T4			Value	Phase	Phase-Shift T5			Value	Phase	Phase-Shift T1 at 400KHz			Value
Master				-0.9776	Master				0.9063	Master				-0.3509
	-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)			-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)			-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)	
Phase	Phase-Shift T2 at 400KHz			Value	Phase	Phase-Shift T3 at 400KHz			Value	Phase	Phase-Shift T4 at 400KHz			Value
Master				0.2849	Master				-0.3229	Master				0.2874
	-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)			-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)			-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)	
Phase	Phase-Shift T5 at 400KHz			Value										
Master				-0.3578										
	-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)											




Master: 6-Jul-2007 11:12														
6.75-in. Array Resistivity Compensated Calibration														
Resistivity: Air														
Phase	Attenuation T1			Value	Phase	Attenuation T2			Value	Phase	Attenuation T3			Value
Master				8.981	Master				5.965	Master				5.607
	6.500 (Minimum)	8.500 (Nominal)	10.50 (Maximum)			4.500 (Minimum)	6.500 (Nominal)	8.500 (Maximum)			2.500 (Minimum)	4.500 (Nominal)	6.500 (Maximum)	
Phase	Attenuation T4			Value	Phase	Attenuation T5			Value	Phase	Attenuation T1 at 400KHz			Value









Master		3.872	Master		4.157	Master		8.986
2.600 (Minimum)	4.600 (Nominal)	6.600 (Maximum)	1.600 (Minimum)	3.600 (Nominal)	5.600 (Maximum)	6.500 (Minimum)	8.500 (Nominal)	10.50 (Maximum)
Phase	Attenuation T2 at 400KHz	Value	Phase	Attenuation T3 at 400KHz	Value	Phase	Attenuation T4 at 400KHz	Value
Master		5.966	Master		5.603	Master		3.869
4.500 (Minimum)	6.500 (Nominal)	8.500 (Maximum)	2.500 (Minimum)	4.500 (Nominal)	6.500 (Maximum)	2.600 (Minimum)	4.600 (Nominal)	6.600 (Maximum)
Phase	Attenuation T5 at 400KHz	Value						
Master		4.163						
1.600 (Minimum)	3.600 (Nominal)	5.600 (Maximum)						

Master: 6-Jul-2007 11:59								
6.75-in. Array Resistivity Compensated Calibration								
Gamma Ray: Blanket								
Phase	Gamma ray factor (equals Calibration Gain multiplied by API Gain Factor) CPS						Value	
Master							4.988	
	2.780 (Minimum)			4.800 (Nominal)			6.000 (Maximum)	

6.75-in. Azimuthal Density Neutron / Equipment Identification								
Primary Equipment:								
Tool Name and Serial Number			ADN6 - CA			437		
Collar Type and Serial Number			ADDC - AA					
Chassis Type and Serial Number			ADSE - EA					
Stabilizer Type and Serial Number			IBS			AD41		
Neutron Logging Source			NSR - M			A181		
Density Logging Source			GSR - J/Z			A2152		
Stabilizer Size			8.25 - in.					
Calibration Status			Valid					


Master: 12-Aug-2007 20:19														
6.75-in. Azimuthal Density Neutron Calibration														
Density: Magnesium Block														
Phase	LS window 3 – Mg CPS			Value	Phase	SS window 1 – Mg CPS			Value	Phase	SS window 3 – Mg CPS			Value
Master				1259	Master				3081	Master				7740
	250.0 (Minimum)	4125 (Nominal)	8000 (Maximum)			700.0 (Minimum)	9350 (Nominal)	18000 (Maximum)			2500 (Minimum)	23750 (Nominal)	45000 (Maximum)	


Master: 12-Aug-2007 20:19														
6.75-in. Azimuthal Density Neutron Calibration														
Density: Aluminum Block														
Phase	LS window 3 – Al CPS			Value	Phase	SS window 1 – Al CPS			Value	Phase	SS window 3 – Al CPS			Value
Master				190.0	Master				1584	Master				4908
	50.00 (Minimum)	725.0 (Nominal)	1400 (Maximum)			500.0 (Minimum)	4250 (Nominal)	8000 (Maximum)			1500 (Minimum)	15750 (Nominal)	30000 (Maximum)	

Master: 12-Aug-2007 20:19														
6.75-in. Azimuthal Density Neutron Calibration														
Density: Background														
Phase	LS window 3 – Background		CPS	Value	Phase	SS window 1 – Background		CPS	Value	Phase	SS window 3 – Background		CPS	Value
Master				45.83	Master				129.6	Master				558.4
	15.00 (Minimum)	82.50 (Nominal)	150.0 (Maximum)			40.00 (Minimum)	220.0 (Nominal)	400.0 (Maximum)			150.0 (Minimum)	825.0 (Nominal)	1500 (Maximum)	







Master: 12-Aug-2007 20:19								
6.75-in. Azimuthal Density Neutron Calibration								
Density: Water Block Check								
Phase	Long spacing water density G/C3			Value	Phase	Short spacing water density G/C3		
Master				1.041	Master			
	1.024 (Minimum)	1.039 (Nominal)	1.054 (Maximum)			1.096 (Minimum)	1.126 (Nominal)	1.156 (Maximum)

Master: 12-Aug-2007 20:19								
6.75-in. Azimuthal Density Neutron Calibration								
Neutron: 3-Point Calibration								
Phase	1st Tube 1 Air Point Measure CPS			Value	Phase	1st Tube 1 Rad Point Measure CPS		
Phase	1st Tube 4 Air Point Measure CPS			Value	Phase	1st Tube 4 Rad Point Measure CPS		

Phase	Far 1 tube 1 Air Point Measure	CPS	Value	Phase	Far 1 tube 1 Rod Point Measure	CPS	Value	Phase	Far 1 tube 1 H2O Point Measure	CPS	Value
Master			22.74	Master			5.557	Master			2.603
	13.30 (Minimum)	19.05 (Nominal)	24.70 (Maximum)		3.400 (Minimum)	4.857 (Nominal)	6.200 (Maximum)		1.600 (Minimum)	2.363 (Nominal)	3.100 (Maximum)
Phase	Far 1 tube 2 Air Point Measure	CPS	Value	Phase	Far 1 tube 2 Rod Point Measure	CPS	Value	Phase	Far 1 tube 2 H2O Point Measure	CPS	Value
Master			23.88	Master			5.851	Master			2.840
	13.30 (Minimum)	19.05 (Nominal)	24.70 (Maximum)		3.400 (Minimum)	4.857 (Nominal)	6.200 (Maximum)		1.600 (Minimum)	2.363 (Nominal)	3.100 (Maximum)
Phase	Far 1 tube 3 Air Point Measure	CPS	Value	Phase	Far 1 tube 3 Rod Point Measure	CPS	Value	Phase	Far 1 tube 3 H2O Point Measure	CPS	Value
Master			23.52	Master			5.821	Master			2.854
	13.30 (Minimum)	19.05 (Nominal)	24.70 (Maximum)		3.400 (Minimum)	4.857 (Nominal)	6.200 (Maximum)		1.600 (Minimum)	2.363 (Nominal)	3.100 (Maximum)
Phase	Far 2 tube 1 Air Point Measure	CPS	Value	Phase	Far 2 tube 1 Rod Point Measure	CPS	Value	Phase	Far 2 tube 1 H2O Point Measure	CPS	Value
Master			22.91	Master			5.718	Master			2.752
	13.30 (Minimum)	19.05 (Nominal)	24.70 (Maximum)		3.400 (Minimum)	4.857 (Nominal)	6.200 (Maximum)		1.600 (Minimum)	2.363 (Nominal)	3.100 (Maximum)
Phase	Far 2 tube 2 Air Point Measure	CPS	Value	Phase	Far 2 tube 2 Rod Point Measure	CPS	Value	Phase	Far 2 tube 2 H2O Point Measure	CPS	Value
Master			24.04	Master			5.735	Master			2.816
	13.30 (Minimum)	19.05 (Nominal)	24.70 (Maximum)		3.400 (Minimum)	4.857 (Nominal)	6.200 (Maximum)		1.600 (Minimum)	2.363 (Nominal)	3.100 (Maximum)
Phase	Far 2 tube 3 Air Point Measure	CPS	Value	Phase	Far 2 tube 3 Rod Point Measure	CPS	Value	Phase	Far 2 tube 3 H2O Point Measure	CPS	Value
Master			22.37	Master			5.544	Master			2.726
	13.30 (Minimum)	19.05 (Nominal)	24.70 (Maximum)		3.400 (Minimum)	4.857 (Nominal)	6.200 (Maximum)		1.600 (Minimum)	2.363 (Nominal)	3.100 (Maximum)
Phase	Near 1 tube 1 Air Point Measure	CPS	Value	Phase	Near 1 tube 1 Rod Point Measure	CPS	Value	Phase	Near 1 tube 1 H2O Point Measure	CPS	Value
Master			552.4	Master			870.0	Master			382.9
	345.0 (Minimum)	487.5 (Nominal)	595.0 (Maximum)		535.0 (Minimum)	768.8 (Nominal)	925.0 (Maximum)		230.0 (Minimum)	343.7 (Nominal)	430.0 (Maximum)
Phase	Near 2 tube 1 Air Point Measure	CPS	Value	Phase	Near 2 tube 1 Rod Point Measure	CPS	Value	Phase	Near 2 tube 1 H2O Point Measure	CPS	Value
Master			555.6	Master			862.9	Master			382.5
	345.0 (Minimum)	487.5 (Nominal)	595.0 (Maximum)		535.0 (Minimum)	768.8 (Nominal)	925.0 (Maximum)		230.0 (Minimum)	343.7 (Nominal)	430.0 (Maximum)


Master: 12-Aug-2007 20:19											
6.75-in. Azimuthal Density Neutron Calibration											
Neutron: Water Block Check											
Phase	Far Neutron water porosity PU									Value	
Master										94.25	
	90.00 (Minimum)					100.0 (Nominal)				125.0 (Maximum)	

6.75-in. Array Resistivity Compensated / Equipment Identification											
Primary Equipment:											
Tool Name and Serial Number						ARC6 – BA		1708			
ARC675 Calibration Status						Valid					

Master: 13-Aug-2007 12:10											
6.75-in. Array Resistivity Compensated Calibration											
Resistivity: Air											
Phase	Phase-Shift T1		Value	Phase	Phase-Shift T2		Value	Phase	Phase-Shift T3		Value
Master			1.832	Master			-1.714	Master			1.759
	-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)		-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)		-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)
Phase	Phase-Shift T4		Value	Phase	Phase-Shift T5		Value	Phase	Phase-Shift T1 at 400KHz		Value
Master			-1.751	Master			1.735	Master			-0.3595
	-3.900	0.1000	4.100		-3.900	0.1000	4.100		-3.900	0.1000	4.100

(Minimum)	(Nominal)	(Maximum)	(Minimum)	(Nominal)	(Maximum)	(Minimum)	(Nominal)	(Maximum)			
Phase	Phase-Shift T2 at 400KHz		Value	Phase	Phase-Shift T3 at 400KHz		Value	Phase	Phase-Shift T4 at 400KHz		Value
Master			0.2418	Master			-0.3292	Master			0.2296
	-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)		-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)		-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)
Phase	Phase-Shift T5 at 400KHz		Value								
Master			-0.3267								
	-3.900 (Minimum)	0.1000 (Nominal)	4.100 (Maximum)								

Master: 13-Aug-2007 12:10											
6.75-in. Array Resistivity Compensated Calibration											
Resistivity: Air											
Phase	Attenuation T1		Value	Phase	Attenuation T2		Value	Phase	Attenuation T3		Value
Master			8.459	Master			6.485	Master			5.086
	6.500 (Minimum)	8.500 (Nominal)	10.50 (Maximum)		4.500 (Minimum)	6.500 (Nominal)	8.500 (Maximum)		2.500 (Minimum)	4.500 (Nominal)	6.500 (Maximum)
Phase	Attenuation T4		Value	Phase	Attenuation T5		Value	Phase	Attenuation T1 at 400KHz		Value
Master			4.390	Master			3.636	Master			8.437
	2.600 (Minimum)	4.600 (Nominal)	6.600 (Maximum)		1.600 (Minimum)	3.600 (Nominal)	5.600 (Maximum)		6.500 (Minimum)	8.500 (Nominal)	10.50 (Maximum)
Phase	Attenuation T2 at 400KHz		Value	Phase	Attenuation T3 at 400KHz		Value	Phase	Attenuation T4 at 400KHz		Value
Master			6.516	Master			5.055	Master			4.413
	4.500 (Minimum)	6.500 (Nominal)	8.500 (Maximum)		2.500 (Minimum)	4.500 (Nominal)	6.500 (Maximum)		2.600 (Minimum)	4.600 (Nominal)	6.600 (Maximum)
Phase	Attenuation T5 at 400KHz		Value								
Master			3.618								
	1.600 (Minimum)	3.600 (Nominal)	5.600 (Maximum)								

Master: 12-Aug-2007 10:43			
6.75-in. Array Resistivity Compensated Calibration			
Gamma Ray: Blanket			
Phase	Gamma ray factor (equals Calibration Gain multiplied by API Gain Factor) CPS		Value
Master			5.258
	2.780 (Minimum)	4.800 (Nominal)	6.000 (Maximum)

SCHLUMBERGER			
Survey report	15-Sep-2007 02:12:10	Page	1 of 4
Client.....	ESSO Australia Pty Ltd		
Field.....	Fortescue		
Well.....	FTA A17A		
API number.....			
Engineer.....	MYT/MA/ML		
RIG:.....	ISDL 175		
STATE:.....	Victoria		
Spud date.....	02-Sep-07		
Last survey date.....	15-Sep-07		
Total accepted surveys....	85		
MD of first survey.....	660.00 m		
MD of last survey.....	3036.00 m		
----- Survey calculation methods-----	----- Geomagnetic data -----		
Method for positions.....: Minimum curvature	Magnetic model.....: BGGM version 2007		
Method for DLS.....: Mason & Taylor	Magnetic date.....: 03-Sep-2007		
----- Depth reference -----	Magnetic field strength...: 1199.44 HCNT		
Permanent datum.....: Mean Sea Level	Magnetic dec (+E/W-).....: 13.21 degrees		
Depth reference.....: Driller's Depth	Magnetic dip.....: -68.86 degrees		
GL above permanent.....: -69.00 m	----- MWD survey Reference Criteria -----		
KB above permanent.....: Top Drive	Reference G.....: 1000.04 mGal		
DF above permanent.....: 42.50 m	Reference H.....: 1199.44 HCNT		
----- Vertical section origin-----	Reference Dip.....: -68.86 degrees		
Latitude (+N/S-).....: -4.05 m	Tolerance of G.....: (+/-) 2.50 mGal		
Departure (+E/W-).....: 4.49 m	Tolerance of H.....: (+/-) 6.00 HCNT		
----- Platform reference point-----	Tolerance of Dip.....: (+/-) 0.45 degrees		
Latitude (+N/S-).....:	----- Corrections -----		
Departure (+E/W-).....:	Magnetic dec (+E/W-).....: 13.21 degrees		
Azimuth from Vsect Origin to target: 126.84 degrees	Grid convergence (+E/W-)..: -0.79 degrees		
	Total az corr (+E/W-).....: 14.00 degrees		
	(Total az corr = magnetic dec - grid conv)		
	Survey Correction Type ...:		
	I=Sag Corrected Inclination		
	M=Schlumberger Magnetic Correction		
	S=Shell Magnetic Correction		
	F=Failed Axis Correction		
	R=Magnetic Resonance Tool Correction		

[[c)2007 IDEAL ID12\_OC\_12]  
SCHLUMBERGER Survey Report

15-Sep-2007 02:12:10

Page 2 of 4

Seq #	Measured depth (m)	Incl angle (deg)	Azimuth angle (deg)	Course length (m)	TVD depth (m)	Vertical section (m)	Displ +N/S- (m)	Displ +E/W- (m)	Total displ (m)	At Azim (deg)	DLS (deg/ 100f)	Srvy tool type	Tool Corr (deg)
1	660.00	43.73	170.72	0.00	612.64	133.65	-180.10	39.59	184.40	167.60	0.00	TIP	None
2	687.00	45.37	160.65	27.00	631.90	148.38	-198.40	44.28	203.28	167.42	8.18	PUP	None
3	715.14	41.29	153.00	28.14	652.38	165.05	-216.14	51.83	222.27	166.52	7.20	PUP	None
4	743.13	38.36	149.47	27.99	673.88	181.36	-231.85	60.43	239.60	165.39	4.03	PUP	None
5	771.30	38.83	149.67	28.17	695.90	197.57	-247.01	69.33	256.55	164.32	0.53	PUP	None
6	799.42	39.10	149.36	28.12	717.76	213.88	-262.24	78.30	273.69	163.37	0.36	PUP	None
7	827.52	39.46	149.08	28.10	739.51	230.33	-277.53	87.41	290.97	162.52	0.44	PUP	None
8	856.31	40.00	148.79	28.79	761.65	247.38	-293.29	96.90	308.89	161.72	0.60	PUP	None
9	884.72	40.15	144.57	28.41	783.40	264.58	-308.57	106.95	326.57	160.88	2.92	PUP	None
10	913.55	39.38	139.55	28.83	805.56	282.36	-323.10	118.27	344.07	159.89	3.49	PUP	None
11	941.59	37.91	135.61	28.04	827.47	299.55	-336.03	130.07	360.33	158.84	3.11	PUP	None
12	969.73	35.92	129.16	28.14	849.97	316.35	-347.43	142.53	375.52	157.70	4.72	PUP	None
13	998.09	35.46	124.47	28.36	873.01	332.89	-357.34	155.76	389.81	156.45	2.98	PUP	None
14	1026.34	35.73	120.07	28.25	895.99	349.27	-366.11	169.66	403.51	155.14	2.78	PUP	None
15	1055.05	36.17	115.56	28.71	919.23	365.91	-373.97	184.56	417.03	153.73	2.85	PUP	None
16	1083.06	37.35	113.45	28.01	941.67	382.28	-380.91	199.81	430.14	152.32	1.88	PUP	None
17	1111.75	38.03	114.28	28.69	964.38	399.37	-388.01	215.85	444.01	150.91	0.90	PUP	None
18	1139.82	38.02	116.07	28.07	986.49	416.30	-395.37	231.50	458.15	149.65	1.20	PUP	None
19	1168.37	38.15	117.86	28.55	1008.96	433.65	-403.35	247.19	473.07	148.50	1.19	PUP	None
20	1196.91	38.43	118.41	28.54	1031.36	451.13	-411.69	262.79	488.41	147.45	0.47	PUP	None
21	1225.68	38.08	118.17	28.77	1053.95	468.75	-420.13	278.47	504.04	146.46	0.40	PUP	None
22	1254.40	37.78	118.21	28.72	1076.61	486.20	-428.47	294.03	519.66	145.54	0.32	PUP	None
23	1282.15	37.10	118.92	27.75	1098.64	502.89	-436.54	308.85	534.75	144.72	0.88	PUP	None
24	1310.69	35.83	119.76	28.54	1121.59	519.71	-444.85	323.63	550.12	143.96	1.46	PUP	None
25	1338.31	36.07	119.61	27.62	1143.95	535.80	-452.88	337.72	564.94	143.29	0.28	PUP	None
26	1367.80	36.15	119.73	29.49	1167.78	553.04	-461.48	352.82	580.90	142.60	0.11	PUP	None
27	1396.39	36.99	119.10	28.59	1190.74	569.93	-469.85	367.66	596.60	141.96	0.98	PUP	None
28	1424.23	38.52	117.23	27.84	1212.75	586.78	-477.89	382.69	612.23	141.31	2.09	PUP	None
29	1452.46	38.59	117.40	28.23	1234.83	604.13	-485.96	398.32	628.35	140.66	0.14	PUP	None
30	1481.68	37.43	117.54	29.22	1257.85	621.89	-494.26	414.29	644.92	140.03	1.21	PUP	None

[[c)2007 IDEAL ID12\_OC\_12]  
SCHLUMBERGER Survey Report

15-Sep-2007 02:12:10

Page 3 of 4

Seq #	Measured depth (m)	Incl angle (deg)	Azimuth angle (deg)	Course length (m)	TVD depth (m)	Vertical section (m)	Displ +N/S- (m)	Displ +E/W- (m)	Total displ (m)	At Azim (deg)	DLS (deg/ 100f)	Srvy tool type	Tool Corr (deg)
31	1510.46	37.27	117.52	28.78	1280.73	639.12	-502.33	429.77	661.09	139.45	0.17	PUP	None
32	1538.73	37.53	117.80	28.27	1303.18	656.07	-510.30	444.98	677.06	138.91	0.33	PUP	None
33	1566.81	38.82	118.34	28.08	1325.26	673.22	-518.47	460.29	693.31	138.40	1.45	PUP	None
34	1595.00	39.21	118.81	28.19	1347.16	690.78	-526.96	475.88	710.03	137.92	0.53	PUP	None
35	1623.56	38.55	118.75	28.56	1369.39	708.53	-535.59	491.59	726.99	137.45	0.71	PUP	None
36	1651.81	38.21	117.82	28.25	1391.54	725.88	-543.90	507.03	743.58	137.01	0.72	PUP	None
37	1680.22	38.26	117.49	28.41	1413.86	743.23	-552.06	522.61	760.19	136.57	0.23	PUP	None
38	1708.96	38.99	116.80	28.74	1436.31	760.92	-560.25	538.57	777.13	136.13	0.90	PUP	None
39	1737.21	39.94	115.58	28.25	1458.12	778.56	-568.17	554.68	794.03	135.69	1.32	PUP	None
40	1765.70	39.99	116.13	28.49	1479.95	796.53	-576.15	571.15	811.27	135.25	0.38	PUP	None
41	1793.80	40.23	117.14	28.10	1501.44	814.34	-584.26	587.33	828.45	134.85	0.75	PUP	None
42	1822.48	40.84	117.86	28.68	1523.24	832.74	-592.87	603.87	846.26	134.47	0.82	PUP	None
43	1851.42	40.26	118.35	28.94	1545.23	851.33	-601.73	620.46	864.32	134.12	0.70	PUP	None
44	1880.34	41.14	118.01	28.92	1567.16	869.97	-610.64	637.08	882.47	133.79	0.96	PUP	None
45	1907.88	41.63	117.36	27.54	1587.82	887.95	-619.10	653.21	899.98	133.46	0.72	PUP	None
46	1935.98	42.48	116.31	28.10	1608.68	906.48	-627.59	670.00	918.03	133.13	1.20	PUP	None
47	1965.09	39.30	113.83	29.11	1630.69	925.14	-635.68	687.25	936.16	132.77	3.74	PUP	None
48	1993.68	35.90	114.81	28.59	1653.34	942.16	-642.86	703.15	952.72	132.44	3.68	PUP	None
49	2022.04	34.84	117.69	28.36	1676.46	958.29	-650.11	717.87	968.49	132.16	2.12	PUP	None
50	2050.17	36.50	119.08	28.13	1699.32	974.52	-657.91	732.30	984.43	131.94	2.00	PUP	None
51	2079.41	37.84	119.35	29.24	1722.62	992.03	-666.53	747.72	1001.67	131.71	1.41	PUP	None
52	2107.37	38.50	118.68	27.96	1744.60	1009.14	-674.91	762.83	1018.53	131.50	0.85	PUP	None
53	2136.33	38.59	118.46	28.96	1767.25	1027.00	-683.54	778.68	1036.13	131.28	0.17	PUP	None
54	2164.51	37.93	118.78	28.18	1789.37	1044.27	-691.90	793.99	1053.16	131.07	0.75	PUP	None
55	2192.55	37.27	118.25	28.04	1811.59	1061.20	-700.07	809.03	1069.87	130.87	0.80	PUP	None
56	2220.97	36.42	118.58	28.42	1834.33	1078.06	-708.18	824.01	1086.52	130.68	0.94	PUP	None
57	2249.50	36.44	119.32	28.53	1857.29	1094.84	-716.38	838.84	1103.11	130.50	0.47	PUP	None
58	2277.75	36.84	121.02	28.25	1879.96	1111.58	-724.85	853.41	1119.70	130.34	1.18	PUP	None
59	2305.75	37.44	122.32	28.00	1902.28	1128.42	-733.73	867.80	1136.41	130.21	1.08	PUP	None
60	2334.40	37.22	121.22	28.65	1925.06	1145.73	-742.88	882.57	1153.60	130.09	0.75	PUP	None

[[c)2007 IDEAL ID12\_OC\_12]  
SCHLUMBERGER Survey Report

15-Sep-2007 02:12:10

Page 4 of 4

Seq #	Measured depth (m)	Incl angle (deg)	Azimuth angle (deg)	Course length (m)	TVD depth (m)	Vertical section (m)	Displ +N/S- (m)	Displ +E/W- (m)	Total displ (m)	At Azim (deg)	DLS (deg/ 100f)	Srvy tool type	Tool Corr (deg)
61	2362.79	36.69	117.35	28.39	1947.75	1162.64	-751.22	897.45	1170.36	129.93	2.56	PUP	None
62	2389.95	36.62	116.10	27.16	1969.54	1178.60	-758.52	911.93	1186.15	129.75	0.84	PUP	None
63	2417.94	37.08	116.97	27.99	1991.94	1195.11	-766.02	926.95	1202.50	129.57	0.76	PUP	None
64	2446.07	36.80	117.57	28.13	2014.42	1211.78	-773.76	941.97	1219.02	129.40	0.49	PUP	None

65	2474.11	36.23	117.97	28.04	2036.96	1228.26	-781.53	956.74	1235.37	129.24	0.67	PUP	None
66	2502.44	38.25	117.50	28.33	2059.51	1245.19	-789.51	971.91	1252.17	129.09	2.19	PUP	None
67	2531.37	39.64	117.87	28.93	2082.01	1263.14	-797.96	988.01	1270.00	128.93	1.48	PUP	None
68	2559.98	39.78	118.54	28.61	2104.02	1281.21	-806.60	1004.12	1287.97	128.77	0.48	PUP	None
69	2588.17	38.68	118.97	28.19	2125.85	1298.86	-815.18	1019.75	1305.53	128.64	1.23	PUP	None
70	2617.01	38.16	118.71	28.84	2148.45	1316.61	-823.82	1035.45	1323.19	128.51	0.58	PUP	None
71	2645.27	38.52	118.20	28.26	2170.61	1333.95	-832.17	1050.86	1340.46	128.38	0.52	PUP	None
72	2674.42	39.10	118.05	29.15	2193.33	1352.01	-840.78	1066.97	1358.44	128.24	0.61	PUP	None
73	2702.52	39.10	117.27	28.10	2215.14	1369.51	-849.01	1082.67	1375.86	128.10	0.53	PUP	None
74	2731.28	37.85	117.19	28.76	2237.65	1387.15	-857.20	1098.58	1393.44	127.96	1.33	PUP	None
75	2760.06	36.63	118.45	28.78	2260.56	1404.35	-865.32	1113.98	1410.58	127.84	1.52	PUP	None
76	2788.47	36.29	120.03	28.41	2283.41	1421.08	-873.57	1128.72	1427.28	127.74	1.07	PUP	None
77	2817.01	37.24	118.98	28.54	2306.28	1438.02	-881.98	1143.58	1444.19	127.64	1.22	PUP	None
78	2845.58	38.07	117.86	28.57	2328.89	1455.29	-890.29	1158.93	1461.41	127.53	1.15	PUP	None
79	2871.86	38.33	117.10	26.28	2349.55	1471.32	-897.78	1173.35	1477.42	127.42	0.62	PUP	None
80	2902.30	37.94	116.95	30.44	2373.49	1489.84	-906.33	1190.09	1495.91	127.29	0.40	PUP	None
81	2931.13	37.24	118.15	28.83	2396.33	1507.20	-914.46	1205.69	1513.25	127.18	1.07	PUP	None
82	2960.01	37.98	118.12	28.88	2419.21	1524.62	-922.77	1221.23	1530.65	127.07	0.78	PUP	None
83	2988.74	38.14	118.12	28.73	2441.83	1542.13	-931.12	1236.85	1548.15	126.97	0.17	PUP	None
84	3014.84	38.56	117.68	26.10	2462.30	1558.12	-938.69	1251.16	1564.15	126.88	0.58	PUP	None
85	3036.00	38.85	117.38	21.16	2478.81	1571.18	-944.81	1262.90	1577.20	126.80	0.50	Projected to TD	
[(c)2007 IDEAL ID12_OC_12]													

Company:

ESSO Australia Pty Ltd

Well:

FTA A17A

Field:

Fortescue

Rig:

ISDL 175

State:

Victoria

8.5 in. Section

VISION Resistivity

1:200 True Vertical Depth

Recorded Mode Log

Schlumberger