


## IDEAL Version: ID11\_0C\_01

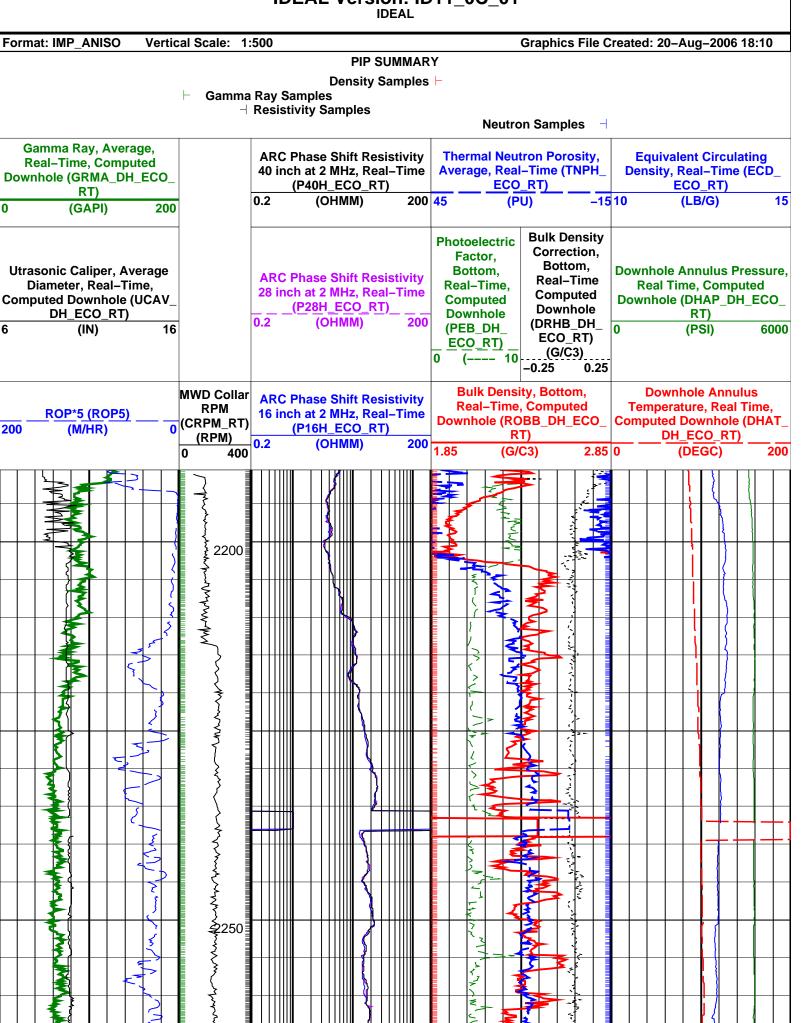

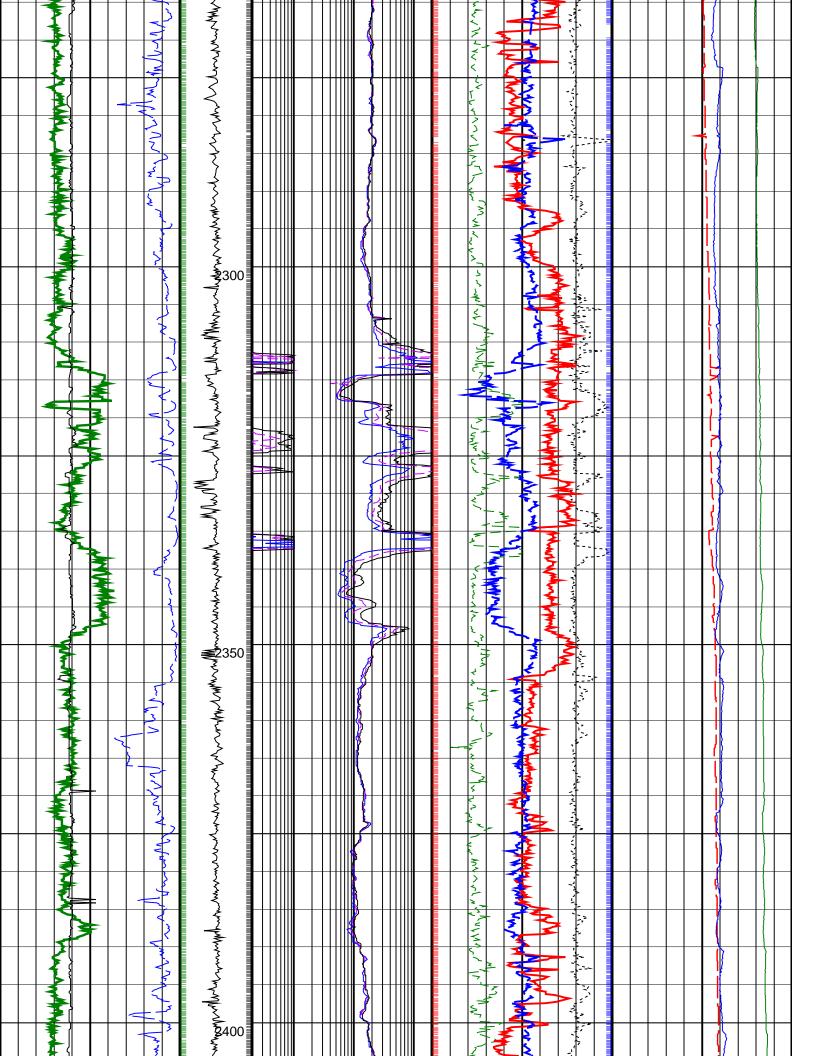

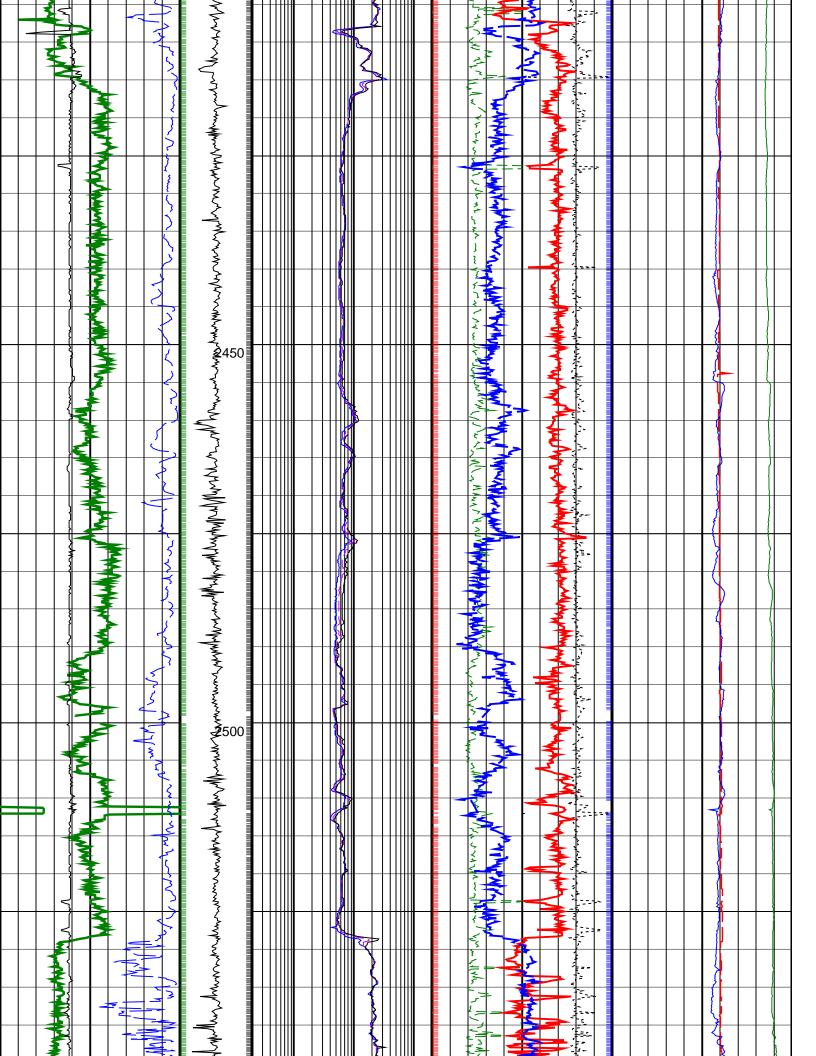

	W AMA				Th. A.	12.5				
ROP*5 (ROP5) 0	MWD Collar RPM (CRPM_RT) (RPM) 0 400	16 inch at 2 M (P16H_	Shift Resistivity MHz, Real-Time ECO_RT) HMM) 200	Real- Downhol	-Time, C		Tempe Compute	wnhole Annul erature, Real 7 ed Downhole ( DH_ECO_RT) (DEGC)	Time,	
Utrasonic Caliper, Average Diameter, Real-Time, Computed Downhole (UCAV_ DH_ECO_RT) 6 (IN) 16		28 inch at 2 M (P28H_	Shift Resistivity MHz, Real–Time ECO_RT) HMM) 200	Comput Downho (PEB_D ECO_R	or, m, ime, ited oole OH_ RT)	Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_ ECO_RT) (G/C3) 0.25 0.25	Real Downho	le Annulus Pr Time, Compu le (DHAP_DH RT) (PSI)	ıted	
Gamma Ray, Average, Real-Time, Computed Downhole (GRMA_DH_ECO_ RT)		ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT)			Thermal Neutron Porosity, Average, Real–Time (TNPHECO_RT)			Equivalent Circulating Density, Real-Time (ECD_ ECO_RT)		
0 (GAPI) 200		0.2 (OF	HMM) 200	45	(PU)	) –15	10	(LB/G)	15	
			PIP SUMMAI	₹Y						
Density Samples ⊢ ⊢ Gamma Ray Samples ⊣ Resistivity Samples Neutron Samples ⊣										
IDEAL Version, ID11, 0C, 01										

IDEAL Version: ID11\_0C\_01