CBA−F27 LWD VISION RT 500TVD

Format: VISION SERVICE RT 500TVD Vertical Scale: 1:500 Graphics File Created: 22−May−2009 04:02

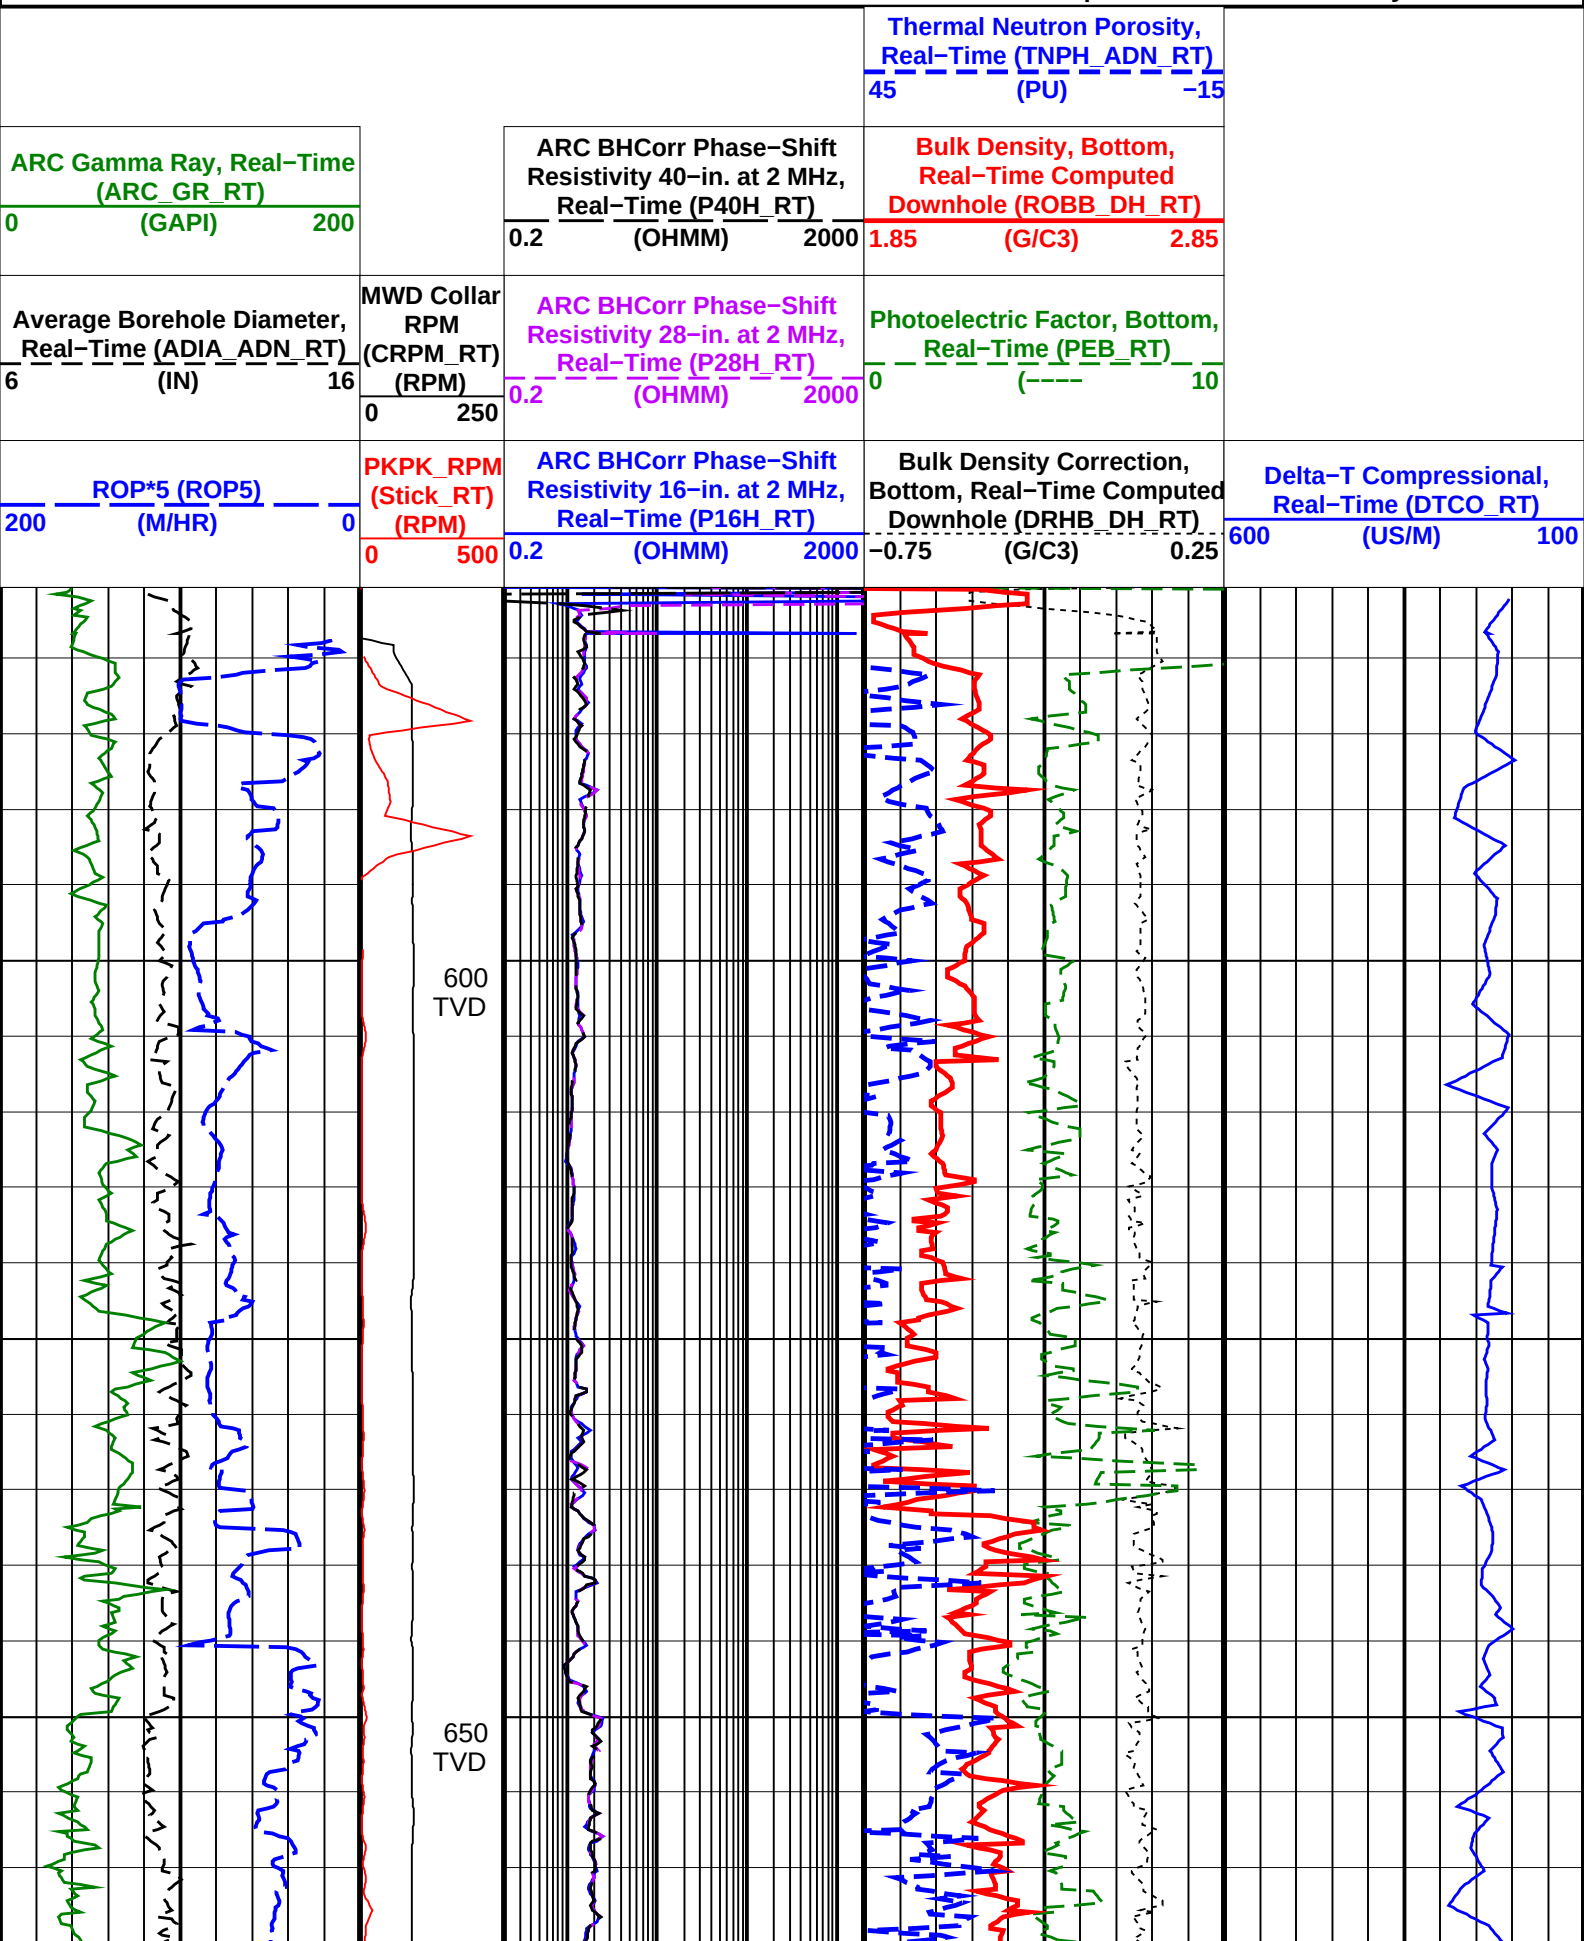

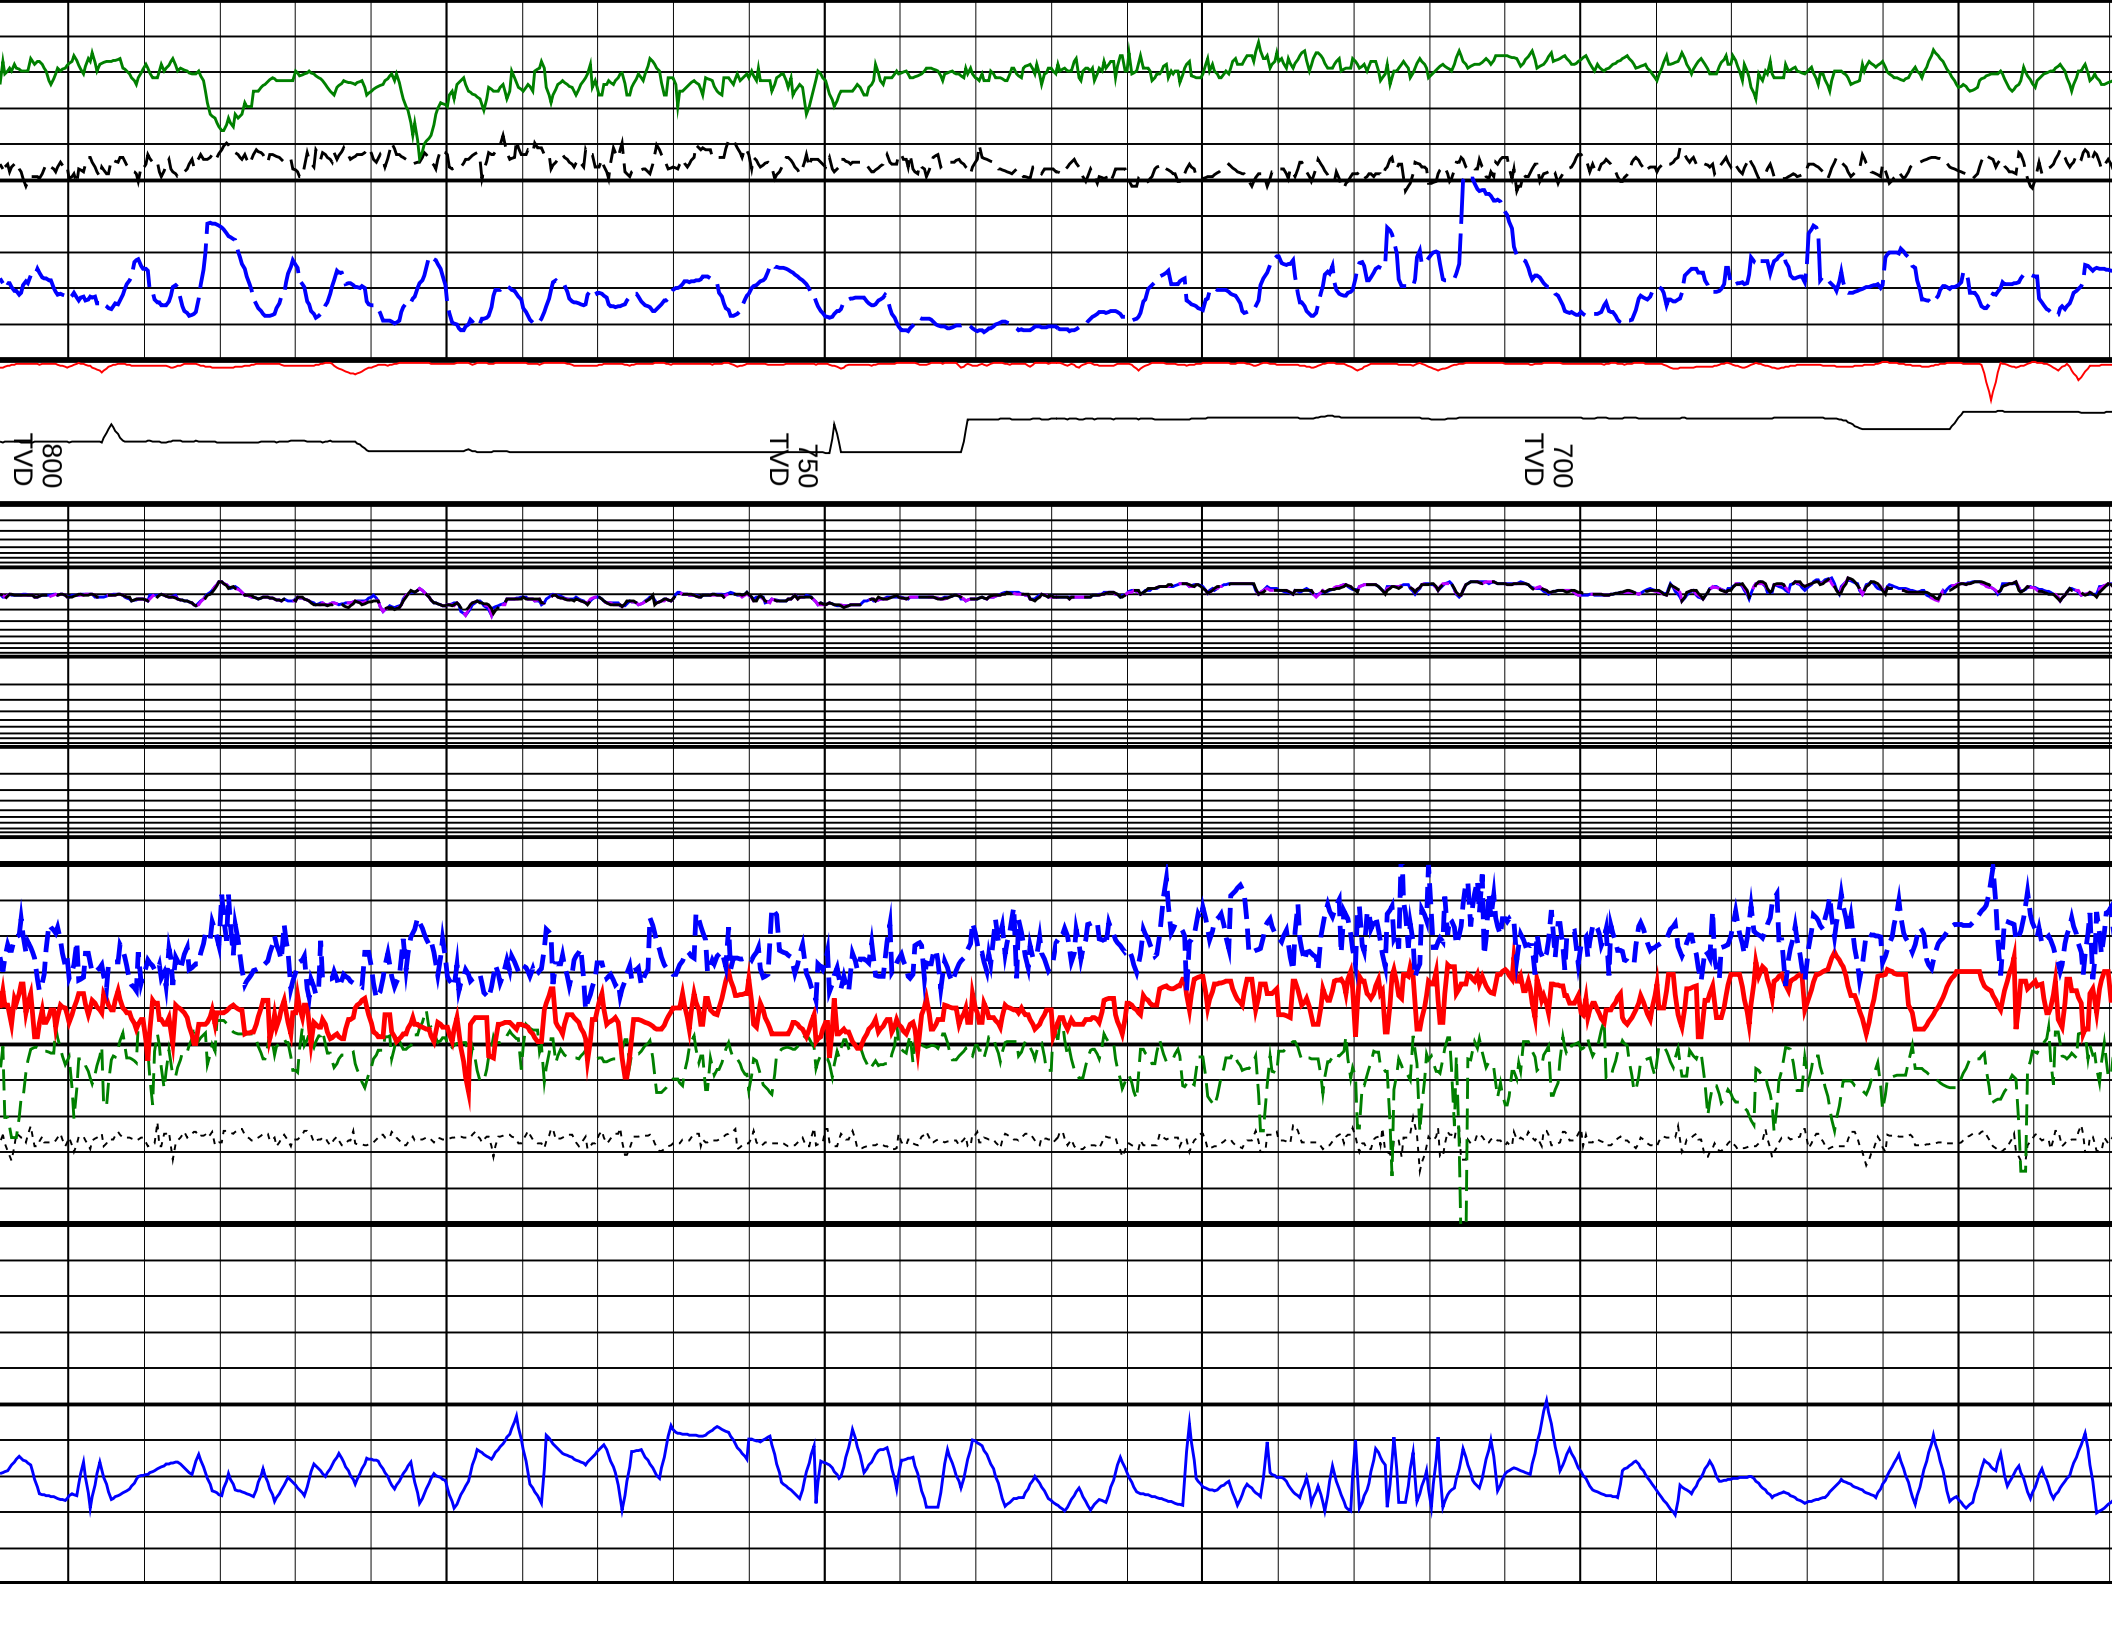
800
TVD
750
TVD
700
TVD

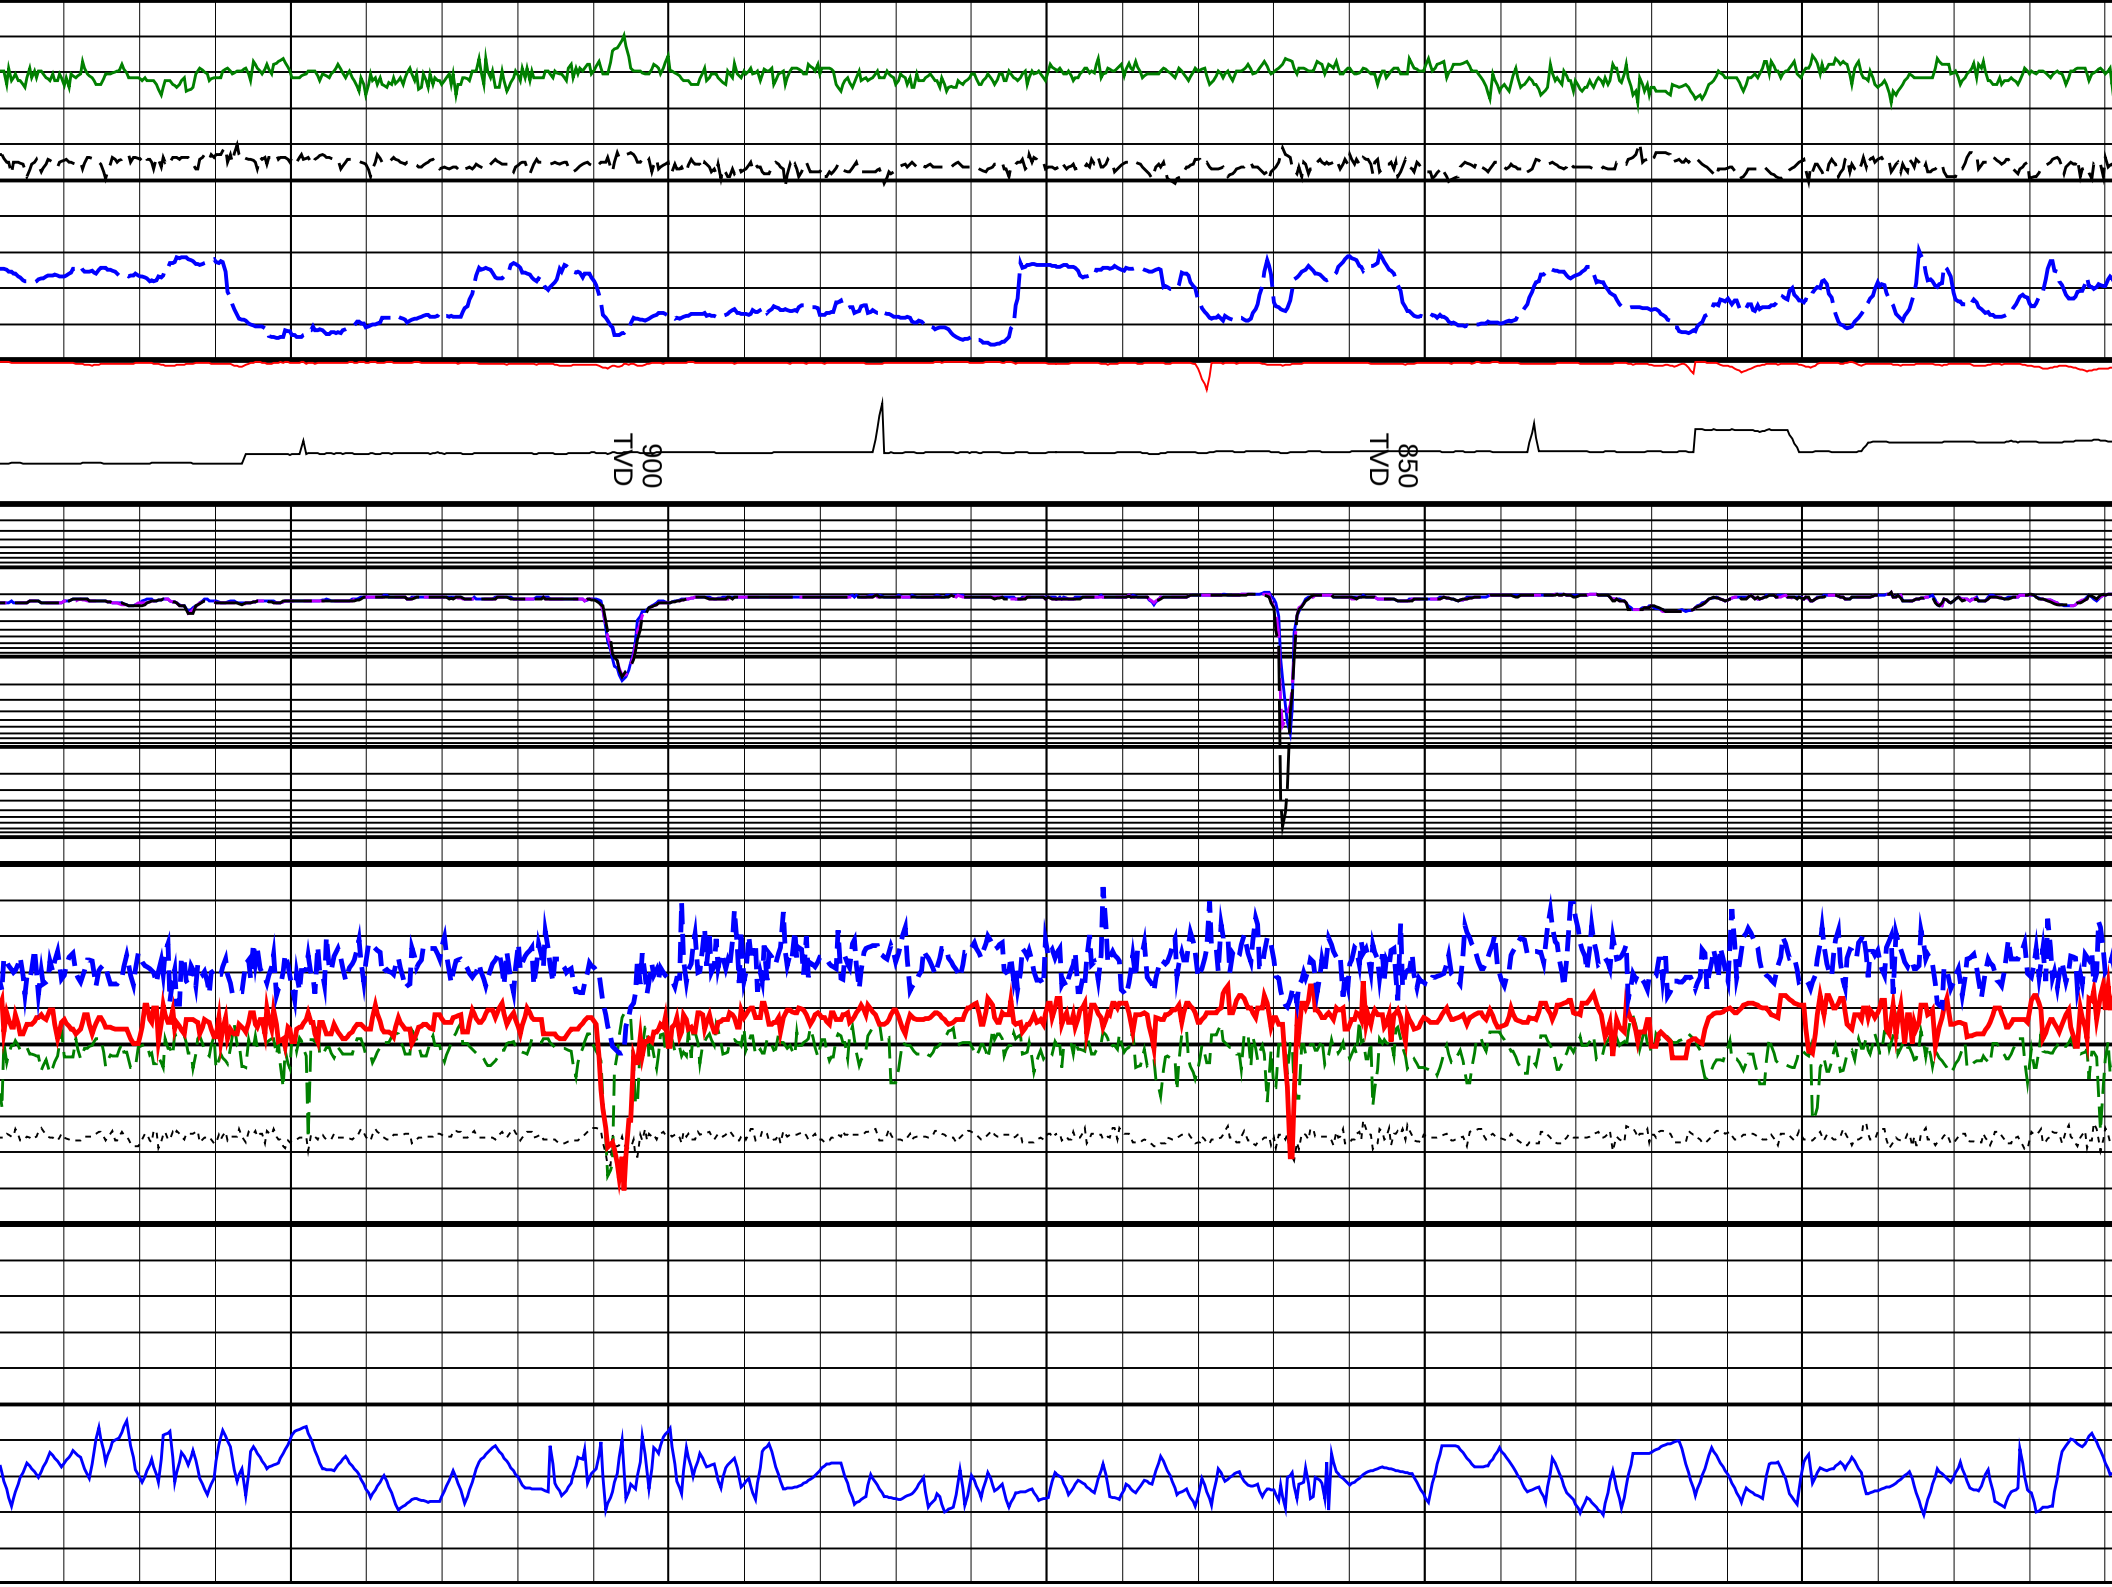
900
TVD
850
TVD

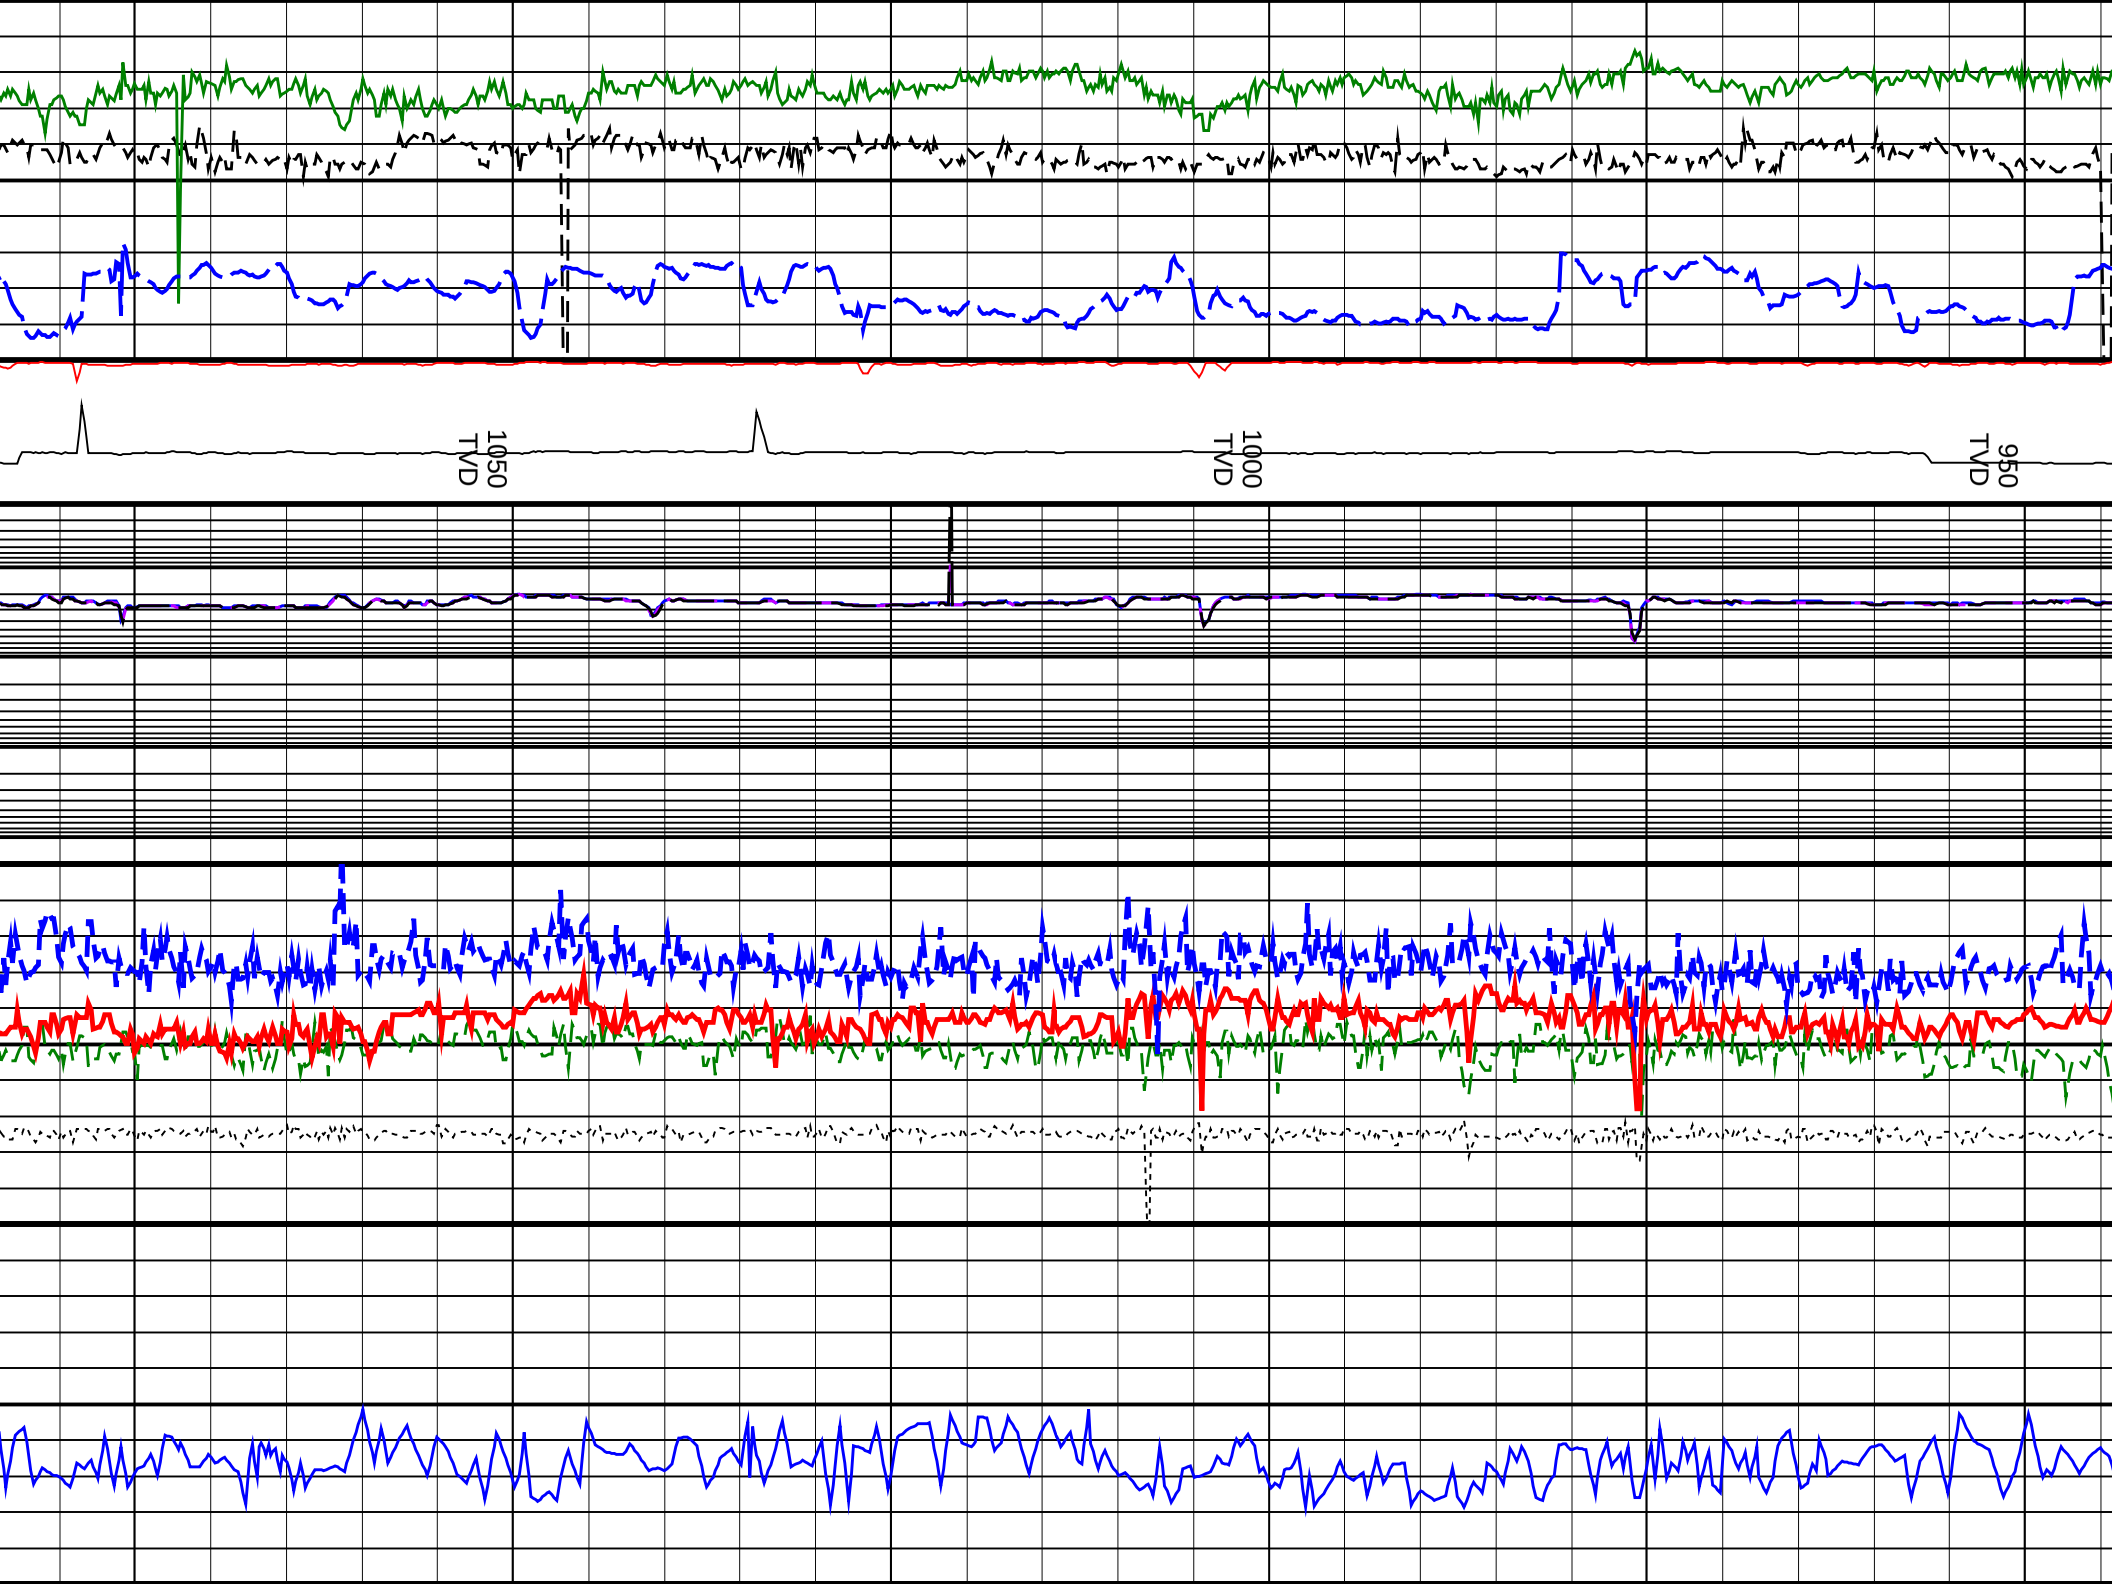
1050
TVD
1000
TVD
950
TVD

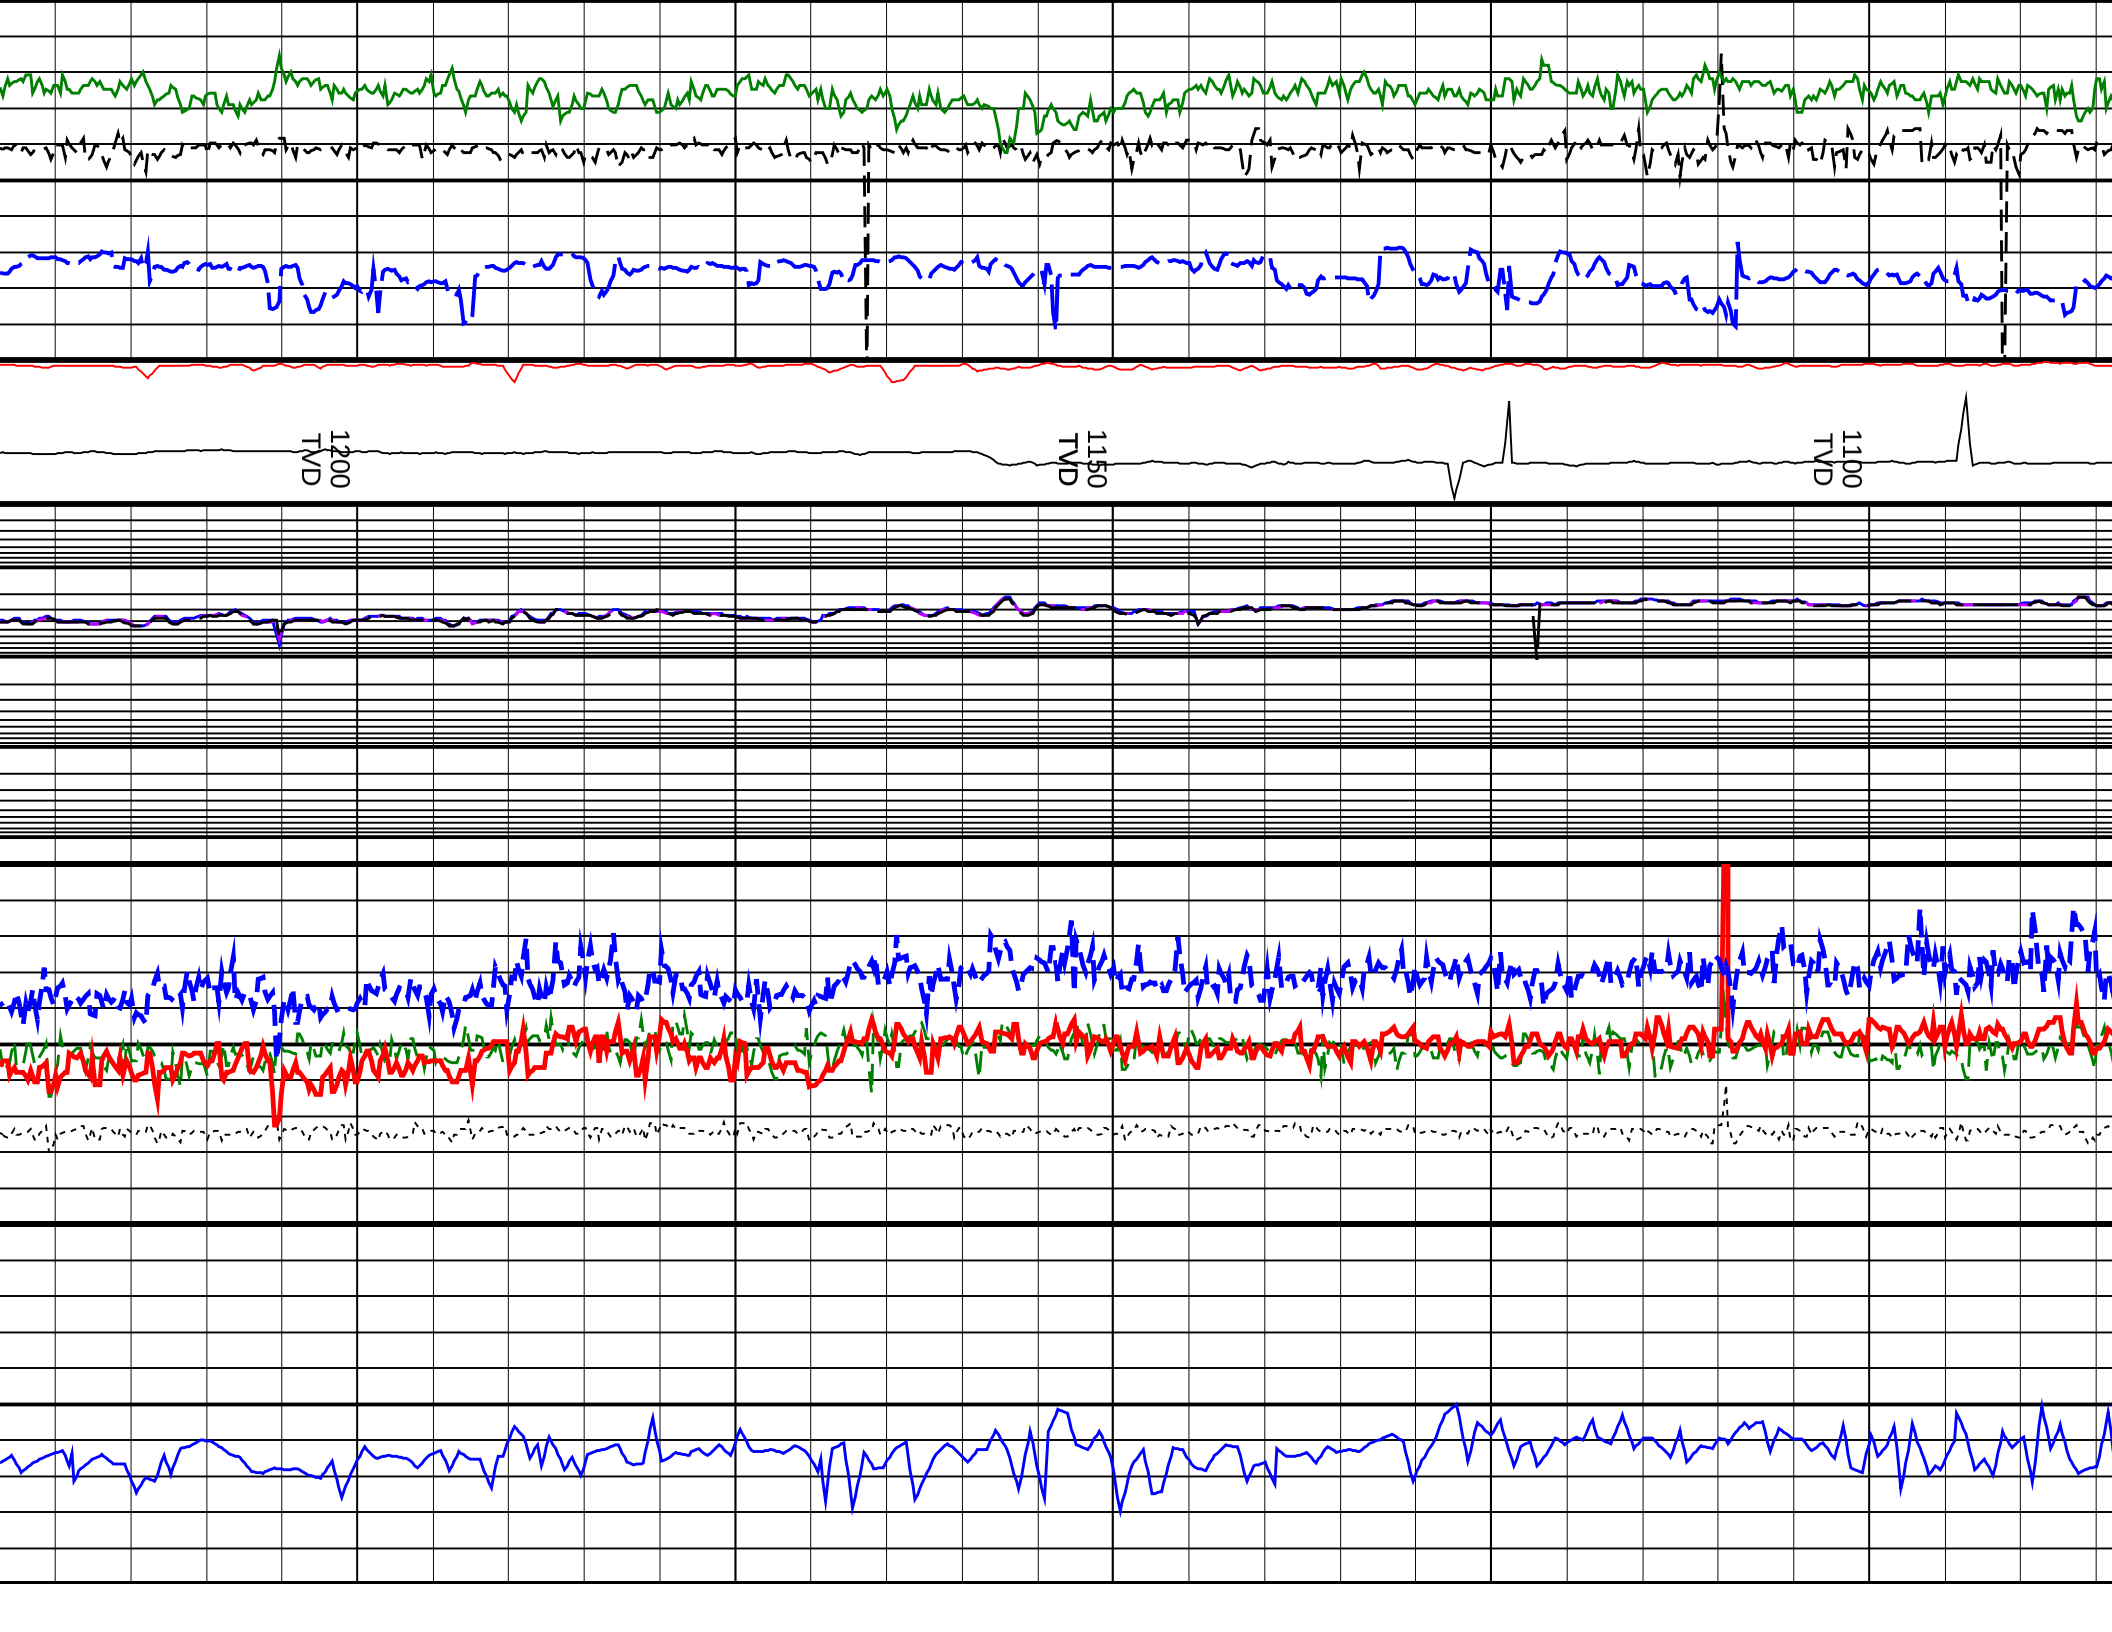
1200
TVD
1150
TVD
1100
TVD

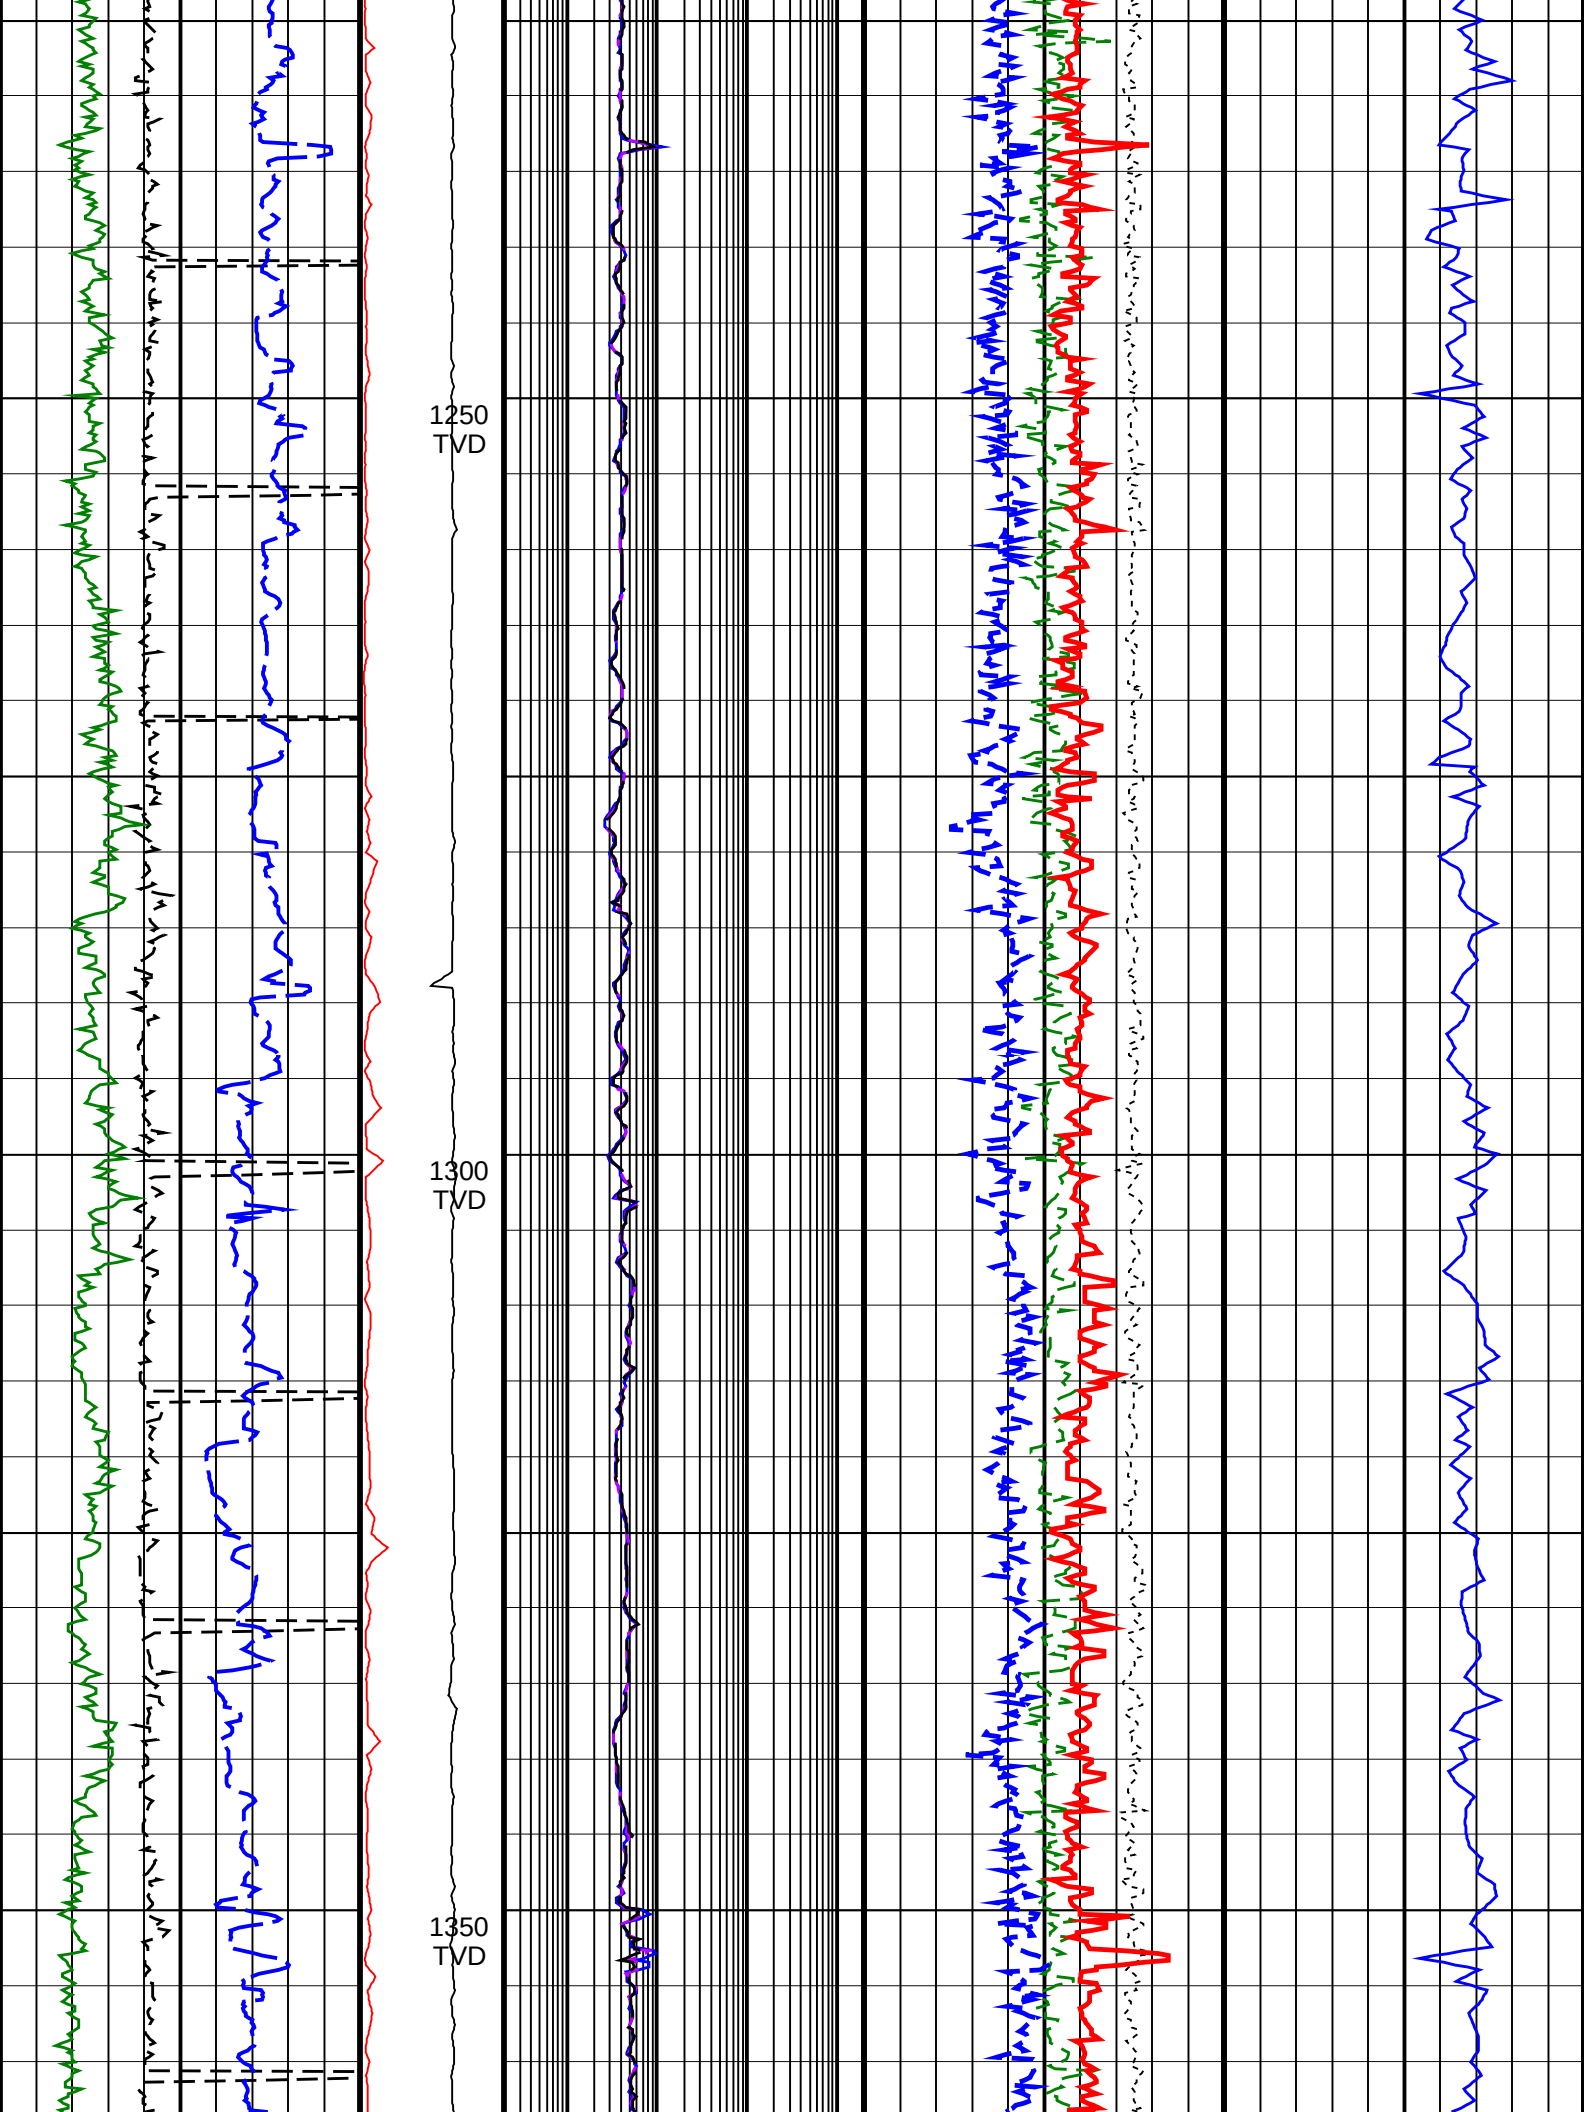
1250
TVD
1300
TVD
1350
TVD

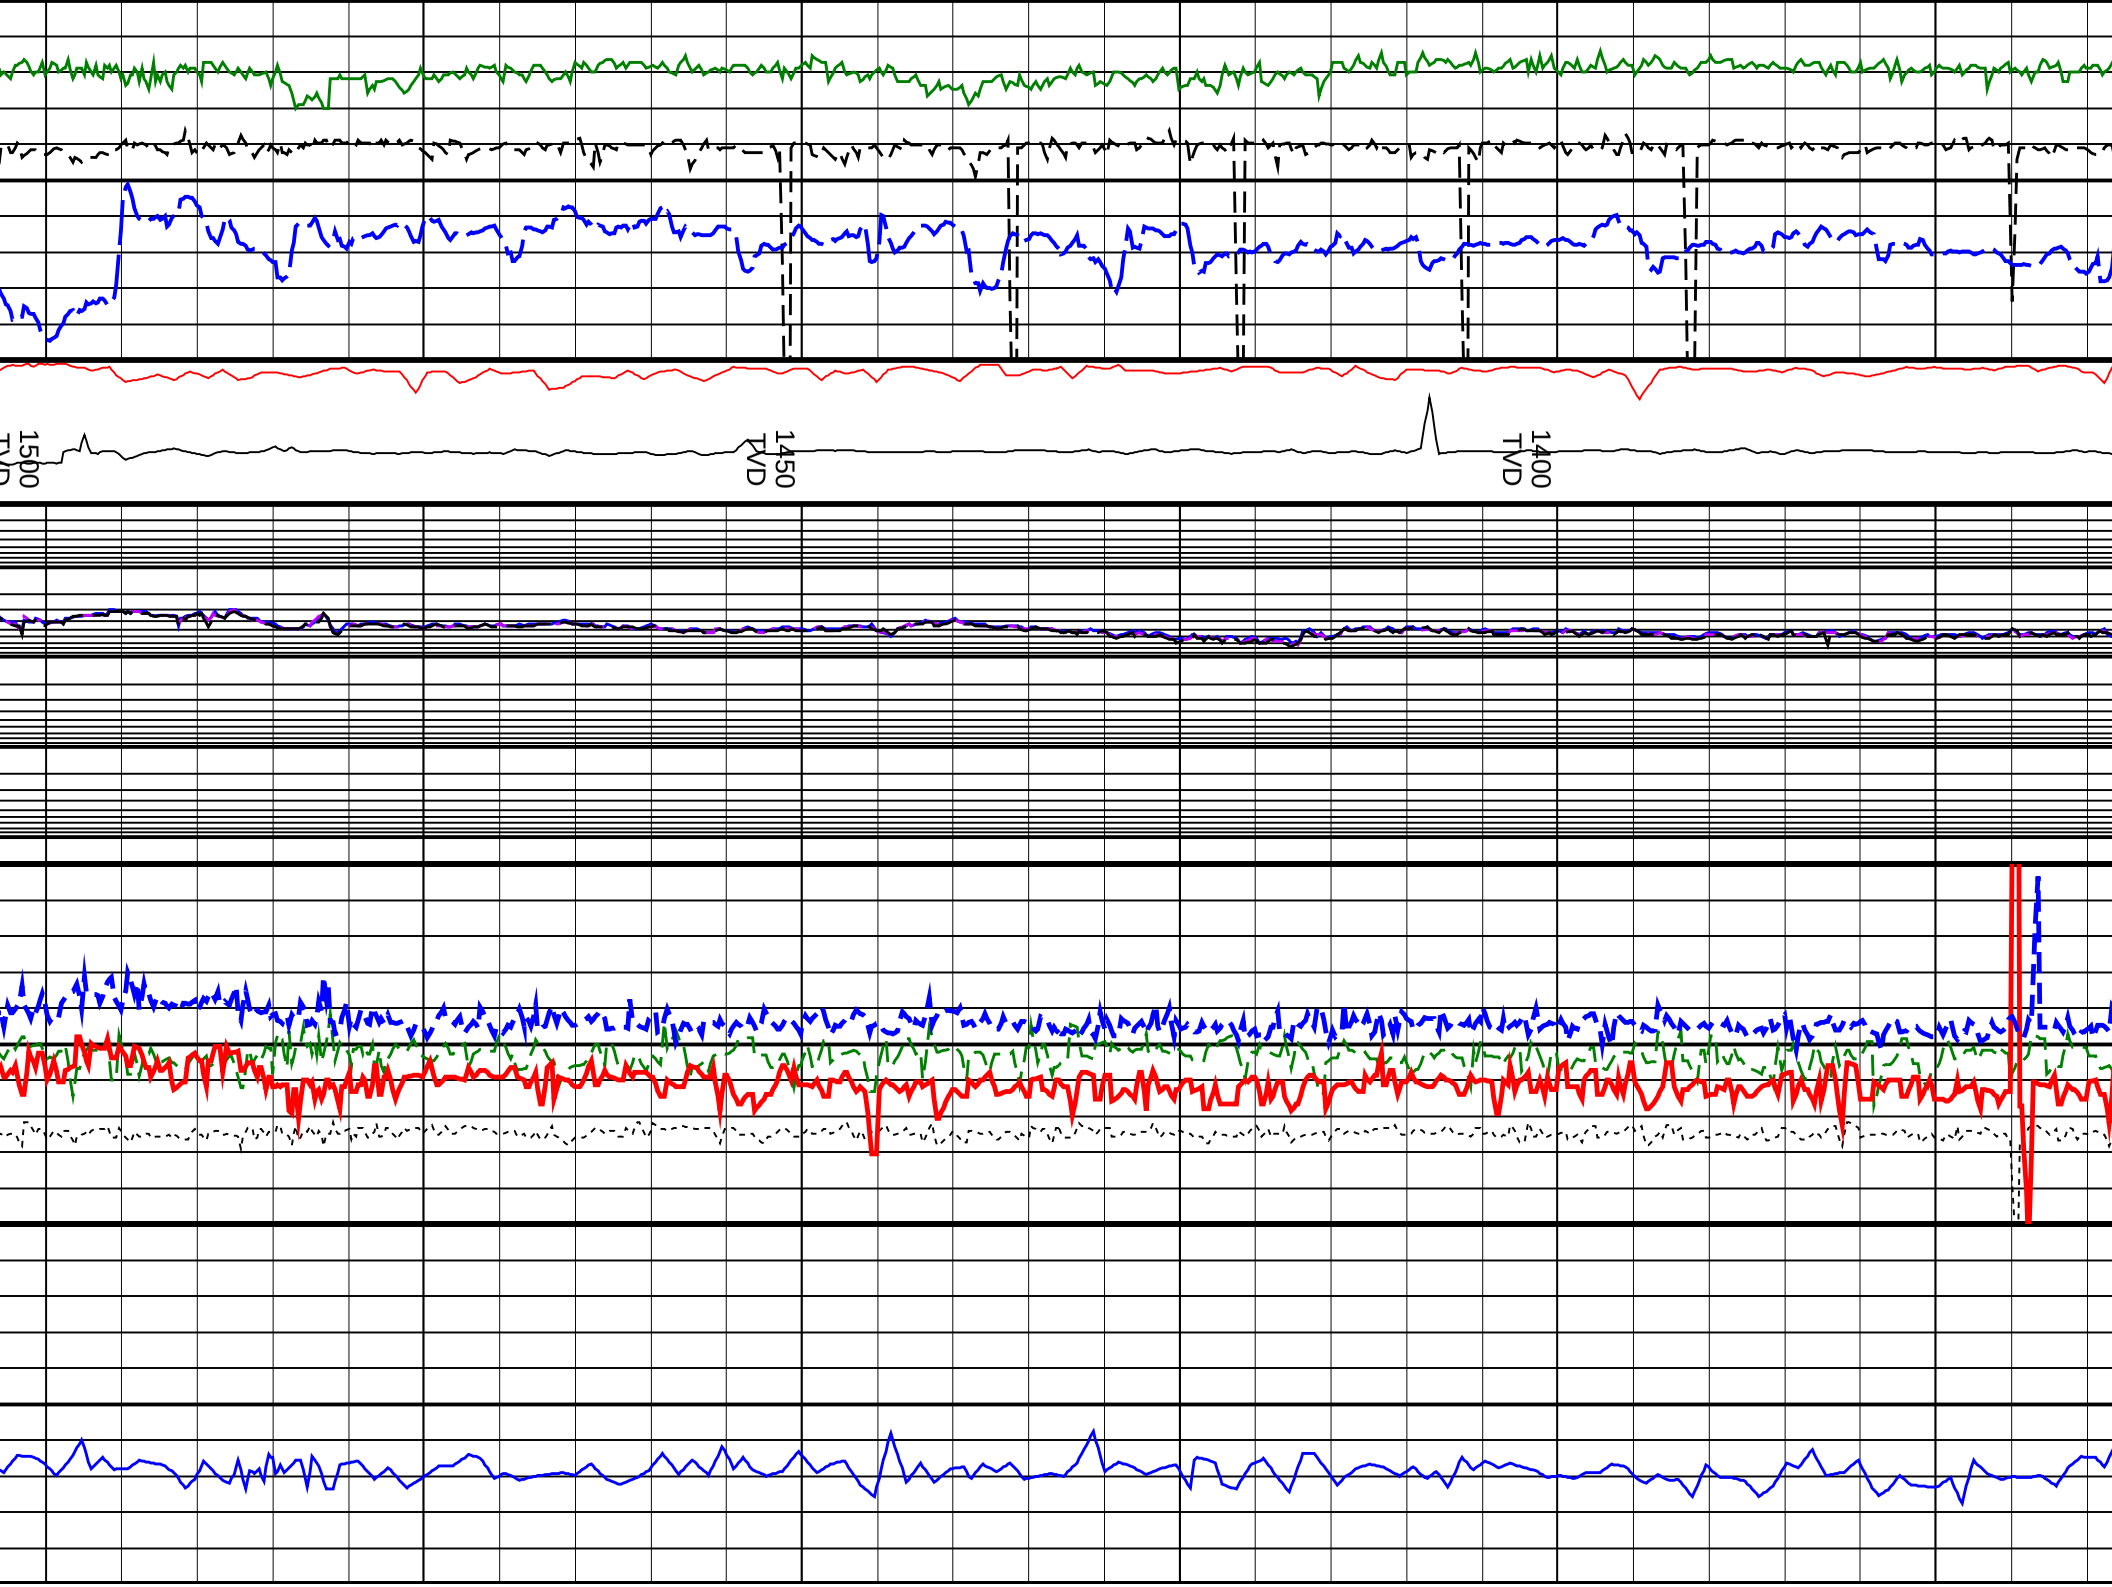
1500
TVD
1450
TVD
1400
TVD

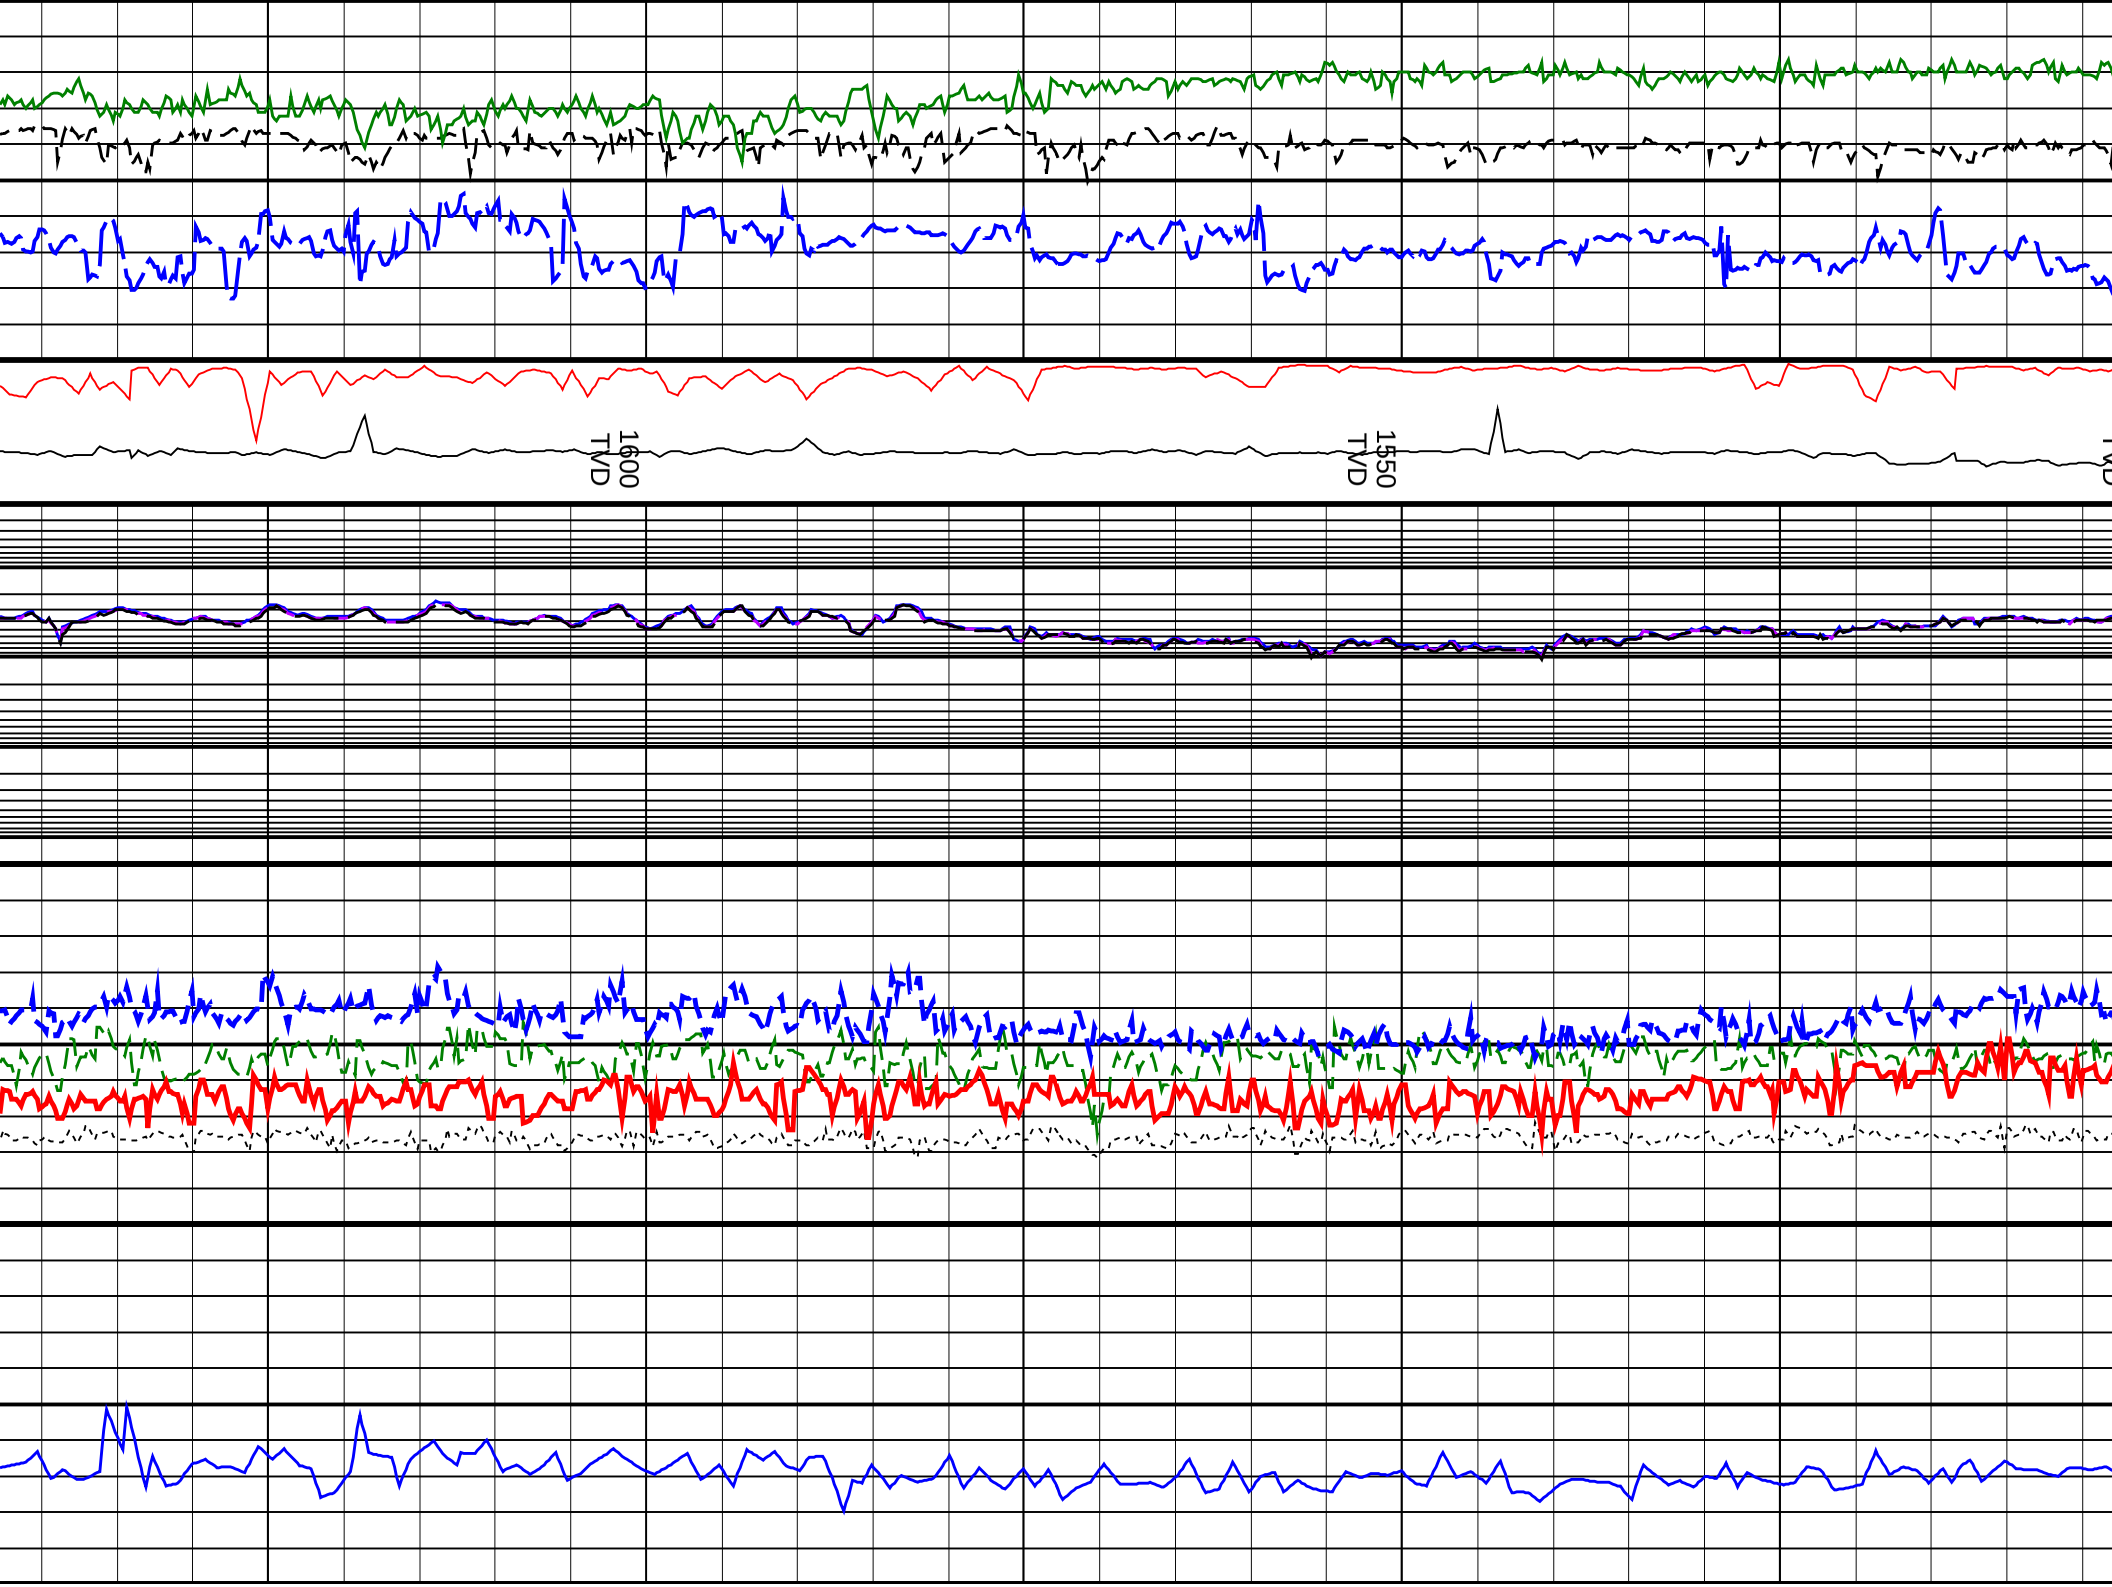
1600
TVD
1550
TVD

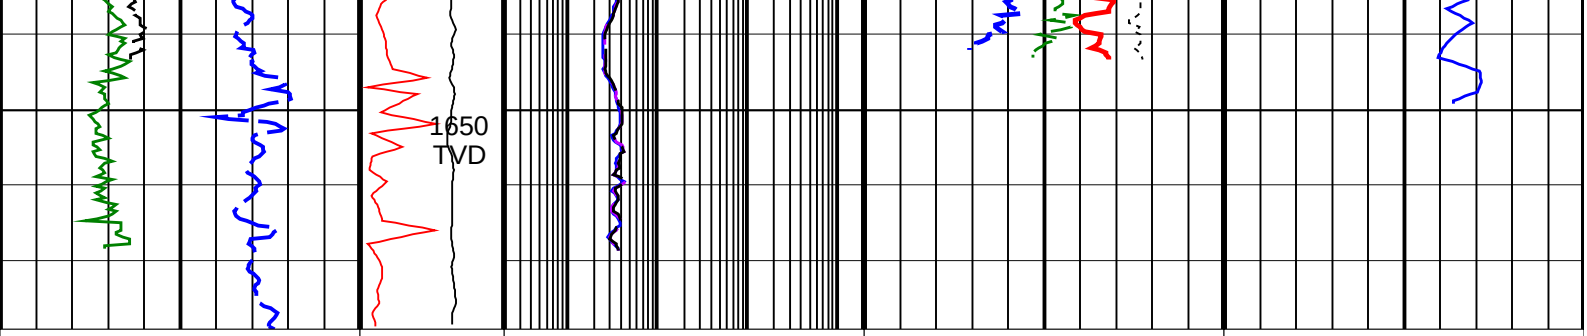

ROP*5 (ROP5) 200 (M/HR) 0	PKPK_RPM (Stick_RT) (RPM) 0 500	ARC BHCorr Phase−Shift Resistivity 16−in. at 2 MHz, Real−Time (P16H_RT) 0.2 (OHMM) 2000	Bulk Density Correction, Bottom, Real−Time Computed Downhole (DRHB_DH_RT) −0.75 (G/C3) 0.25	Delta−T Compressional, Real−Time (DTCO_RT) 600 (US/M) 100
Average Borehole Diameter, Real−Time (ADIA_ADN_RT) 6 (IN) 16	MWD Collar RPM (CRPM_RT) (RPM) 0 250	ARC BHCorr Phase−Shift Resistivity 28−in. at 2 MHz, Real−Time (P28H_RT) 0.2 (OHMM) 2000	Photoelectric Factor, Bottom, Real−Time (PEB_RT) 0 (−−−− 10	
ARC Gamma Ray, Real−Time (ARC_GR_RT) 0 (GAPI) 200		ARC BHCorr Phase−Shift Resistivity 40−in. at 2 MHz, Real−Time (P40H_RT) 0.2 (OHMM) 2000	Bulk Density, Bottom, Real−Time Computed Downhole (ROBB_DH_RT) 1.85 (G/C3) 2.85	
			Thermal Neutron Porosity, Real−Time (TNPH_ADN_RT) 45 (PU) −15	

IDEAL Version: ID14_0C_12

IDF