

# Elver-1 EcoScope Service RT 500MD

Format: ECO-SON-GVR\_500MD\_RT


Vertical Scale: 1:500


Graphics File Created: 05-Jan-2009 13:11


## PIP SUMMARY


- └ Gamma Ray Samples
- └ Resistivity Samples

		<p style="color: purple;">Shallow Button Resistivity, Real-Time (RES_BS_RT)</p> <p style="color: purple;">0.2 (OHMM) 2000</p>			
		<p style="color: blue;">Deep Button Resistivity, Real-Time (RES_BD_RT)</p> <p style="color: blue;">0.2 (OHMM) 2000</p>			<p style="color: cyan;">Equivalent Circulating Density, Real-Time (ECD_ECO_RT)</p> <p style="color: cyan;">0 (G/C3) 2</p>
<p>Ultrasonic Caliper, Average Diameter, Real-Time, Recomputed at Surface (UCAV_ECO_RT)</p> <p style="color: red;">8 (IN) 13</p>		<p style="color: black;">Ring Resistivity, Real-Time (RES_RING_RT)</p> <p style="color: black;">0.2 (OHMM) 2000</p>	<p style="color: black;">Photoelectric Factor, Bottom, Real-Time, Computed Downhole (PEB_DH_ECO_RT)</p> <p style="color: black;">0 (----) 10</p>	<p style="color: black;">Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_ECO_RT)</p> <p style="color: black;">-0.25 0.25 (G/C3)</p>	<p style="color: black;">Delta-T Compressional, Real-Time (DTCO_RT)</p> <p style="color: black;">40 (US/F) 140</p>
<p>Gamma Ray, Average, Real-Time (GRMA_ECO_RT)</p> <p style="color: green;">0 (GAPI) 200</p>		<p>ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT)</p> <p style="color: orange;">0.2 (OHMM) 2000</p>	<p>Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_RT)</p> <p style="color: red;">1.95 (G/C3) 2.95</p>		<p>Coherence at Compressional Peak, Real-Time (CHCO_RT)</p> <p style="color: blue;">-9 (----) 1</p>
<p>ROP*5 (ROP5)</p> <p style="color: blue;">200 (M/HR) 0</p>	<p>MWD Collar RPM (CRPM_RT) (RPM)</p> <p style="color: black;">0 400</p>	<p>ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT)</p> <p style="color: red;">0.2 (OHMM) 2000</p>	<p>Best Thermal Neutron Porosity, Average, Real-Time (BPHI_ECO_RT)</p> <p style="color: blue;">45 (PU) -15</p>		<p>Downhole Annulus Temperature, Real Time, Computed Downhole (DHAT_DH_ECO_RT)</p> <p style="color: red;">0 (DEGC) 200</p>

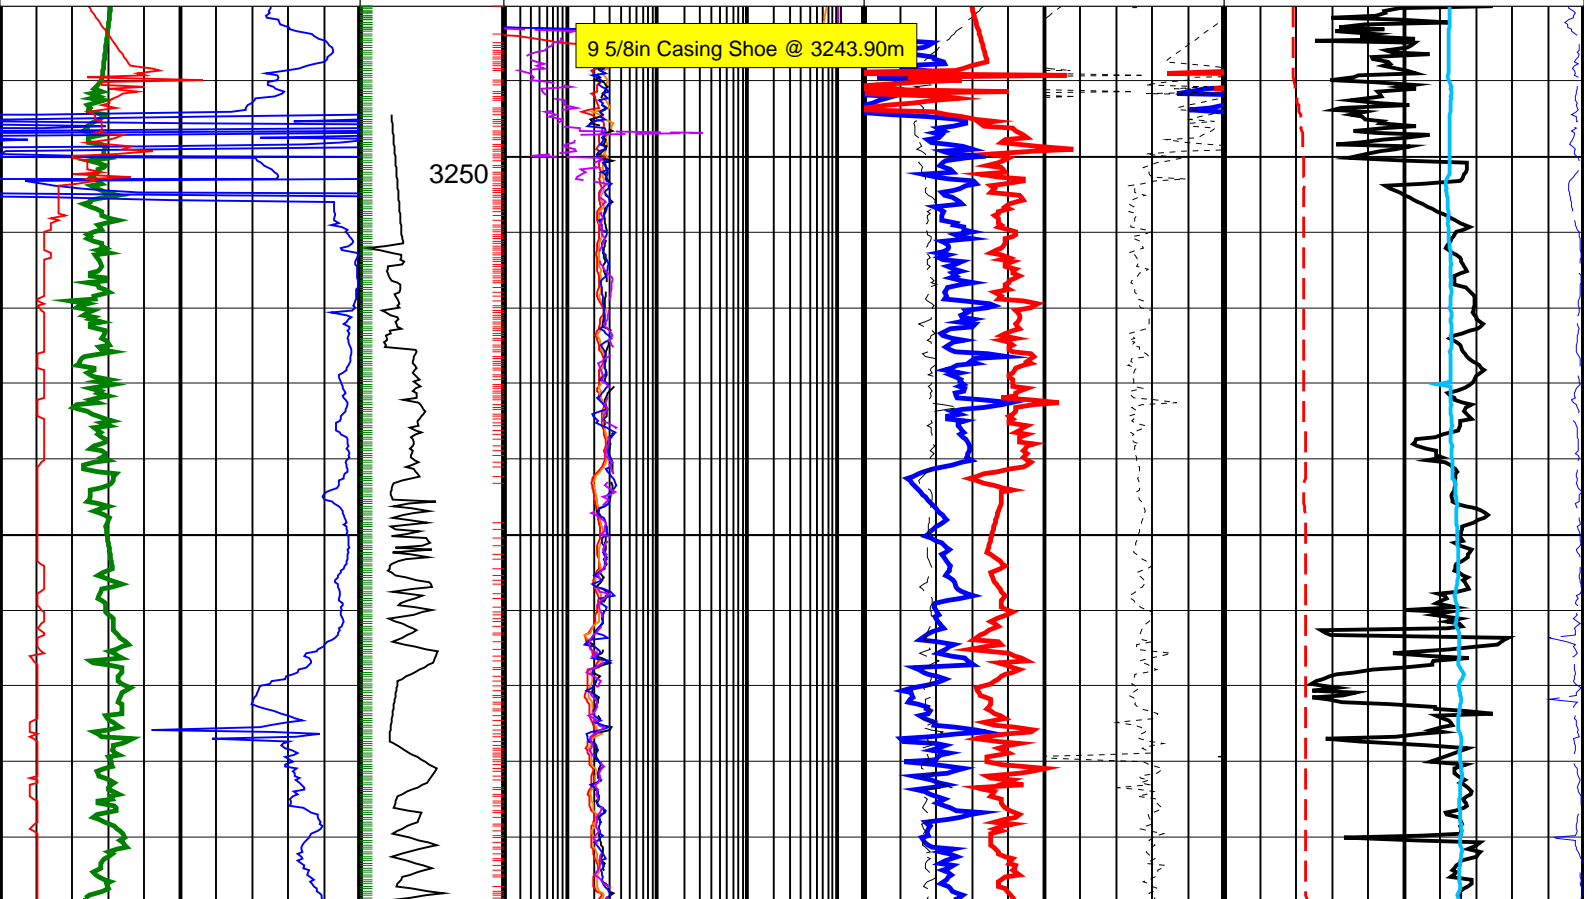

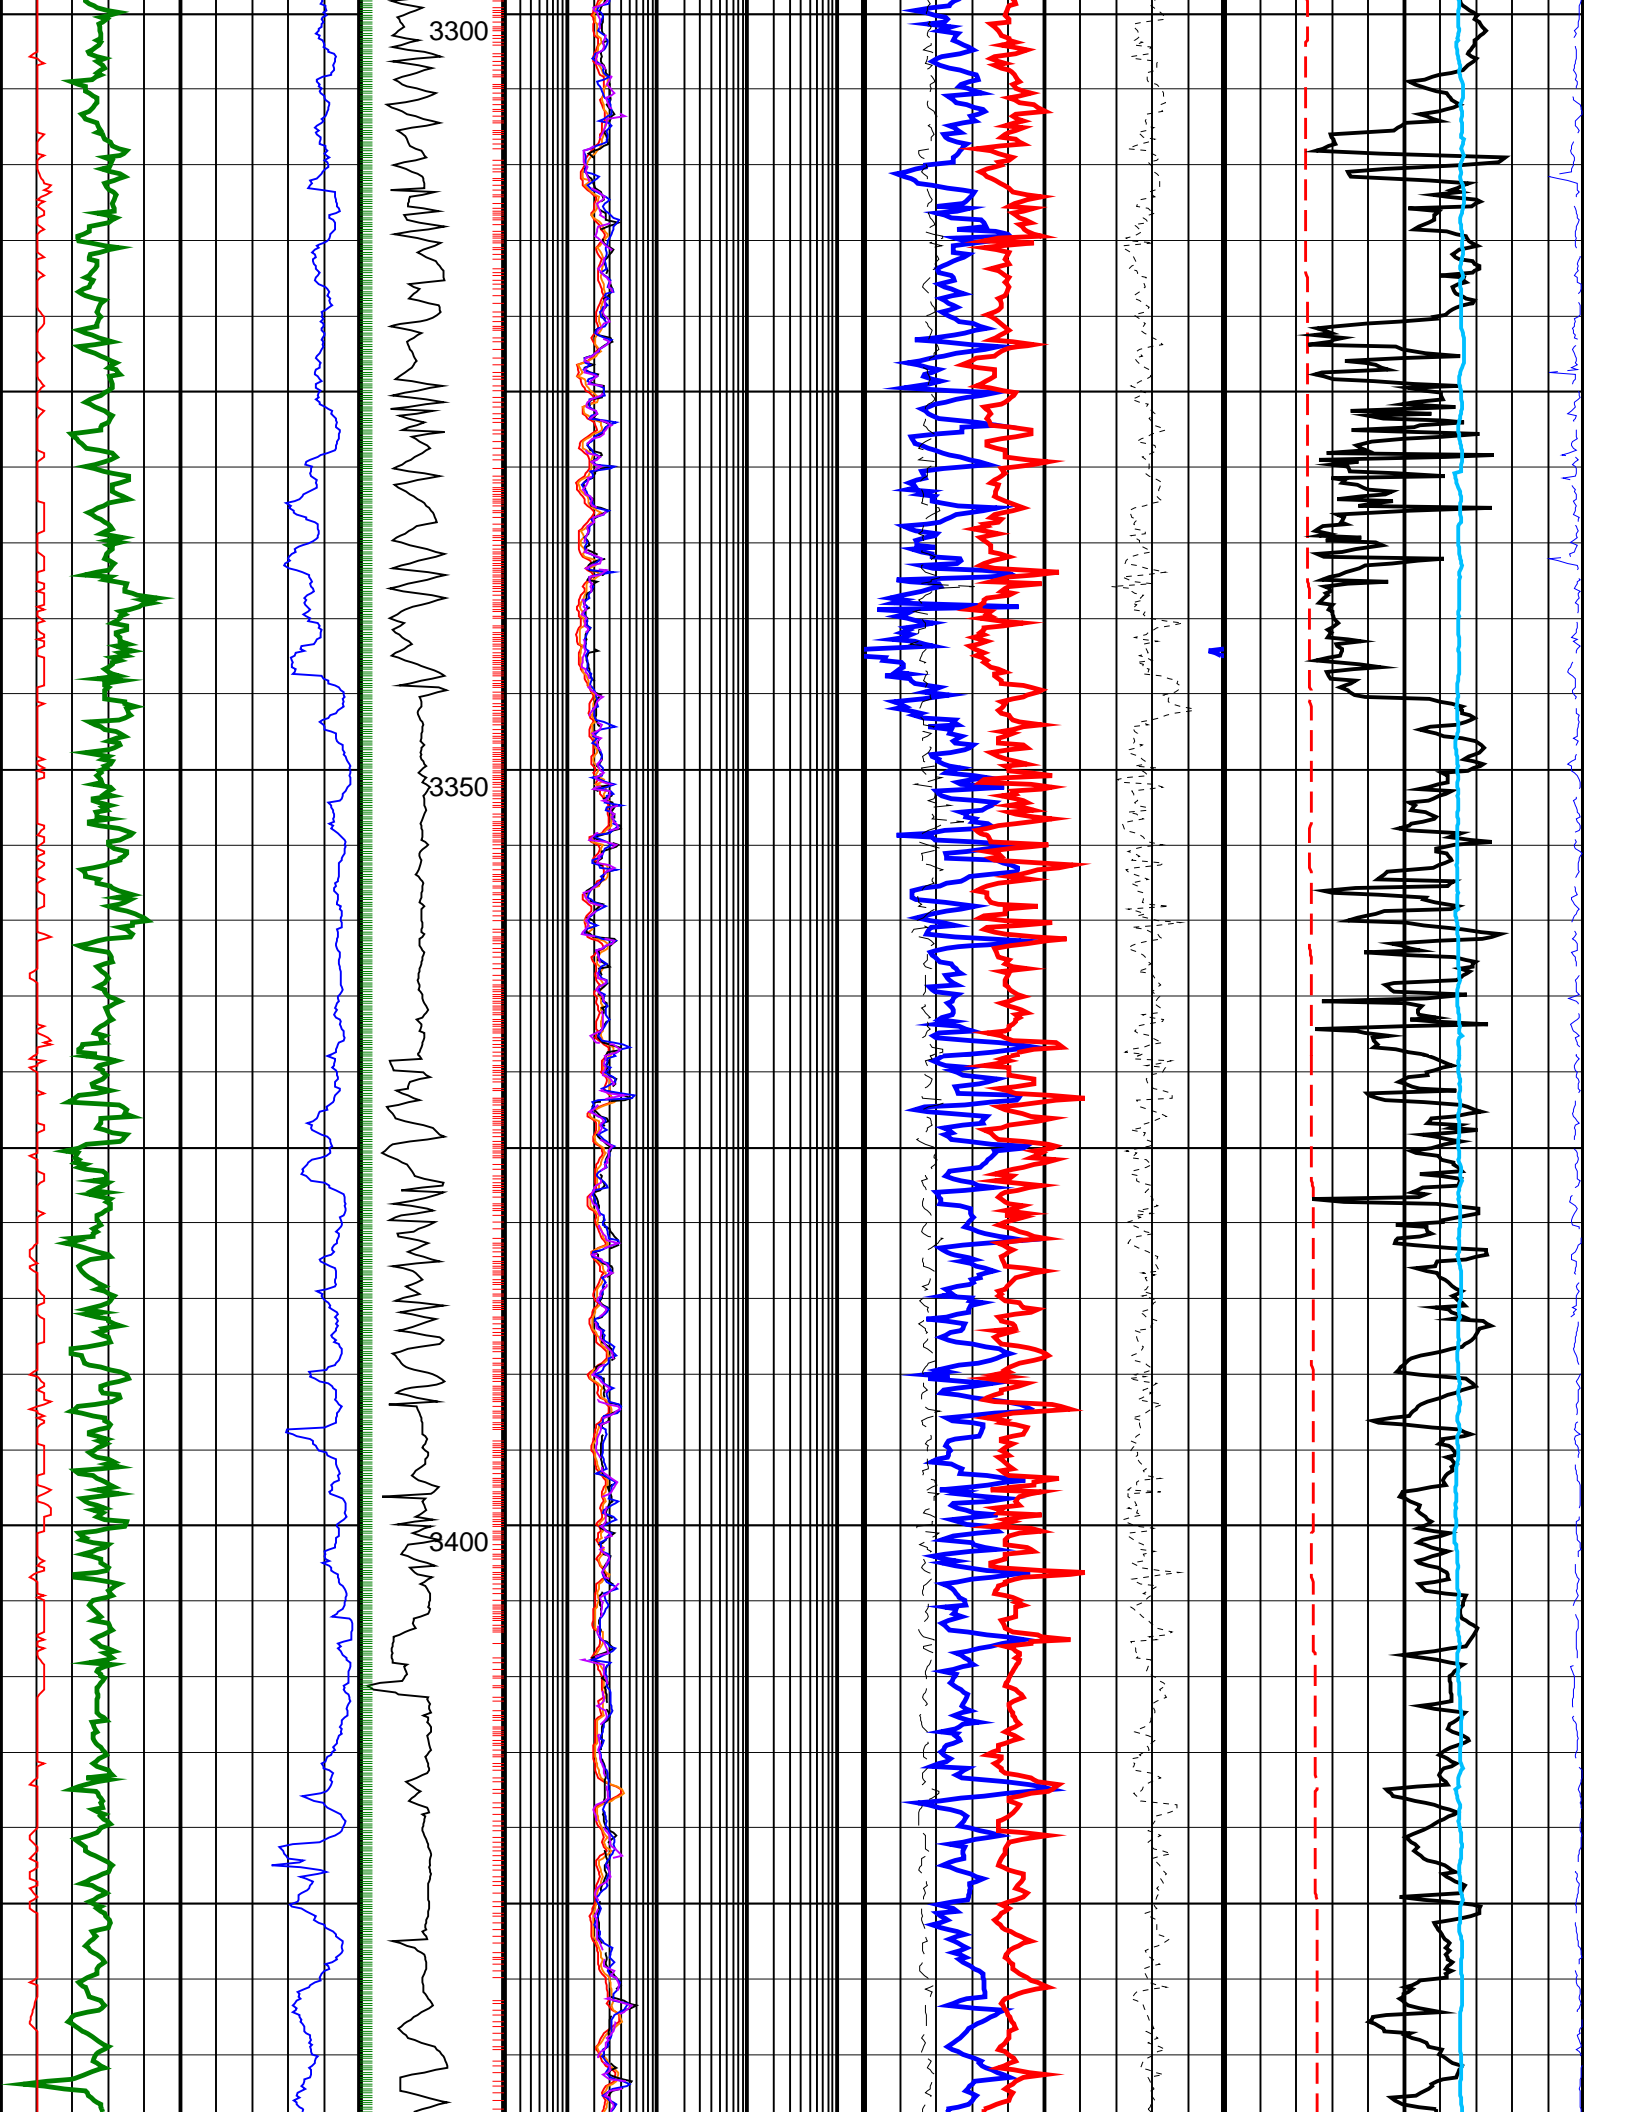

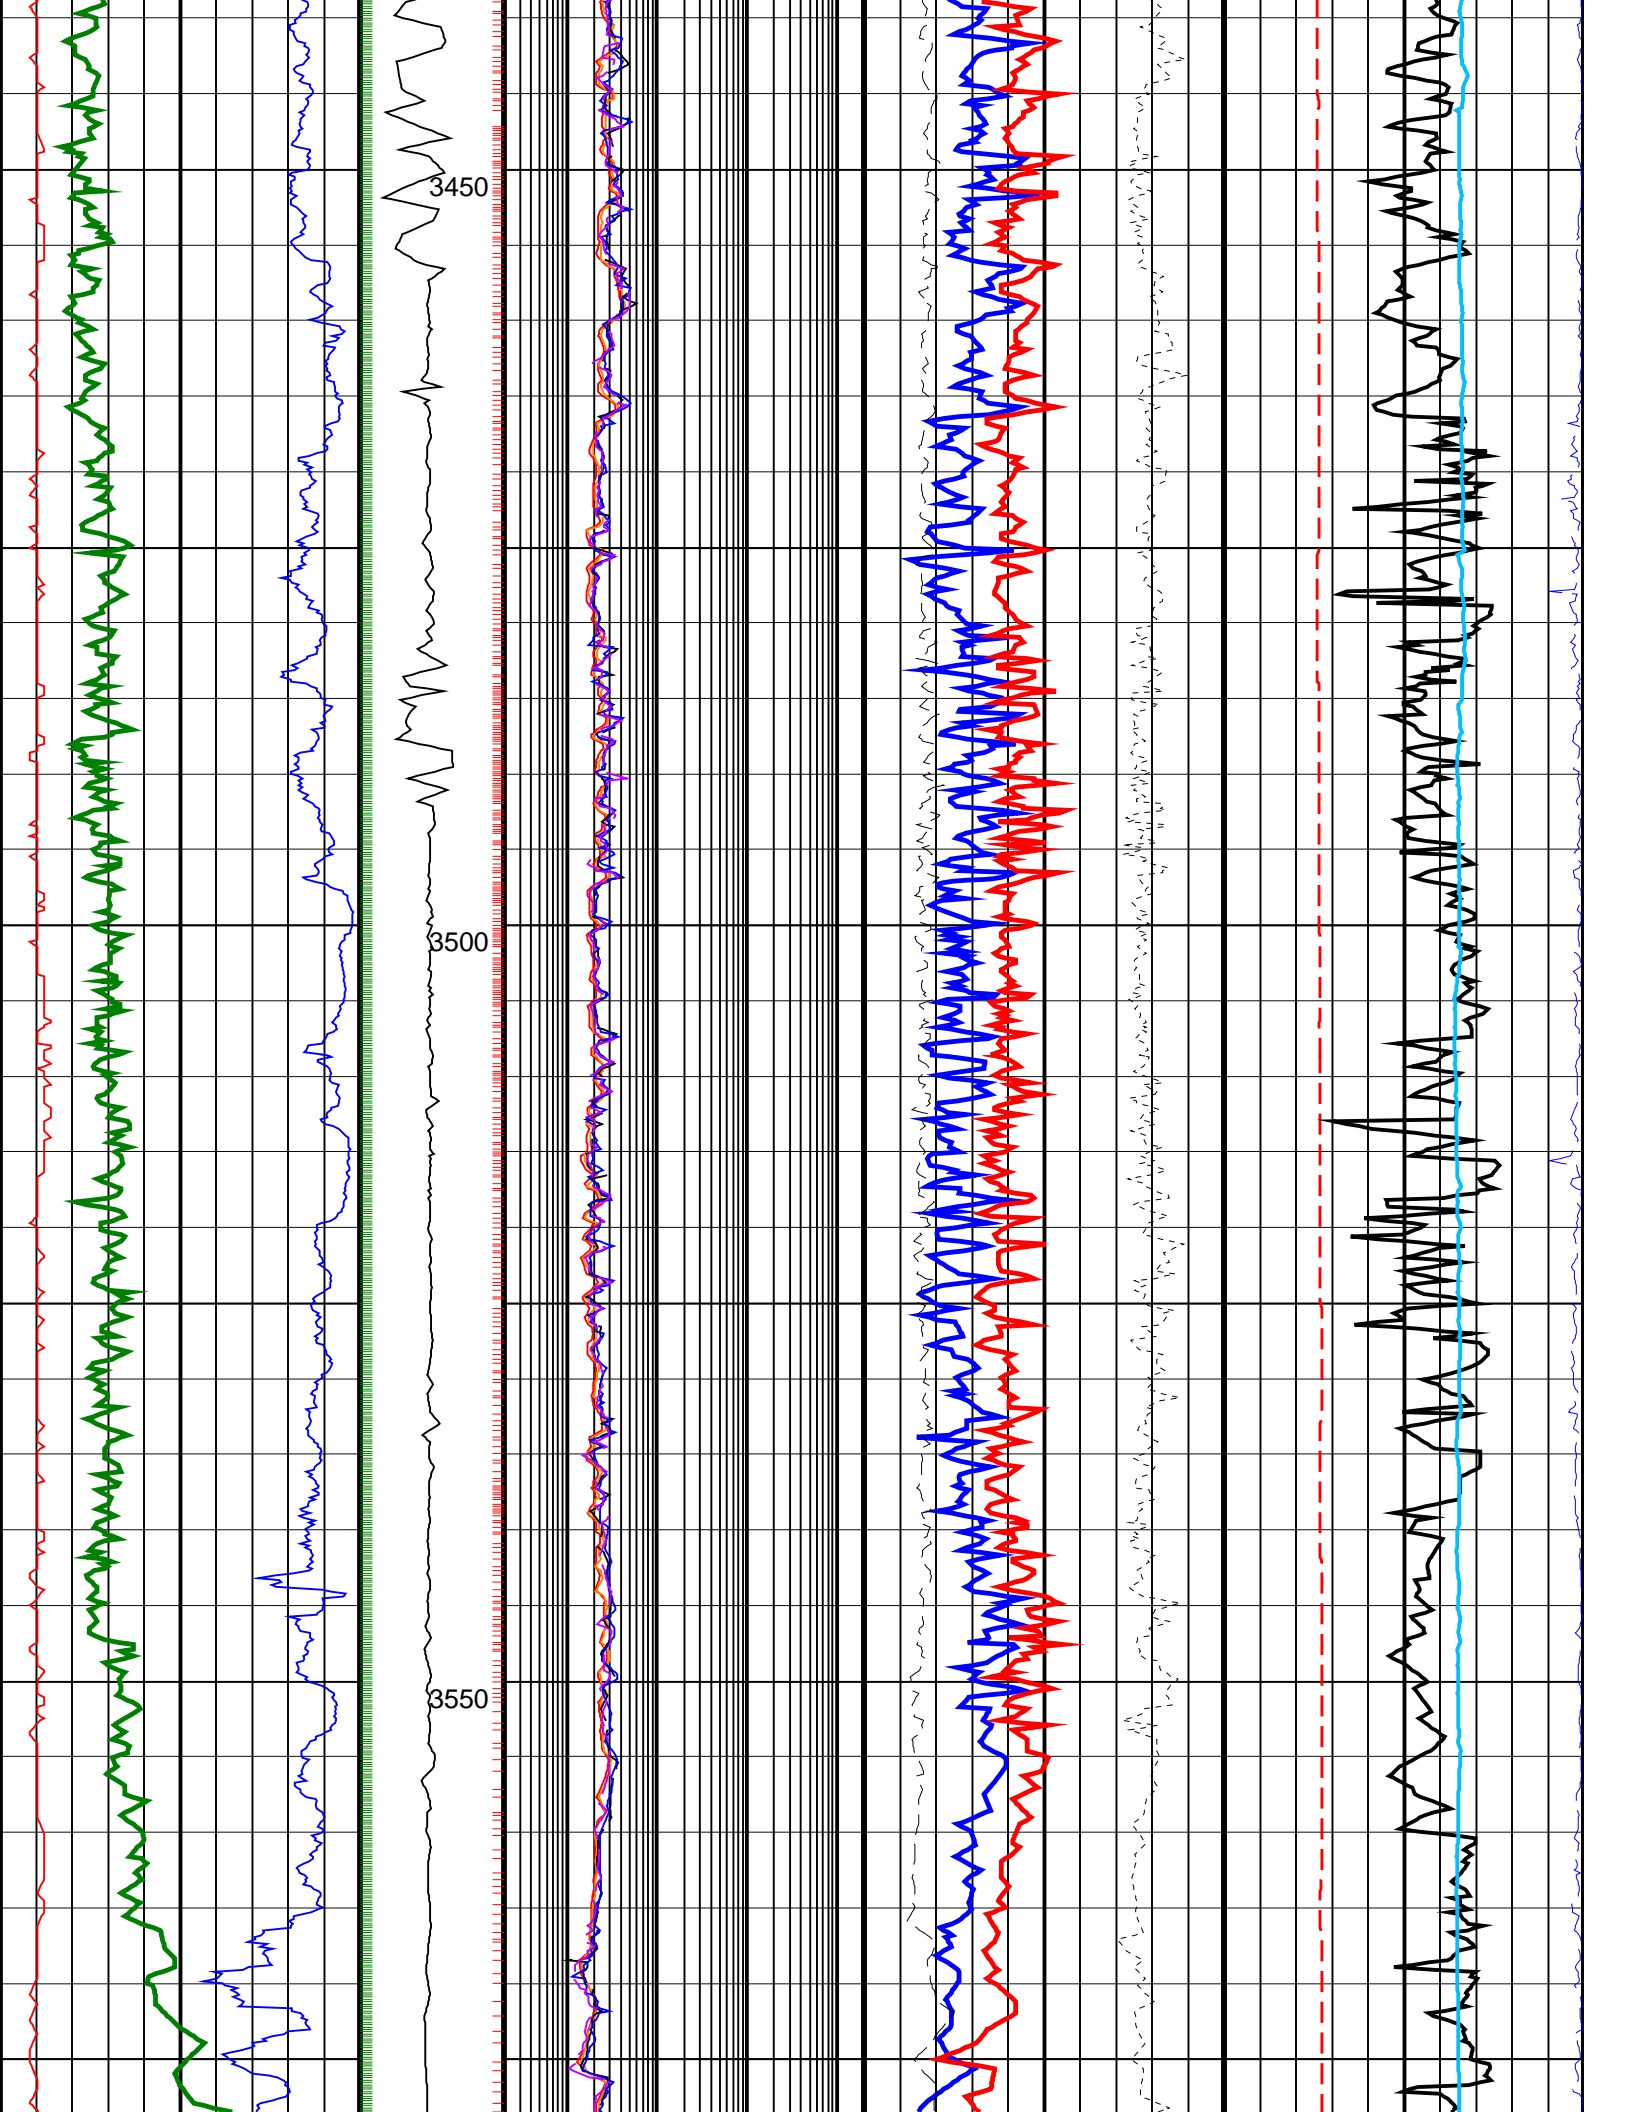

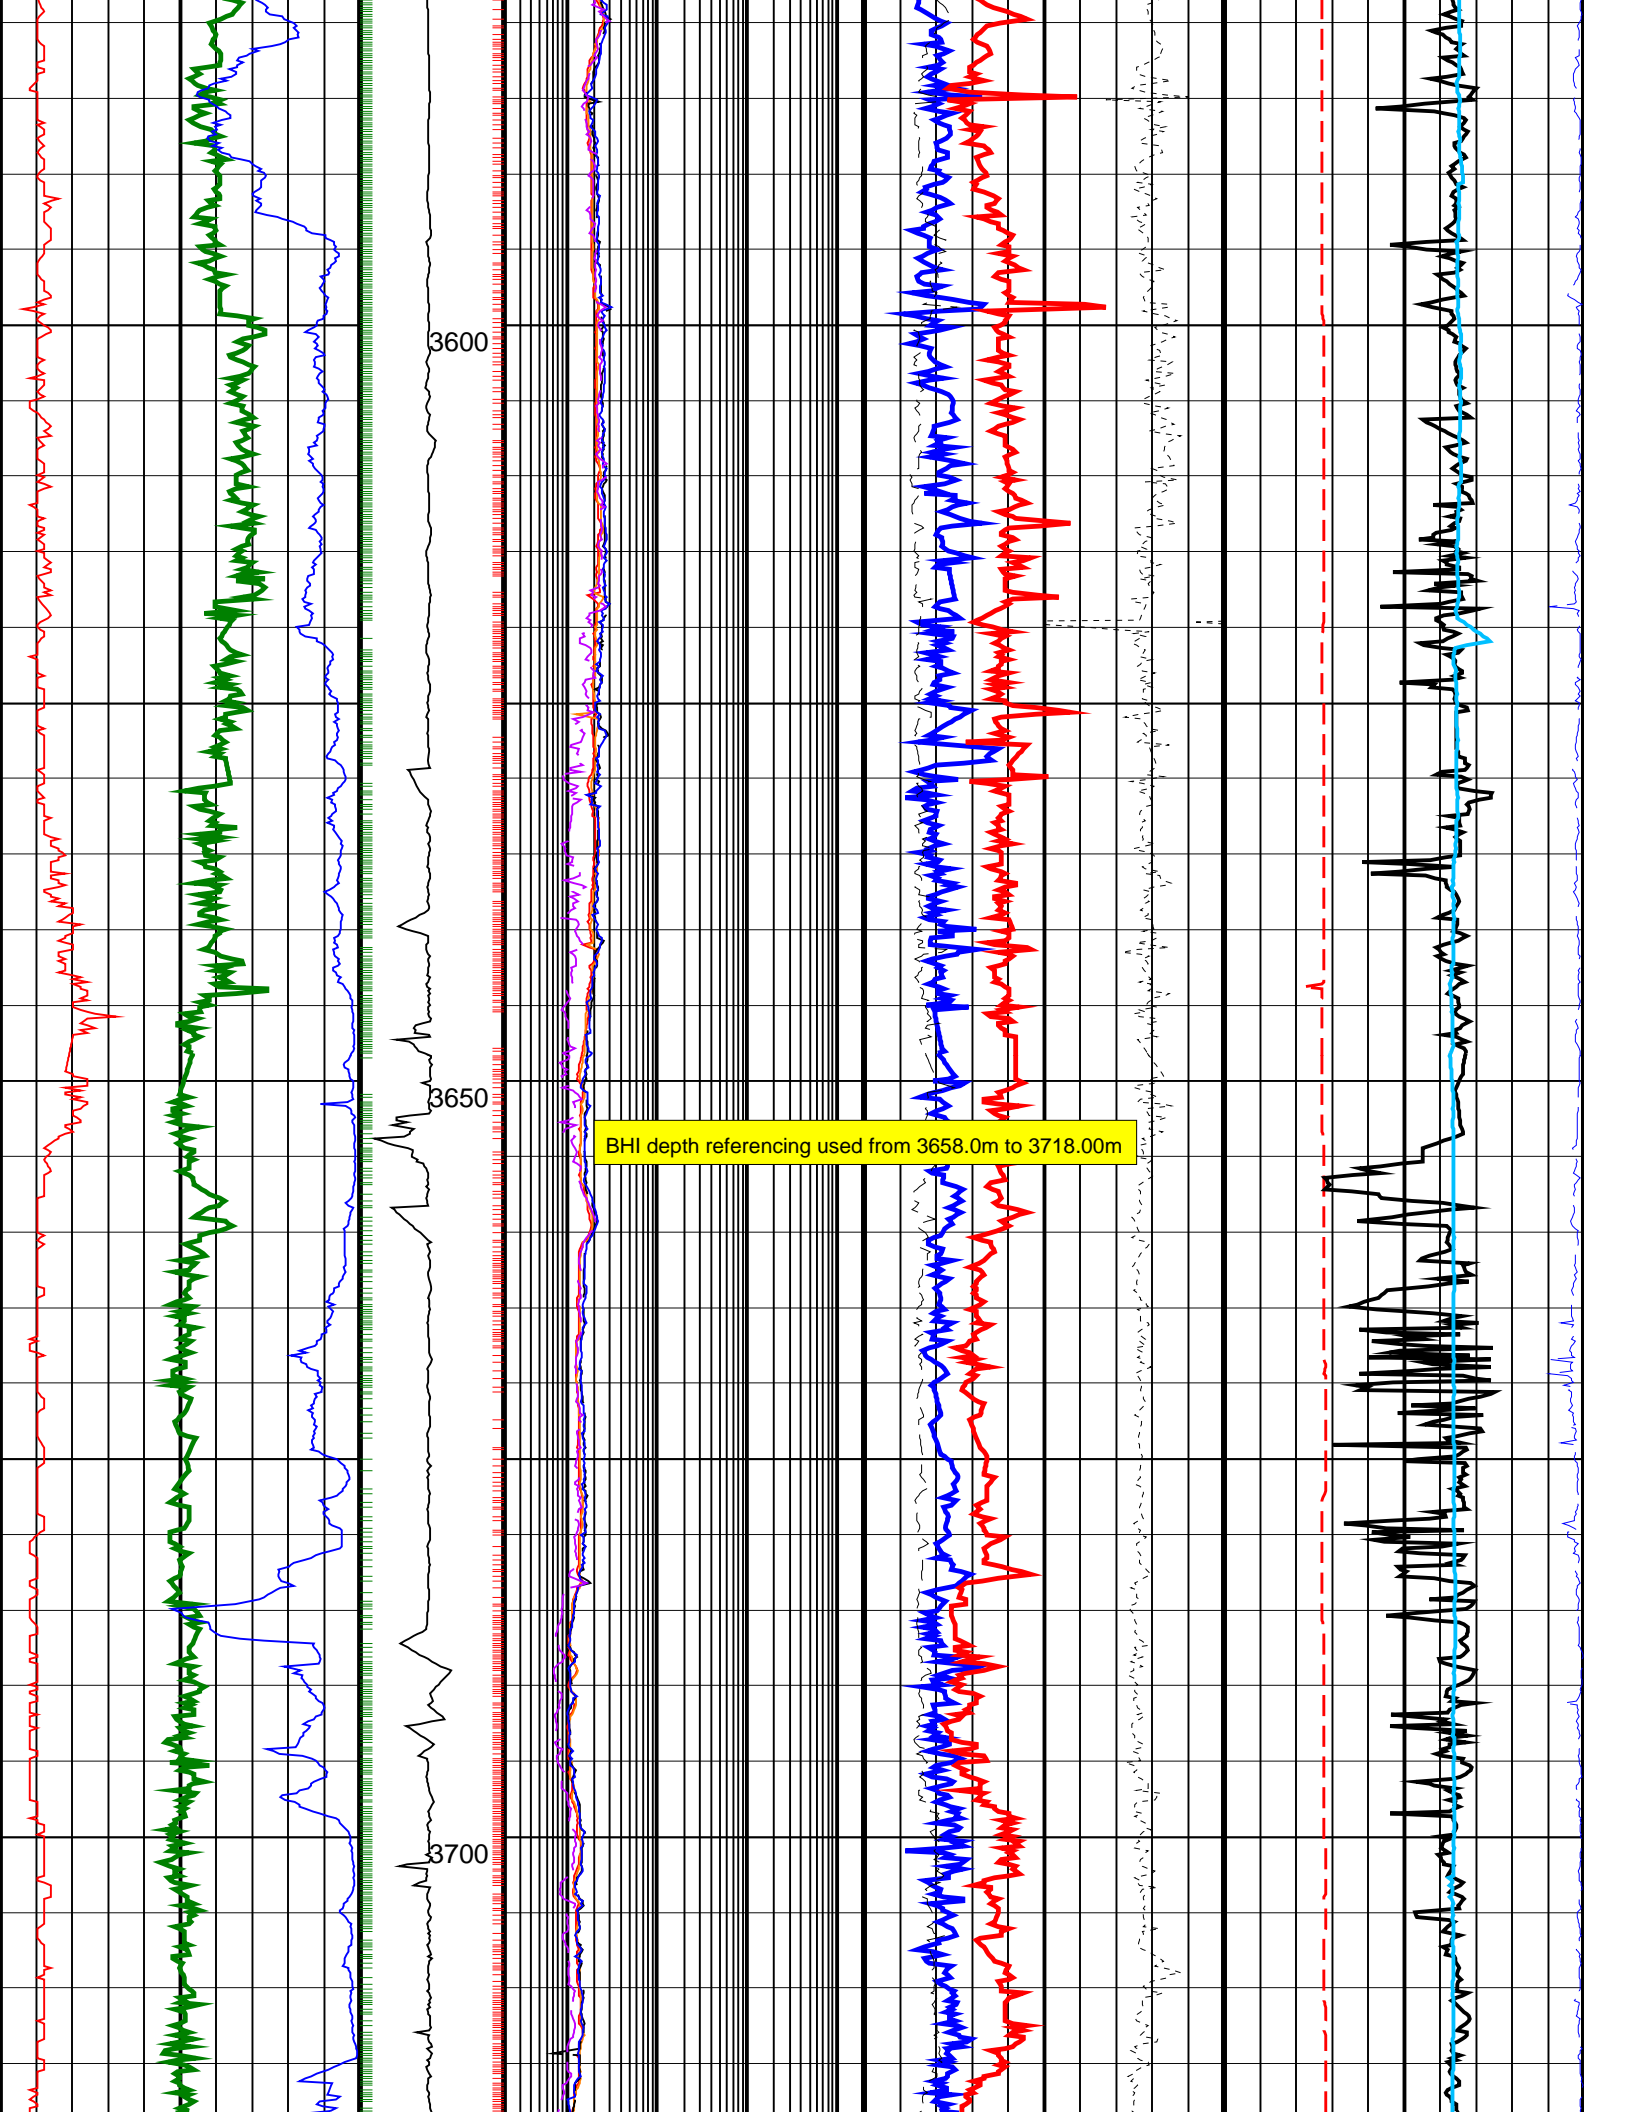



3600

3650

3700

BHI depth referencing used from 3658.00m to 3718.00m

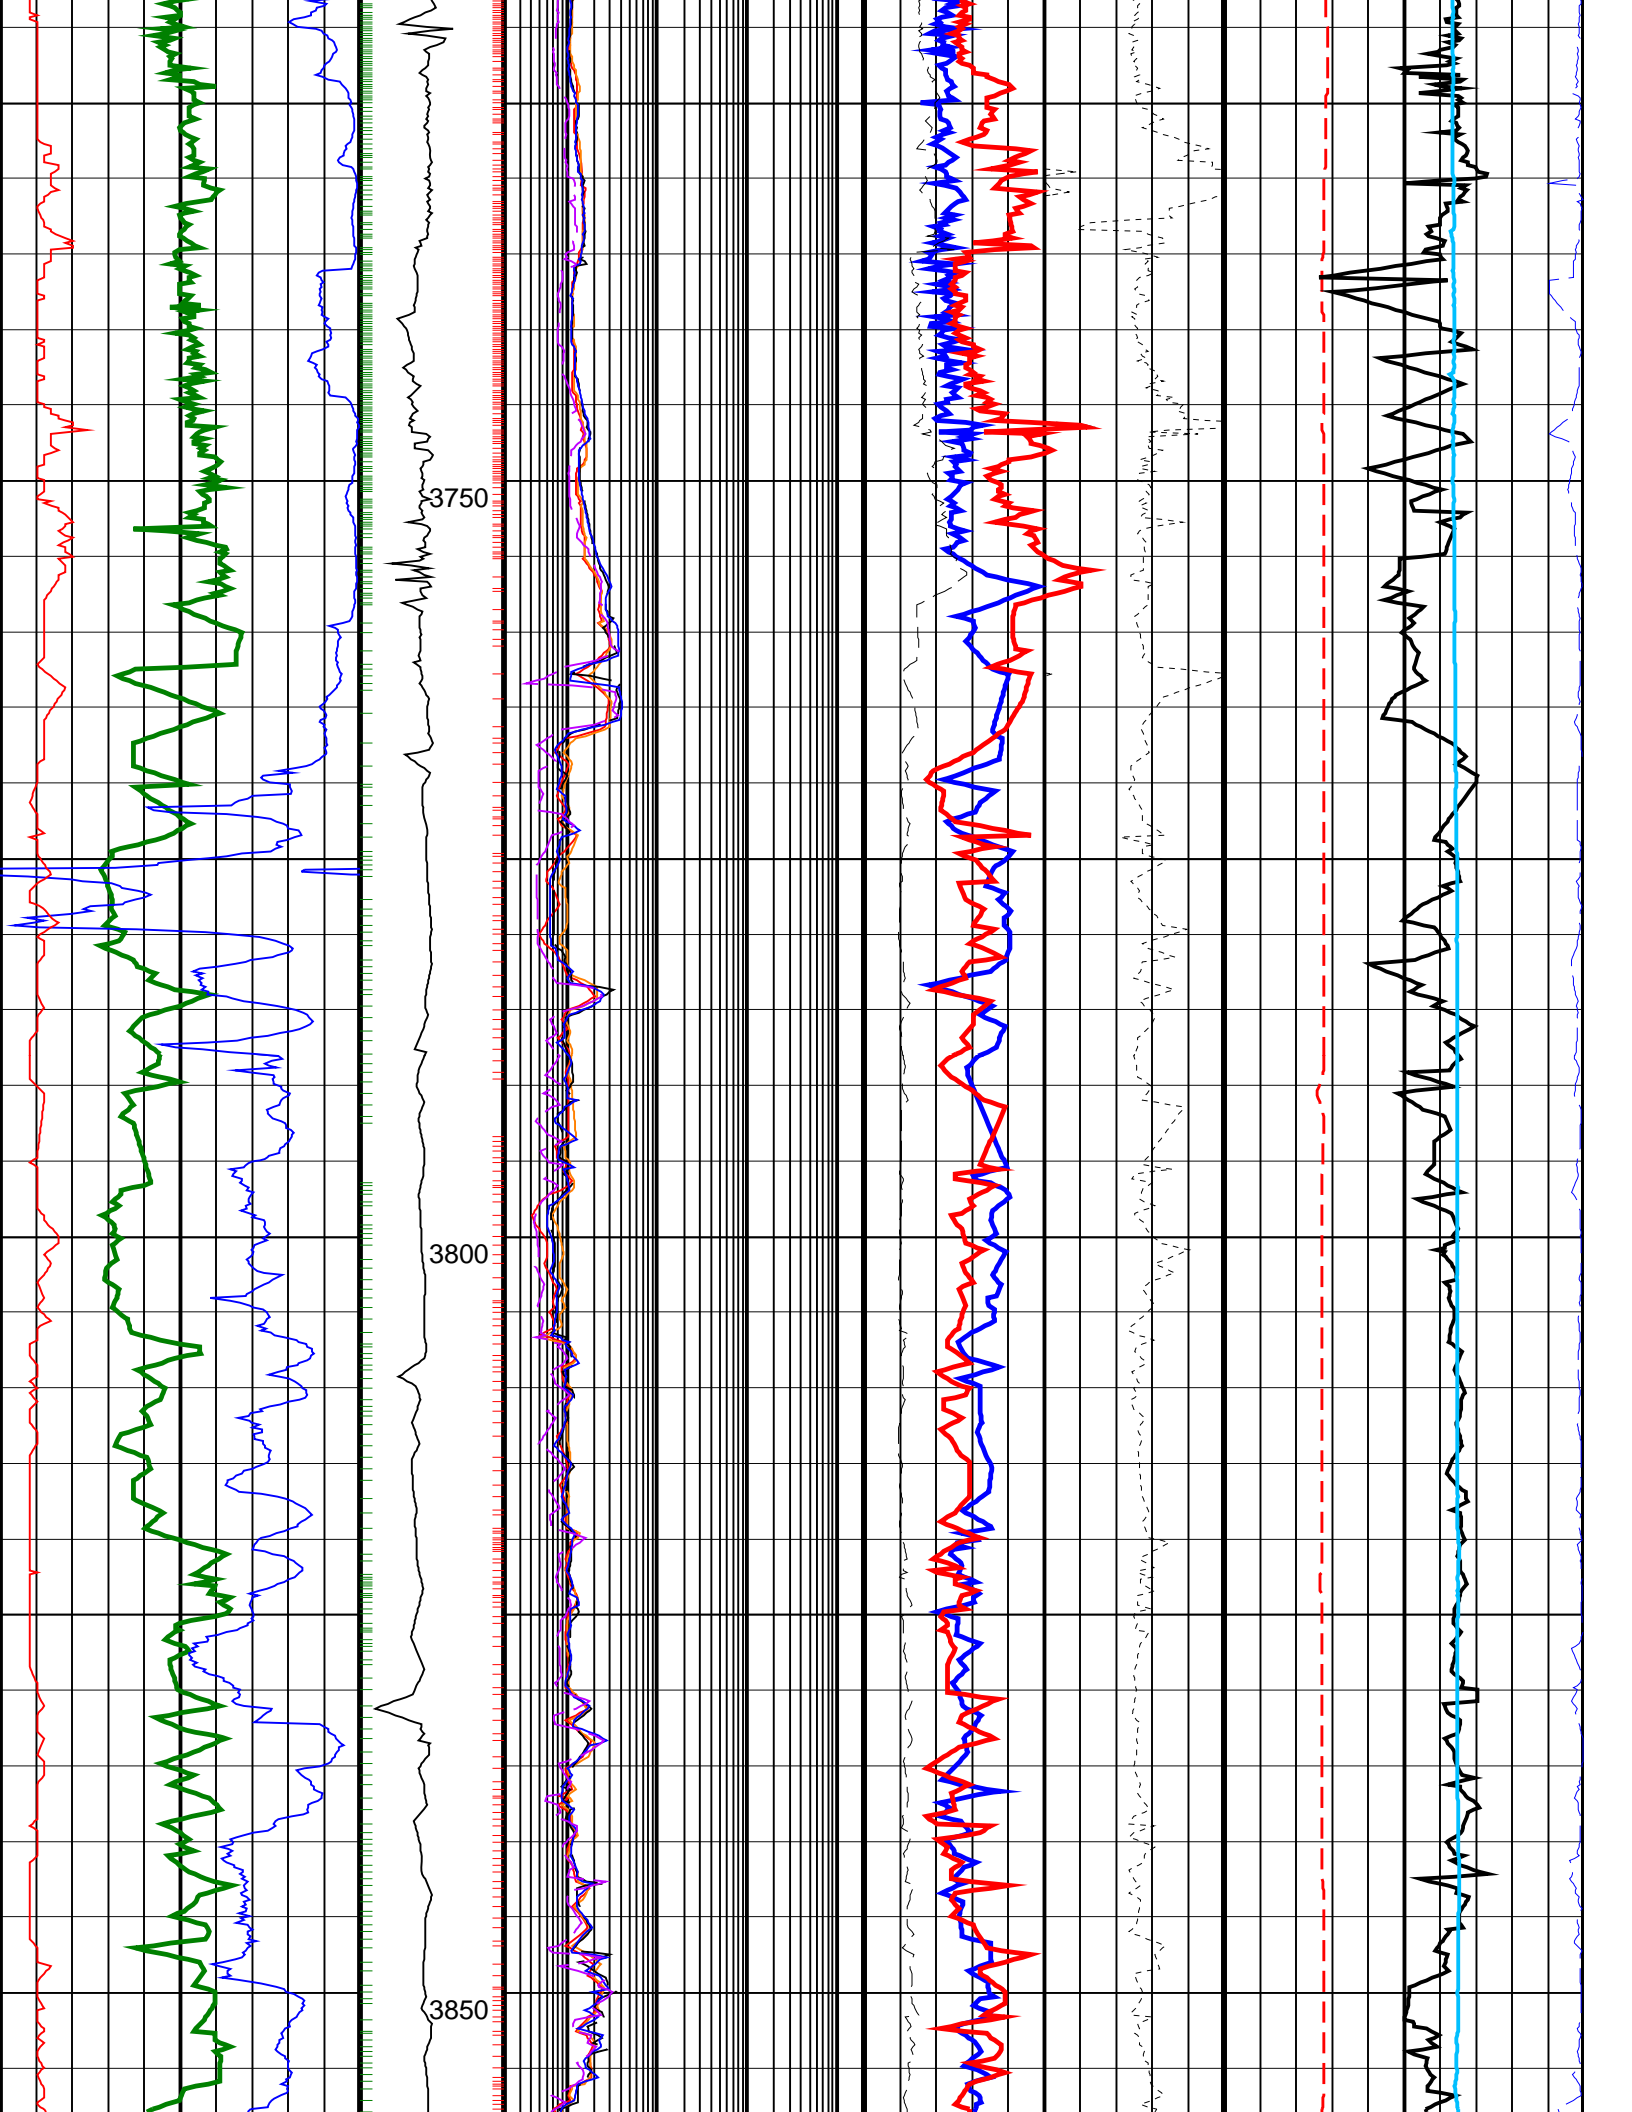

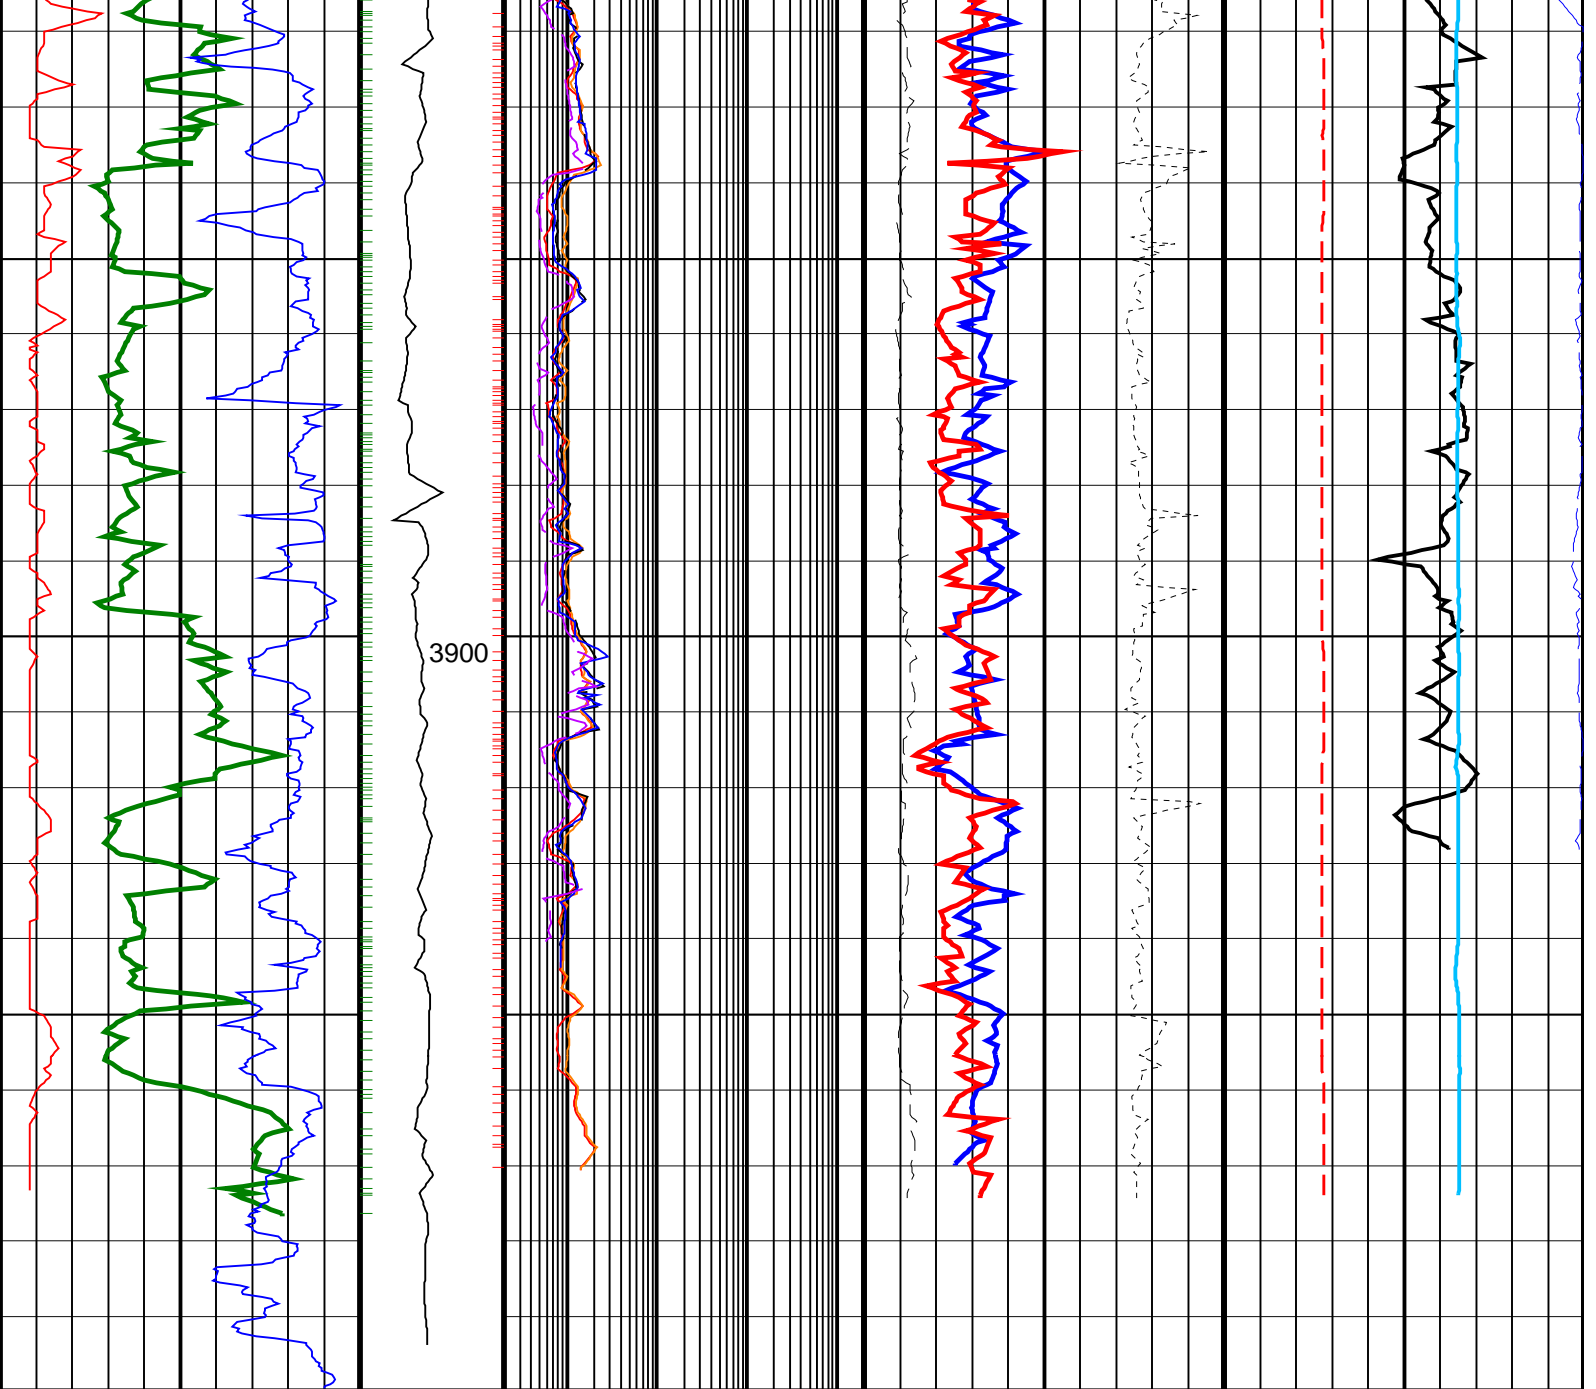

<p><b>ROP*5 (ROP5)</b> 200 (M/HR) 0</p>	<p><b>MWD Collar RPM (CRPM_RT)</b> 0 400 (RPM)</p>	<p><b>ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT)</b> 0.2 (OHMM) 2000</p>	<p><b>Best Thermal Neutron Porosity, Average, Real-Time (BPHI_ECO_RT)</b> 45 (PU) -15</p>	<p><b>Downhole Annulus Temperature, Real Time, Computed Downhole (DHAT_DH_ECO_RT)</b> 0 (DEGC) 200</p>
---	--	---	---	--

<p><b>Gamma Ray, Average, Real-Time (GRMA_ECO_RT)</b> 0 (GAPI) 200</p>	<p><b>ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT)</b> 0.2 (OHMM) 2000</p>	<p><b>Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_RT)</b> 1.95 (G/C3) 2.95</p>	<p><b>Coherence at Compressional Peak, Real-Time (CHCO_RT)</b> -9 (----) 1</p>
--	---	--	--

<p><b>Ultrasonic Caliper, Average Diameter, Real-Time, Recomputed at Surface (UCAV_ECO_RT)</b> 8 (IN) 13</p>	<p><b>Ring Resistivity, Real-Time (RES_RING_RT)</b> 0.2 (OHMM) 2000</p>	<p><b>Photoelectric Factor, Bottom, Real-Time, Computed Downhole (PEB_DH_ECO_RT)</b> 0 (----) 10</p>	<p><b>Bulk Density Correction, Bottom, Real-Time, Computed Downhole (DRHB_DH_ECO_RT)</b> -0.25 (G/C3) 0.25</p>	<p><b>Delta-T Compressional, Real-Time (DTCO_RT)</b> 40 (US/F) 140</p>
--	---	--	--	--

<p><b>Deep Button Resistivity, Real-Time (RFB_DP_RT)</b></p>	<p><b>Equivalent Circulating Density, Real-Time (ECD)</b></p>
--	---

Real-Time (RES\_BD\_RT)  
0.2 (OHMM) 2000

ECO\_RT  
0 (G/C3) 2

Shallow Button Resistivity,  
Real-Time (RES\_BS\_RT)  
0.2 (OHMM) 2000

PIP SUMMARY

- + Gamma Ray Samples
- + Resistivity Samples

IDEAL Version: ID13\_OC\_08

IDF